

This product is no longer manufactured



VR

[Find more details in our online catalogue](#)

Certifications



Ecodesign (ErP) compliant

Complies with stringent EU regulations on energy labelling and Ecodesign for Sustainable Products (ESPR) and Energy-related Products (ErP). Ready to meet future requirements.

Technical parameters

Unit		
Frequency	50	Hz
Voltage (nominal)	230	V
Phases	1~	
Recommended fuse	10 A	
Enclosure class	IP24	
Speed regulation	Stepless	
Nominal Airflow	300	m³/h
Product type	Heat recovery unit	
Supply fan		
Input power (P1), supply fan	121	W
Supply air filter		
Filter class, supply air	ePM1 55%	

Return fan / Extract fan

Input power (P1), extract fan	121	W
-------------------------------	-----	---

Extract air filter

Filter class, extract air	Coarse 50%
---------------------------	------------

Heater

Heater type	Electric
-------------	----------

Preheater / Reheater

Input power, reheater	1.67	kW
-----------------------	------	----

Exchanger

Heat exchanger	Rotating
----------------	----------

Others

Fan control	CAV, air flow control
-------------	-----------------------

Installation type	Vertical
-------------------	----------

Supply side	Left
-------------	------

Dimensions and weights

Weight	57	kg
--------	----	----

ERP

Energy class, Basic unit	B
--------------------------	---

Energy class, Local demand	A
----------------------------	---

ErP ready	ErP 2016;ErP 2018
-----------	-------------------


Performance

- ⚠


Recommended low airflow is outside valid range
- ⚠

Recommended high airflow is outside valid range

Supply - Performance curve

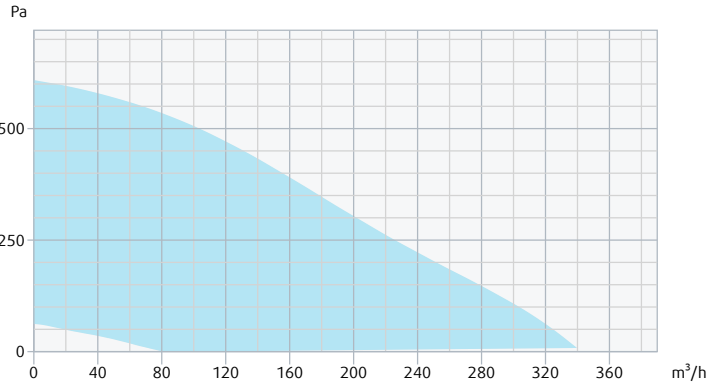

Extract - Performance curve

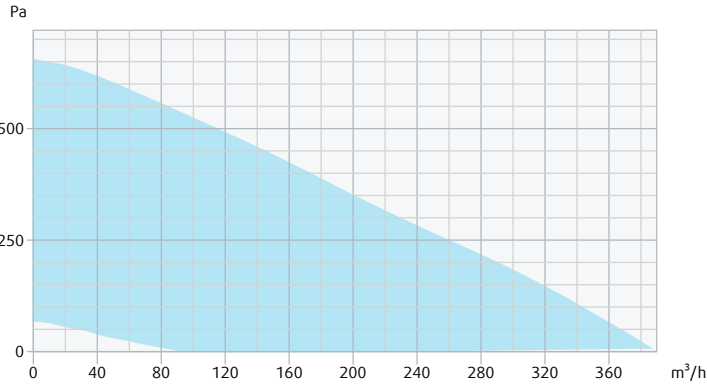

Unit	Supply	Extract
Air density	1.204 kg/m³	
	Summer	Winter
Supply air temperature	-	-20.0 °C

Ecodesign


Product	
Trade name	Systemair
Product name	VR 400 DCV/DE

Basic unit		
ErP compliance	2016/2018	
SEC Average	-29.3	kWh/(m ² .a)
SEC Cold	-68.5	kWh/(m ² .a)
SEC Warm	-5.3	kWh/(m ² .a)
SEC Class	B	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	82	%
qv max	302	m ³ /h
P max	215	W
Sound power (LWA)	53	dB(A)
qv ref	0.059	m ³ /s
Ps ref	50	Pa
SPI	0.489	W/(m ³ /h)
CTRL	0.95	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	0.1	%
Internal Leakage	Not applicable	
Carry over	0.1	%
Type of product	RAHU/AAHE	
AEC average	582	kWh
AEC cold	1062	kWh
AEC warm	582	kWh
AHS Average	4386	kWh/a
AHS Cold	8633	kWh/a
AHS Warm	1983	kWh/a


Units with local demand control		
ErP compliance	2016/2018	
SEC Average	-35.5	kWh/(m ² .a)
SEC Cold	-75.7	kWh/(m ² .a)
SEC Warm	-10.6	kWh/(m ² .a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	82	%
qv max	302	m ³ /h
P max	215	W
Sound power (LWA)	53	dB(A)
qv ref	0.059	m ³ /s
Ps ref	50	Pa
SPI	0.489	W/(m ³ /h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	0.1	%
Internal Leakage	Not applicable	
Carry over	0.1	%
Type of product	RAHU/AAHE	
AEC average	259	kWh
AEC cold	863	kWh
AEC warm	259	kWh
AHS Average	4548	kWh/a
AHS Cold	8857	kWh/a
AHS Warm	2057	kWh/a

Dimension

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

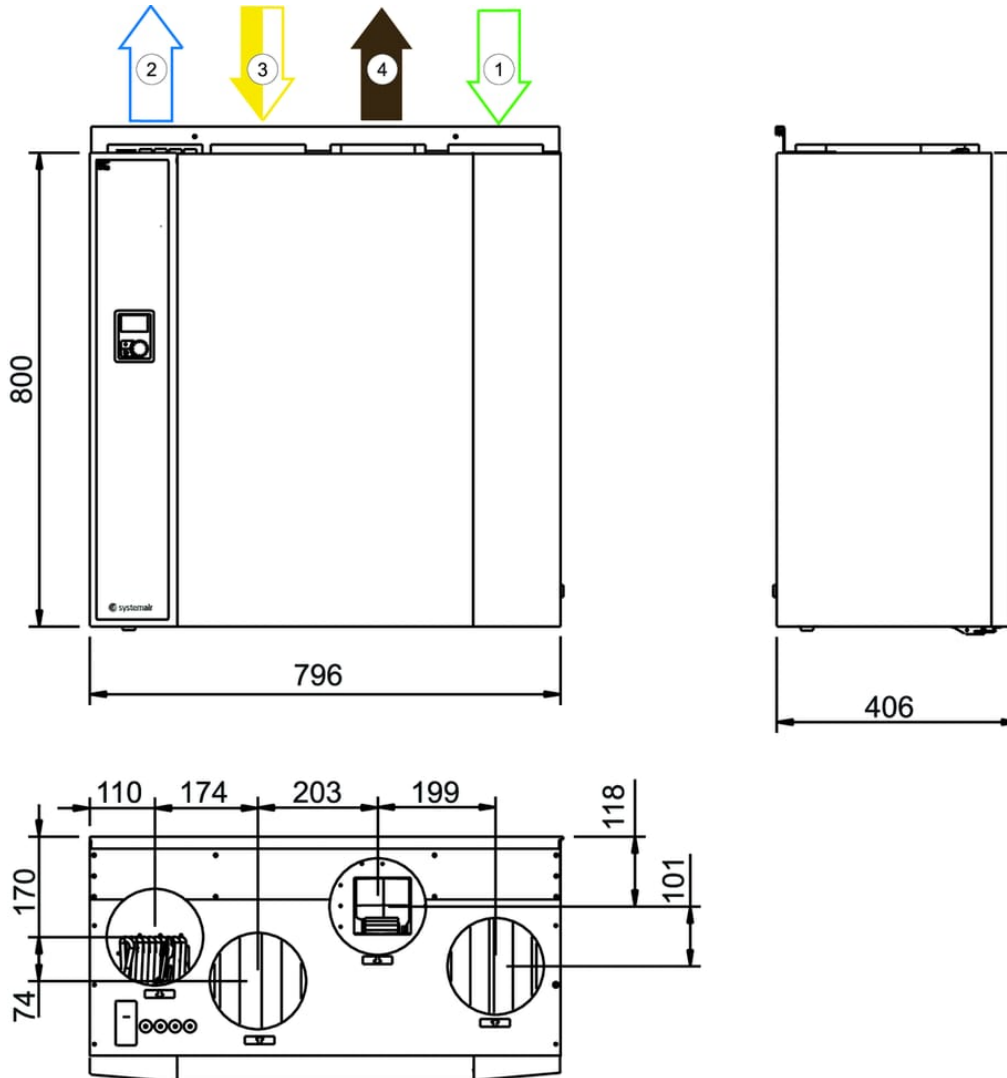

Wiring

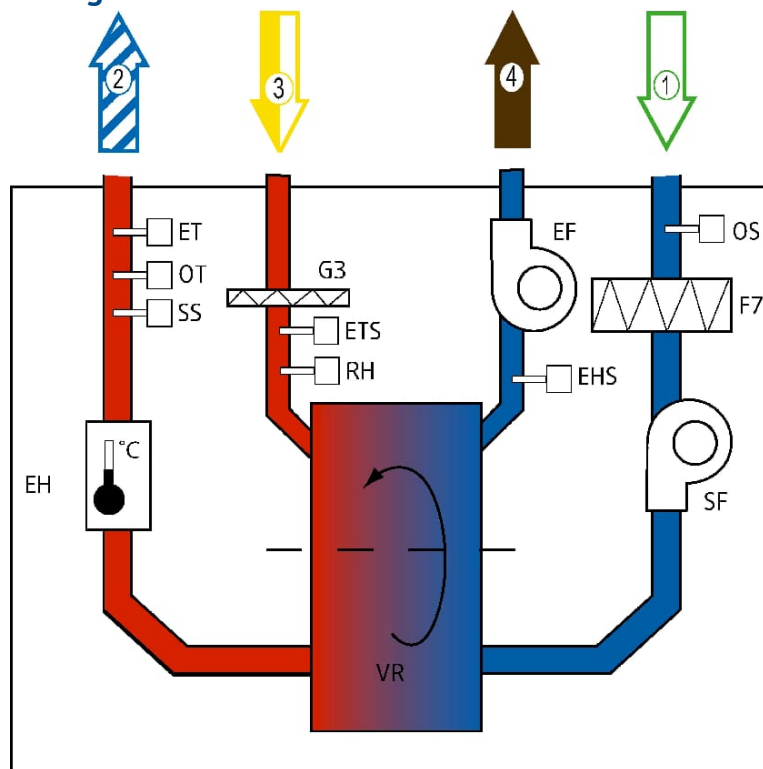


F7 =	Filter outdoor air
VR =	Rotary heat recovery unit
EF =	Extract fan
G3 =	Filter extract air
G4 =	Extract/Supply filter (only for VTC unit)
ETS =	Extract air temp. sensor
SF =	Supply fan
EH =	Electric heater
SS =	Supply air temp. sensor
OT =	Overheating thermostat
ET =	Emergency thermostat
EHS =	Exhaust air sensor
OS =	Outdoor air sensor
BP =	Bypass cooker hood
BD =	Bypass integrated cooker hood
DB =	Bypass damper
RH =	Relative humidity sensor
1 =	Outdoor air
2 =	Supply air
3 =	Extract air
4 =	Exhaust air


Wiring diagram

Energy class label

opt

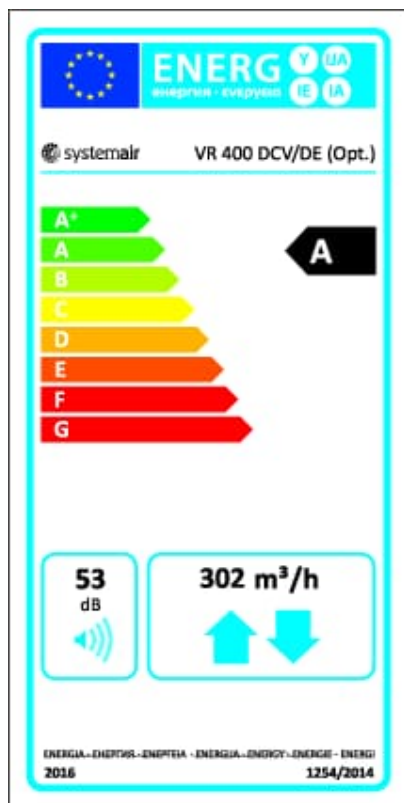

std

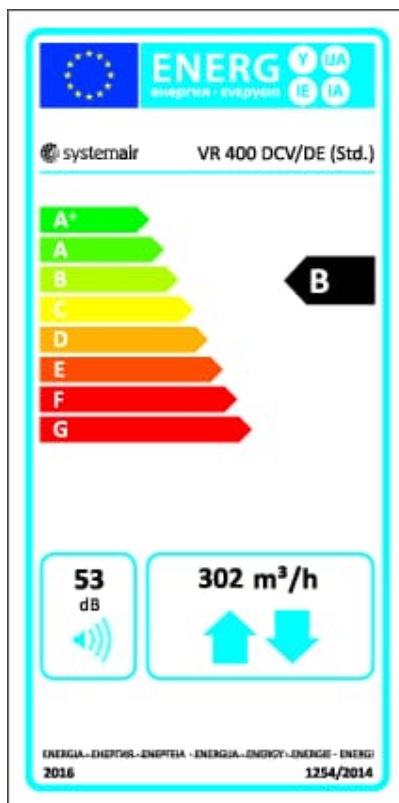

Accessories

- CE/CD-diverting plug 4pin (37367)
- CVVX 160 Combi grille, white (25396)
- JP Junction plug for cable (12428)
- LDC 160-900 Silencer (5193)
- SCD 160 silencer 25mm insulat. (2558)
- TG-K360 Duct sensor 0-60°C (4846)
- VBC 160-2 Water heating batt (5458)
- CVVX 160 Combi grille, black (25394)
- FK 160 Fast clamp (1610)
- LDC 160-600 Silencer (5192)
- RVAZ4 24A Actuator 0-10V (9862)
- TG-A130 Surface sensor 0-30°C (5159)
- TUNE-R-160-3-M4 (311969)
- ZTR 15-0,4 valve 3-way (9670)

Documents

- 205844 OPERATION SERVICE MENU.PDF
- 210449 Energy label placement DE.PDF
- B&V VR 400_700 DCV-DE.PDF
- MONT VR 400&700 DCV-DE.PDF
- Quick_Guide 205821.pdf
- SYSTEMAIR_VR 400 DCV DE_DISASSEMBLY_EN_SE_DE_NO_FI_20181207.PDF
- VR 400 DCV_DE CE DECLARATION_EN.PDF
- VR_400-700_DC_DCV_WIRING_DIAGRAM_205816_EN-GB (A004).PDF