

This product is no longer manufactured

This product was replaced by **X-SAVE VSR 500**



VR

[Find more details in our online catalogue](#)

Certifications



Ecodesign (ErP) compliant

Complies with stringent EU regulations on energy labelling and Ecodesign for Sustainable Products (ESPR) and Energy-related Products (ErP). Ready to meet future requirements.

Technical parameters

Unit		
Frequency	50	Hz
Voltage (nominal)	230	V
Phases	1~	
Recommended fuse	10 A	
Enclosure class	IP24	
Speed regulation	Stepless	
Nominal Airflow	500	m ³ /h
Product type	Heat recovery unit	
Supply fan		
Input power (P1), supply fan	246	W
Supply air filter		
Filter class, supply air	ePM1 55%	

Return fan / Extract fan

Input power (P1), extract fan	246	W
-------------------------------	-----	---

Extract air filter

Filter class, extract air	Coarse 50%
---------------------------	------------

Heater

Heater type	Electric
-------------	----------

Preheater / Reheater

Input power, reheater	1.67	kW
-----------------------	------	----

Exchanger

Heat exchanger rotor drive type	Fixed speed
---------------------------------	-------------

Heat exchanger	Rotating
----------------	----------

Others

Fan control	CAV, air flow control
-------------	-----------------------

Installation type	Horizontal
-------------------	------------

Supply side	Left;Right
-------------	------------

Dimensions and weights

Weight	66.4	kg
--------	------	----

ERP

Energy class, Basic unit	B
--------------------------	---

Energy class, Local demand	A
----------------------------	---


ErP ready	ErP 2016;ErP 2018
-----------	-------------------

Performance


⚠ Recommended low airflow is outside valid range

⚠ Recommended high airflow is outside valid range

Supply - Performance curve

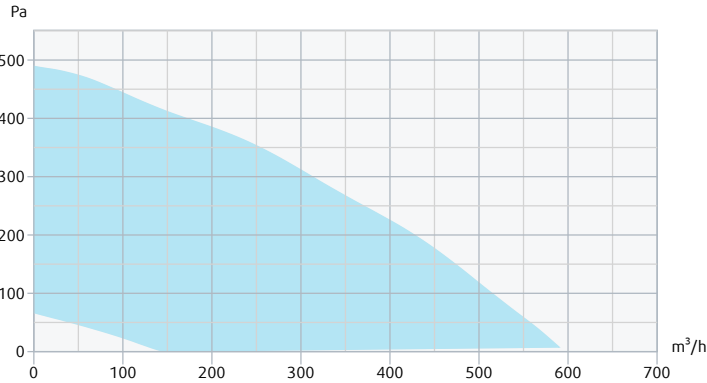

Extract - Performance curve

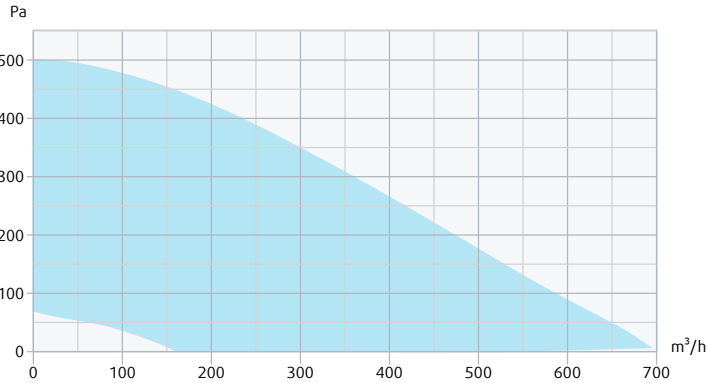

Unit	Supply	Extract
Air density	1.204 kg/m³	
	Summer	Winter
Supply air temperature	-	-20.0 °C


Ecodesign

Product		
Trade name	Systemair	
Product name	VR 700 DC /DE	
Basic unit		
ErP compliance	2016/2018	
SEC Average	-31.6	kWh/(m².a)
SEC Cold	-73.8	kWh/(m².a)
SEC Warm	-7.4	kWh/(m².a)
SEC Class	B	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	82	%
qv max	515	m³/h
P max	390	W
Sound power (LWA)	51	dB(A)
qv ref	0.1	m³/s
Ps ref	50	Pa
SPI	0.556	W/(m³/h)
CTRL	0.85	
MISC	1.1	
x-value	2	
External Leakage	2	%
Internal Leakage	0.1	%
Type of product	RAHU/AAHE	
AEC average	503	kWh
AEC cold	503	kWh
AEC warm	503	kWh
AHS Average	4413	kWh/a
AHS Cold	8633	kWh/a
AHS Warm	1996	kWh/a


Units with local demand control		
ErP compliance	2016/2018	
SEC Average	-37.9	kWh/(m ² .a)
SEC Cold	-81.2	kWh/(m ² .a)
SEC Warm	-13.1	kWh/(m ² .a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	82	%
qv max	515	m ³ /h
P max	390	W
Sound power (LWA)	51	dB(A)
qv ref	0.1	m ³ /s
Ps ref	50	Pa
SPI	0.556	W/(m ³ /h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	2	%
Internal Leakage	0.1	%
Type of product	RAHU/AAHE	
AEC average	294	kWh
AEC cold	294	kWh
AEC warm	294	kWh
AHS Average	4528	kWh/a
AHS Cold	8857	kWh/a
AHS Warm	2047	kWh/a

Dimension

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

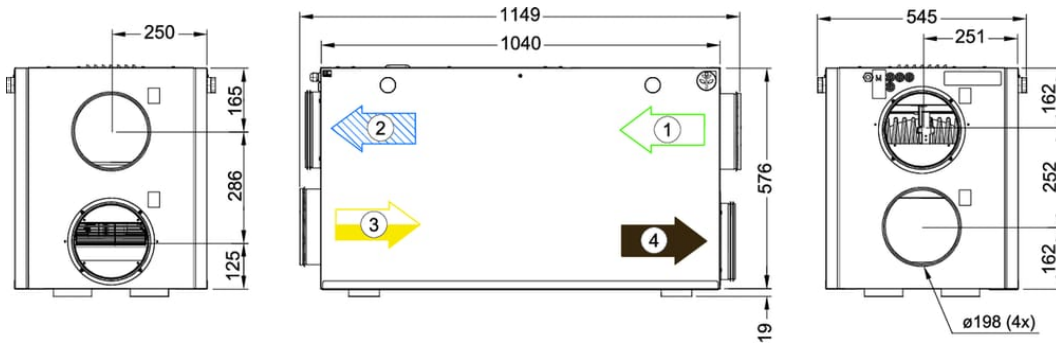

Wiring

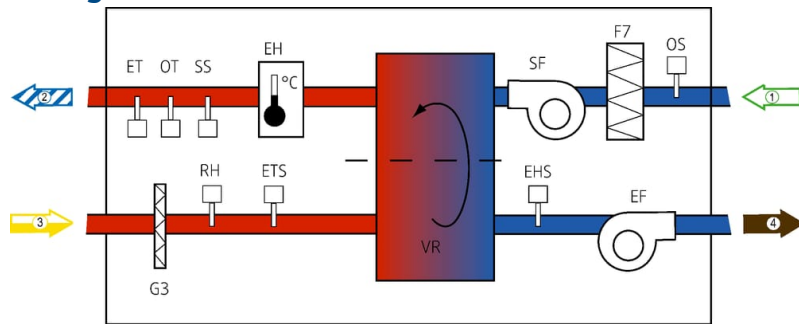

F7 =	Filter outdoor air
VR =	Rotary heat recovery unit
EF =	Extract fan
G3 =	Filter extract air
G4 =	Extract/Supply filter (only for VTC unit)
ETS =	Extract air temp. sensor
SF =	Supply fan
EH =	Electric heater
SS =	Supply air temp. sensor
OT =	Overheating thermostat
ET =	Emergency thermostat
EHS =	Exhaust air sensor
OS =	Outdoor air sensor
BP =	Bypass cooker hood
BD =	Bypass integrated cooker hood
DB =	Bypass damper
RH =	Relative humidity sensor
1 =	Outdoor air
2 =	Supply air
3 =	Extract air
4 =	Exhaust air

Wiring diagram

Accessories

- CE/CD-diverting plug 4pin (37367)
- CVVX 200 Combi grille, white (25397)
- JP Junction plug for cable (12428)
- LDC 200-900 Silencer (5195)
- SCD 200 silencer 25mm insulat. (2560)
- TG-K360 Duct sensor 0-60°C (4846)
- VBC 200-2 Water heating batt (5459)
- ZTR 15-1,0 valve 3-way (9672)
- CVVX 200 Combi grille, black (25395)
- FK 200 Fast clamp (1611)
- LDC 200-600 Silencer (5194)
- RVAZ4 24A Actuator 0-10V (9862)
- TG-A130 Surface sensor 0-30°C (5159)
- TUNE-R-200-3-M4 (311970)
- ZTR 15-0,6 valve 3-way (6573)

Documents

- 205844 OPERATION SERVICE MENU.PDF
- 210449 Energy label placement DE.PDF
- Conformity_decl_VM_VX_VR_GB_202665.pdf
- VR_400-700_DC_DCV_WIRING_DIAGRAM_205816_EN-GB (A004).PDF