

This product is no longer manufactured

This product was replaced by **X-SAVE VTR 500 R**



VR

[Find more details in our online catalogue](#)

Technical parameters

Unit

Frequency	50	Hz
Voltage (nominal)	230	V
Phases	1~	
Recommended fuse	13 A	
Enclosure class	IP24	
Speed regulation	Stepless	

Supply fan

Input power (P1), supply fan	240	W
------------------------------	-----	---

Supply air filter

Filter class, supply air	F7
--------------------------	----

Extract air filter

Filter class, extract air	G3
---------------------------	----

Heater

Heater type	Electric
-------------	----------

Preheater / Reheater

Input power, reheater	1.67	kW
-----------------------	------	----

Exchanger

Heat exchanger	Rotating
----------------	----------

Others

Fan control	CAV, air flow control
-------------	-----------------------


Installation type	Vertical
-------------------	----------

Supply side	Left
-------------	------

Dimensions and weights

Weight	72.6	kg
--------	------	----

Dimension

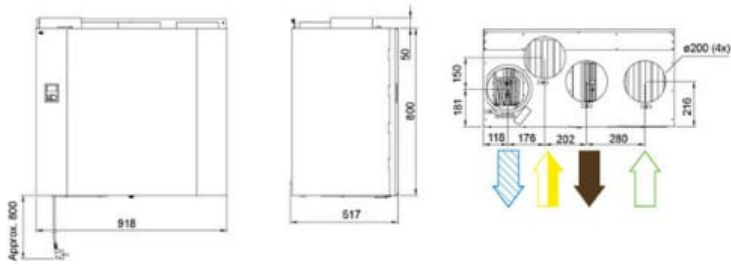

Supply air

Exhaust
air

Outdoor
air

Extract air



Accessories

- CE/CD-diverting plug 4pin (37367)
- F-T120 Timer frame (5137)
- JP Junction plug for cable (12428)
- LDC 200-900 Silencer (5195)
- T 120 Timer (5165)
- TG-K360 Duct sensor 0-60°C (4846)
- VBC 200-3 Water heating batt (9841)
- ZTR 15-1,0 valve 3-way (9672)
- ZTV 15-1,0 2-way valve (9823)
- CWK 200-3-2,5 Duct cooler,circ (30023)
- FK 200 Fast clamp (1611)
- LDC 200-600 Silencer (5194)
- RVAZ4 24A Actuator 0-10V (9862)
- TG-A130 Surface sensor 0-30°C (5159)
- VBC 200-2 Water heating batt (5459)
- ZTR 15-0,6 valve 3-way (6573)
- ZTV 15-0,6 2-way valve (6571)

Documents

- Conformity_decl_VM_VX_VR_GB_202665.pdf
- Quick_Guide 205821.pdf
- VR 400-700_DC, DCV, DCVB_205816_GB_WD_A002.pdf
- VR 400&700 DCV Installation Instructions 205818 _10-03_.pdf
- VR 400&700 DCV Operation and Maintenance instructions 205820 _11-04_.pdf