



SAVE Air Handling Units

Crisp, fresh, and clean air for every home.

[Find more details in our online catalogue](#)

Unlock even greater efficiency

SAVE AHUs come with different heating and cooling recovery methods. Allowing you to further boost the energy efficiency of your units, wherever they're installed.

Performance you can rely on

Our heat exchanger systems automatically regulates the heat/cool recovery and has automatic defrosting functions. Your SAVE AHUs will keep you comfortable inside, no matter the weather on the outside.

For buildings big and small

Whether you're building a new home or renovating an apartment block, SAVE air handling units are a perfect match for any indoor spaces up to 550m².

Health and safety first

SAVE air handling units are Eurovent certified and ErP compliant, easy to service and maintain. So you can relax – knowing the air you breathe is clean and pure.

Full control, from anywhere

All SAVE units come with SAVE Control – multiple, easy-to-use interfaces that let you communicate with your AHUs wherever you are.

Certifications



Bygghälsöcertifieringen

This product complies with Bygghälsöcertifieringen, a Swedish certification that evaluates construction products based on their environmental and health impacts throughout their life cycle. It supports sustainable building by guiding responsible material choices.



Eurovent Certified Performance

Eurovent Certified Performance is the global benchmark in HVACR certification. The mark guarantees that this product performs as advertised. Check the ongoing validity of our certificates in the Eurovent Certified Products Directory.



Eco Platform: EPD Verified

This product comes with an Environmental Product Declaration (EPD), published by EPD Norway, a global EPD program operator and member of the ECO Platform. Compliant with ISO 14025 and EN 15804, Systemair EPDs support Life Cycle Assessments (LCAs) in all markets where the product is used. Scroll down to download the EPDs.



Ecodesign (ErP) compliant

Complies with stringent EU regulations on energy labelling and Ecodesign for Sustainable Products (ESPR) and Energy-related Products (ErP). Ready to meet future requirements.



Passive House Institute Certified Component

Certified to meet energy efficiency and health requirements according to Passive House standards. Learn more about our certified components in the Passive House Portal component database.



Green Ventilation

Our proprietary environmental performance benchmark guides you towards the most sustainable solutions within our portfolio. Only products that meet a clear set of verifiable minimum requirements—covering aspects such as energy efficiency, indoor air quality, and safety—are eligible to carry the Green Ventilation™ label.

Technical parameters

Unit		
Frequency	50;60	Hz
Voltage (nominal)	230	V
Phases	1~	
Recommended fuse	10 A	
Enclosure class	IP24	
Speed regulation	Stepless	
Product type	Heat recovery unit	
Temperature	-3 to 40	°C
Supply fan		
Input power (P1), supply fan	81	W
Supply air filter		
Filter class, supply air	ePM1 60%	
Return fan / Extract fan		
Input power (P1), extract fan	81	W
Extract air filter		
Filter class, extract air	ePM10 50%	
Heater		
Heater type	No heater	
Exchanger		
Heat exchanger	Counterflow	
Heat exchanger type	Standard	
Connections		
Duct dimension; Circular, inlet	125	mm
Duct dimension; Circular, outlet	125	mm

Others

Fan control	Stepless voltage control
Installation type	False ceiling
Supply side	Left;Right

Color casing

Color casing	Galvanized steel
--------------	------------------

Dimensions and weights

Weight	70	kg
--------	----	----

ERP

Energy class, Basic unit	A
Energy class, Local demand	A
ErP ready	ErP 2018;ErP 2016


Performance

- ⚠


Recommended low airflow is outside valid range
- ⚠

Recommended high airflow is outside valid range

Supply - Performance curve

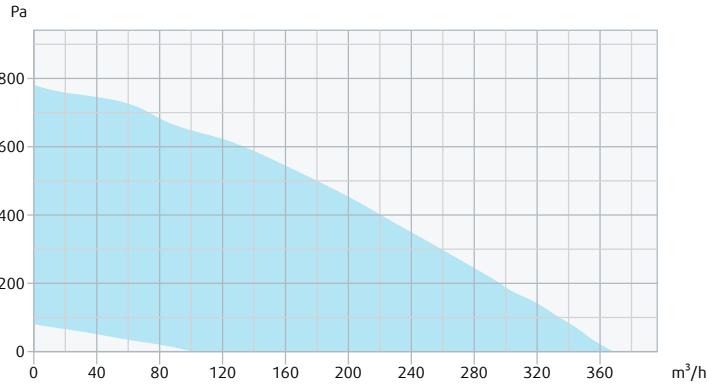

Extract - Performance curve

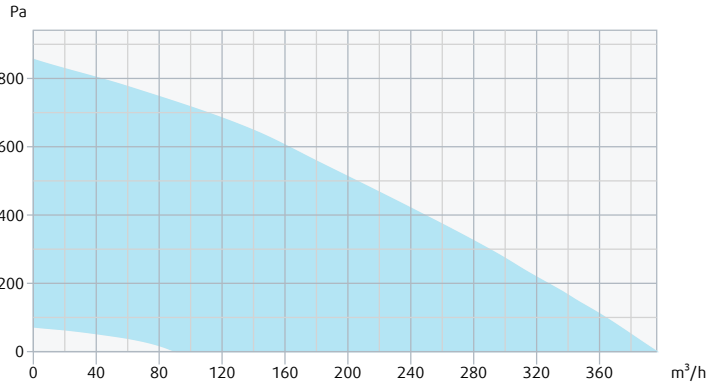

Unit	Supply	Extract
Air density	1.204 kg/m³	
	Summer	Winter
Supply air temperature	-	-20.0 °C

Ecodesign

Product		
Trade name	Systemair	
Product name	SAVE VSC 200	
Basic unit		
ErP compliance	2018	
SEC Average	-38.2	kWh/(m².a)
SEC Cold	-76.9	kWh/(m².a)
SEC Warm	-13.5	kWh/(m².a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Recuperative	
Temperature ratio	89	%
qv max	333	m³/h
P max	164	W
Sound power (LWA)	45	dB(A)
qv ref	0.065	m³/s
Ps ref	50	Pa
SPI	0.324	W/(m³/h)
CTRL	0.85	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	3	%
Type of product	RAHU/AAHE	
AEC average	339	kWh/a
AEC cold	877	kWh/a
AEC warm	294	kWh/a
AHS Average	4603	kWh/a
AHS Cold	9004	kWh/a
AHS Warm	2081	kWh/a

Units with local demand control		
ErP compliance	2018	
SEC Average	-42	kWh/(m ² .a)
SEC Cold	-81.3	kWh/(m ² .a)
SEC Warm	-16.8	kWh/(m ² .a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Recuperative	
Temperature ratio	89	%
qv max	333	m ³ /h
P max	164	W
Sound power (LWA)	45	dB(A)
qv ref	0.065	m ³ /s
Ps ref	50	Pa
SPI	0.324	W/(m ³ /h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	3	%
Type of product	RAHU/AAHE	
AEC average	217	kWh/a
AEC cold	755	kWh/a
AEC warm	172	kWh/a
AHS Average	4673	kWh/a
AHS Cold	9141	kWh/a
AHS Warm	2113	kWh/a

Dimension


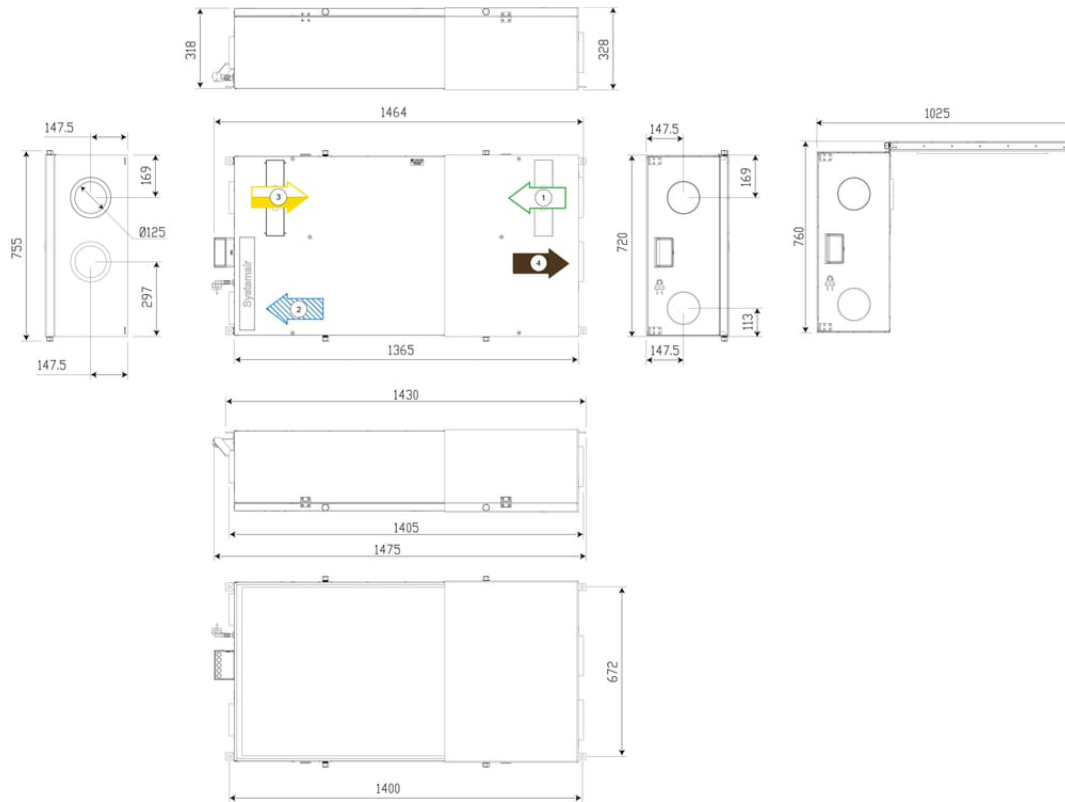


Image connection

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

Energy class label

std

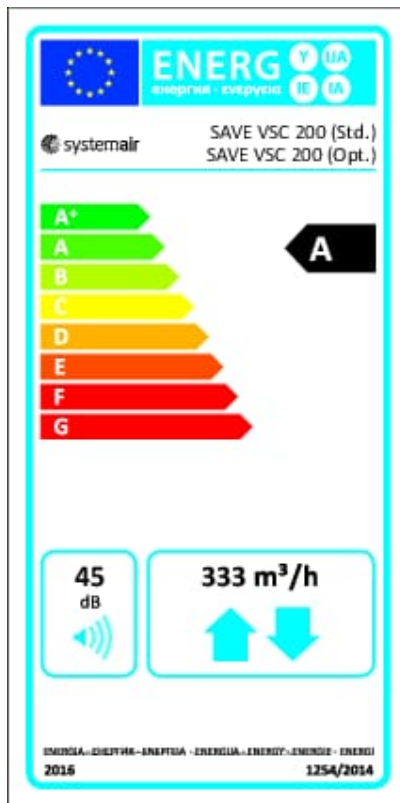

Accessories

- CB 125-0,6 230V/1 Duct heater (5289)
- CEC Cable w/plug 12m (24782)
- CVVX 125 Combi grille, black (26421)
- CWK 125-3-2,5 Duct cooler,circ (30021)
- Duct sensor -30-70C (211524)
- LDC 125-600 Silencer (5190)
- Modbus RTU to TCP gateway (454345)
- OG Ø 125 White (477990)
- OG Ø 160 Black (486900)
- OG Ø 160 Zinc-Magnesium (487500)
- PF VSC 200 STD kit (251905)
- Pressure guard with pitot tube (212987)
- PTC - DN125 - 0.8 kW (215132)
- RMK (153549)
- Room sensor 0-50C (211525)
- RVAZ4 24A Actuator 0-10V (9862)
- SAVE LIGHT Black (319119)
- SAVE TOUCH Black (138078)
- SAVE Wall Mounted Kit (140736)
- SPI-125 C Iris damper (6751)
- Surface sensor -30-150C (211523)
- Systemair-E CO2 RH Temperature (211522)
- TUNE-R-125-3-M1 (311938)
- TUNE-R-125-3-M2 (311948)
- TUNE-R-125-3-M4 (311968)
- TUNE-R-125-3-M5 (311978)
- VBC 125-2 Water heating batt (5457)
- ZTR 15-0,4 valve 3-way (9670)
- ZTV 15-0,4 2-way valve (9829)
- CB heater connection kit 1 ~ (142852)
- CEC Cable w/plug 6m (24783)
- CVVX 125 Combi grille, white (26422)
- Diverting plug 4pin (254978)
- FK 125 Fast clamp (1608)
- LDC 125-900 Silencer (5191)
- OG Ø 125 Black (486800)
- OG Ø 125 Zinc-Magnesium (487400)
- OG Ø 160 White (466900)
- PF VSC 200 OPT kit (251906)
- Presence detector/IR24-P (6995)
- PSS20 Transformer 24V (202692)
- PTC - DN125 - 1.2 kW (215133)
- RMK-T (153548)
- RS-24V (159484)
- SAVE CONNECT 2.0 (399999)
- SAVE LIGHT White (319118)
- SAVE TOUCH White (138077)
- SCD 125 silencer 25mm insulat. (2556)
- SPI-125 C Iris damper (6751)
- Systemair-1 CO2 duct sensor (14906)
- Systemair-E CO2 sensor (14904)
- TUNE-R-125-3-M1 (311938)
- TUNE-R-125-3-M2 (311948)
- TUNE-R-125-3-M5 (311978)
- VAV/CAV conversion kit (140777)
- VBC 125-3 Water heating batt (9839)
- ZTR 15-0,6 valve 3-way (6573)
- ZTV 15-0,6 2-way valve (6571)

Documents

- Certificate Passive House Institute - SAVE VSC 200
- Commissioning record
- Control panel installation quick guide
- Disassembly guide
- Electrical diagrams for accessories
- Energy label placement quick guide
- EPD_403929_Systemair_SAVE_VSC_200_json
- EPD_403929_Systemair_SAVE_VSC_200_pdf
- Eurovent Certification Diploma
- Installation manual SAVE CONNECT 2.0
- Installation Operation Maintenance manual
- Modbus variable list
- Schematic layout and description of components
- Service manual
- Technical fiche
- Wiring diagram

Specification

Filter kits:

251905 PF STD kit (F7/ePM1 60% supply and M5/ePM10 50% extract)

251906 PF OPT kit (accessory) (F7/ePM1 70% supply and M5/ePM10 50% extract)

SAVE VSC 200 is perfect for ventilating areas up to 200 m².

Take control of your SAVE residential ventilation unit with the user-friendly **SAVE CONNECT** app. Adjust and manage your unit remotely, making home ventilation simpler and more convenient than ever.

Rest assured, the SAVE unit comes with the **SAVE CONNECT** module included, putting remote control firmly in your hands.

MAIN FEATURES

- High energy-efficiency counter flow heat exchanger with EC technology fans
- Demand control regulation with the built-in humidity sensor
- Remote control via the SAVE CONNECT app
- Optional SAVE TOUCH and SAVE LIGHT control panels
- Local control and configuration via WEB interface
- Connection board for easy access and connection of accessories
- Modbus communication RS-485 as standard
- Automatic defrosting
- Eurovent and Passive House Certification

EXPAND YOUR CONTROL WITH ADDITIONAL PANELS

You can choose and buy these panels separately, adding more convenience to your setup.

- **SAVE LIGHT** – control panel for basic functions to keep things simple and easy. You can control the airflow, get alerts for general alarms and filter changes.
- **SAVE TOUCH** – Take it up a notch with the SAVE TOUCH panel. It has a touch screen that lets you control everything and mirrors functionality of the SAVE CONNECT app. You can see info like airflow, temperature, and air quality. Each control method is optional and have to be ordered separately as an accessory. A six meter cable for the external control panel connection is already included with the unit.

INSTALLATION

The unit can be installed under the ceiling.

Our external connection board comes ready with prewired inputs and outputs, making it a breeze to set up external sensors, heaters, coolers, and more. Embrace hassle-free installation and harness the power of customization.

KEY COMPONENTS

The built-in humidity sensor in extract air can be used for demand control.

The unit features sturdy double-skinned panels. Maintenance is effortless with easily removable components.

Change filters smoothly through accessible hatches on the door.

The unit is equipped with a high efficiency counter flow heat exchanger. Energy efficient fans with EC motors as well as low-pressure filters reduce the energy consumptions and ensures low SFP factor (Specific Fan Power) and sound level. The built-in humidity sensor in extract air can be used for demand control.

DEFROSTING

The product has an automatic defrost function with 3 different modes for different indoor environments as well as the outdoor conditions.

The pre-heater is always recommended for frost protection when the outside air temperature is below -3 °C. The pre-heater increases the intake air temperature and reduces the need for the defrost function. During the defrosting process the supply air fan may be stopped periodically to remove frost from the heat exchanger.

When the unbalanced airflow is not desired, for example in tight or passive houses, the pre-heater is always required when the outside air temperature is 0 °C to prevent supply air fan from stopping during defrost mode.

The pre-heater and a CB Preheater Connection kit can be ordered as accessories.