

This product is no longer manufactured

This product was replaced by **X-SAVE VTC 200 L**



SAVE Air Handling Units

Crisp, fresh, and clean air for every home.

[Find more details in our online catalogue](#)

Unlock even greater efficiency

SAVE AHUs come with different heating and cooling recovery methods. Allowing you to further boost the energy efficiency of your units, wherever they're installed.

Performance you can rely on

Our heat exchanger systems automatically regulates the heat/cool recovery and has automatic defrosting functions. Your SAVE AHUs will keep you comfortable inside, no matter the weather on the outside.

For buildings big and small

Whether you're building a new home or renovating an apartment block, SAVE air handling units are a perfect match for any indoor spaces up to 550m².

Health and safety first

SAVE air handling units are Eurovent certified and ErP compliant, easy to service and maintain. So you can relax – knowing the air you breathe is clean and pure.

Full control, from anywhere

All SAVE units come with SAVE Control – multiple, easy-to-use interfaces that let you communicate with your AHUs wherever you are.

Certifications



Ecodesign (ErP) compliant

Complies with stringent EU regulations on energy labelling and Ecodesign for Sustainable Products (ESPR) and Energy-related Products (ErP). Ready to meet future requirements.



Eurovent Certified Performance

Eurovent Certified Performance is the global benchmark in HVACR certification. The mark guarantees that this product performs as advertised. Check the ongoing validity of our certificates in the Eurovent Certified Products Directory.



Passive House Institute Certified Component

Certified to meet energy efficiency and health requirements according to Passive House standards. Learn more about our certified components in the Passive House Portal component database.

Technical parameters

Unit		
Frequency	50	Hz
Voltage (nominal)	230	V
Phases	1~	
Recommended fuse	10 A	
Enclosure class	IP24	
Speed regulation	Stepless	
Nominal Airflow	200	m ³ /h
Product type	Heat recovery unit	
Supply fan		
Input power (P1), supply fan	68	W
Supply air filter		
Filter class, supply air	G4	
Return fan / Extract fan		
Input power (P1), extract fan	68	W
Extract air filter		
Filter class, extract air	G4	

Heater

Heater type	No heater
-------------	-----------

Exchanger

Heat exchanger	Counterflow
----------------	-------------

Others

Fan control	Stepless voltage control
-------------	--------------------------

Installation type	Vertical
-------------------	----------

Supply side	Left
-------------	------

Dimensions and weights

Weight	42 kg
--------	----------

ERP


Energy class, Basic unit	A
--------------------------	---

Energy class, Local demand	A+
----------------------------	----


Performance

-  Recommended low airflow is outside valid range
-  Recommended high airflow is outside valid range

Supply - Performance curve

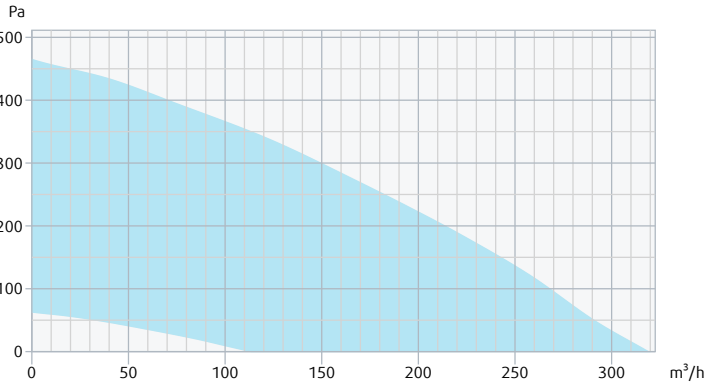

Extract - Performance curve

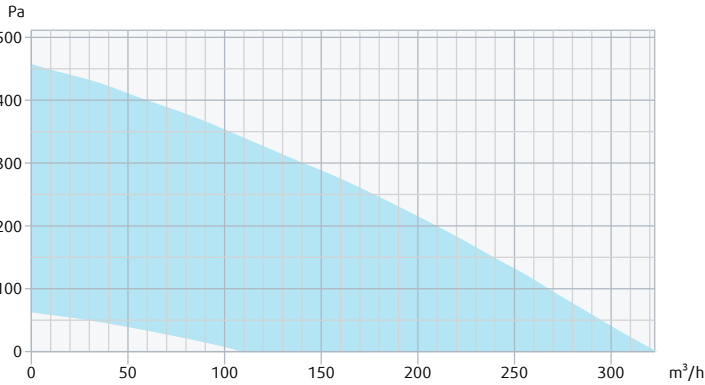

Unit	Supply	Extract
Air density	1.204 kg/m³	
	Summer	Winter
Supply air temperature	-	-20.0 °C


Ecodesign

Product		
Trade name	Systemair	
Product name	SAVE VTC 200 L	
Basic unit		
ErP compliance	2018	
SEC Average	-40.8	kWh/(m².a)
SEC Cold	-85.6	kWh/(m².a)
SEC Warm	-15.1	kWh/(m².a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Recuperative	
Temperature ratio	92	%
qv max	267	m³/h
P max	139	W
Sound power (LWA)	45	dB(A)
qv ref	0.0519	m³/s
Ps ref	50	Pa
SPI	0.267	W/(m³/h)
CTRL	0.85	
MISC	1.1	
x-value	2	
External Leakage	2	%
Internal Leakage	Not applicable	
Type of product	RAHU/AAHE	
AEC average	242	kWh
AEC cold	842	kWh
AEC warm	242	kWh
AHS Average	4684	kWh/a
AHS Cold	9163	kWh/a
AHS Warm	2118	kWh/a

Units with local demand control		
ErP compliance	2018	
SEC Average	-43.8	kWh/(m ² .a)
SEC Cold	-89.1	kWh/(m ² .a)
SEC Warm	-17.9	kWh/(m ² .a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Recuperative	
Temperature ratio	92	%
qv max	267	m ³ /h
P max	139	W
Sound power (LWA)	45	dB(A)
qv ref	0.0519	m ³ /s
Ps ref	50	Pa
SPI	0.267	W/(m ³ /h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	2	%
Internal Leakage	Not applicable	
Type of product	RAHU/AAHE	
AEC average	141	kWh
AEC cold	141	kWh
AEC warm	141	kWh
AHS Average	4735	kWh/a
AHS Cold	9263	kWh/a
AHS Warm	2141	kWh/a


Dimension

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

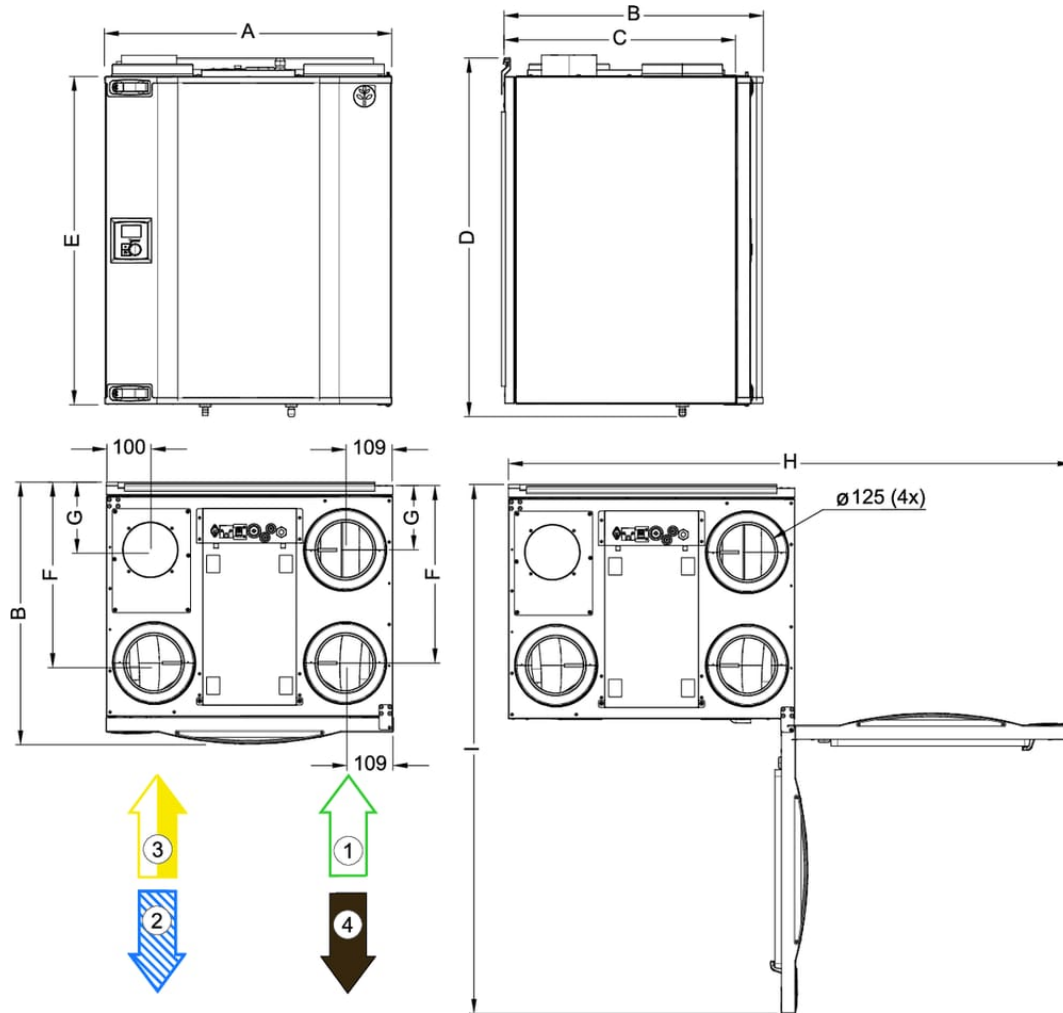


SAVE VTC 200	A	B	C	D	E	F	G	H	I
	660	597	534	824	752	412	152	1302	1211

Wiring

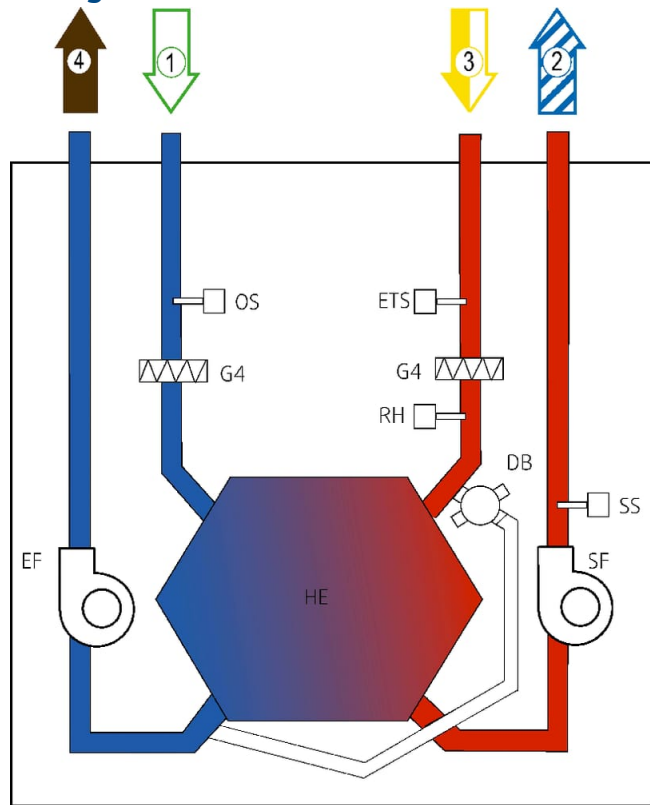


Energy class label

opt

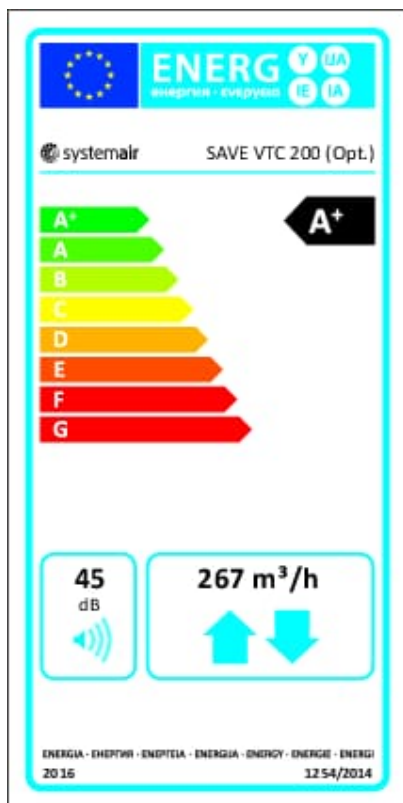

std

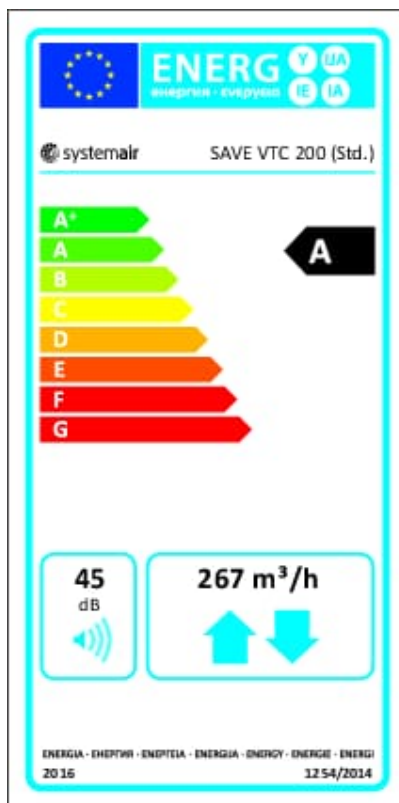

Accessories

- CB 125-0,6 230V/1 Duct heater (5289)
- CB 125-1,8 230V/1 Duct heater (5377)
- CVVX 125 Combi grille, black (26421)
- CWK 125-3-2,5 Duct cooler,circ (30021)
- F-T120 Timer frame (5137)
- JP Junction plug for cable (12428)
- LDC 125-900 Silencer (5191)
- PSS20 Transformer 24V (202692)
- SCD 125 silencer 25mm insulat. (2556)
- TG-A130 Surface sensor 0-30°C (5159)
- TUNE-R-125-3-M4 (311968)
- VBC 125-3 Water heating batt (9839)
- ZTR 15-0,6 valve 3-way (6573)
- ZTV 15-0,6 2-way valve (6571)
- CB 125-1,2 230V/1 Duct heater (5290)
- CE/CD-diverting plug 4pin (37367)
- CVVX 125 Combi grille, white (26422)
- Duct Cover VTC 200 (113227)
- FK 125 Fast clamp (1608)
- LDC 125-600 Silencer (5190)
- Presence detector/IR24-P (6995)
- RVAZ4 24A Actuator 0-10V (9862)
- T 120 Timer (5165)
- TG-K360 Duct sensor 0-60°C (4846)
- VBC 125-2 Water heating batt (5457)
- ZTR 15-0,4 valve 3-way (9670)
- ZTV 15-0,4 2-way valve (9829)

Documents

- 208699_VTC_200_INSTALLATION_AND_SERVICE_CE_EN-GB (A006).PDF
- 208700_VTC_200_USER_MANUAL_EN-GB (A004).PDF
- 208759_SAVE_VTC_200_WIRING_DIAGRAM_EN-GB (A004).PDF
- 24803 VTC 200 L.dxf
- CD PANEL INSTRUCTION FOR WALL MOUNTING 206858 GB_SE A002.PDF
- Eurovent Certification Diploma
- Leaflet SAVE VTC 200 EN.pdf
- Modbus_for_residential_D24810_User_manual_EN (A007).pdf
- PHI CERTIFICATE SAVE VTC 200 EN 2017.PDF
- SAVE_VTC200_Pre-heater_kit_installation_guide_209390.pdf
- VTC 200_SCHEME_EN (A001).PDF

Specification

- A high-efficiency heat recovery unit with about 90 % heat recovery
- Energy-efficient RadiCal fans with modern EC technology
- Separate settings of supply and extract air flow
- Start-up wizard for easy commissioning
- Automatic defrosting (built-in humidity sensor)
- Demand ventilation regulation as standard by the built-in humidity sensor
- Modbus communication via RS-485

The SAVE VTC 200 is designed for installation on the wall and preferably installed in a secondary room, for example a storeroom or laundry room. The SAVE VTC 200 is designed for applications up to approx. 160 m².

The casing is built of sheet metal and well insulated against condensation. The inner part of the case is made of expanded polypropylene (EPP) and provides extremely good insulation in terms of noise and heat losses. All components are easily removed for maintenance and service.

Commissioning of the unit will be done from one or more CD control panels. A start-up wizard will make the commissioning easier, which can avoid that the unit is running at wrong conditions. Symbols and text in the display will indicate chosen settings; Supply air temperature and fan speed. Commissioning of airflow on supply and extract, will be done at start-up but can be set from the menu settings as well. Timer-function for automatic change between day and night operation is integrated. Setting of filter period is also available. Alarm signal will indicate possible malfunctions.

The unit is equipped with outputs to control an external hot water battery and inputs prepared for demand controlled ventilation from external sensors, e.g. CO₂, presence or humidity sensor (potential free contact). Unit is delivered with built in moisture sensor that not only provides you demand controlled ventilation as standard but also is used for detecting and control defrosting in colder climate

The unit has an automatic defrost function with the built in moisture sensor that can be chosen in 3 different modes depending on the indoor environment as well as the outdoor conditions. Without preheater in tight houses / passive houses where unbalanced airflow is not allowed the unit works down to 0°C. Without preheater when unbalance is allowed the unit works down to -3°C. With preheater the unit works down to -20°C depending on the preheater size. The CB preheater can be obtained as an accessory together with the preheater card

The unit is delivered with supply air filter G4 and extract air filter G4. Option for F7 supply air filter is available.