

This product is no longer manufactured

This product was replaced by **SAVE VTR 250/B R 1000W**



SAVE Air Handling Units

Crisp, fresh, and clean air for every home.

[Find more details in our online catalogue](#)

Unlock even greater efficiency

SAVE AHUs come with different heating and cooling recovery methods. Allowing you to further boost the energy efficiency of your units, wherever they're installed.

Performance you can rely on

Our heat exchanger systems automatically regulates the heat/cool recovery and has automatic defrosting functions. Your SAVE AHUs will keep you comfortable inside, no matter the weather on the outside.

For buildings big and small

Whether you're building a new home or renovating an apartment block, SAVE air handling units are a perfect match for any indoor spaces up to 550m².

Health and safety first

SAVE air handling units are Eurovent certified and ErP compliant, easy to service and maintain. So you can relax – knowing the air you breathe is clean and pure.

Full control, from anywhere

All SAVE units come with SAVE Control – multiple, easy-to-use interfaces that let you communicate with your AHUs wherever you are.

Certifications



Ecodesign (ErP) compliant

Complies with stringent EU regulations on energy labelling and Ecodesign for Sustainable Products (ESPR) and Energy-related Products (ErP). Ready to meet future requirements.



Eurovent Certified Performance

Eurovent Certified Performance is the global benchmark in HVACR certification. The mark guarantees that this product performs as advertised. Check the ongoing validity of our certificates in the Eurovent Certified Products Directory.

Technical parameters

Unit

Enclosure class	IP24
Speed regulation	Stepless
Nominal Airflow	200 m ³ /h

Heater

Heater type	Electric
-------------	----------

Exchanger

Heat exchanger rotor drive type	Variable speed
Heat exchanger	Rotating

Others

Fan control	Stepless voltage control
Installation type	Vertical
Supply side	Right

Dimensions and weights

Weight	46 kg
--------	-------


ERP

Energy class, Basic unit	A
Energy class, Local demand	A


Performance

-  Recommended low airflow is outside valid range
-  Recommended high airflow is outside valid range

Supply - Performance curve

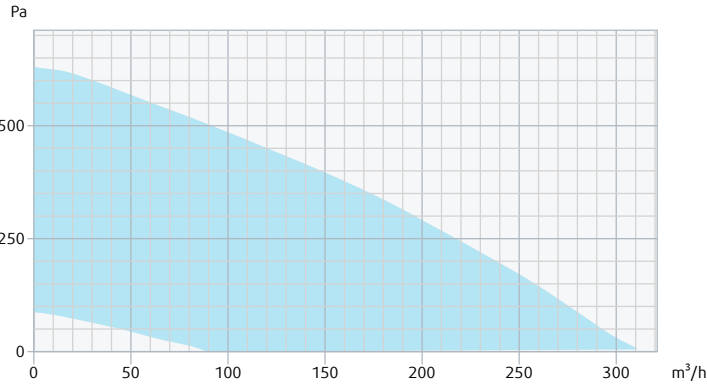

Extract - Performance curve

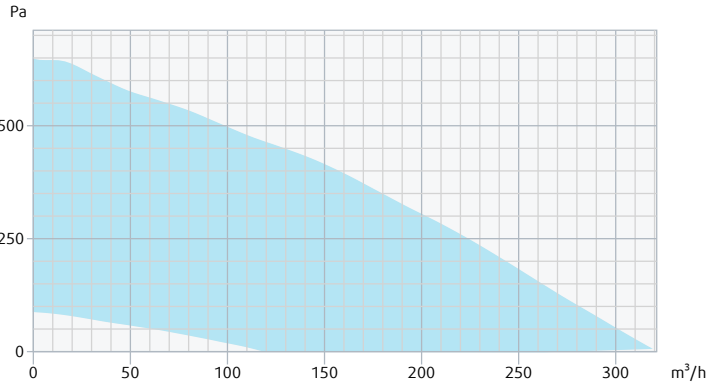


Unit	Supply	Extract
Air density	1.204 kg/m³	
	Summer	Winter
Supply air temperature	-	-20.0 °C

Ecodesign

Product			
Trade name		Systemair	
Product name		SAVE VTR 200/B R 1000W	
Basic unit			
ErP compliance		2018	
SEC Average		-34.2	kWh/(m².a)
SEC Cold		-75.9	kWh/(m².a)
SEC Warm		-10.4	kWh/(m².a)
SEC Class		A	
Unit category		RVU	
Unit type		BVU	
Drive		Integrated VSD	
Heat recovery type		Regenerative	
Temperature ratio		80	%
qv max		275	m³/h
P max		173	W
Sound power (LWA)		42	dB(A)
qv ref		0.0536	m³/s
Ps ref		50	Pa
SPI		0.413	W/(m³/h)
CTRL		0.85	
MISC		1.1	
x-value		2	
External Leakage		3	%
Internal Leakage		Not applicable	
Type of product		RAHU/AAHE	
AEC average		374	kWh
AEC cold		374	kWh
AEC warm		374	kWh
AHS Average		4359	kWh/a
AHS Cold		8527	kWh/a
AHS Warm		1971	kWh/a

Units with local demand control		
ErP compliance	2018	
SEC Average	-39.4	kWh/(m ² .a)
SEC Cold	-82.3	kWh/(m ² .a)
SEC Warm	-14.8	kWh/(m ² .a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	80	%
qv max	275	m ³ /h
P max	173	W
Sound power (LWA)	42	dB(A)
qv ref	0.0536	m ³ /s
Ps ref	50	Pa
SPI	0.413	W/(m ³ /h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	Not applicable	
Type of product	RAHU/AAHE	
AEC average	219	kWh
AEC cold	219	kWh
AEC warm	219	kWh
AHS Average	4486	kWh/a
AHS Cold	8776	kWh/a
AHS Warm	2029	kWh/a

Dimension

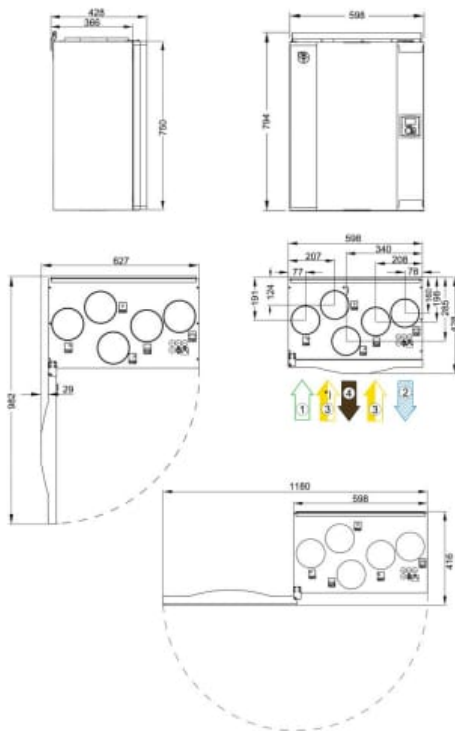

*) = Connection for cooker hood

Connection Ø 125 mm
(5x)

1	Outdoor air
2	Supply air
3	Extract air
4	Exhaust air

Accessories

- 602-10/B Cookerhood S.Steel (47562)
- 722-10/B TENDER Wall 600 steel (78976)
- 722-10/B TENDER Wall 900 steel (78977)
- 762-10/B OPAL Wall 900 steel (78971)
- 782-10/B STIL Wall 600 steel (78973)
- 792-10/B STIL Free 900 steel (78975)
- CEC Cable w/plug 12m (24782)
- CVVX 125 Combi grille, black (26421)
- CWK 125-3-2,5 Duct cooler,circ (30021)
- FK 125 Fast clamp (1608)
- LDC 125-600 Silencer (5190)
- Presence detector/IR24-P (6995)
- RVAZ4 24A Actuator 0-10V (9862)
- T 120 Timer (5165)
- TG-K360 Duct sensor 0-60°C (4846)
- VBC 125-2 Water heating batt (5457)
- ZTR 15-0,4 valve 3-way (9670)
- ZTV 15-0,4 2-way valve (9829)
- 602-10/B Cookerhood White (47561)
- 722-10/B TENDER Wall 600 white (78978)
- 762-10/B OPAL Wall 600 steel (78970)
- 772-10/B OPAL Free 900 steel (78972)
- 782-10/B STIL Wall 900 steel (78974)
- CE/CD-diverting plug 4pin (37367)
- CEC Cable w/plug 6m (24783)
- CVVX 125 Combi grille, white (26422)
- F-T120 Timer frame (5137)
- JP Junction plug for cable (12428)
- LDC 125-900 Silencer (5191)
- PSS20 Transformer 24V (202692)
- SCD 125 silencer 25mm insulat. (2556)
- TG-A130 Surface sensor 0-30°C (5159)
- TUNE-R-125-3-M4 (311968)
- VBC 125-3 Water heating batt (9839)
- ZTR 15-0,6 valve 3-way (6573)
- ZTV 15-0,6 2-way valve (6571)

Documents

- 208063_SAVE_VTR_200_300_500_Wiring_diagram_en-GB (A010).pdf
- CD panel Instruction for wall mounting 206858 GB_SE A002.pdf
- Eurovent Certification Diploma 20180928.pdf
- Modbus_for_residential_D24810_User_manual_EN (A007).pdf
- VTR_200_B_Installation_Guide_Drain pipe_208001.pdf
- VTR200_Installation_and_service_208061_CE_en-GB (A007).pdf
- VTR200_User_manual_208062_en-GB (A004).pdf