

This product is no longer manufactured

This product was replaced by **SAVE VTR 350/B L**



SAVE Air Handling Units

Crisp, fresh, and clean air for every home.

[Find more details in our online catalogue](#)

Unlock even greater efficiency

SAVE AHUs come with different heating and cooling recovery methods. Allowing you to further boost the energy efficiency of your units, wherever they're installed.

Performance you can rely on

Our heat exchanger systems automatically regulates the heat/cool recovery and has automatic defrosting functions. Your SAVE AHUs will keep you comfortable inside, no matter the weather on the outside.

For buildings big and small

Whether you're building a new home or renovating an apartment block, SAVE air handling units are a perfect match for any indoor spaces up to 550m².

Health and safety first

SAVE air handling units are Eurovent certified and ErP compliant, easy to service and maintain. So you can relax – knowing the air you breathe is clean and pure.

Full control, from anywhere

All SAVE units come with SAVE Control – multiple, easy-to-use interfaces that let you communicate with your AHUs wherever you are.

Certifications



Byggarbeteckningen

This product complies with Byggarbeteckningen, a Swedish certification that evaluates construction products based on their environmental and health impacts throughout their life cycle. It supports sustainable building by guiding responsible material choices.



Ecodesign (ErP) compliant

Complies with stringent EU regulations on energy labelling and Ecodesign for Sustainable Products (ESPR) and Energy-related Products (ErP). Ready to meet future requirements.



Eurovent Certified Performance

Eurovent Certified Performance is the global benchmark in HVACR certification. The mark guarantees that this product performs as advertised. Check the ongoing validity of our certificates in the Eurovent Certified Products Directory.



Passive House Institute Certified Component

Certified to meet energy efficiency and health requirements according to Passive House standards. Learn more about our certified components in the Passive House Portal component database.



Eco Platform: EPD Verified

This product comes with an Environmental Product Declaration (EPD), published by EPD Norway, a global EPD program operator and member of the ECO Platform. Compliant with ISO 14025 and EN 15804, Systemair EPDs support Life Cycle Assessments (LCAs) in all markets where the product is used. Scroll down to download the EPDs.



Green Ventilation

Our proprietary environmental performance benchmark guides you towards the most sustainable solutions within our portfolio. Only products that meet a clear set of verifiable minimum requirements—covering aspects such as energy efficiency, indoor air quality, and safety—are eligible to carry the Green Ventilation™ label.

Technical parameters

Unit		
Frequency	50;60	Hz
Voltage (nominal)	230	V
Phases	1~	
Recommended fuse	10 A	
Enclosure class	IP24	
Speed regulation	Stepless	
Product type	Heat recovery unit	
Temperature	-20 to 40	°C
Supply fan		
Input power (P1), supply fan	81	W

Supply air filter

Filter class, supply air	ePM1 60%
--------------------------	----------

Return fan / Extract fan

Input power (P1), extract fan	81 W
-------------------------------	---------

Extract air filter

Filter class, extract air	ePM10 50%
---------------------------	-----------

Heater

Heater type	Electric
-------------	----------

Preheater / Reheater

Input power, reheater	1.67 kW
-----------------------	------------

Exchanger

Heat exchanger rotor drive type	Variable speed
---------------------------------	----------------

Heat exchanger	Rotating
----------------	----------

Others

Fan control	Stepless voltage control
-------------	--------------------------

Installation type	Vertical
-------------------	----------

Supply side	Left
-------------	------

Color casing

Color casing	White
--------------	-------

Color casing, RAL	RAL 9010
-------------------	----------

Dimensions and weights

Weight	63 kg
--------	----------

ERP

Energy class, Basic unit	A
--------------------------	---


Energy class, Local demand	A
----------------------------	---

ErP ready	ErP 2018;ErP 2016
-----------	-------------------


Performance

-  Recommended low airflow is outside valid range
-  Recommended high airflow is outside valid range

Supply - Performance curve

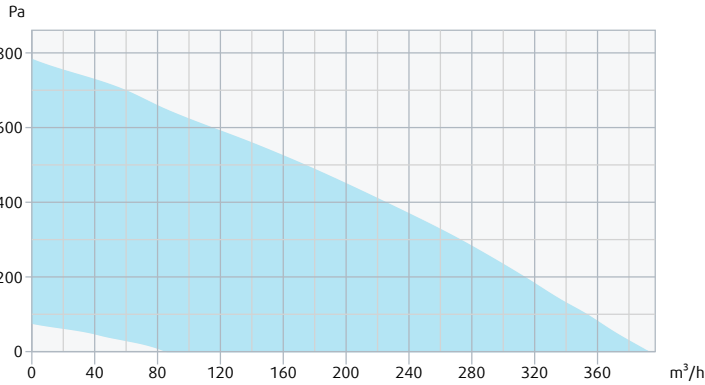

Extract - Performance curve

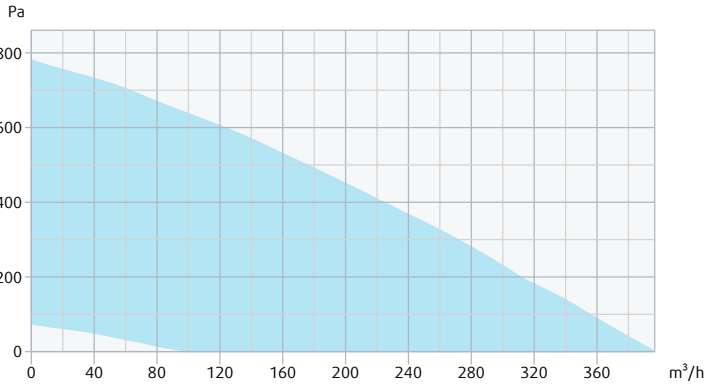

Unit	Supply	Extract
Air density	1.204 kg/m³	
	Summer	Winter
Supply air temperature	-	-20.0 °C


Ecodesign

Product	
Trade name	Systemair
Product name	SAVE VTR 300/B L

Basic unit		
ErP compliance	2018	
SEC Average	-36.6	kWh/(m ² .a)
SEC Cold	-79	kWh/(m ² .a)
SEC Warm	-12.2	kWh/(m ² .a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	83	%
qv max	351	m ³ /h
P max	174	W
Sound power (LWA)	41	dB(A)
qv ref	0.068	m ³ /s
Ps ref	50	Pa
SPI	0.346	W/(m ³ /h)
CTRL	0.85	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	Not applicable	
Carry over	4	%
Type of product	RAHU/AAHE	
AEC average	313	kWh/a
AEC cold	313	kWh/a
AEC warm	313	kWh/a
AHS Average	4440	kWh/a
AHS Cold	8686	kWh/a
AHS Warm	2008	kWh/a

Units with local demand control		
ErP compliance	2018	
SEC Average	-40.9	kWh/(m ² .a)
SEC Cold	-84.4	kWh/(m ² .a)
SEC Warm	-16	kWh/(m ² .a)
SEC Class	A	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	83	%
qv max	351	m ³ /h
P max	174	W
Sound power (LWA)	41	dB(A)
qv ref	0.068	m ³ /s
Ps ref	50	Pa
SPI	0.346	W/(m ³ /h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	Not applicable	
Carry over	4	%
Type of product	RAHU/AAHE	
AEC average	183	kWh/a
AEC cold	183	kWh/a
AEC warm	183	kWh/a
AHS Average	4548	kWh/a
AHS Cold	8898	kWh/a
AHS Warm	2057	kWh/a

Dimension

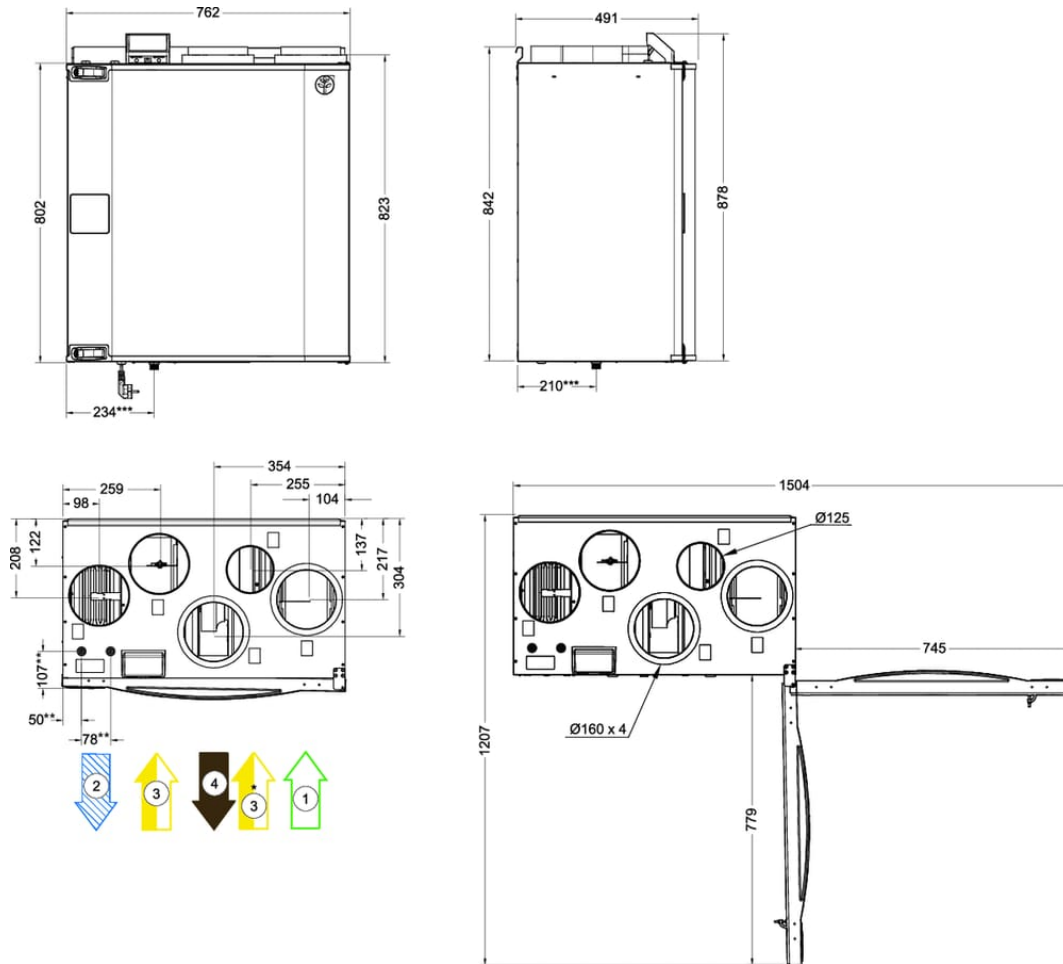

hood connection


battery connections

inage connection

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

Energy class label

std

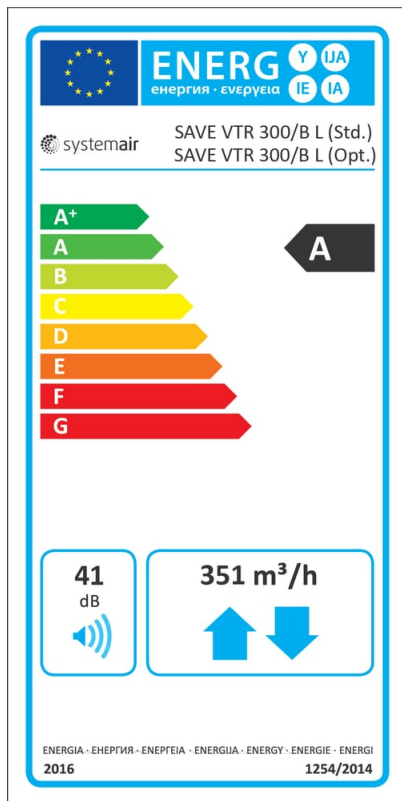

Accessories

- 602-10/B Cookerhood S.Steel (47562)
- 722-10/B TENDER Wall 600 steel (78976)
- 722-10/B TENDER Wall 900 steel (78977)
- 762-10/B OPAL Wall 900 steel (78971)
- 782-10/B STIL Wall 600 steel (78973)
- 792-10/B STIL Free 900 steel (78975)
- CB 160-1,2 230V/1 Duct heater (5291)
- CB 160-2,7 230V/1 Duct heater (5382)
- CB heater connection kit 1 ~ (142852)
- CEC Cable w/plug 12m (24782)
- CLASSIC - B White (326802)
- CVVX 160 Combi grille, white (25396)
- Diverting plug 4pin (254978)
- Duct sensor -30-70C (211524)
- LDC 160-600 Silencer (5192)
- Modbus RTU to TCP gateway (454345)
- MONOLIT - B White (326800)
- PF VTR 300/350 STD kit (246659)
- Presence detector/IR24-P (6995)
- PSS20 Transformer 24V (202692)
- RMK-T (153548)
- RS-24V (159484)
- SAVE CONNECT 2.0 (399999)
- SAVE LIGHT White (319118)
- SAVE TOUCH White (138077)
- SCD 160 silencer 25mm insulat. (2558)
- Surface sensor -30-150C (211523)
- Systemair-E CO2 RH Temperature (211522)
- TUNE-R-160-3-M1 (311939)
- TUNE-R-160-3-M4 (311969)
- VAV/CAV conversion kit (140777)
- VBC 160-3 Water heating batt (9840)
- ZTR 15-0,4 valve 3-way (9670)
- ZTV 15-0,4 2-way valve (9829)
- 602-10/B Cookerhood White (47561)
- 722-10/B TENDER Wall 600 white (78978)
- 762-10/B OPAL Wall 600 steel (78970)
- 772-10/B OPAL Free 900 steel (78972)
- 782-10/B STIL Wall 900 steel (78974)
- CAV kit (161100)
- CB 160-2,1 230V/1 Duct heater (5292)
- CB 160-5,0 400V/2 Duct heater (5383)
- CE/CD-diverting plug 4pin (37367)
- CEC Cable w/plug 6m (24783)
- CVVX 160 Combi grille, black (25394)
- CWK 160-3-2,5 Duct cooler,circ (30022)
- Duct Cover VTR 300/350 (113489)
- FK 160 Fast clamp (1610)
- LDC 160-900 Silencer (5193)
- MONOLIT - B S.Steel (326801)
- PF VTR 300/350 OPT kit (317696)
- Plastic Drainage kit (146077)
- Pressure guard with pitot tube (212987)
- RMK (153549)
- Room sensor 0-50C (211525)
- RVAZ4 24A Actuator 0-10V (9862)
- SAVE LIGHT Black (319119)
- SAVE TOUCH Black (138078)
- SAVE Wall Mounted Kit (140736)
- SPI-160 C Iris damper (6753)
- Systemair-1 CO2 duct sensor (14906)
- Systemair-E CO2 sensor (14904)
- TUNE-R-160-3-M2 (311949)
- TUNE-R-160-3-M5 (311979)
- VBC 160-2 Water heating batt (5458)
- WHC VTR 300/350 (141700)
- ZTR 15-0,6 valve 3-way (6573)
- ZTV 15-0,6 2-way valve (6571)

Documents

- Certificate Passive House Institute - SAVE VTR 300
- Commissioning record
- Control panel installation quick guide
- Disassembly guide
- Electrical diagrams for accessories
- Energy label placement quick guide
- EPD_162163_Systemair_SAVE_VTR_300_B__json
- EPD_162163_Systemair_SAVE_VTR_300_B__pdf
- Eurovent Certification Diploma
- Installation manual SAVE CONNECT 2.0
- Installation Operation and Maintenance manual
- Modbus variable list
- Schematic layout and description of components
- Service manual
- Technical fiche
- Wiring diagram