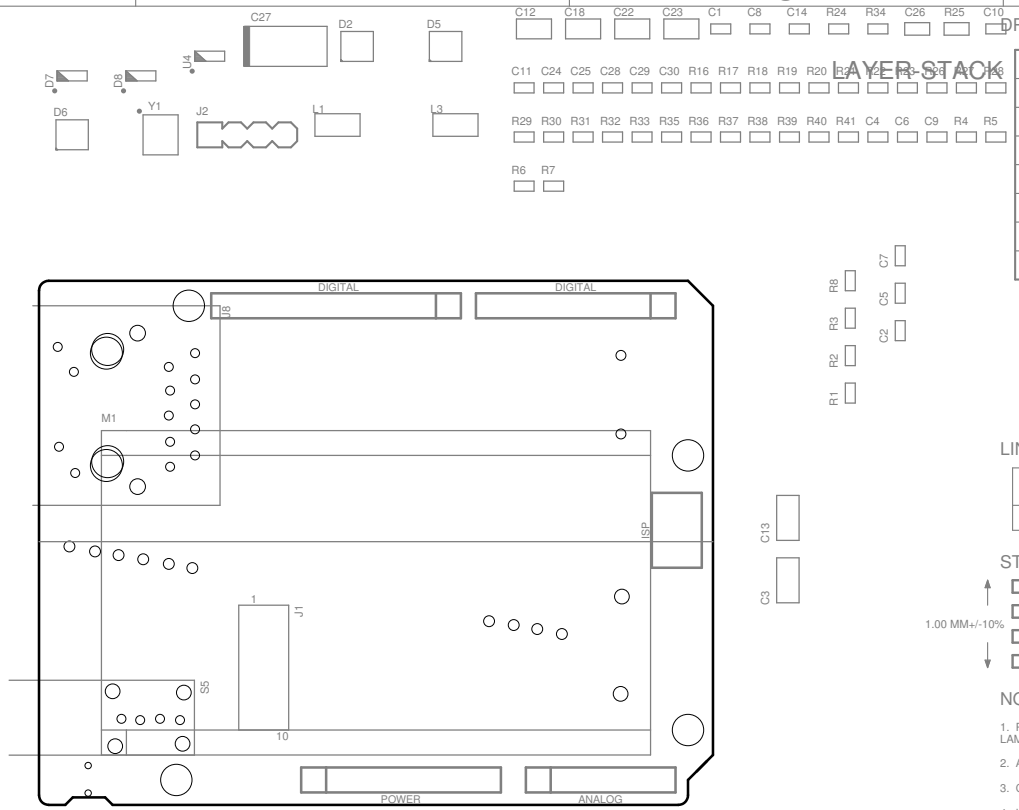


## LAYER STACK

## DRILL CHART: TOP TO BOTTOM

| Sym | N° | Mils | MM | Qty | Plated |
|---|---|---|---|---|---|
| + | 1 | 31 | 0.80 | 3 | YES |
| × | 2 | 36 | 0.92 | 4 | YES |
| ◻ | 3 | 39 | 1.00 | 4 | BOTH |
| ◇ | 4 | 40 | 1.02 | 36 | YES |
| ⧖ | 5 | 53 | 1.35 | 4 | YES |
| ⋈ | 6 | 79 | 2.00 | 2 | NOT |
| ⌖ | 7 | 126 | 3.20 | 4 | NOT |

## LINE WIDTH IMPEDANCE CHART FOR REFERENCE

| LAYER | SINGLE ENDED LINE WIDTH | 100 OHM DIFF LINE IWDTH | SPACE | 90 OHM DIFF LINE WIDTH | SPACE |
|---|---|---|---|---|---|
| TOP, BOTTOM | 8 MILS | 6.5 MILS | 9 MILS | 8 MILS | 10 MILS |

## STACK-UP FOR REFERENCE




## NOTES:

1. PRINTED CIRCUIT BOARD MADE FROM NEMA GRADE FR-4 TG 135 EPOXY LAMINATE WITH 18 UM COPPER PLATING AND 1 MM THICKNESS.
2. ALL DIMENSIONS ARE GIVEN IN MILLIMETERS EXCEPT TRACE WIDTH/SPACE.
3. CIRCUIT PATHS ARE FOR REFERENCE ONLY.
4. HOLE SIZES SHOWN ARE FINISHED DIAMETERS AFTER PLATING.
5. BOARD PLATED USING REFLOW OR SIMILAR METHOD.
6. BOARD TO HAVE WHITE SOLDER MASK ON PLATED SURFACES USING WET FILM SR100 OR SR1010 EPOXY.
EQUIVALENT WET OR DRY FILM MAY BE USED.
7. SILKSCREEN BOARD USING BLACK INK. DISTORTION OF SILKSCREEN IS ACCEPTABLE OVER TRACES. EPOXY INK ON PLATED LANDS IS NOT ACCEPTABLE
8. THE FOLLOWING INFORMATION APPLIES TO THIS BOARD:
   * 2 COPPER LAYERS
   * 1 MM BOARD THICKNESS
   * REQUIRES TOP AND BOTTOM SIDE SILKSCREENS

DOMINO Qi
WIFI 4 THINGS

CC BY SA
CC-BY-SA

Licensed under a Creative Commons Attribution-Share-Alike Unported License.
See creativecommons.org/licenses/by-sa/4.0/

Reference designs are provided "AS IS" and "WITH ALL FAULTS". The Domino Team disclaims all other warranties express or implied, regarding this product, including but not limited to, any implied warranties of merchantibility or fitness for any particular application.

The Domino Team may make changes to specifications and product descriptions at any time, without notice.

© 2014, The Domino Team.
All rights reserved.

Domino Qi

not saved!

Silk screen CMP (.PLC)

Rev. A