


DRILL CHART: TOP TO BOTTOM

Sym	N°	Mils	MM	Qty	Plated
+	1	12	0.30	301	YES
×	2	22	0.55	2	NOT
□	3	31	0.80	2	NOT
◇	4	40	1.02	56	YES
⊗	5	126	3.20	2	NOT

LINE WIDTH IMPEDANCE CHART FOR REFERENCE

Class	RF	Type	Coated Coplanar Waveguide With Ground 1B		
Layer	Impedance	Trace Width	Trace Separation	Ground Separation	
TOP, BOTTOM	50 Ohms	26 mils	N/A	6 mils	
Class	USB	Type	Diff Coated Coplanar Waveguide With Ground 1B		
Layer	Impedance	Trace Width	Trace Separation	Ground Separation	
TOP, BOTTOM	90 Ohms	14.5 mils	6 mils	6 mils	
Class	Ethernet	Type	Diff Coated Coplanar Waveguide With Ground 1B		
Layer	Impedance	Trace Width	Trace Separation	Ground Separation	
TOP, BOTTOM	100 Ohms	10 mils	6 mils	6 mils	

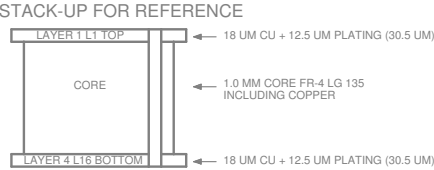

- NOTES:
- PRINTED CIRCUIT BOARD MADE FROM NEMA GRADE FR-4 TG 135 EPOXY LAMINATE WITH 18 UM COPPER PLATING AND 1 MM THICKNESS.
 - ALL DIMENSIONS ARE GIVEN IN MILLIMETERS EXCEPT TRACE WIDTH/SPACE
 - CIRCUIT PATHS ARE FOR REFERENCE ONLY.
 - HOLE SIZES SHOWN ARE FINISHED DIAMETERS AFTER PLATING.
 - BOARD PLATED USING REFLOW OR SIMILAR METHOD.
 - BOARD TO HAVE WHITE SOLDER MASK ON PLATED SURFACES USING WET FILM SR100 OR SR1010 EPOXY. EQUIVALENT WET OR DRY FILM MAY BE USED.
 - SILKSCREEN BOARD USING BLACK INK. DISTORTION OF SILKSCREEN IS ACCEPTABLE OVER TRACES. EPOXY INK ON PLATED LANDS IS NOT ACCEPTABLE
 - THE FOLLOWING INFORMATION APPLIES TO THIS BOARD:
 - * 2 COPPER LAYERS
 - * 1 MM BOARD THICKNESS
 - * REQUIRES TOP AND BOTTOM SIDE SILKSCREENS

© 2014-2015, The Domino Team.
All rights reserved.

Domino Pi

20/01/15 14:06

Silk screen CMP (.PLC)

Rev. D