


Rb CELL ENCLOSURE - LOWER HALF (1 off)


UNITS mm ALUMINIUM V9.6 (2026-10-08)

Local frame: x along the bore (= beam), y across (sliding direction), z up; origin on the bore axis at the middle of the CELL (the block runs x = -38 .. 44); the parting face is z = 0 (the plate's 12.7 mm optical axis). Plain block 82 x 43.9, height 24. Half bore R 15.2; stem half-channel 12 x 5 and cable notch 6 x 6 in the parting face through the +y wall; one through slot 4.37 wide at x = 39.3 in the bore's +x end region (beyond the cell); four 8-32 taps 16 deep in the end faces (z = -17). Bore both halves clamped together.


PLAN (parting face, looking down -z)

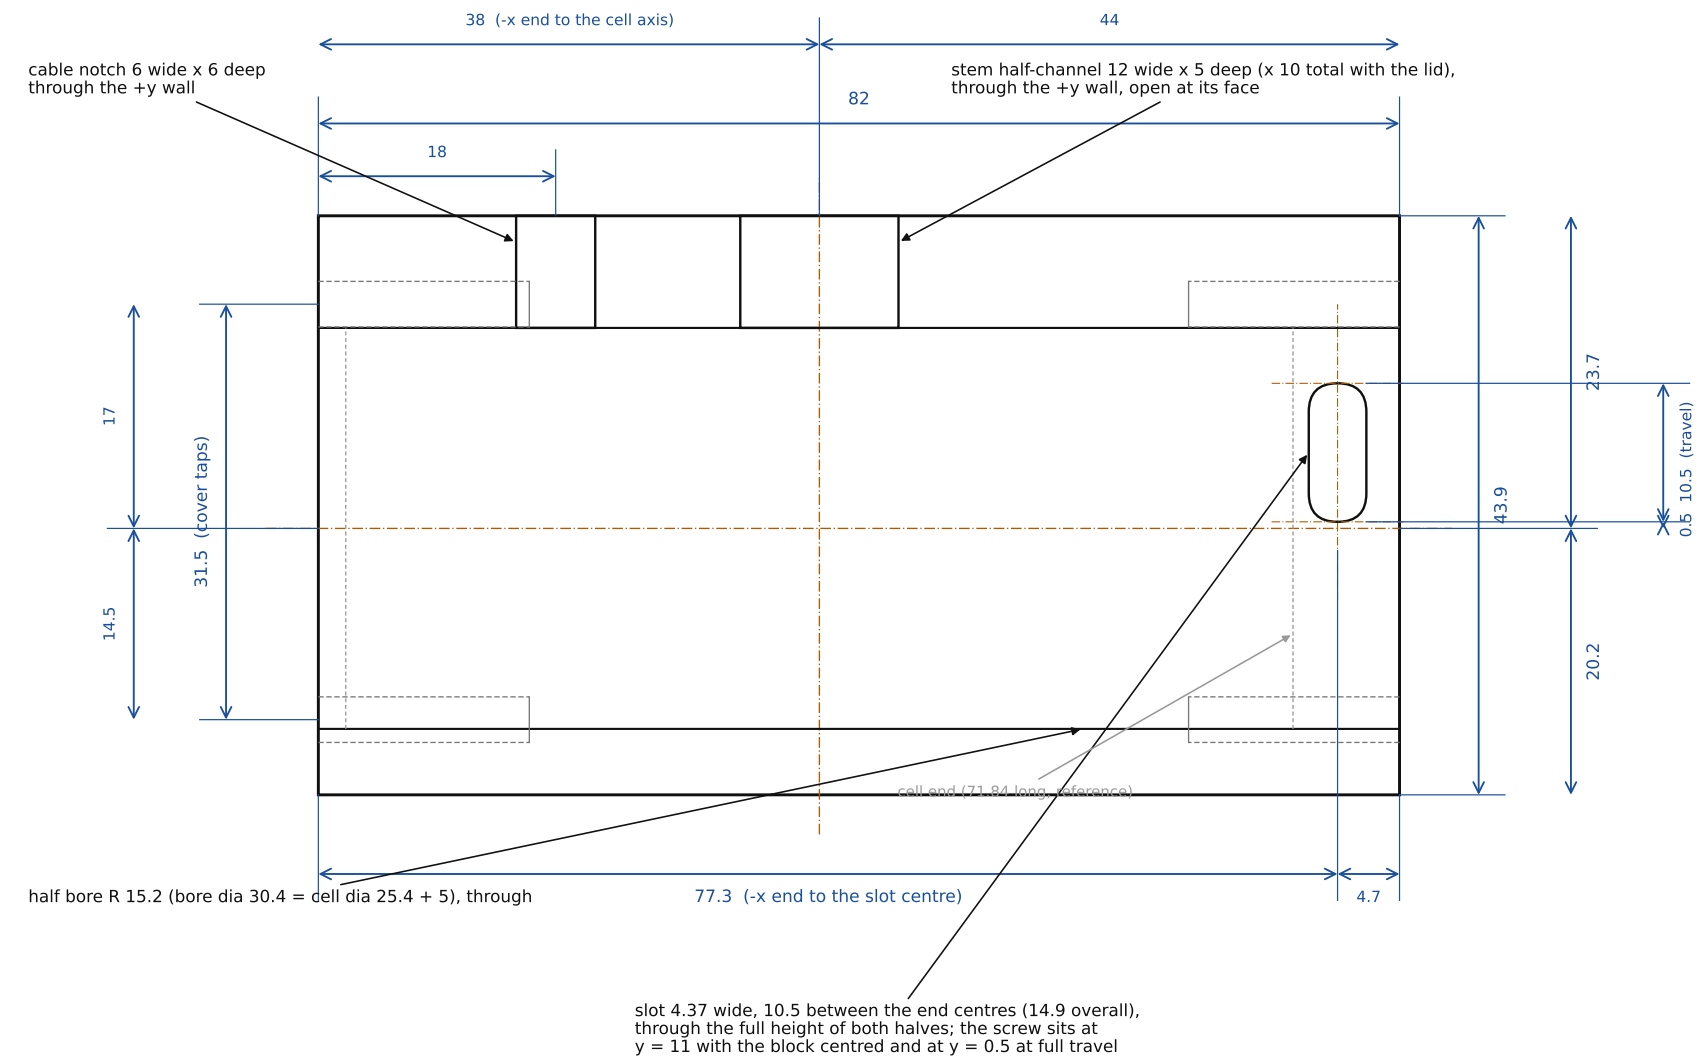

END VIEW (+x end face)

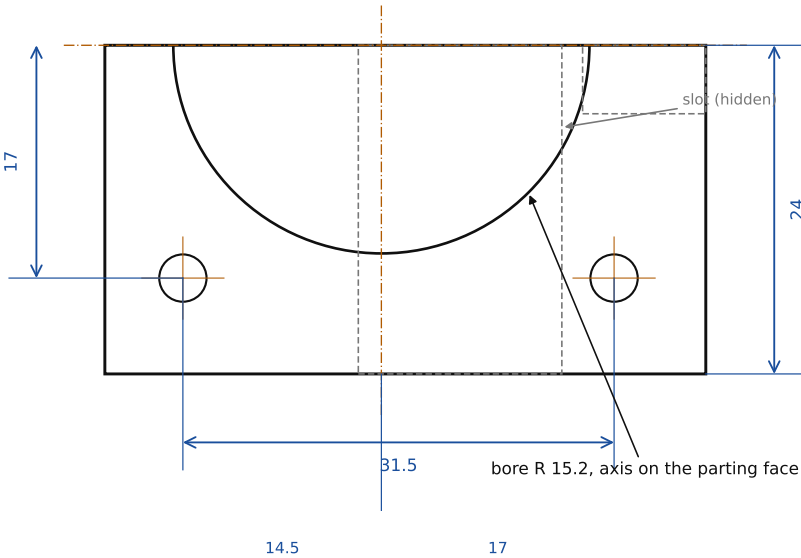

SIDE VIEW (from -y, the beam side)

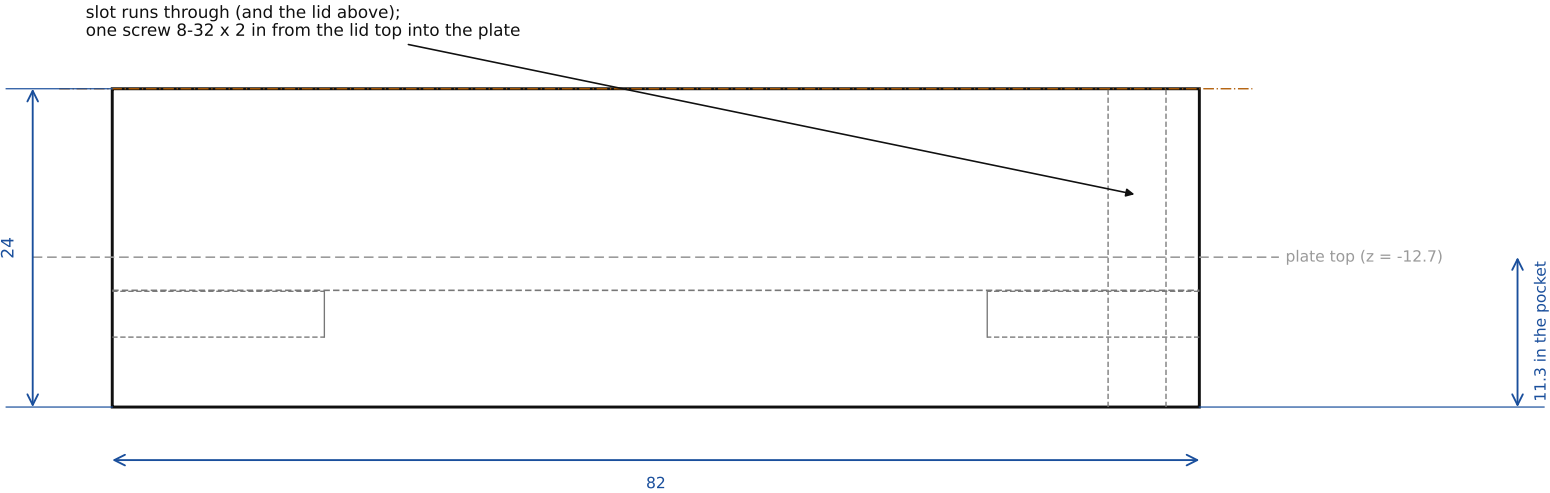


Rb CELL ENCLOSURE - LID (UPPER HALF) (1 off)


UNITS mm ALUMINIUM V9.6 (2026-10-08)

Same plain block as the lower half, height 24, half bore R 15.2 on the underside, stem half-channel 12 x 5 on the underside through the +y wall; the slot 4.37 wide runs through and carries a 8.5 wide x 5 deep counter-slot on the top face so the socket head rides below the top; four 8-32 taps 16 deep in the end faces (z = +17). No cable notch in the lid.

PLAN (top face, looking down -z)

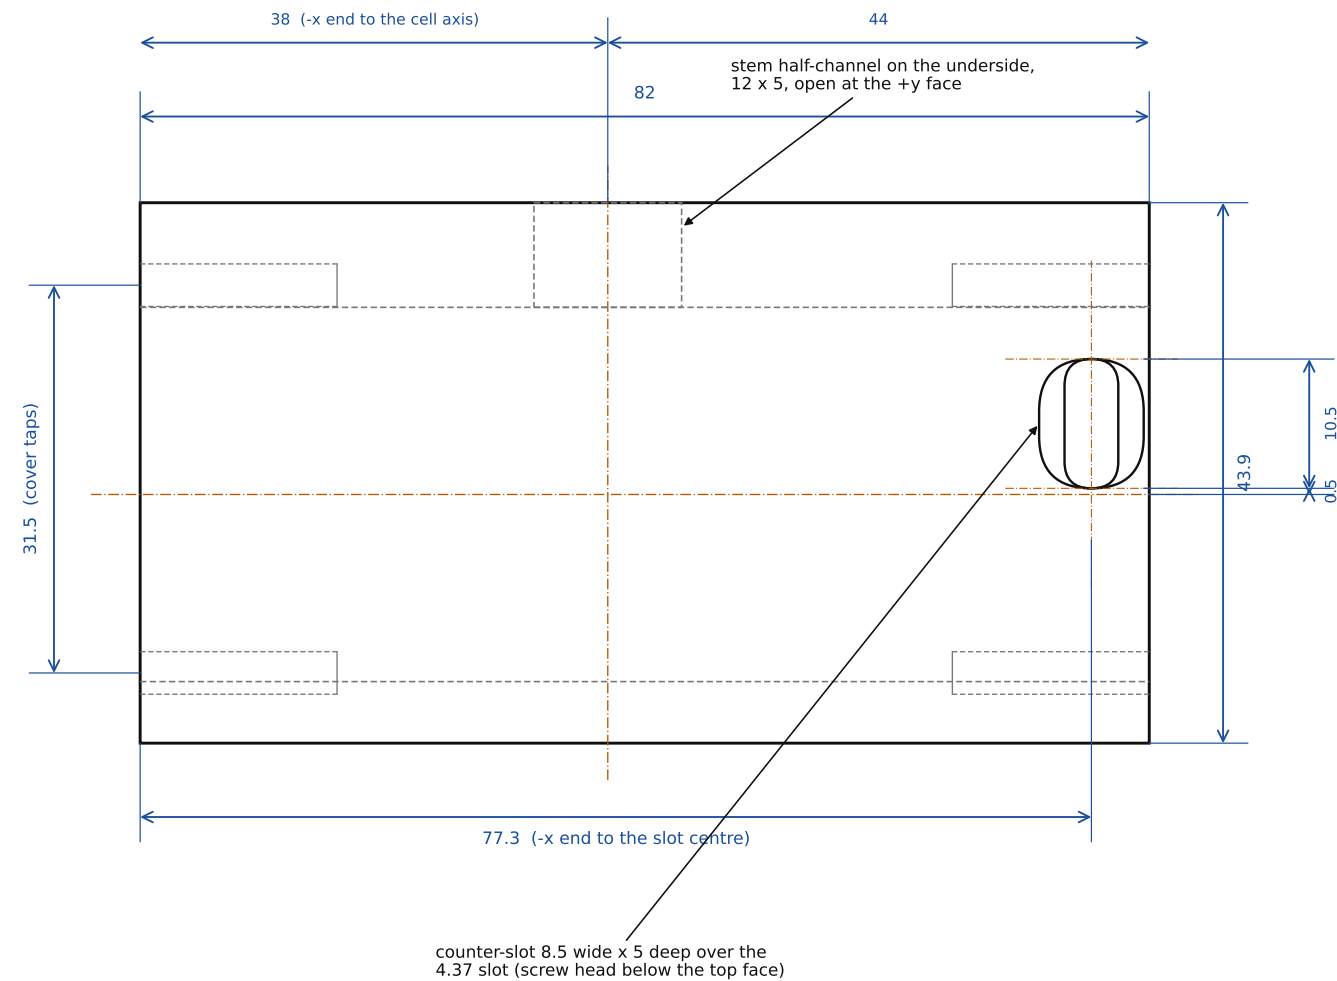

END VIEW (+x end face)

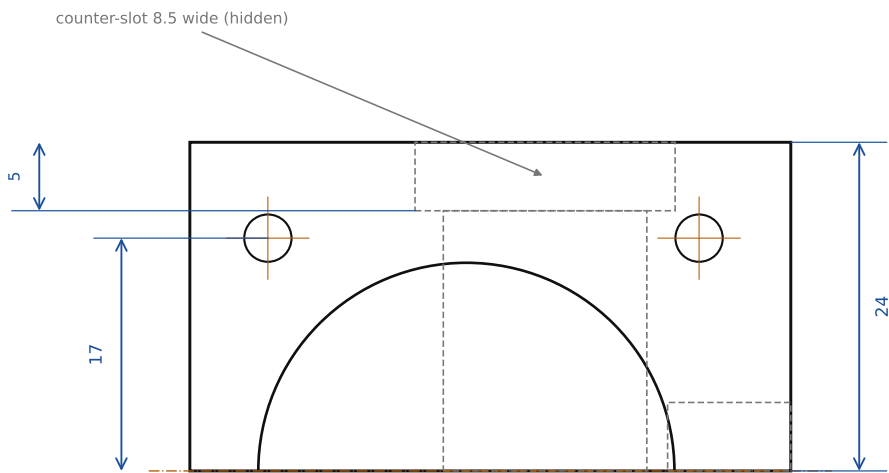

Assembly: lay the cell (stem toward +y, in the channel) into the lower half, put the lid on, screw the two end covers on (their upper screws into the lid, lower screws into the lower half), then the 8-32 x 2 in screw through the lid and the lower half into the plate tap. Loosen it, slide the block along y (0 .. 10.5 mm), tighten: the beam goes from the cell centre to 2.2 mm inside the cell wall on the -y side; the screw stays in the bore's end region on the +y side, clear of the beam and of the cell. Suggested machining: bore the dia 30.4 through both halves clamped together.



Rb CELL ENCLOSURE - END COVER (2 off)

UNITS mm ALUMINIUM V9.6 (2026-10-08)

Plate 43.9 x 48 x 8. Four 8-32 clearance holes dia 4.37 with a dia 7.5 x 4.5 counterbore on the outer face (socket head flush); the holes sit 17 (+y) and 14.5 (-y) from the bore axis and 17 above/below the parting plane, two into each half (the +y pair clears the slot). Both covers are mounted the same way round (+y row toward the stem side). No beam aperture yet - to be machined later on the bore axis.

SECTION A-A (through the holes at y = +17)

FACE VIEW (outer face)

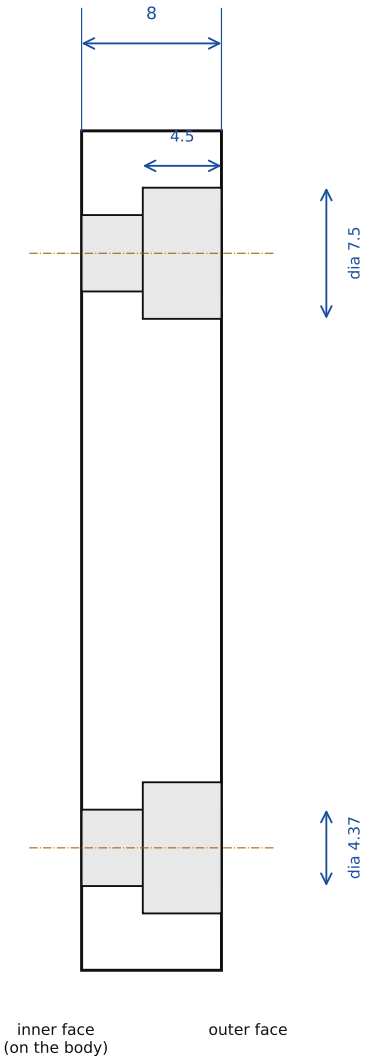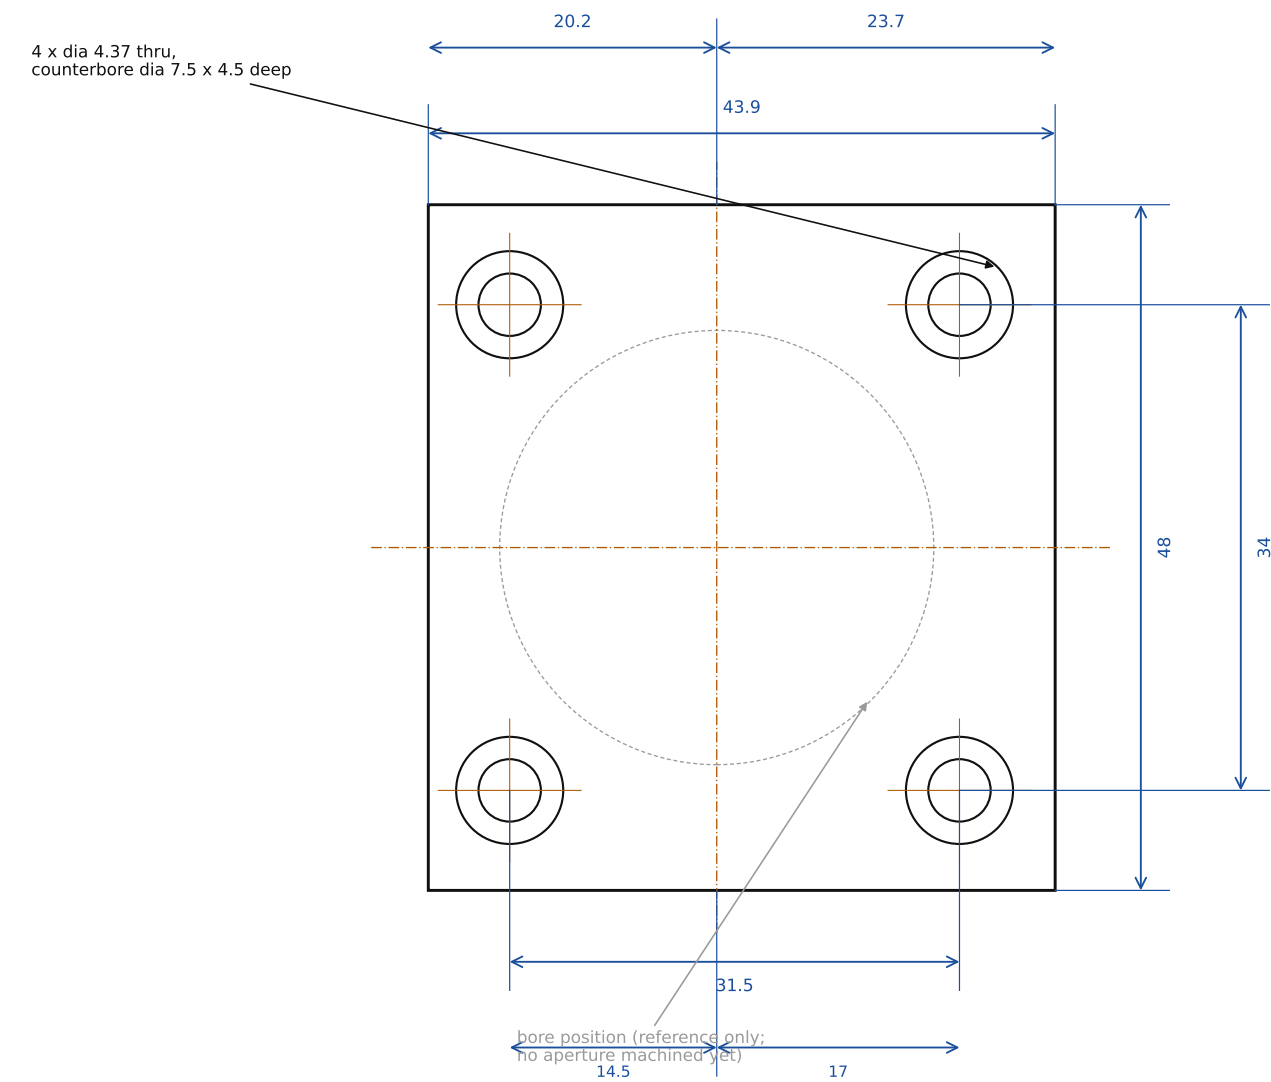


Screws: 8 x 8-32 UNC x 5/8 in (15.9 mm) socket head cap screws per enclosure; thread engaged in the body: $15.9 - (8 - 4.5) = 12.4$ mm (tap 16 deep). The covers tie the two halves together.

Rb CELL SEAT - LATTICE BASEPLATE V9.6 (plate machining, board frame)

UNITS mm ALUMINIUM V9.6 (2026-10-08)

Pocket 11.3 deep from the plate top (floor 14.1 above the plate bottom), end-mill fillets R 3.174 on the corners; one 8-32 UNC tap through the floor.
Coordinates = STEP-file coordinates of Lattice_V9_6_baseplate_24x15in.step.

PLAN (board x right, board y up; beam runs along +y at x = 196)

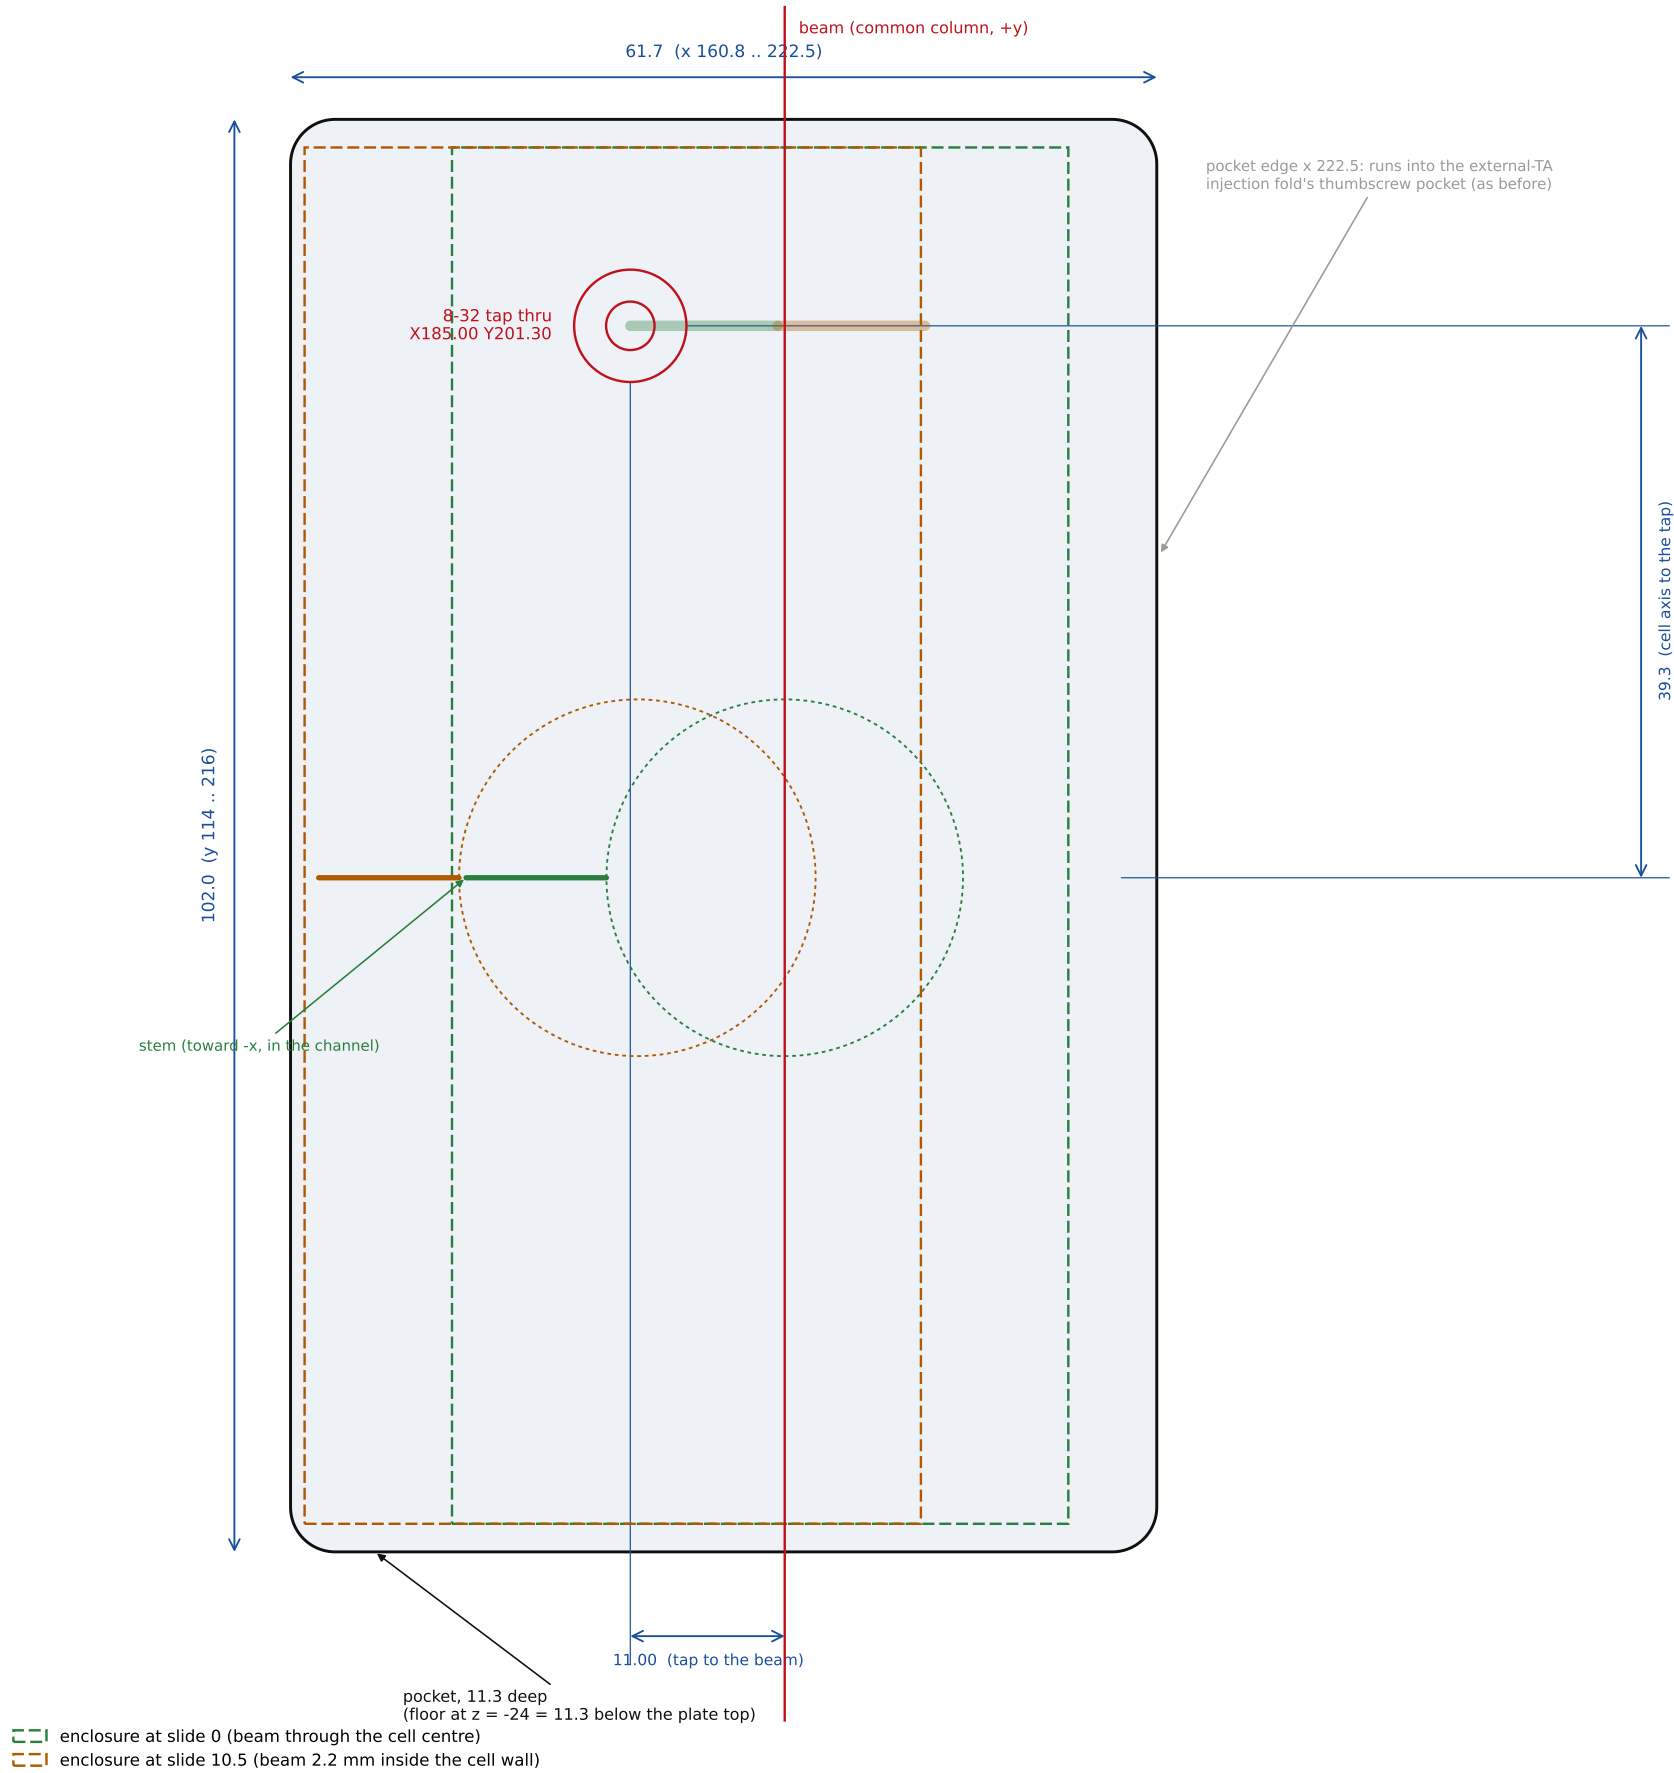

POCKET (11.3 deep)
x 160.8 .. 222.5 y 114 .. 216
(corners R 3.174)

TAP 8-32 UNC through the floor
X 185.00 Y 201.30

Removed against V9.5: the 10.3 mm pocket with its 48 x 27 ear and its two taps at (223.35, 132 / 162). The V9.4.2 corner taps (151/241, 117/207) are gone since V9.5.