


Rb CELL ENCLOSURE - LOWER HALF (1 off)


UNITS mm ALUMINIUM V9.7 (2026-10-08)

Local frame: x along the bore (= beam), y across (sliding direction), z up; origin on the bore axis at the middle of the CELL (the block runs x = -44 .. 44); the parting face is z = 0 (the plate's 12.7 mm optical axis). Plain block 88 x 46.9, height 24. Half bore R 15.2; closed stem half-pocket 12 x 5 (to 24.2 from the axis, 2.5 of wall left) and cable notch 6 x 6 in the parting face; two through slots 4.37 wide at x = +-39.9 in the bore's end regions (beyond the cell); four 8-32 taps 16 deep in the end faces (z = -17). Bore both halves clamped together.


PLAN (parting face, looking down -z)

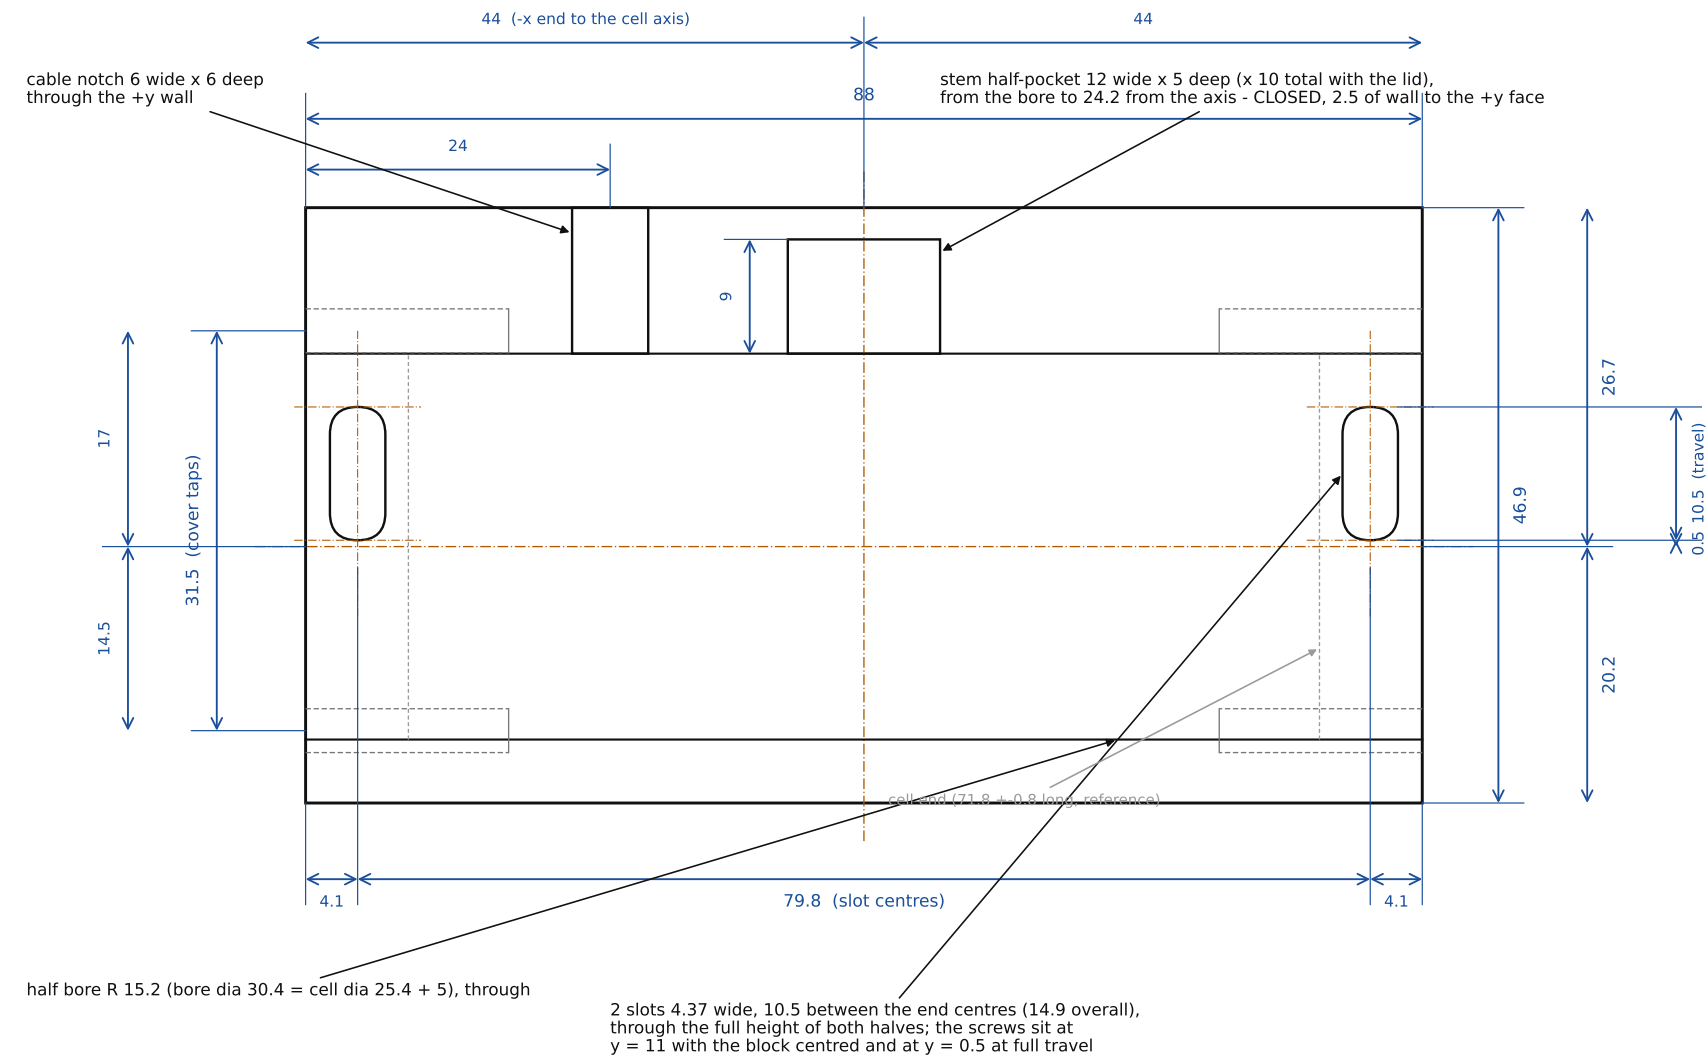

END VIEW (+x end face)

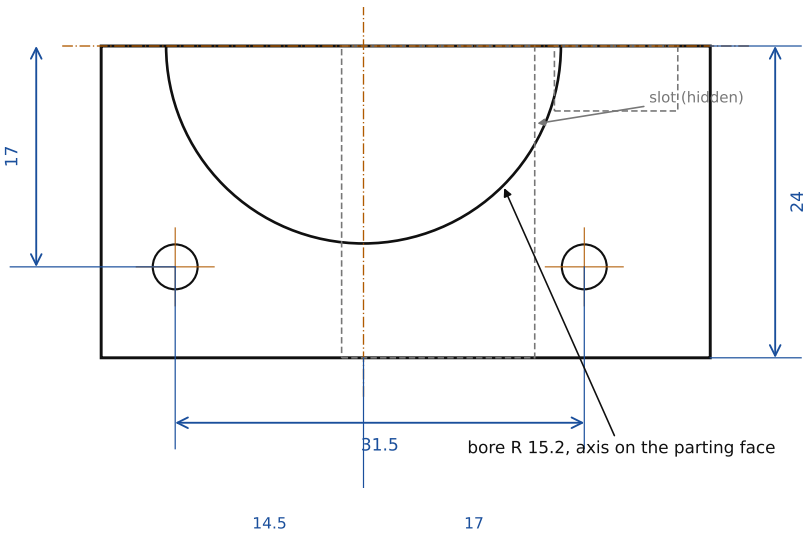

SIDE VIEW (from -y, the beam side)

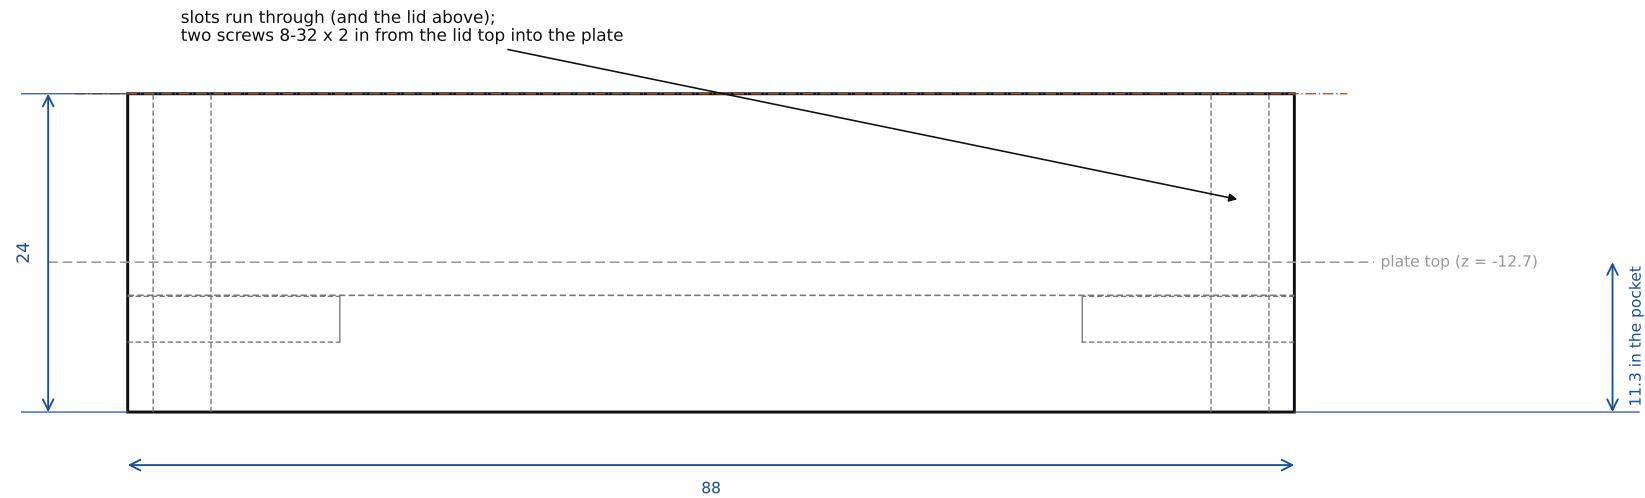


Rb CELL ENCLOSURE - LID (UPPER HALF) (1 off)


UNITS mm ALUMINIUM V9.7 (2026-10-08)

Same plain block as the lower half, height 24, half bore R 15.2 on the underside, closed stem half-pocket 12 x 5 on the underside; the two slots 4.37 wide run through and carry 8.5 wide x 5 deep counter-slots on the top face so the socket heads ride below the top; four 8-32 taps 16 deep in the end faces (z = +17). No cable notch in the lid.

PLAN (top face, looking down -z)

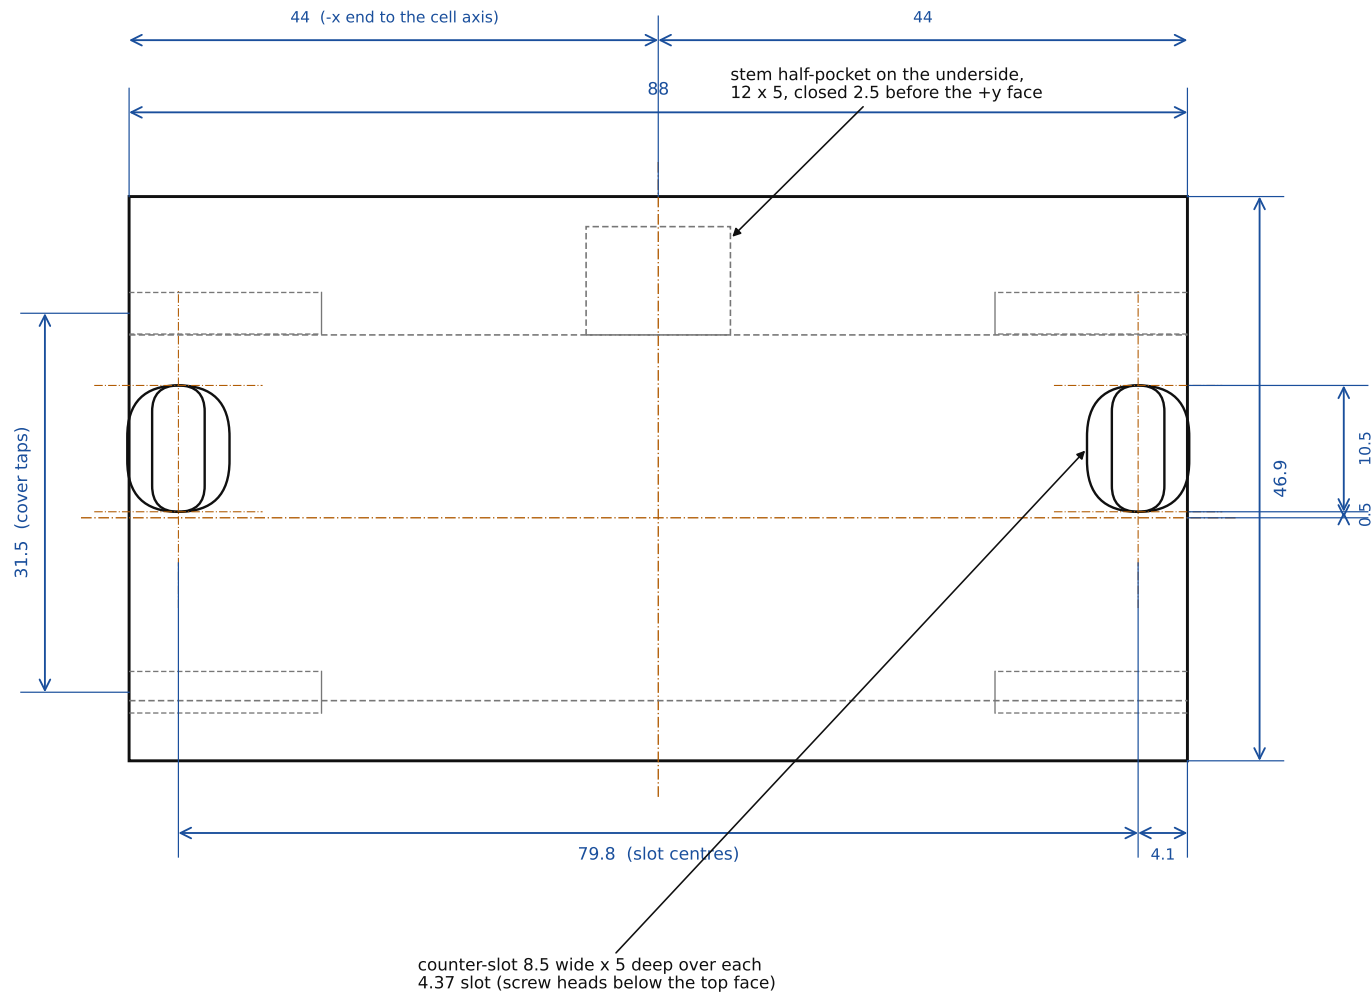

END VIEW (+x end face)

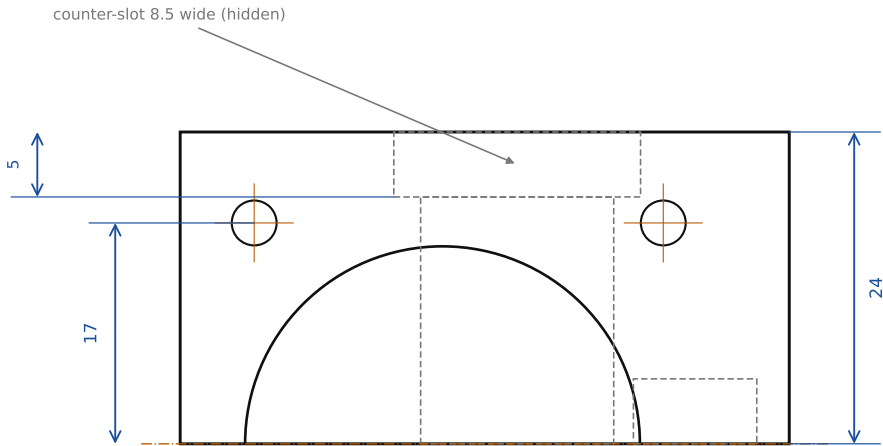

Assembly: lay the cell (stem toward +y, into the closed pocket) into the lower half, put the lid on, screw the two end covers on (their upper screws into the lid, lower screws into the lower half), then the two 8-32 x 2 in screws through the lid and the lower half into the plate taps. Loosen them, slide the block along y (0 .. 10.5 mm), tighten: the beam goes from the cell centre to 2.2 mm inside the cell wall on the -y side; the screws stay in the bore's end regions on the +y side, clear of the beam and of the cell (1 mm even at the cell's +0.8 length tolerance). Suggested machining: bore the dia 30.4 through both halves clamped together.



Rb CELL ENCLOSURE - END COVER (2 off)

UNITS mm ALUMINIUM V9.7 (2026-10-08)

Plate 46.9 x 48 x 7. Four 8-32 clearance holes dia 4.37 with a dia 7.5 x 3.5 counterbore on the outer face (the 4.4 mm socket head stands 0.9 proud); the holes sit 17 (+y) and 14.5 (-y) from the bore axis and 17 above/below the parting plane, two into each half (the +y pair clears the slots). Both covers are mounted the same way round (+y row toward the stem side). No beam aperture yet - to be machined later on the bore axis.

SECTION A-A (through the holes at y = +17)

FACE VIEW (outer face)

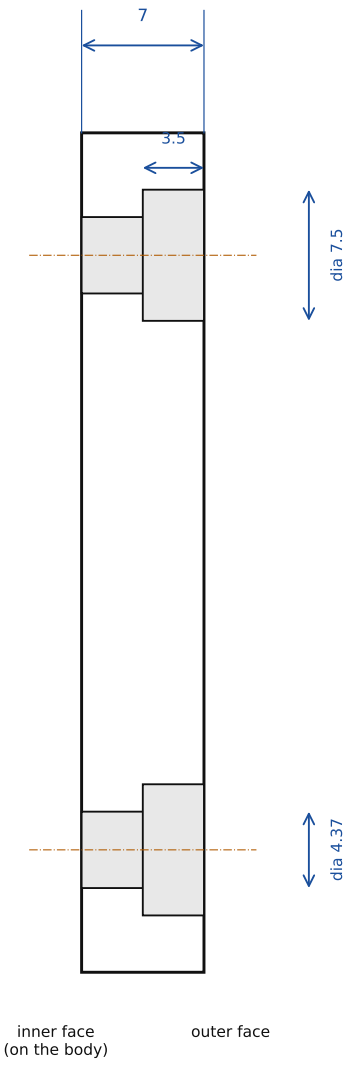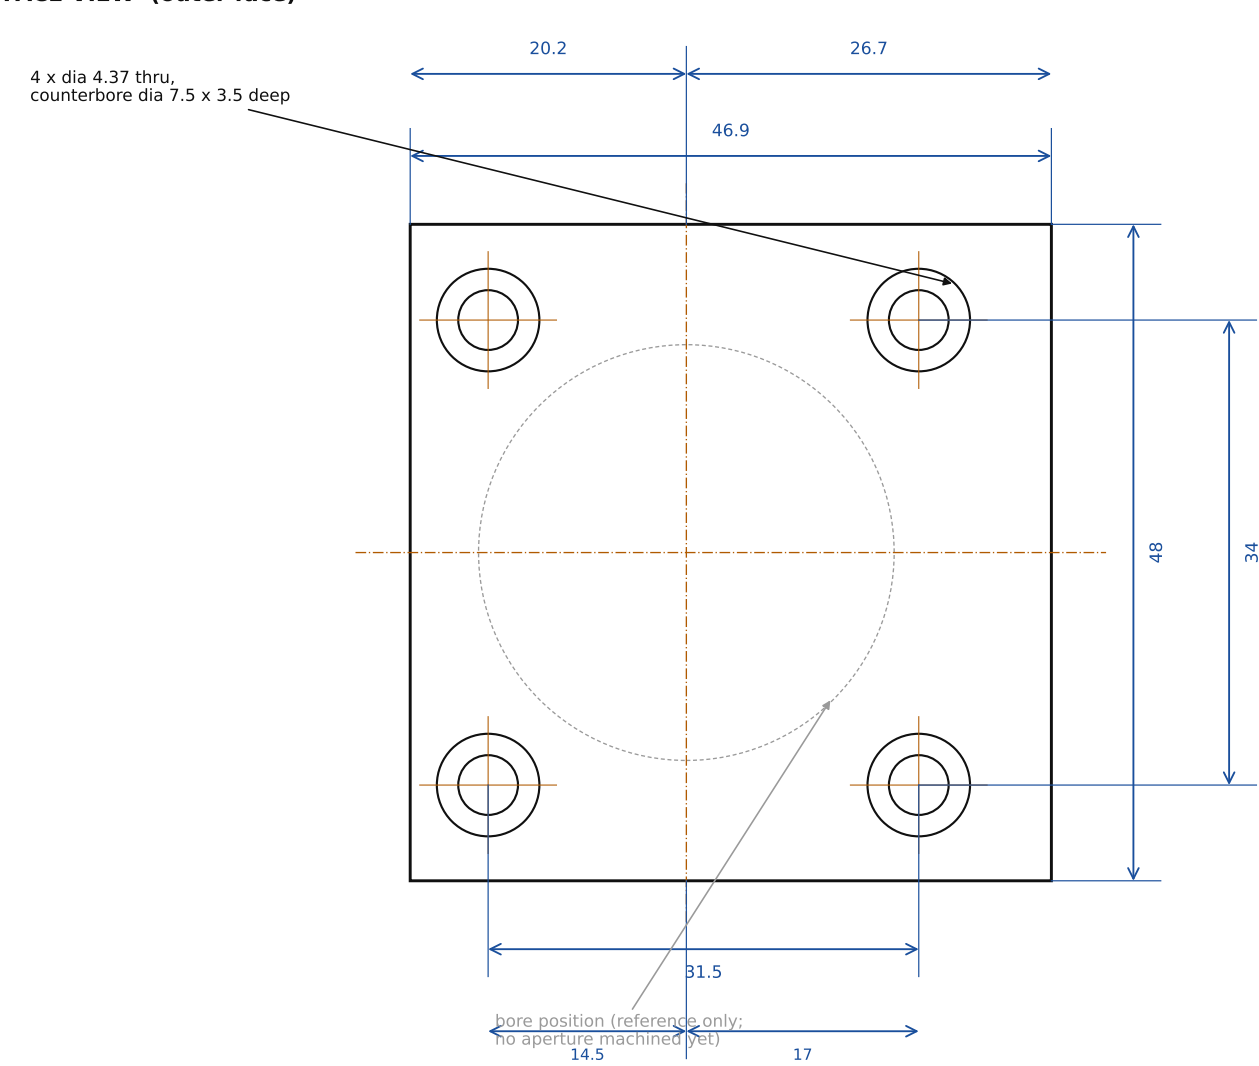


Screws: 8 x 8-32 UNC x 5/8 in (15.9 mm) socket head cap screws per enclosure; thread engaged in the body: $15.9 - (7 - 3.5) = 12.4$ mm (tap 16 deep). The covers tie the two halves together.

Rb CELL SEAT - LATTICE BASEPLATE V9.7 (plate machining, board frame)

UNITS mm ALUMINIUM V9.7 (2026-10-08)

Pocket 11.3 deep from the plate top (floor 14.1 above the plate bottom), end-mill fillets R 3.174 on the corners; two 8-32 UNC taps through the floor.
Coordinates = STEP-file coordinates of Lattice_V9_7_baseplate_24x15in.step.

PLAN (board x right, board y up; beam runs along +y at x = 196)

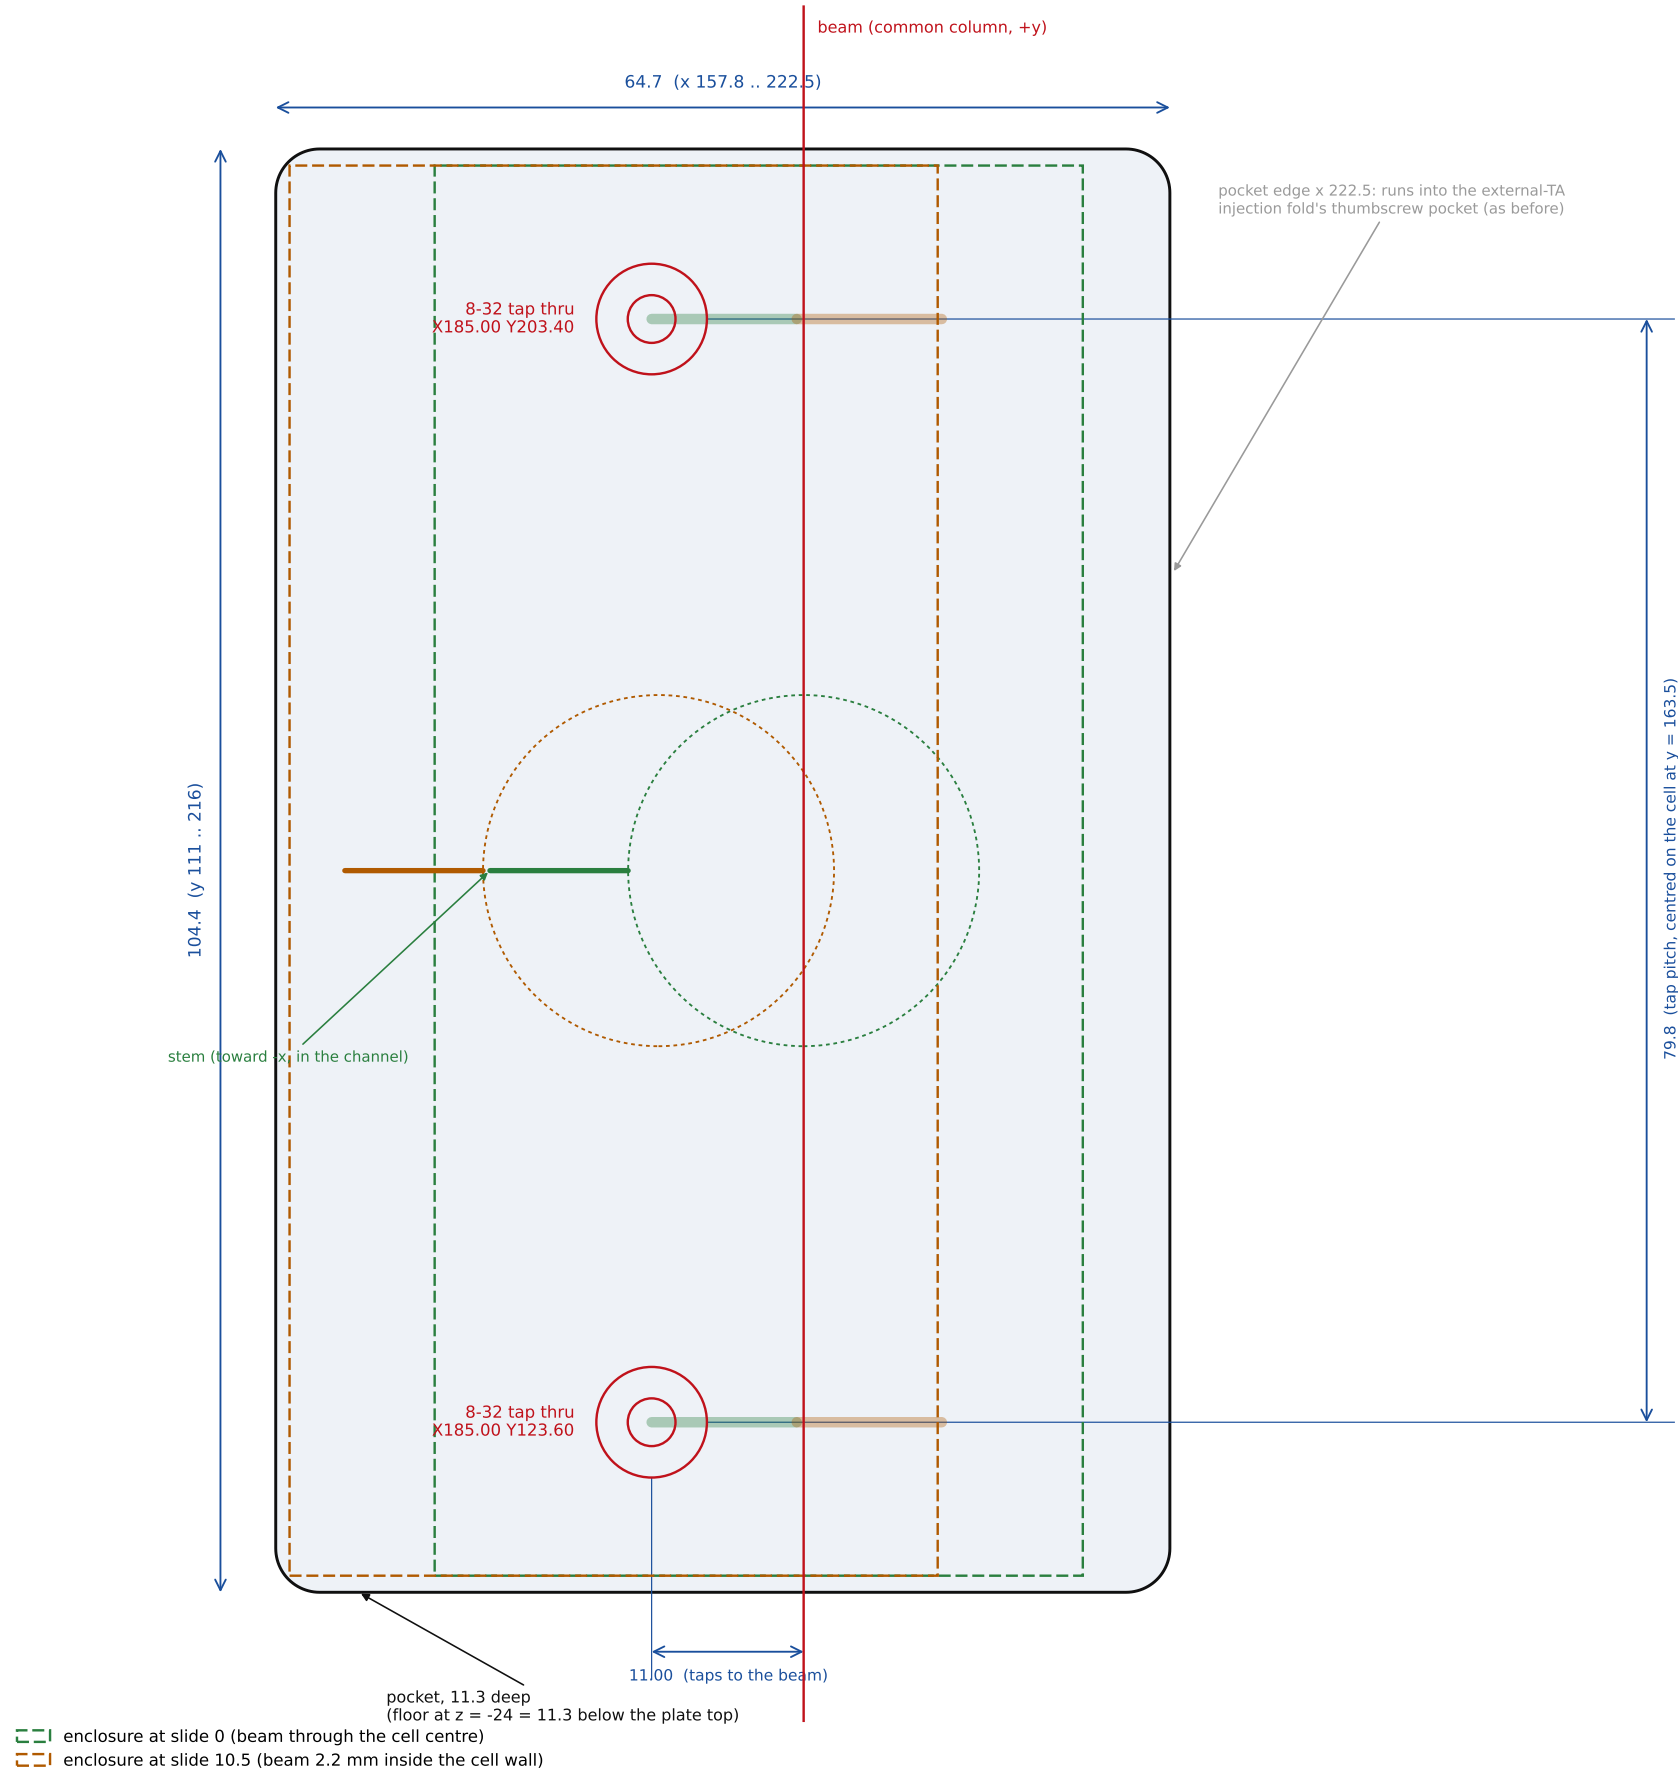

POCKET (11.3 deep)
x 157.8 .. 222.5 y 111.3 .. 215.7
(corners R 3.174)

TAPS 8-32 UNC through the floor
1 X 185.00 Y 123.60
2 X 185.00 Y 203.40

Removed against V9.6: the 102 x 61.7 pocket (y 114..216) and its tap at (185, 201.3). The V9.5 taps (223.35, 132 / 162) and the V9.4.2 corner taps (151/241, 117/207) are long gone.