PSoC® Creator™
Project Datasheet for BLEModule

Creation Time: 03/31/2018 21:01:08
User: DESKTOP-L58I2FV\Muneeb
Project: BLEModule
Tool: PSoC Creator 4.2

Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709
Phone (USA): 800.858.1810
Phone (Intl): 408.943.2600
http://www.cypress.com

Copyright

Trademarks

PSoC and CapSense are registered trademarks of Cypress Semiconductor Corporation. PSoC Creator is a trademark of Cypress Semiconductor Corporation. All other trademarks or registered trademarks referenced herein are the property of their respective owners.

Philips I2C Patent Rights

Purchase of I2C components from Cypress or one of its sublicensed Associated Companies conveys a license under the Philips I2C Patent Rights to use these components in an I2C system, provided that the system conforms to the I2C Standard Specification as defined by Philips. As from October 1st, 2006 Philips Semiconductors has a new trade name, NXP Semiconductors.

Disclaimer

CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. While reasonable precautions have been taken, Cypress assumes no responsibility for any errors that may appear in this document. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of a Cypress product in a life support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Flash Code Protection

Cypress products meet the specifications contained in their particular Cypress PSoC Datasheets. Cypress believes that its family of PSoC products is one of the most secure families of its kind on the market today, regardless of how they are used. There may be methods, unknown to Cypress, that can breach the code protection features. Any of these methods, to our knowledge, would be dishonest and possibly illegal. Neither Cypress nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as 'unbreakable.'

Cypress is willing to work with the customer who is concerned about the integrity of their code. Code protection is constantly evolving. We at Cypress are committed to continuously improving the code protection features of our products.

Table of Contents

1 Overview

The Cypress PSoC 4 is a family of 32-bit devices with the following characteristics:

- Digital system that includes configurable Universal Digital Blocks (UDBs) and specific function peripherals such as PWM, UART, SPI and I2C
- Analog subsystem that includes 12-bit SAR ADC, comparators, op amps, CapSense, LCD drive and more
- Several types of memory elements, including SRAM and flash
- Programming and debug system through Serial Wire Debug (SWD)
- High-performance 32-bit ARM Cortex-M0 core with a nested vectored interrupt controller (NVIC)
- Flexible routing to all pins

Figure 1 shows the major components of a typical PRoC BLE series member PSoC 4 device. For details on all the systems listed above, please refer to the PSoC 4 Technical Reference Manual .

Figure 1. PRoC BLE Device Series Block Diagram

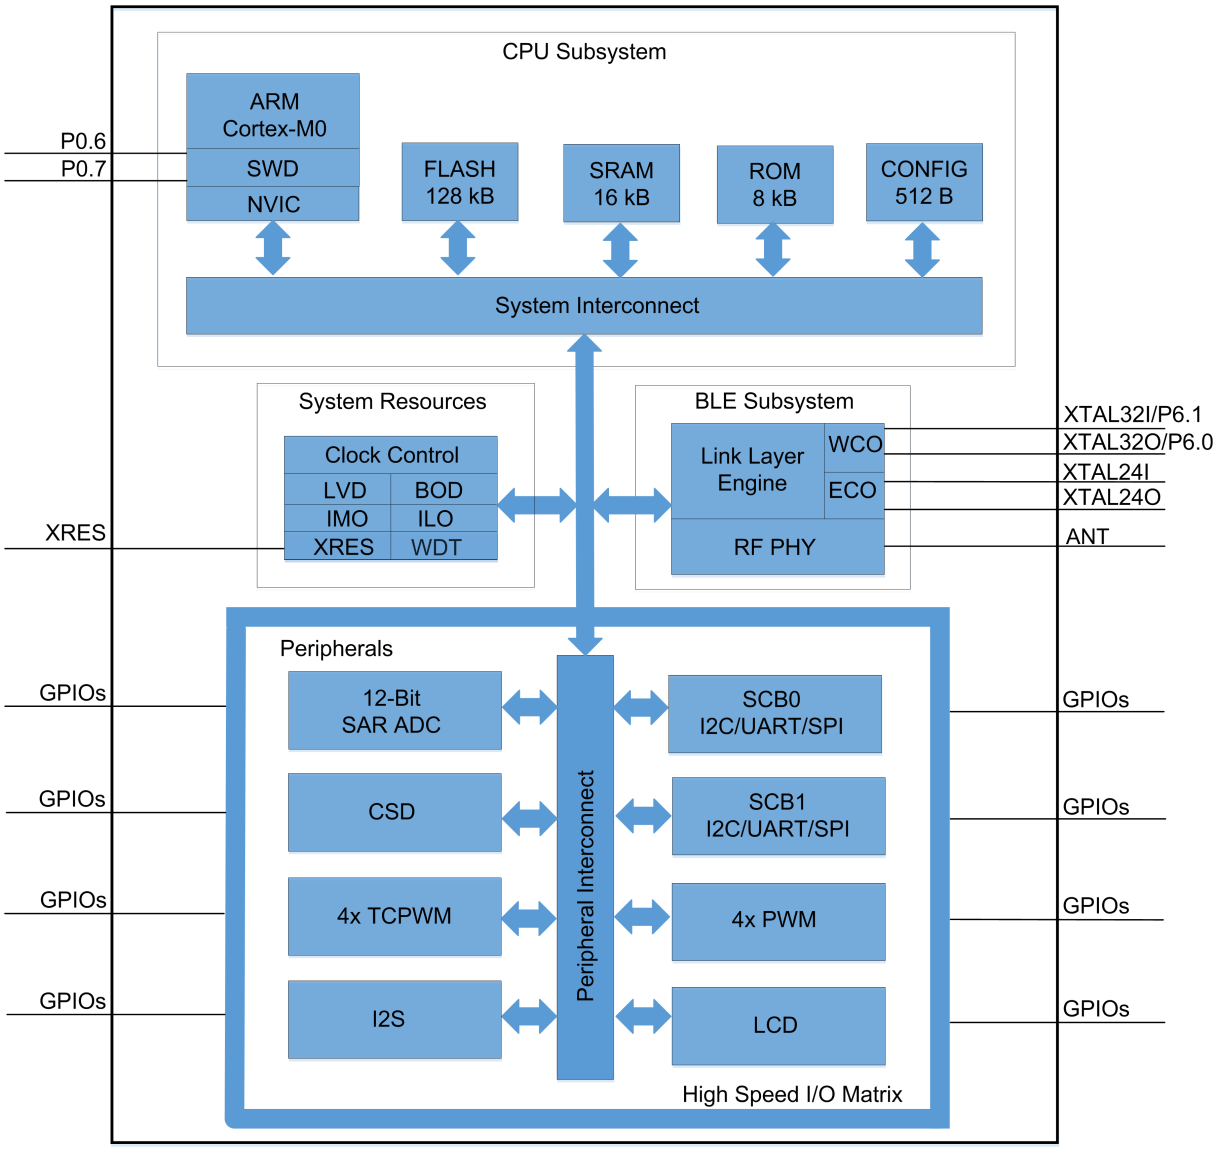

Table 1 lists the key characteristics of this device.

Table 1. Device Characteristics

Name	Value
Part Number	CYBLE-022001-00
Package Name	21-SMT
Family	PSoC 4
Series	PRoC BLE
Max CPU speed (MHz)	48
Flash size (kB)	128
SRAM size (kB)	16
Vdd range (V)	1.9 to 5.5
Automotive qualified	No (Industrial Grade Only)
Temp range (Celsius)	-40 to 85

NOTE: The CPU speed noted above is the maximum available speed. The CPU is clocked by HFCLK, listed in the System Clocks section below.

Table 2 lists the device resources that this design uses:

Table 2. Device Resources

Resource Type	Used	Free	Max	% Used
Digital Clocks	1	3	4	25.00 %
Interrupts	3	29	32	9.38 %
IO	8	9	17	47.06 %
Segment LCD	0	1	1	0.00 %
CapSense	0	1	1	0.00 %
Die Temp	0	1	1	0.00 %
Serial Communication (SCB)	2	0	2	100.00 %
BLE	1	0	1	100.00 %
Timer/Counter/PWM	0	4	4	0.00 %
Pre-configured Blocks	2	2	4	50.00 %
SAR ADC	0	1	1	0.00 %
DAC				
7-bit IDAC	0	1	1	0.00 %
8-bit IDAC	0	1	1	0.00 %

2 Pins

Figure 2 shows the pin layout of this device.

Figure 2. Device Pin Layout

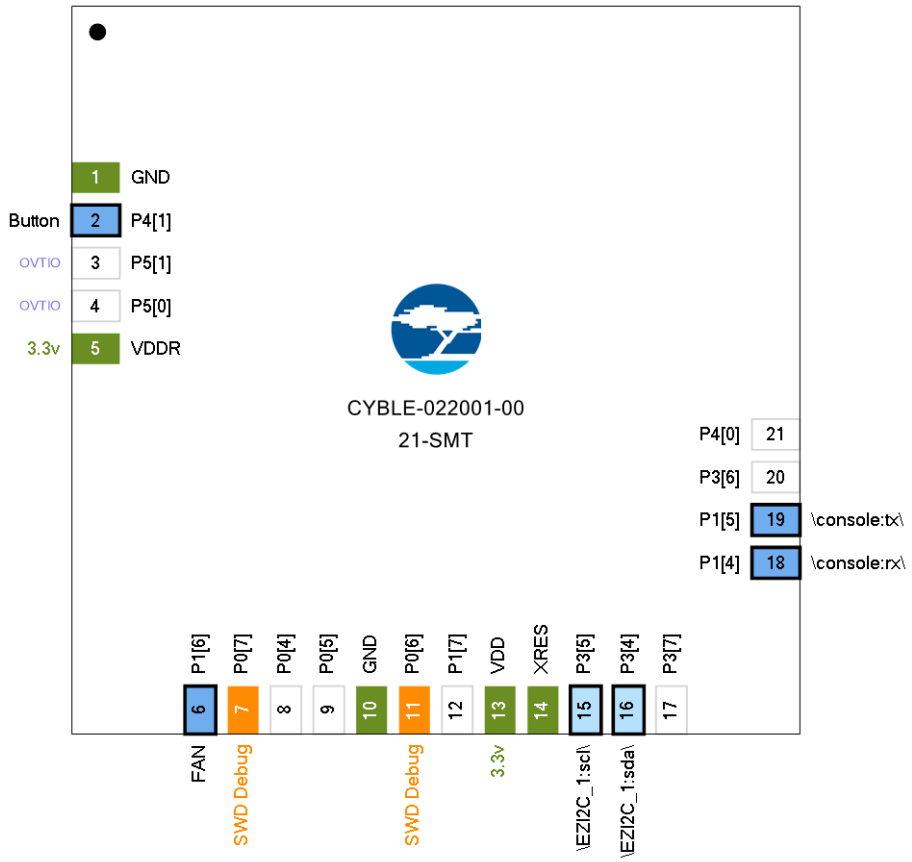

2.1 Hardware Pins

Table 3 contains information about the pins on this device in device pin order. (No connection ["n/c"] pins have been omitted.)

Table 3. Device Pins

Pin	Port	Name	Type	Drive Mode
2	GND	GND	Power	
17	GND	GND	Power	
18	P0[6]	Debug:SWD_IO	Reserved	
19	P1[7]	GPIO [unused]		
20	VDD	VDD	Power	
21	XRES	XRES	Dedicated	
22	P3[5]	\EZI2C_1:scl\	Dgtl In	OD, DL
23	P3[4]	\EZI2C_1:sda\	Dgtl In	OD, DL
24	P3[7]	GPIO [unused]		
26	P1[4]	\console:rx\	Dgtl In	HiZ digital
27	P1[5]	\console:tx\	Dgtl Out	Strong drive
3	P4[1]	Button	Software In/Out	Res pull up
28	P3[6]	GPIO [unused]		
29	P4[0]	GPIO [unused]		
144	VREF	VREF	Dedicated	
4	P5[1]	OVT IO [unused]		
5	P5[0]	OVT IO [unused]		
6	VDDR	VDDR	Power	
13	P1[6]	FAN	Dgtl Out	Strong drive
14	P0[7]	Debug:SWD_CK	Reserved	
15	P0[4]	GPIO [unused]		
16	P0[5]	GPIO [unused]		

Abbreviations used in Table 3 have the following meanings:

- Dgtl In = Digital Input
- OD, DL = Open drain, drives low
- HiZ digital = High impedance digital
- Dgtl Out = Digital Output
- Res pull up = Resistive pull up

2.2 Hardware Ports

Table 4 contains information about the pins on this device in device port order. (No connection ["n/c"], power and dedicated pins have been omitted.)

Table 4. Device Ports

Port	Pin	Name	Type	Drive Mode
P0[4]	15	GPIO [unused]		
P0[5]	16	GPIO [unused]		
P0[6]	18	Debug:SWD_IO	Reserved	
P0[7]	14	Debug:SWD_CK	Reserved	
P1[4]	26	\console:rx\	Dgtl In	HiZ digital
P1[5]	27	\console:tx\	Dgtl Out	Strong drive
P1[6]	13	FAN	Dgtl Out	Strong drive
P1[7]	19	GPIO [unused]		
P3[4]	23	\EZI2C_1:sda\	Dgtl In	OD, DL
P3[5]	22	\EZI2C_1:scl\	Dgtl In	OD, DL
P3[6]	28	GPIO [unused]		
P3[7]	24	GPIO [unused]		
P4[0]	29	GPIO [unused]		
P4[1]	3	Button	Software In/Out	Res pull up
P5[0]	5	OVT IO [unused]		
P5[1]	4	OVT IO [unused]		

Abbreviations used in Table 4 have the following meanings:

- Dgtl In = Digital Input
- HiZ digital = High impedance digital
- Dgtl Out = Digital Output
- OD, DL = Open drain, drives low
- Res pull up = Resistive pull up

2.3 Software Pins

Table 5 contains information about the software pins on this device in alphabetical order. (Only software-accessible pins are shown.)

Table 5. Software Pins

Name	Port	Type
\console:rx\	P1[4]	Dgtl In
\console:tx\	P1[5]	Dgtl Out
\EZI2C_1:scl\	P3[5]	Dgtl In
\EZI2C_1:sda\	P3[4]	Dgtl In
Button	P4[1]	Software In/Out
Debug:SWD_CK	P0[7]	Reserved
Debug:SWD_IO	P0[6]	Reserved
FAN	P1[6]	Dgtl Out
GPIO [unused]	P0[4]	
GPIO [unused]	P4[0]	
GPIO [unused]	P3[6]	
GPIO [unused]	P1[7]	
GPIO [unused]	P3[7]	
GPIO [unused]	P0[5]	
OVT IO [unused]	P5[0]	
OVT IO [unused]	P5[1]	

Abbreviations used in Table 5 have the following meanings:

- Dgtl In = Digital Input
- Dgtl Out = Digital Output

For more information on reading, writing and configuring pins, please refer to:

- Pins chapter in the System Reference Guide
  - CyPins API routines
- Programming Application Interface section in the cy_pins component datasheet

3 System Settings

3.1 System Configuration

Table 6. System Configuration Settings

Name	Value
Device Configuration Mode	Compressed
Unused Bonded IO	Disallowed
Heap Size (bytes)	0x80
Stack Size (bytes)	0x0800
Include CMSIS Core Peripheral Library Files	True

3.2 System Debug Settings

Table 7. System Debug Settings

Name	Value
Debug Select	SWD (serial wire debug)
Chip Protection	Open

3.3 System Operating Conditions

Table 8. System Operating Conditions

Name	Value
VDD (V)	3.3
VDDR (V)	3.3
Variable VDDA	True

4 Clocks

The clock system includes these clock resources:

- Four internal clock sources:
  - 3 to 48 MHz Internal Main Oscillator (IMO) ±2% at 3 MHz
  - 4 to 33 MHz External Crystal Oscillator (ECO)
  - 32 kHz Internal Low Speed Oscillator (ILO) output
  - 32.768 kHz Watch Crystal Oscillator (ILO) output
- HFCLK can be generated using an external signal from EXTCLK pin
- Twelve clock dividers, each with 16-bit divide capability:
  - Eight can be used for fixed-function blocks
  - Four can be used for the UDBs

Figure 3. System Clock Configuration

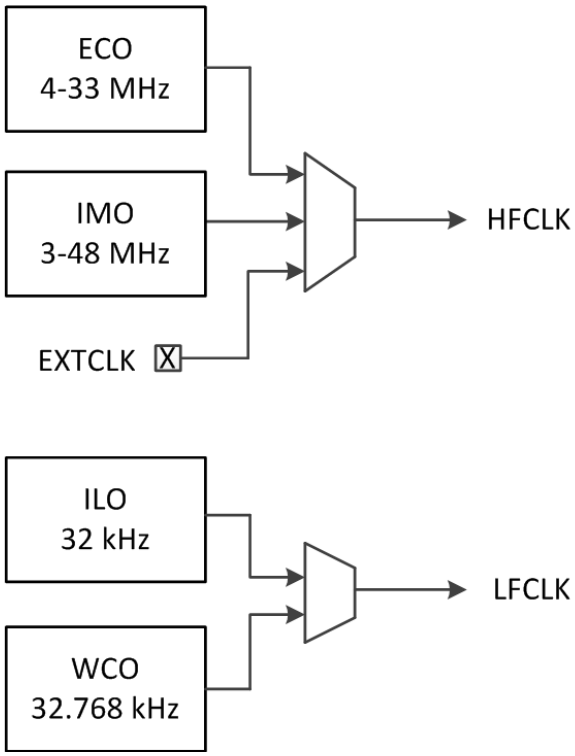

4.1 System Clocks

Table 9 lists the system clocks used in this design.

Table 9. System Clocks

Name	Domain	Source	Desired Freq	Nominal Freq	Accuracy (%)	Start at Reset	Enabled
PLL1_Sel	NONE	IMO	48 MHz	48 MHz	±2	True	True
SysClk	NONE	HFClk	? MHz	48 MHz	±2	True	True
PLL0_Sel	NONE	IMO	48 MHz	48 MHz	±2	True	True
Direct_Sel	NONE	IMO	48 MHz	48 MHz	±2	True	True
HFClk	NONE	Direct_Sel	48 MHz	48 MHz	±2	True	True
IMO	NONE		48 MHz	48 MHz	±2	True	True
ECO	NONE		24 MHz	24 MHz	±0	True	True
LFClk	NONE	WCO	? MHz	32.768 kHz	±0.015	True	True
WCO	NONE		32.768 kHz	32.768 kHz	±0.015	True	True
ILO	NONE		32 kHz	32 kHz	±60	True	True
RTC_Sel	NONE	None	? MHz	? MHz	±0	True	True
DigSig2	NONE		? MHz	? MHz	±0	False	False
DigSig4	NONE		? MHz	? MHz	±0	False	False
DigSig3	NONE		? MHz	? MHz	±0	False	False
Timer2 (WDT2)	NONE	LFClk	? MHz	? MHz	±0	False	False
DigSig1	NONE		? MHz	? MHz	±0	False	False
ExtClk	NONE		24 MHz	? MHz	±0	False	False
Timer1 (WDT1)	NONE	LFClk	? MHz	? MHz	±0	False	False
Timer0 (WDT0)	NONE	LFClk	? MHz	? MHz	±0	False	False

4.2 Local and Design Wide Clocks

Local clocks drive individual analog and digital blocks. Design wide clocks are a user-defined optimization, where two or more analog or digital blocks that share a common clock profile (frequency, etc) can be driven from the same clock divider output source.

Figure 4. Local and Design Wide Clock Configuration

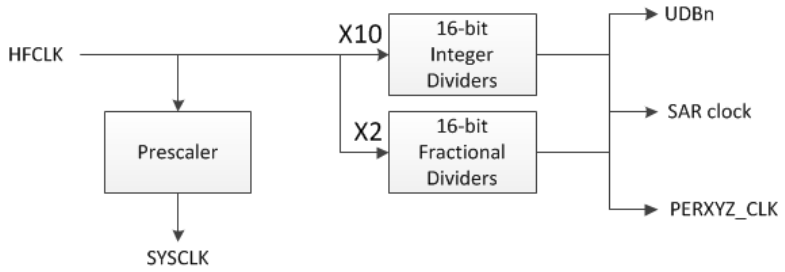

Table 10 lists the local clocks used in this design.

Table 10. Local Clocks

Name	Domain	Source	Desired Freq	Nominal Freq	Accuracy (%)	Start at Reset	Enabled
Clock_1	DIGITAL	HFClk	12 MHz	12 MHz	±2	True	True
EZI2C_1_-SCBCLK	FIXED_-FUNCT-ION	HFClk	1.55 MHz	1.6 MHz	±2	True	True
console_-SCBCLK	FIXED_-FUNCT-ION	HFClk	460.8 kHz	461.538 kHz	±2	True	True
BLE_1_LFCLK	NONE	LFClk	32.768 kHz	32.768 kHz	±0.015	True	True

For more information on clocking resources, please refer to:

- Clocking System chapter in the PSoC 4 Technical Reference Manual
- Clocking chapter in the System Reference Guide
  - CySysClkImo API routines
  - CySysClkIlo API routines
  - CySysClkEco API routines
  - CySysClkWco API routines
  - CySysClkWrite API routines

5 Interrupts

5.1 Interrupts

This design contains the following interrupt components: (0 is the highest priority)

Table 11. Interrupts

Name	Intr Num	Vector	Priority
isr_1	4	4	3
EZI2C_1_SCB_IRQ	10	10	3
BLE_1_bless_isr	12	12	3

For more information on interrupts, please refer to:

- Interrupt Controller chapter in the PSoC 4 Technical Reference Manual
- Interrupts chapter in the System Reference Guide
  - CyInt API routines and related registers
- Datasheet for cy_isr component

6 Flash Memory

PSoC 4 devices offer a host of Flash protection options and device security features that you can leverage to meet the security and protection requirements of an application. These requirements range from protecting configuration settings or Flash data to locking the entire device from external access.

Table 12 lists the Flash protection settings for your design.

Table 12. Flash Protection Settings

Start Address	End Address	Protection Level
0x0	0x1FFFF	U - Unprotected

Flash memory is organized as rows with each row of flash having 128 bytes. Each flash row can be assigned one of four protection levels:

- U - Unprotected
- W - Full Protection

For more information on Flash memory and protection, please refer to:

- Flash Protection chapter in the PSoC 4 Technical Reference Manual
- Flash and EEPROM chapter in the System Reference Guide
  - CySysFlash API routines

7 Design Contents

This design's schematic content consists of the following schematic sheet:

7.1 Schematic Sheet: Page 1

Figure 5. Schematic Sheet: Page 1

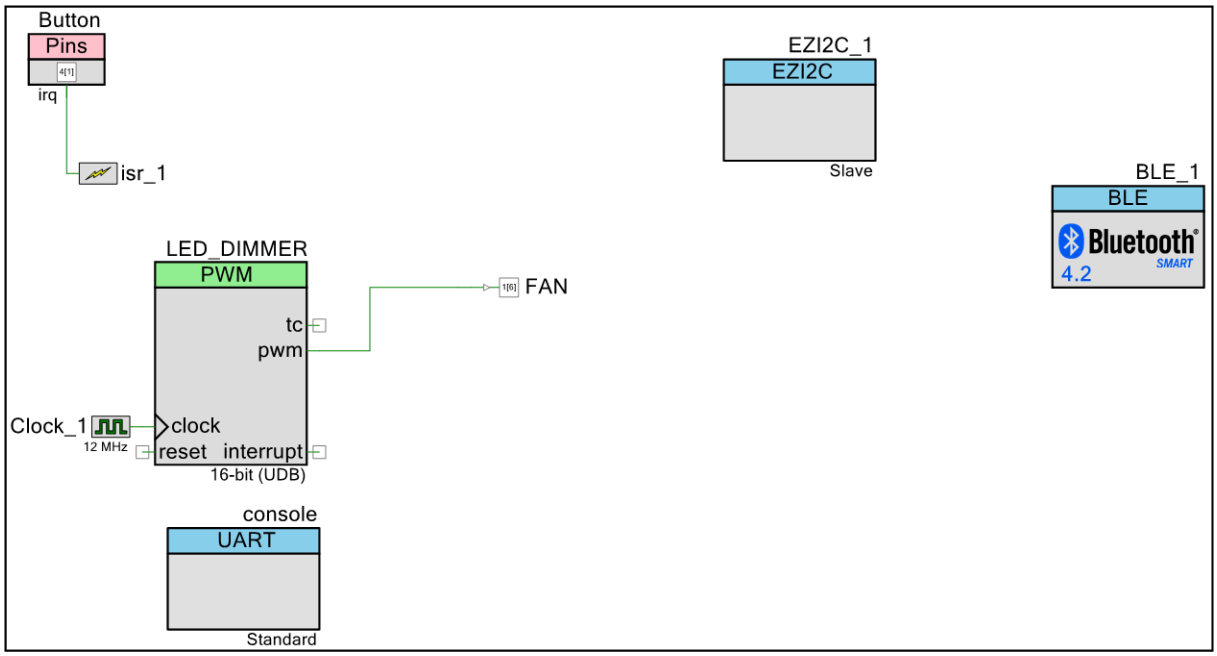

This schematic sheet contains the following component instances:

- Instance BLE_1 (type: BLE_v3_40)
- Instance console (type: SCB_P4_v4_0)
- Instance EZI2C_1 (type: SCB_P4_v4_0)
- Instance LED_DIMMER (type: PWM_v3_30)

8 Components

8.1 Component type: BLE [v3.40]

8.1.1 Instance BLE_1

Description: Bluetooth Low Energy (BLE)
Instance type: BLE [v3.40]
Datasheet: online component datasheet for BLE

Table 13. Component Parameters for BLE_1

Parameter Name	Value	Description
AutopopulateWhitelist	true	Provides an option to link the whitelist to the bonded device list.
EnableExternalPAcontrol	false	Enables external power amplifier control signal with align with internal PA on time. High active.
EnableExternalPrepWriteBuff	false	Enables application to provide dynamically allocated buffer for prepare write request. The buffer should be allocated and provided after CYBLE_EVT_-MEMORY_REQUEST event from stack.
EnableL2capLogicalChannels	true	Enables L2CAP logical channels support.
EnableLinkLayerPrivacy	false	Enables LL Privacy 1.2 feature of Bluetooth 4.2.
HalBaudRate	115200	UART baud rate
HalCtsEnable	true	In the HCI mode, the parameter enables the cts output in the UART.
HalCtsPolarity	Active Low	In the HCI mode, the parameter specifies the active polarity of the output cts signal of the UART.
HalRtsEnable	true	In the HCI mode, the parameter enables the rts output in the UART.
HalRtsPolarity	Active Low	In the HCI mode, the parameter specifies the active polarity of the output rts signal of the UART.
HalRtsTriggerLevel	4	In the HCI mode, the parameter specifies the number of entries in the RX FIFO to activate the rts output signal of the UART.
HciMode	UART	Defines the HCI interface.
ImportFilePath		The path to the file shared by another BLE component instance.

Parameter Name	Value	Description
KeypressNotifications	false	Provides an option for a keyboard-only device during the LE secure pairing process to send key press notifications when the user enters or deletes a key.
L2capMpsSize	23	The maximum size of payload data that the L2CAP layer is capable of accepting.
L2capMtuSize	23	The maximum SDU size of an L2CAP packet.
L2capNumChannels	1	The number of LE L2CAP connection oriented logical channels required by the application.
L2capNumPsm	1	The number of PSMs required by the application.
LLMaxRxPayloadSize	27	The maximum link layer receive payload size to be used in the design.
LLMaxTxPayloadSize	27	The maximum link layer transmit payload size to be used in the design.
MaxAttrNoOfBuffer	1	Number of buffers can be increased from 1 to 10 to achieve better throughput if attribute mtu > 32.
MaxBondedDevices	4	The maximum number of bonded devices to be supported by this device.
MaxResolvableDevices	8	The maximum number of peer devices whose addresses should be resolved by this device.
MaxWhitelistSize	8	The maximum number of devices that can be added to the whitelist.
Mode	Profile	Defines the component operating mode.
SharingMode	None	Defines if some parts of code are shared between two BLE components.
StackMode	Release	Determines the internal stack mode. Is used to switch the operation for debugging.
StrictPairing	false	Provides an option to use only the selected security features and doesn’t fallback to an unsecure connection if the peer device doesn’t support the selected security features.
UseDeepSleep	false	Indicates whether deep sleep mode is used.
User Comments		Instance-specific comments.

8.2 Component type: PWM [v3.30]

8.2.1 Instance LED_DIMMER

Description: 8 or 16-bit Pulse Width Modulator
Instance type: PWM [v3.30]
Datasheet: online component datasheet for PWM

Table 14. Component Parameters for LED_DIMMER

Parameter Name	Value	Description
CaptureMode	None	Defines the functionality of the capture Input. The parameter determines which signal on the capture input is required to capture the current count value to the FIFO.
CompareStatusEdgeSense	true	Enables edge sense detection on compare outputs for use in edge sensitive interrupts
CompareType1	Less	Sets the compare value comparison type setting for the compare 1 output
CompareType2	Less	Sets the compare value comparison type setting for the compare 2 output
CompareValue1	12000	Compares Output 1 to value
CompareValue2	63	Compares Output 2 to value
DeadBand	Disabled	Defines whether dead band outputs are desired or not.
DeadTime	1	Defines the number of required dead band clock cycles
DitherOffset	0.00	Allows the user to implement dither to get more bits out of a 8 or 16 bit PWM.
EnableMode	Software Only	Specifies the method of enabling the PWM. This can be either hardware or software.
FixedFunction	false	Determines whether the fixed function counter timer is used or the UDB implementation is used.
InterruptOnCMP1	false	Enables the interrupt on compare1 true event
InterruptOnCMP2	false	Enables the interrupt on compare2 true event
InterruptOnKill	false	Enables the interrupt on a kill event
InterruptOnTC	false	Enables the interrupt on terminal count event
KillMode	Disabled	Parameter to select the kill mode for build time.
MinimumKillTime	1	Sets the minimum number of clock cycles that a kill must be active on the outputs when KillMode is set to Minimum Kill Time mode
Period	12000	Defines the PWM period value
PWMMode	One Output	Defines the overall mode of the PWM
Resolution	16	Defines the bit width of the PWM (8 or 16 bits)

Parameter Name	Value	Description
RunMode	Continuous	Defines the run mode options to be either continuous or one shot
TriggerMode	None	Determines the mode of starting the PWM, i.e. triggering the PWM counter to start
UseInterrupt	true	Enables the placement and usage of the status register
User Comments		Instance-specific comments.

8.3 Component type: SCB_P4 [v4.0]

8.3.1 Instance console

Description: Serial Communication Block (SCB)
Instance type: SCB_P4 [v4.0]
Datasheet: online component datasheet for SCB_P4

Table 15. Component Parameters for console

Parameter Name	Value	Description
EzI2cByteModeEnable	false	When the SCB mode is EZI2C, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
EzI2cClockFromTerm	false	When the SCB mode is EZI2C, this parameter provides a clock terminal to connect a clock outside the component.
EzI2cClockStretching	true	When the SCB mode is EZI2C, this parameter specifies whether the SCL is stretched while in EZI2C operation.
EzI2cDataRate	100	When the SCB mode is EZI2C, this parameter defines EZI2C Data rate in kbps. The standard data rates are: 100, 400 and 1000 kbps.
EzI2cNumberOfAddresses	1	When the SCB mode is EZI2C, this parameter defines the number of I2C slave addresses that device respond to.
EzI2cPrimarySlaveAddress	8	When the SCB mode is EZI2C, this parameter specifies EZI2C primary 7-bits slave address (MSB ignored).

Parameter Name	Value	Description
EzI2cSecondarySlaveAddress	9	When the SCB mode is EZI2C, this parameter specifies EZI2C secondary 7-bits slave address (MSB ignored). Only applicable when EZI2C clock stretching option is set.
EzI2cSubAddressSize	8	When the SCB mode is EZI2C, this parameter specifies the maximum size of the slave buffer that is exposed to the master: 8bits – maximum buffer size is 256 bytes, 16 bits – maximum buffer size is 65535 bytes.
EzI2cWakeEnable	false	When the SCB mode is EZI2C, this parameter enables wakeup from Deep Sleep on I2C address match event.
I2C Bus Voltage	3.3	When the SCB mode is I2C, this parameter specifies the voltage applied to the pull-up resistors on the I2C bus. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
I2C Bus Voltage	3.3	When the SCB mode is EZI2C, this parameter specifies the voltage applied to the pull-up resistors on the I2C bus. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
I2cAcceptAddress	false	When the SCB mode is I2C, this parameter specifies whether to accept the match slave address in RX FIFO or not. All slave matched addresses are ACKed. The user has to register the callback function to handle accepted addresses. This feature has to be used when more than one address support is required.
I2cAcceptGeneralCall	false	When the SCB mode is I2C, this parameter specifies whether to accept the general call address. The general call address is ACKed when accepted and NAKed otherwise. The user has to register the callback function to handle the general call address.

Parameter Name	Value	Description
I2cByteModeEnable	false	When the SCB mode is I2C, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
I2cClockFromTerm	false	When the SCB mode is I2C, this parameter provides a clock terminal to connect a clock outside the component.
I2cDataRate	100	When the SCB mode is I2C, this parameter specifies the data rate in kbps. The standard data rates are: 100, 400 and 1000 kbps.
I2cExternIntrHandler	false	When the SCB mode is I2C, this parameter specifies whether the I2C interrupt handler is configured in SCB_I2CInit(). This parameter is intended to be used by the PM/SM bus component. The modification parameter default value causes I2C mode failures.
I2cManualOversampleControl	true	When the SCB mode is I2C, this parameter specifies the method of calculating the oversampling as manual or automatic.
I2cMode	Slave	When the SCB mode is I2C, this parameter defines the I2C operation mode as: Slave, Master, Multi-Master or Multi-Master-Slave.
I2cOvsFactor	16	When the SCB mode is I2C, this parameter defines the oversampling factor of SCBCLK.
I2cOvsFactorHigh	8	When the SCB mode is I2C, this parameter defines the high oversampling factor of SCBCLK. Only applicable for I2C Master modes.
I2cOvsFactorLow	8	When the SCB mode is I2C, this parameter defines the low oversampling factor of SCBCLK. Only applicable for I2C Master modes.

Parameter Name	Value	Description
I2cSlaveAddress	8	When the SCB mode is I2C, this parameter specifies the I2C 7-bits slave address (MSB ignored).
I2cSlaveAddressMask	254	When the SCB mode is I2C, this parameter specifies the I2C Slave address mask. Bit value 0 – excludes bit from address comparison. Bit value 1 – the bit needs to match with the corresponding bit of the I2C slave address.
I2cWakeEnable	false	When the SCB mode is I2C, this parameter enables wakeup from Deep Sleep on an I2C address match event.
ScbMisoSdaTxEnable	true	This parameter defines the availability of the spi_miso_i2c_-sda_uart_tx pin.
ScbMode	UART	This parameter defines the mode of operation for the SCB component.
ScbMosiSclRxEnable	true	This parameter defines the availability of the spi_mosi_i2c_-scl_uart_rx pin.
ScbRxWakeIrqEnable	false	This parameter defines the availability of the spi_mosi_i2c_-scl_uart_rx_wake pin.
ScbSclkEnable	false	This parameter defines the availability of the sclk pin.
ScbSs0Enable	false	This parameter defines the availability of the ss0 pin.
ScbSs1Enable	false	This parameter defines the availability of the ss1 pin.
ScbSs2Enable	false	This parameter defines the availability of the ss2 pin.
ScbSs3Enable	false	This parameter defines the availability of the ss3 pin.
Show EZI2C Terminals	false	When the SCB mode is EZI2C, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins.
Show I2C Terminals	false	When the SCB mode is I2C, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins.
Show SPI Terminals	false	When the SCB mode is SPI, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins or SmartIO component.

Parameter Name	Value	Description
Show UART Terminals	false	When the SCB mode is UART, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins or SmartIO component.
Slew Rate	Fast	When the SCB mode is EZI2C, this parameter specifies the slew rate settings of the I2C pins. For devices supporting GPIO Over-Voltage Tolerance (GPIO_OVT) pins, I2C FM+ options should be used when I2C data rate is greater than 400 kbps. This option also requires the I2C bus voltage to be defined.Refer to the Device Datasheet to determine which pins are GPIO_OVT capable.
Slew Rate	Fast	When the SCB mode is I2C, this parameter specifies the slew rate settings of the I2C pins. For devices supporting GPIO Over-Voltage Tolerance (GPIO_OVT) pins, I2C FM+ options should be used when I2C data rate is greater than 400 kbps. This option also requires the I2C bus voltage to be defined. Refer to the Device Datasheet to determine which pins are GPIO_OVT capable.
SpiBitRate	1000	When the SCB mode is SPI, this parameter specifies the Bit rate in kbps (up to 8000 kbps); the actual rate may differ based on available clock frequency and component settings. This parameter has no effect if the Clock from terminal parameter is enabled.
SpiBitsOrder	MSB First	When the SCB mode is SPI, this parameter defines the bit order as: MSB first or LSB first.
SpiByteModeEnable	false	When the SCB mode is SPI, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.

Parameter Name	Value	Description
SpiClockFromTerm	false	When the SCB mode is SPI, this parameter provides a clock terminal to connect a clock outside the component.
SpiFreeRunningSclk	false	When the SCB mode is SPI, this parameter specifies the SCLK generation by the master as: gated or free running (continuous). Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiInterruptMode	None	When the SCB mode is SPI, this parameter specifies the interrupt mode. None: Removes all interrupt support. Internal: Leaves the interrupt SCBIRQ inside the component - the interrupt terminal becomes invisible. External: Provides an interrupt terminal to connect an interrupt outside the component.
SpiIntrMasterSpiDone	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_M. SPI_DONE interrupt source. SCB.INTR_M. SPI_DONE: all data are sent into TX FIFO and the TX FIFO and the shifter register are emptied. Only applicable for SPI Master mode.
SpiIntrRxFull	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.FULL interrupt source. SCB.INTR_RX.FULL trigger condition: RX FIFO is full.
SpiIntrRxNotEmpty	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.NOT_EMPTY interrupt source. SCB.INTR_RX.NOT_EMPTY trigger condition: RX FIFO is not empty. There is at least one entry to get data from.
SpiIntrRxOverflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.OVERFLOW interrupt source. SCB.INTR_RX.OVERFLOW trigger condition: attempt to write to a full RX FIFO.

Parameter Name	Value	Description
SpiIntrRxTrigger	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.TRIGGER interrupt source. SCB.INTR_RX.TRIGGER trigger condition: remains active until RX FIFO has more entries than the value specified by SpiRxTriggerLevel.
SpiIntrRxUnderflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.UNDERFLOW interrupt source. SCB.INTR_RX.UNDERFLOW trigger condition: attempt to read from an empty RX FIFO.
SpiIntrSlaveBusError	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_SLAVE.BUS_-ERROR interrupt source. SCB.INTR_SLAVE.BUS_-ERROR trigger condition: slave select line is deselected at an unexpected time in the SPI transfer. Only applicable for SPI Slave mode.
SpiIntrTxEmpty	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.EMPTY interrupt source. SCB.INTR_TX.EMPTY trigger condition: TX FIFO is empty.
SpiIntrTxNotFull	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.NOT_FULL interrupt source. SCB.INTR_TX.NOT_FULL trigger condition: TX FIFO is not full. There is at least one entry to put data.
SpiIntrTxOverflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.OVERFLOW interrupt source. SCB.INTR_TX.OVERFLOW trigger condition: attempt to write to a full TX FIFO.
SpiIntrTxTrigger	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.TRIGGER interrupt source. SCB.INTR_TX.TRIGGER trigger condition: remains active until TX FIFO has fewer entries than the value specified by SpiTxTriggerLevel.

Parameter Name	Value	Description
SpiIntrTxUnderflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.UNDERFLOW interrupt source. SCB.INTR_TX.UNDERFLOW trigger condition: attempt to read from an empty TX FIFO.
SpiLateMisoSampleEnable	false	When the SCB mode is SPI, this parameter enables late sampling of the MISO line by the master.
SpiMedianFilterEnable	false	When the SCB mode is SPI, this parameter applies a digital 3 tap median filter to the SPI input line.
SpiMode	Slave	When the SCB mode is SPI, this parameter selects SPI mode of operation as: Slave or Master.
SpiNumberOfRxDataBits	8	When the SCB mode is SPI, this parameter specifies the number of data bits inside the SPI byte/word for RX direction.
SpiNumberOfSelectLines	1	When the SCB mode is SPI, this parameter defines the number of slave select lines. The SPI Slave has only one slave select line. The SPI Master has up to 4 lines.
SpiNumberOfTxDataBits	8	When the SCB mode is SPI, this parameter define the number of data bits inside the SPI byte/word for TX direction.
SpiOvsFactor	16	When the SCB mode is SPI, this parameter defines the oversampling factor of SCBCLK.
SpiRemoveMiso	false	When the SCB mode is SPI, this parameter removes the MISO pin.
SpiRemoveMosi	false	When the SCB mode is SPI, this parameter removes the MOSI pin.
SpiRemoveSclk	false	When the SCB mode is SPI, this parameter removes the SCLK pin.
SpiRxBufferSize	8	When the SCB mode is SPI, this parameter defines the size of the RX buffer.
SpiRxOutputEnable	false	When the SCB mode is SPI, this parameter enables the RX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.

Parameter Name	Value	Description
SpiRxTriggerLevel	7	When the SCB mode is SPI, this parameter defines the number of entries in the RX FIFO to control the SCB.INTR_-RX.TRIGGER interrupt event or RX DMA trigger output.
SpiSclkMode	CPHA = 0, CPOL = 0	When the SCB mode is SPI, this parameter defines the serial clock phase (CPHA) and polarity (CPOL).
SpiSs0Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 0. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiSs1Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 1. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiSs2Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 2. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiSs3Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 3. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiSubMode	Motorola	When the SCB mode is SPI, this parameter defines the sub mode of the SPI as: Motorola, TI(Start Coincides), TI(Start Precedes), or National Semiconductor.
SpiTransferSeparation	Continuous	When the SCB mode is SPI, this parameter defines the type of SPI transfers separation as: continuous or separated.
SpiTxBufferSize	8	When the SCB mode is SPI, this parameter defines the size of the TX buffer.
SpiTxOutputEnable	false	When the SCB mode is SPI, this parameter enables the TX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.

Parameter Name	Value	Description
SpiTxTriggerLevel	0	When the SCB mode is SPI, this parameter defines the number of entries in the TX FIFO to control the SCB.INTR_-TX.TRIGGER interrupt event or TX DMA trigger output.
SpiWakeEnable	false	When the SCB mode is SPI, this parameter enables wakeup from Deep Sleep on slave select event.
UartByteModeEnable	false	When the SCB mode is UART, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartClockFromTerm	false	When the SCB mode is UART, this parameter provides a clock terminal to connect a clock outside the component.
UartCtsEnable	false	When the SCB mode is UART, this parameter enables the cts input. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartCtsPolarity	Active Low	When the SCB mode is UART, this parameter specifies active polarity of an input cts signal. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartDataRate	38400	When the SCB mode is UART, this parameter specifies the Baud rate in bps (up to 1000 kbps); the actual rate may differ based on available clock frequency and component settings. This parameter has no effect if the Clock from terminal parameter is enabled.
UartDirection	TX + RX	When the SCB mode is UART, this parameter enables RX or TX direction or both simultaneously.
UartDropOnFrameErr	false	When the SCB mode is UART, this parameter defines whether the data is dropped from RX FIFO on a frame error event.

Parameter Name	Value	Description
UartDropOnParityErr	false	When the SCB mode is UART, this parameter determines whether the data is dropped from RX FIFO on a parity error event.
UartInterruptMode	None	When the SCB mode is UART, this parameter specifies the interrupt mode. None: Removes all interrupt support. Internal: Leaves the interrupt SCBIRQ inside the component - the interrupt terminal becomes invisible. External: Provides an interrupt terminal to connect an interrupt outside component.
UartIntrRxBreakDetected	false	This parameter enables the RX break detection interrupt source to trigger the interrupt output.
UartIntrRxFrameErr	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.FRAME_-ERROR interrupt source. SCB.INTR_RX.FRAME_-ERROR trigger condition: frame error in received data frame.
UartIntrRxFull	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.FULL interrupt source. SCB.INTR_RX.FULL trigger condition: RX FIFO is full.
UartIntrRxNotEmpty	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.NOT_EMPTY interrupt source. SCB.INTR_RX.NOT_EMPTY trigger condition: RX FIFO is not empty. There is at least one entry to get data from.
UartIntrRxOverflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.OVERFLOW interrupt source. SCB.INTR_RX.OVERFLOW trigger condition: attempt to write to a full RX FIFO.
UartIntrRxParityErr	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.PARITY_-ERROR interrupt source. SCB.INTR_RX.PARITY_-ERROR trigger condition: parity error in received data frame.

Parameter Name	Value	Description
UartIntrRxTrigger	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.TRIGGER interrupt source. SCB.INTR_RX.TRIGGER trigger condition: remains active until RX FIFO has more entries than the value specified by UartRxTriggerLevel.
UartIntrRxUnderflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.UNDERFLOW interrupt source. SCB.INTR_RX.UNDERFLOW trigger condition: attempt to read from an empty RX FIFO.
UartIntrTxEmpty	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.EMPTY interrupt source. SCB.INTR_TX.EMPTY trigger condition: TX FIFO is empty.
UartIntrTxNotFull	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.NOT_FULL interrupt source. SCB.INTR_TX.NOT_FULL trigger condition: TX FIFO is not full. There is at least one entry to put data.
UartIntrTxOverflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.OVERFLOW interrupt source. SCB.INTR_TX.OVERFLOW trigger condition: attempt to write to a full TX FIFO.
UartIntrTxTrigger	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.TRIGGER interrupt source. SCB.INTR_TX.TRIGGER trigger condition: remains active until TX FIFO has fewer entries than the value specified by UartTxTriggerLevel.
UartIntrTxUartDone	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UART_DONE interrupt source. SCB.INTR_TX.UART_DONE trigger condition: all data are sent in to TX FIFO and the transmit FIFO and the shifter register are emptied.

Parameter Name	Value	Description
UartIntrTxUartLostArb	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UART_ARB_-LOST interrupt source. SCB.INTR_TX.UART_ARB_-LOST trigger condition: UART lost arbitration, the value driven on the TX line is not the same as the value observed on the RX line. This event is useful when the transmitter and the receiver share a TX/RX line. Only applicable for UART SmartCard mode.
UartIntrTxUartNack	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UART_NACK interrupt source. SCB.INTR_TX.UART_NACK trigger condition: UART transmitter received a negative acknowledgement. Only applicable for UART SmartCard mode.
UartIntrTxUnderflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UNDERFLOW interrupt source. SCB.INTR_TX.UNDERFLOW trigger condition: attempt to read from an empty TX FIFO.
UartIrdaLowPower	false	When the SCB mode is UART, this parameter enables the low power receiver option. Only applicable for UART IrDA mode.
UartIrdaPolarity	Non-Inverting	When the SCB mode is UART, this parameter inverts the incoming RX line signal. Only applicable for UART IrDA mode.
UartMedianFilterEnable	false	When the SCB mode is UART, this parameter applies a digital 3 tap median filter to the UART input line.
UartMpEnable	false	When the SCB mode is UART, this parameter enables the UART multi-processor mode. Only applicable for UART Standard mode.
UartMpRxAcceptAddress	false	When the SCB mode is UART, this parameter define whether to put the matched UART address into RX FIFO. Only applicable for UART multi-processor mode.

Parameter Name	Value	Description
UartMpRxAddress	2	When the SCB mode is UART, this parameter defines the UART address. Only applicable for UART multi-processor mode.
UartMpRxAddressMask	255	When the SCB mode is UART, this parameter defines the address mask in multi-processor operation mode. Bit value 0 – excludes bit from address comparison. Bit value 1 – the bit needs to match with the corresponding bit of the UART address. Only applicable for UART multi-processor mode.
UartNumberOfDataBits	8 bits	When the SCB mode is UART, this parameter defines the number of data bits inside the UART byte/word.
UartNumberOfStopBits	1 bit	When the SCB mode is UART, this parameter defines the number of Stop bits.
UartOvsFactor	12	When the SCB mode is UART, this parameter defines the oversampling factor of SCBCLK.
UartParityType	None	When the SCB mode is UART, this parameter applies UART parity check as Odd or Even or discards the parity entirely.
UartRtsEnable	false	When the SCB mode is UART, this parameter enables the rts output. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartRtsPolarity	Active Low	When the SCB mode is UART, this parameter specifies active polarity of the output rts signal. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartRtsTriggerLevel	4	When the SCB mode is UART, this parameter specifies the number of entries in the RX FIFO to activate the rts output signal. When the receiver FIFO has fewer entries than the UartRtsTriggerLevel, an rts output signal is activated. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartRxBreakWidth	11	This parameter specifies the break width in bits.

Parameter Name	Value	Description
UartRxBufferSize	8	When the SCB mode is UART, this parameter defines the size of the RX buffer.
UartRxOutputEnable	false	When the SCB mode is UART, this parameter enables the RX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.
UartRxTriggerLevel	7	When the SCB mode is UART, this parameter defines the number of entries in the RX FIFO to trigger control the SCB.INTR_RX.TRIGGER interrupt event or RX DMA trigger output.
UartSmCardRetryOnNack	false	When the SCB mode is UART, this parameter defines whether to send a message again when a NACK response is received. Only applicable for UART SmartCard mode.
UartSubMode	Standard	When the SCB mode is UART, this parameter defines the sub mode of UART as: Standard, SmartCard or IrDA.
UartTxBufferSize	8	When the SCB mode is UART, this parameter defines the size of the TX buffer.
UartTxOutputEnable	false	When the SCB mode is UART, this parameter enables the TX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.
UartTxTriggerLevel	0	When the SCB mode is UART, this parameter defines the number of entries in the TX FIFO to control the SCB.INTR_-TX.TRIGGER interrupt event or TX DMA trigger output.
UartWakeEnable	false	When the SCB mode is UART, this parameter enables the wakeup from Deep Sleep on start bit event. The actual wakeup source is RX GPIO. The skip start UART feature allows it to continue receiving bytes.
User Comments		Instance-specific comments.

8.3.2 Instance EZI2C_1

Description: Serial Communication Block (SCB)

Instance type: SCB_P4 [v4.0]
Datasheet: online component datasheet for SCB_P4

Table 16. Component Parameters for EZI2C_1

Parameter Name	Value	Description
EzI2cByteModeEnable	false	When the SCB mode is EZI2C, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
EzI2cClockFromTerm	false	When the SCB mode is EZI2C, this parameter provides a clock terminal to connect a clock outside the component.
EzI2cClockStretching	true	When the SCB mode is EZI2C, this parameter specifies whether the SCL is stretched while in EZI2C operation.
EzI2cDataRate	100	When the SCB mode is EZI2C, this parameter defines EZI2C Data rate in kbps. The standard data rates are: 100, 400 and 1000 kbps.
EzI2cNumberOfAddresses	1	When the SCB mode is EZI2C, this parameter defines the number of I2C slave addresses that device respond to.
EzI2cPrimarySlaveAddress	8	When the SCB mode is EZI2C, this parameter specifies EZI2C primary 7-bits slave address (MSB ignored).
EzI2cSecondarySlaveAddress	9	When the SCB mode is EZI2C, this parameter specifies EZI2C secondary 7-bits slave address (MSB ignored). Only applicable when EZI2C clock stretching option is set.
EzI2cSubAddressSize	8	When the SCB mode is EZI2C, this parameter specifies the maximum size of the slave buffer that is exposed to the master: 8bits – maximum buffer size is 256 bytes, 16 bits – maximum buffer size is 65535 bytes.
EzI2cWakeEnable	false	When the SCB mode is EZI2C, this parameter enables wakeup from Deep Sleep on I2C address match event.

Parameter Name	Value	Description
I2C Bus Voltage	3.3	When the SCB mode is I2C, this parameter specifies the voltage applied to the pull-up resistors on the I2C bus. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
I2C Bus Voltage	3.3	When the SCB mode is EZI2C, this parameter specifies the voltage applied to the pull-up resistors on the I2C bus. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
I2cAcceptAddress	false	When the SCB mode is I2C, this parameter specifies whether to accept the match slave address in RX FIFO or not. All slave matched addresses are ACKed. The user has to register the callback function to handle accepted addresses. This feature has to be used when more than one address support is required.
I2cAcceptGeneralCall	false	When the SCB mode is I2C, this parameter specifies whether to accept the general call address. The general call address is ACKed when accepted and NAKed otherwise. The user has to register the callback function to handle the general call address.
I2cByteModeEnable	false	When the SCB mode is I2C, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
I2cClockFromTerm	false	When the SCB mode is I2C, this parameter provides a clock terminal to connect a clock outside the component.
I2cDataRate	100	When the SCB mode is I2C, this parameter specifies the data rate in kbps. The standard data rates are: 100, 400 and 1000 kbps.

Parameter Name	Value	Description
I2cExternIntrHandler	false	When the SCB mode is I2C, this parameter specifies whether the I2C interrupt handler is configured in SCB_I2CInit(). This parameter is intended to be used by the PM/SM bus component. The modification parameter default value causes I2C mode failures.
I2cManualOversampleControl	true	When the SCB mode is I2C, this parameter specifies the method of calculating the oversampling as manual or automatic.
I2cMode	Slave	When the SCB mode is I2C, this parameter defines the I2C operation mode as: Slave, Master, Multi-Master or Multi-Master-Slave.
I2cOvsFactor	16	When the SCB mode is I2C, this parameter defines the oversampling factor of SCBCLK.
I2cOvsFactorHigh	8	When the SCB mode is I2C, this parameter defines the high oversampling factor of SCBCLK. Only applicable for I2C Master modes.
I2cOvsFactorLow	8	When the SCB mode is I2C, this parameter defines the low oversampling factor of SCBCLK. Only applicable for I2C Master modes.
I2cSlaveAddress	8	When the SCB mode is I2C, this parameter specifies the I2C 7-bits slave address (MSB ignored).
I2cSlaveAddressMask	254	When the SCB mode is I2C, this parameter specifies the I2C Slave address mask. Bit value 0 – excludes bit from address comparison. Bit value 1 – the bit needs to match with the corresponding bit of the I2C slave address.
I2cWakeEnable	false	When the SCB mode is I2C, this parameter enables wakeup from Deep Sleep on an I2C address match event.
ScbMisoSdaTxEnable	true	This parameter defines the availability of the spi_miso_i2c_-sda_uart_tx pin.
ScbMode	EZI2C	This parameter defines the mode of operation for the SCB component.
ScbMosiSclRxEnable	true	This parameter defines the availability of the spi_mosi_i2c_-scl_uart_rx pin.

Parameter Name	Value	Description
ScbRxWakeIrqEnable	false	This parameter defines the availability of the spi_mosi_i2c_-scl_uart_rx_wake pin.
ScbSclkEnable	false	This parameter defines the availability of the sclk pin.
ScbSs0Enable	false	This parameter defines the availability of the ss0 pin.
ScbSs1Enable	false	This parameter defines the availability of the ss1 pin.
ScbSs2Enable	false	This parameter defines the availability of the ss2 pin.
ScbSs3Enable	false	This parameter defines the availability of the ss3 pin.
Show EZI2C Terminals	false	When the SCB mode is EZI2C, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins.
Show I2C Terminals	false	When the SCB mode is I2C, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins.
Show SPI Terminals	false	When the SCB mode is SPI, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins or SmartIO component.
Show UART Terminals	false	When the SCB mode is UART, this parameter removes internal pins and expose signals to terminals. The exposed terminals must be connected to the pins or SmartIO component.
Slew Rate	Fast	When the SCB mode is EZI2C, this parameter specifies the slew rate settings of the I2C pins. For devices supporting GPIO Over-Voltage Tolerance (GPIO_OVT) pins, I2C FM+ options should be used when I2C data rate is greater than 400 kbps. This option also requires the I2C bus voltage to be defined.Refer to the Device Datasheet to determine which pins are GPIO_OVT capable.

Parameter Name	Value	Description
Slew Rate	Fast	When the SCB mode is I2C, this parameter specifies the slew rate settings of the I2C pins. For devices supporting GPIO Over-Voltage Tolerance (GPIO_OVT) pins, I2C FM+ options should be used when I2C data rate is greater than 400 kbps. This option also requires the I2C bus voltage to be defined. Refer to the Device Datasheet to determine which pins are GPIO_OVT capable.
SpiBitRate	1000	When the SCB mode is SPI, this parameter specifies the Bit rate in kbps (up to 8000 kbps); the actual rate may differ based on available clock frequency and component settings. This parameter has no effect if the Clock from terminal parameter is enabled.
SpiBitsOrder	MSB First	When the SCB mode is SPI, this parameter defines the bit order as: MSB first or LSB first.
SpiByteModeEnable	false	When the SCB mode is SPI, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiClockFromTerm	false	When the SCB mode is SPI, this parameter provides a clock terminal to connect a clock outside the component.
SpiFreeRunningSclk	false	When the SCB mode is SPI, this parameter specifies the SCLK generation by the master as: gated or free running (continuous). Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.

Parameter Name	Value	Description
SpiInterruptMode	None	When the SCB mode is SPI, this parameter specifies the interrupt mode. None: Removes all interrupt support. Internal: Leaves the interrupt SCBIRQ inside the component - the interrupt terminal becomes invisible. External: Provides an interrupt terminal to connect an interrupt outside the component.
SpiIntrMasterSpiDone	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_M. SPI_DONE interrupt source. SCB.INTR_M. SPI_DONE: all data are sent into TX FIFO and the TX FIFO and the shifter register are emptied. Only applicable for SPI Master mode.
SpiIntrRxFull	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.FULL interrupt source. SCB.INTR_RX.FULL trigger condition: RX FIFO is full.
SpiIntrRxNotEmpty	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.NOT_EMPTY interrupt source. SCB.INTR_RX.NOT_EMPTY trigger condition: RX FIFO is not empty. There is at least one entry to get data from.
SpiIntrRxOverflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.OVERFLOW interrupt source. SCB.INTR_RX.OVERFLOW trigger condition: attempt to write to a full RX FIFO.
SpiIntrRxTrigger	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.TRIGGER interrupt source. SCB.INTR_RX.TRIGGER trigger condition: remains active until RX FIFO has more entries than the value specified by SpiRxTriggerLevel.
SpiIntrRxUnderflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_RX.UNDERFLOW interrupt source. SCB.INTR_RX.UNDERFLOW trigger condition: attempt to read from an empty RX FIFO.

Parameter Name	Value	Description
SpiIntrSlaveBusError	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_SLAVE.BUS_-ERROR interrupt source. SCB.INTR_SLAVE.BUS_-ERROR trigger condition: slave select line is deselected at an unexpected time in the SPI transfer. Only applicable for SPI Slave mode.
SpiIntrTxEmpty	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.EMPTY interrupt source. SCB.INTR_TX.EMPTY trigger condition: TX FIFO is empty.
SpiIntrTxNotFull	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.NOT_FULL interrupt source. SCB.INTR_TX.NOT_FULL trigger condition: TX FIFO is not full. There is at least one entry to put data.
SpiIntrTxOverflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.OVERFLOW interrupt source. SCB.INTR_TX.OVERFLOW trigger condition: attempt to write to a full TX FIFO.
SpiIntrTxTrigger	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.TRIGGER interrupt source. SCB.INTR_TX.TRIGGER trigger condition: remains active until TX FIFO has fewer entries than the value specified by SpiTxTriggerLevel.
SpiIntrTxUnderflow	false	When the SCB mode is SPI, this parameter enables the SCB.INTR_TX.UNDERFLOW interrupt source. SCB.INTR_TX.UNDERFLOW trigger condition: attempt to read from an empty TX FIFO.
SpiLateMisoSampleEnable	false	When the SCB mode is SPI, this parameter enables late sampling of the MISO line by the master.
SpiMedianFilterEnable	false	When the SCB mode is SPI, this parameter applies a digital 3 tap median filter to the SPI input line.

Parameter Name	Value	Description
SpiMode	Slave	When the SCB mode is SPI, this parameter selects SPI mode of operation as: Slave or Master.
SpiNumberOfRxDataBits	8	When the SCB mode is SPI, this parameter specifies the number of data bits inside the SPI byte/word for RX direction.
SpiNumberOfSelectLines	1	When the SCB mode is SPI, this parameter defines the number of slave select lines. The SPI Slave has only one slave select line. The SPI Master has up to 4 lines.
SpiNumberOfTxDataBits	8	When the SCB mode is SPI, this parameter define the number of data bits inside the SPI byte/word for TX direction.
SpiOvsFactor	16	When the SCB mode is SPI, this parameter defines the oversampling factor of SCBCLK.
SpiRemoveMiso	false	When the SCB mode is SPI, this parameter removes the MISO pin.
SpiRemoveMosi	false	When the SCB mode is SPI, this parameter removes the MOSI pin.
SpiRemoveSclk	false	When the SCB mode is SPI, this parameter removes the SCLK pin.
SpiRxBufferSize	8	When the SCB mode is SPI, this parameter defines the size of the RX buffer.
SpiRxOutputEnable	false	When the SCB mode is SPI, this parameter enables the RX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.
SpiRxTriggerLevel	7	When the SCB mode is SPI, this parameter defines the number of entries in the RX FIFO to control the SCB.INTR_-RX.TRIGGER interrupt event or RX DMA trigger output.
SpiSclkMode	CPHA = 0, CPOL = 0	When the SCB mode is SPI, this parameter defines the serial clock phase (CPHA) and polarity (CPOL).
SpiSs0Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 0. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.

Parameter Name	Value	Description
SpiSs1Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 1. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiSs2Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 2. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiSs3Polarity	Active Low	When the SCB mode is SPI, this parameter specifies active polarity of slave select 3. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
SpiSubMode	Motorola	When the SCB mode is SPI, this parameter defines the sub mode of the SPI as: Motorola, TI(Start Coincides), TI(Start Precedes), or National Semiconductor.
SpiTransferSeparation	Continuous	When the SCB mode is SPI, this parameter defines the type of SPI transfers separation as: continuous or separated.
SpiTxBufferSize	8	When the SCB mode is SPI, this parameter defines the size of the TX buffer.
SpiTxOutputEnable	false	When the SCB mode is SPI, this parameter enables the TX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.
SpiTxTriggerLevel	0	When the SCB mode is SPI, this parameter defines the number of entries in the TX FIFO to control the SCB.INTR_-TX.TRIGGER interrupt event or TX DMA trigger output.
SpiWakeEnable	false	When the SCB mode is SPI, this parameter enables wakeup from Deep Sleep on slave select event.

Parameter Name	Value	Description
UartByteModeEnable	false	When the SCB mode is UART, this parameter specifies the number of bits per FIFO data element. The byte mode – false: a 16-bit FIFO data element. The FIFO depth is 8 entries. The byte mode – true: an 8-bit FIFO data element. The FIFO depth is 16 entries. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartClockFromTerm	false	When the SCB mode is UART, this parameter provides a clock terminal to connect a clock outside the component.
UartCtsEnable	false	When the SCB mode is UART, this parameter enables the cts input. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartCtsPolarity	Active Low	When the SCB mode is UART, this parameter specifies active polarity of an input cts signal. Only applicable for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartDataRate	115200	When the SCB mode is UART, this parameter specifies the Baud rate in bps (up to 1000 kbps); the actual rate may differ based on available clock frequency and component settings. This parameter has no effect if the Clock from terminal parameter is enabled.
UartDirection	TX + RX	When the SCB mode is UART, this parameter enables RX or TX direction or both simultaneously.
UartDropOnFrameErr	false	When the SCB mode is UART, this parameter defines whether the data is dropped from RX FIFO on a frame error event.
UartDropOnParityErr	false	When the SCB mode is UART, this parameter determines whether the data is dropped from RX FIFO on a parity error event.

Parameter Name	Value	Description
UartInterruptMode	None	When the SCB mode is UART, this parameter specifies the interrupt mode. None: Removes all interrupt support. Internal: Leaves the interrupt SCBIRQ inside the component - the interrupt terminal becomes invisible. External: Provides an interrupt terminal to connect an interrupt outside component.
UartIntrRxBreakDetected	false	This parameter enables the RX break detection interrupt source to trigger the interrupt output.
UartIntrRxFrameErr	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.FRAME_-ERROR interrupt source. SCB.INTR_RX.FRAME_-ERROR trigger condition: frame error in received data frame.
UartIntrRxFull	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.FULL interrupt source. SCB.INTR_RX.FULL trigger condition: RX FIFO is full.
UartIntrRxNotEmpty	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.NOT_EMPTY interrupt source. SCB.INTR_RX.NOT_EMPTY trigger condition: RX FIFO is not empty. There is at least one entry to get data from.
UartIntrRxOverflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.OVERFLOW interrupt source. SCB.INTR_RX.OVERFLOW trigger condition: attempt to write to a full RX FIFO.
UartIntrRxParityErr	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.PARITY_-ERROR interrupt source. SCB.INTR_RX.PARITY_-ERROR trigger condition: parity error in received data frame.
UartIntrRxTrigger	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.TRIGGER interrupt source. SCB.INTR_RX.TRIGGER trigger condition: remains active until RX FIFO has more entries than the value specified by UartRxTriggerLevel.

Parameter Name	Value	Description
UartIntrRxUnderflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_RX.UNDERFLOW interrupt source. SCB.INTR_RX.UNDERFLOW trigger condition: attempt to read from an empty RX FIFO.
UartIntrTxEmpty	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.EMPTY interrupt source. SCB.INTR_TX.EMPTY trigger condition: TX FIFO is empty.
UartIntrTxNotFull	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.NOT_FULL interrupt source. SCB.INTR_TX.NOT_FULL trigger condition: TX FIFO is not full. There is at least one entry to put data.
UartIntrTxOverflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.OVERFLOW interrupt source. SCB.INTR_TX.OVERFLOW trigger condition: attempt to write to a full TX FIFO.
UartIntrTxTrigger	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.TRIGGER interrupt source. SCB.INTR_TX.TRIGGER trigger condition: remains active until TX FIFO has fewer entries than the value specified by UartTxTriggerLevel.
UartIntrTxUartDone	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UART_DONE interrupt source. SCB.INTR_TX.UART_DONE trigger condition: all data are sent in to TX FIFO and the transmit FIFO and the shifter register are emptied.
UartIntrTxUartLostArb	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UART_ARB_-LOST interrupt source. SCB.INTR_TX.UART_ARB_-LOST trigger condition: UART lost arbitration, the value driven on the TX line is not the same as the value observed on the RX line. This event is useful when the transmitter and the receiver share a TX/RX line. Only applicable for UART SmartCard mode.

Parameter Name	Value	Description
UartIntrTxUartNack	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UART_NACK interrupt source. SCB.INTR_TX.UART_NACK trigger condition: UART transmitter received a negative acknowledgement. Only applicable for UART SmartCard mode.
UartIntrTxUnderflow	false	When the SCB mode is UART, this parameter enables the SCB.INTR_TX.UNDERFLOW interrupt source. SCB.INTR_TX.UNDERFLOW trigger condition: attempt to read from an empty TX FIFO.
UartIrdaLowPower	false	When the SCB mode is UART, this parameter enables the low power receiver option. Only applicable for UART IrDA mode.
UartIrdaPolarity	Non-Inverting	When the SCB mode is UART, this parameter inverts the incoming RX line signal. Only applicable for UART IrDA mode.
UartMedianFilterEnable	false	When the SCB mode is UART, this parameter applies a digital 3 tap median filter to the UART input line.
UartMpEnable	false	When the SCB mode is UART, this parameter enables the UART multi-processor mode. Only applicable for UART Standard mode.
UartMpRxAcceptAddress	false	When the SCB mode is UART, this parameter define whether to put the matched UART address into RX FIFO. Only applicable for UART multi-processor mode.
UartMpRxAddress	2	When the SCB mode is UART, this parameter defines the UART address. Only applicable for UART multi-processor mode.
UartMpRxAddressMask	255	When the SCB mode is UART, this parameter defines the address mask in multi-processor operation mode. Bit value 0 – excludes bit from address comparison. Bit value 1 – the bit needs to match with the corresponding bit of the UART address. Only applicable for UART multi-processor mode.

Parameter Name	Value	Description
UartNumberOfDataBits	8 bits	When the SCB mode is UART, this parameter defines the number of data bits inside the UART byte/word.
UartNumberOfStopBits	1 bit	When the SCB mode is UART, this parameter defines the number of Stop bits.
UartOvsFactor	12	When the SCB mode is UART, this parameter defines the oversampling factor of SCBCLK.
UartParityType	None	When the SCB mode is UART, this parameter applies UART parity check as Odd or Even or discards the parity entirely.
UartRtsEnable	false	When the SCB mode is UART, this parameter enables the rts output. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartRtsPolarity	Active Low	When the SCB mode is UART, this parameter specifies active polarity of the output rts signal. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartRtsTriggerLevel	4	When the SCB mode is UART, this parameter specifies the number of entries in the RX FIFO to activate the rts output signal. When the receiver FIFO has fewer entries than the UartRtsTriggerLevel, an rts output signal is activated. Applicable only for devices other than PSoC 4000/PSoC 4100/PSoC 4200.
UartRxBreakWidth	11	This parameter specifies the break width in bits.
UartRxBufferSize	8	When the SCB mode is UART, this parameter defines the size of the RX buffer.
UartRxOutputEnable	false	When the SCB mode is UART, this parameter enables the RX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.

Parameter Name	Value	Description
UartRxTriggerLevel	7	When the SCB mode is UART, this parameter defines the number of entries in the RX FIFO to trigger control the SCB.INTR_RX.TRIGGER interrupt event or RX DMA trigger output.
UartSmCardRetryOnNack	false	When the SCB mode is UART, this parameter defines whether to send a message again when a NACK response is received. Only applicable for UART SmartCard mode.
UartSubMode	Standard	When the SCB mode is UART, this parameter defines the sub mode of UART as: Standard, SmartCard or IrDA.
UartTxBufferSize	8	When the SCB mode is UART, this parameter defines the size of the TX buffer.
UartTxOutputEnable	false	When the SCB mode is UART, this parameter enables the TX trigger output terminal of the component. This terminal must be connected to the DMA input trigger or left unconnected. Only applicable for devices which have a DMA controller.
UartTxTriggerLevel	0	When the SCB mode is UART, this parameter defines the number of entries in the TX FIFO to control the SCB.INTR_-TX.TRIGGER interrupt event or TX DMA trigger output.
UartWakeEnable	false	When the SCB mode is UART, this parameter enables the wakeup from Deep Sleep on start bit event. The actual wakeup source is RX GPIO. The skip start UART feature allows it to continue receiving bytes.
User Comments		Instance-specific comments.

9 Other Resources

The following documents contain important information on Cypress software APIs that might be relevant to this design:

- Standard Types and Defines chapter in the System Reference Guide
  - Software base types
  - Hardware register types
  - Compiler defines
  - Cypress API return codes
  - Interrupt types and macros
- Registers
  - The full PSoC 4 register map is covered in the PSoC 4 Registers Technical Reference Manual
  - Register Access chapter in the System Reference Guide
    - CY_GET API routines
    - CY_SET API routines
- System Functions chapter in the System Reference Guide
  - General API routines
  - CyDelay API routines
  - CyVd Voltage Detect API routines
- Power Management
  - Power Supply and Monitoring chapter in the PSoC 4 Technical Reference Manual
  - Low Power Modes chapter in the PSoC 4 Technical Reference Manual
  - Power Management chapter in the System Reference Guide
    - CyPm API routines
- Watchdog Timer chapter in the System Reference Guide
  - CyWdt API routines