

User Manual

PENELOPA

LOOPER & DSP FX PROCESSOR

PRESET / BYPAS



PENELOPA



EFFECT RANGE



INPUT LEVEL



DRY




FX LEVEL




LOOP LEVEL



VOLUME

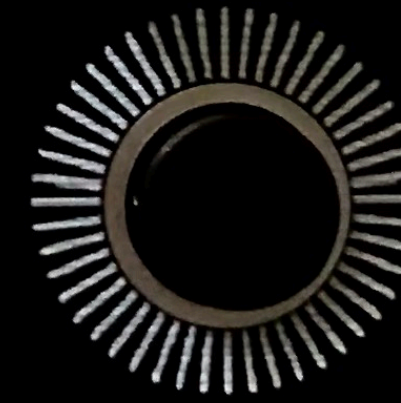

INPUT



CV INPUT



REC IN



STOP IN



AUDIO OUT

LOOPER & DSP FX PROCESSOR

DIODAC ELECTRONICS

2103267A-Y73-220520

LOOPER & DSP FX PROCESSOR

36 high quality unique effect presets including all kinds of delays, echo, flange, tremolo, wobble modulators, ring modulators, VCO sine, square and ramp, reverse sound, octave and real-time pitch shifters, distortion and overdrive.

Performance looper on board can recording up to 6 seconds 16 bit mono audio signal.

Looper in stack with DSP FX can act like a sampler for creating incredible sounds effects.

Penellopa is a perfect “all in one” tool for creating d&b, electro, garage or dubstep sounds, wobble basses, glitchy and broken drum patterns in the simplest and creative as possible way.

CV control 0-5V for effect range.

External controls for looper rec/stop function.

Compatible Eurorack power supply.

Power supply 12VDC 120mA

Panel dimension 26HP

CONTROL KNOBS

PRESET / BYPAS effect selector. Push knob for bypassing the effect.

EFFECT RANGE control of the range or amount of effect.

INPUT LEVEL control of the level input signal.

DRY add dry signal to the output.

FX LEVEL control of the wet signal level.

LOOP LEVEL control of the looper output level.

VOLUME control.



CONTROL BUTTONS

LEFT BUTTON on/off external CV control.

MIDDLE BUTTON push and hold for loop recording. On display appear recording progress bar. Releasing the button will automatically running play and automatically loop recorded sound. Push and hold again will start recording the new loop.

RIGHT BUTTON stop and delete recorded loop.



INPUTS AND OUTPUTS

INPUT input for mono audio signals.

CV INPUT control voltage 0-5V
assigned to Effect Range control.

REC IN 5V high state will running
recording loop. Low state automatically
switch to play recorded loop.

STOP IN 5V high state will stop looper
and delete recorded loop.

AUDIO OUT output mono audio signal.



DIODAC ELECTRONICS

www.diodac.com