

iUniker

Pi Zero 3.5 inch Screen

Instructions



For Raspberry Pi Zero/Zero W

Customer Service Email: iuniker@yeah.net

Online Mode: (Keep your Pi connect to Network)

Step1: Download and Install Raspbian or RetroPie OS to your SD card.


Step2: Make sure the OS was installed and completed.

Step3: Open Terminal, and type the following command:

```
cd ~/
git clone https://github.com/tianyoujian/MZDPI.git
cd MZDPI/mzp351hv00br
sudo chmod +x mzdpi-hvga-autoinstall
sudo ./mzdpi-hvga-autoinstall
```

Waiting for the process completed and then, Reboot Pi.

Please Solder your pi Zero to the screen Like this:

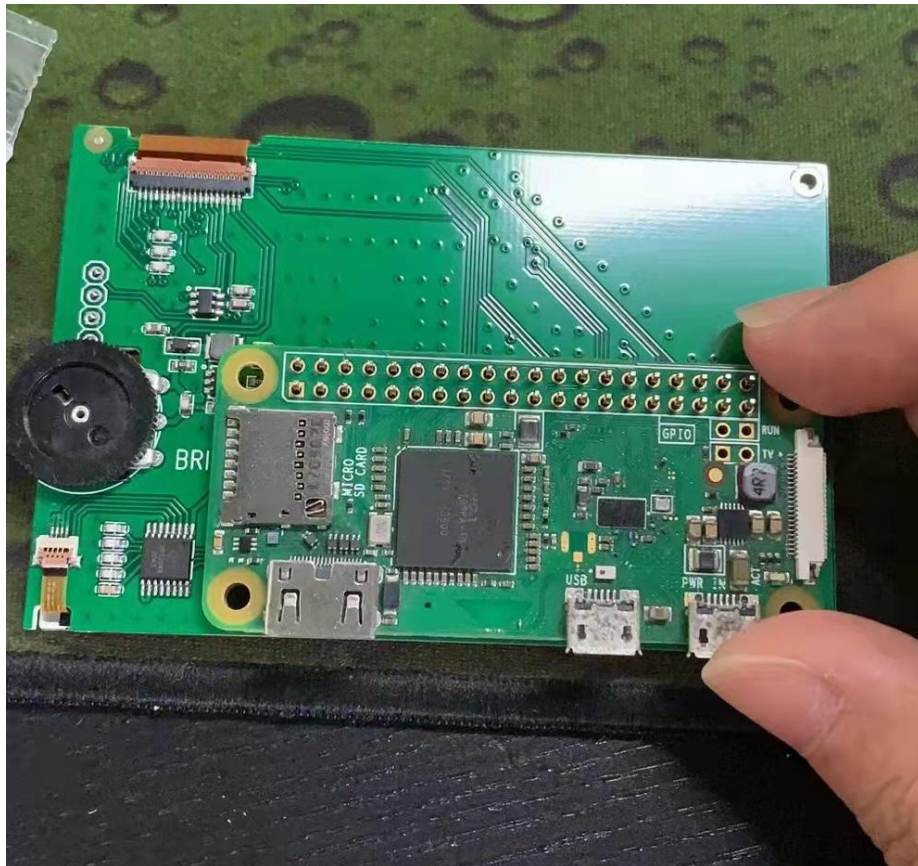

Offline Mode:

Step1: Download and Install Raspbian or Retropie OS to your SD card.

Step2: Make sure the OS was installed and completed.

Step3: Download file named: "mzdpi.zip" from: <http://bit.ly/2NDVcRO> , and then copy it to your sd card and unzip It to : /boot

Step4: Open Terminal, and type the following command:

1. cd /boot
2. ls -l

After these two steps , you will see the MZDPI dir which you unzip.

Step3: cd MZDPI/mzp351hv00br

Step4: sudo chmod +x mzdpi-hvga-autoinstall

Step5: sudo ./mzdpi-hvga-autoinstall

Waiting for the process completed and then, Reboot Pi.

Notice:

If you want use your hdmi screen to display your Pi after you install the driver, there are two ways to solve it:

1. Uninstall Config:

Open Terminal, and type the following command:

cd ~/

git clone <https://github.com/tianyoujian/MZDPI.git>

cd MZDPI/mzp351hv00br

sudo chmod +x mzdpi-hvga-uninstall

sudo ./ mzdpi-hvga-uninstall

Waiting for the process completed and then, Reboot Pi.

2. Delete:

Just open config, then delete the following:

[include mzp351hv00br.txt](#)

Then save it, insert your sd card to Pi, the hdmi will work.

Waring: When you soldering your Pi to the screen, please pay attention. We tested every screen before send them to you, so if the screen can't work, maybe it's a soldering problem.

If you have any question, please contact iuniker@yeah.net