

EE301 Homework-3



İsmail Enes Bülbül, Eren Meydanlı, Ahmet Caner Akar

December 12, 2022

Question 1

a)

The magnitude and phase responses of $H(j\omega)$ can be seen below:

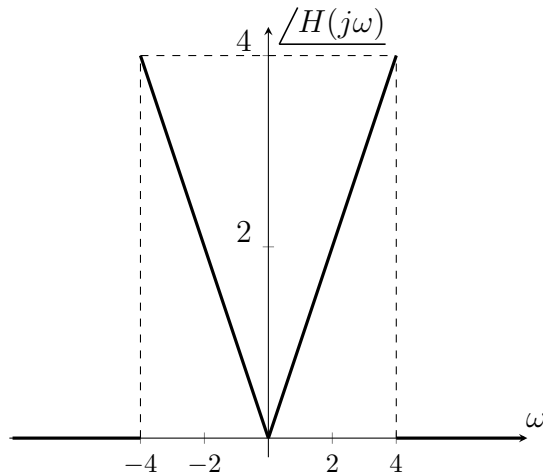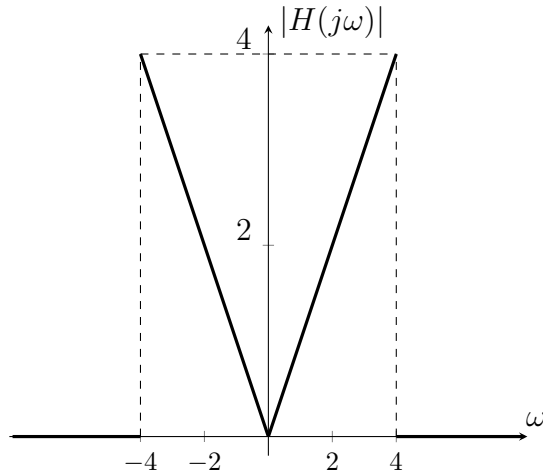

b)

Question 2

a)

b)

c)

Question 3

a)

i)

$$x(t) = \frac{\sin(4\pi t)}{\pi t} \cos(2\pi t) = \frac{4\sin(4\pi t)}{4\pi t} \cos(2\pi t) = x_1(t)x_2(t) \left(\text{where } x_1(t) = \frac{4\sin(4\pi t)}{4\pi t}, x_2(t) = \cos(2\pi t) \right)$$

$$\text{Recall that: } \mathcal{F}\{rect(\theta)\} = \frac{\sin(\omega/2)}{\omega/2}$$

$$\text{By duality property of CTFT: } \frac{\sin(t/2)}{t/2} \longleftrightarrow 2\pi rect(-\omega) = 2\pi rect(\omega)$$

$$\text{By scaling property of CTFT: } \frac{\sin(4\pi t)}{4\pi t} \longleftrightarrow \frac{rect(\frac{\omega}{8\pi})}{4}$$

$$\text{By linearity: } \frac{4\sin(4\pi t)}{4\pi t} \longleftrightarrow rect(\frac{\omega}{8\pi}) = X_1(j\omega)$$

$$x_2(t) = \cos(2\pi t) = \frac{1}{2}e^{j2\pi t} + \frac{1}{2}e^{-j2\pi t}$$


$$\mathcal{F}\{\frac{1}{2}e^{j2\pi t} + \frac{1}{2}e^{-j2\pi t}\} \longleftrightarrow \pi[\delta(\omega + 2\pi) + \delta(\omega - 2\pi)] = X_2(j\omega)$$

By modulation property of CTFT:

$$x(t) = x_1(t)x_2(t) \longleftrightarrow X(j\omega) = \frac{1}{2\pi}X_1(j\omega) * X_2(j\omega)$$

$$X(j\omega) = \frac{1}{2\pi}rect(\frac{\omega}{8\pi}) * \pi[\delta(\omega + 2\pi) + \delta(\omega - 2\pi)] = \frac{1}{2}[rect(\frac{\omega}{8\pi}) * \delta(\omega + 2\pi) + rect(\frac{\omega}{8\pi}) * \delta(\omega - 2\pi)]$$

$$X(j\omega) = \frac{1}{2}rect(\frac{\omega+2\pi}{8\pi}) + \frac{1}{2}rect(\frac{\omega-2\pi}{8\pi})$$

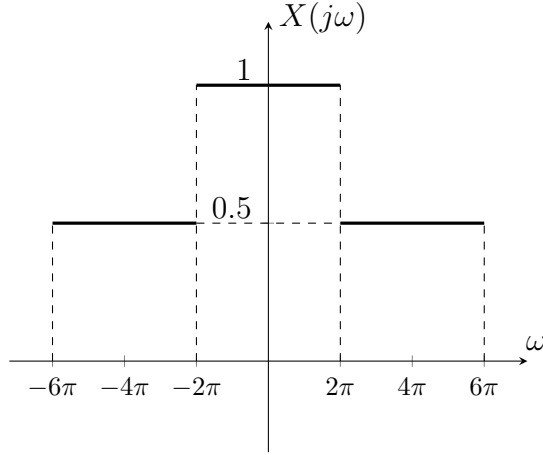

ii)


$$y(t) = h(t) * x(t)$$

By convolution property of CTFT: $y(t) = h(t) * x(t) \longleftrightarrow Y(j\omega) = H(j\omega)X(j\omega)$

$$Y(j\omega) = \left(1 - \text{rect}\left(\frac{\omega}{4\pi}\right)\right) \left(\frac{1}{2}\text{rect}\left(\frac{\omega-2\pi}{8\pi}\right) + \frac{1}{2}\text{rect}\left(\frac{\omega+2\pi}{8\pi}\right)\right)$$

$$Y(j\omega) = \frac{1}{2}\text{rect}\left(\frac{\omega-2\pi}{8\pi}\right) + \frac{1}{2}\text{rect}\left(\frac{\omega+2\pi}{8\pi}\right) - \frac{1}{2}\left(\text{rect}\left(\frac{\omega}{4\pi}\right)\text{rect}\left(\frac{\omega-2\pi}{8\pi}\right) + \text{rect}\left(\frac{\omega}{4\pi}\right)\text{rect}\left(\frac{\omega+2\pi}{8\pi}\right)\right)$$

$$Y(j\omega) = \text{rect}\left(\frac{\omega+4\pi}{4\pi}\right) + \text{rect}\left(\frac{\omega-4\pi}{4\pi}\right)$$

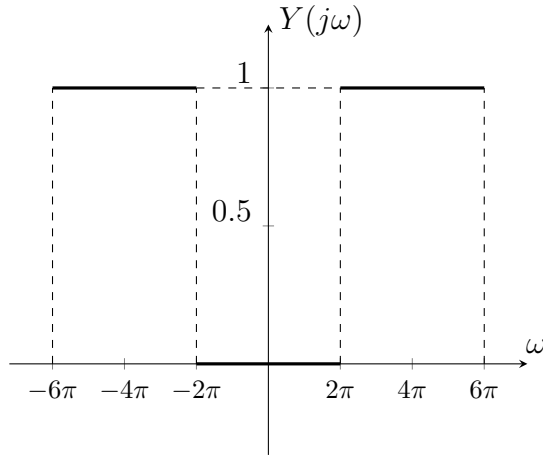

b)


i)

By modulation property of CTFT:

$$z(t) \longleftrightarrow Z(j\omega) = \frac{1}{2\pi}Y(j\omega) * \mathcal{F}\left\{\frac{\sin(2\pi t)}{\pi t}\right\} = \frac{1}{2\pi}Y(j\omega) * \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$\Rightarrow Z(j\omega) = \frac{1}{2\pi} \left(\text{rect}\left(\frac{\omega+4\pi}{4\pi}\right) + \text{rect}\left(\frac{\omega-4\pi}{4\pi}\right)\right) * \text{rect}\left(\frac{\omega}{4\pi}\right)$$

$$\Rightarrow Z(j\omega) = \begin{cases} \frac{8\pi-\omega}{2\pi}, & 4\pi < \omega < 8\pi \\ \frac{\omega}{2\pi}, & 0 < \omega \leq 4\pi \\ \frac{-\omega}{2\pi}, & -4\pi < \omega < 0 \\ \frac{8\pi+\omega}{2\pi}, & -8\pi < \omega \leq -4\pi \end{cases}$$

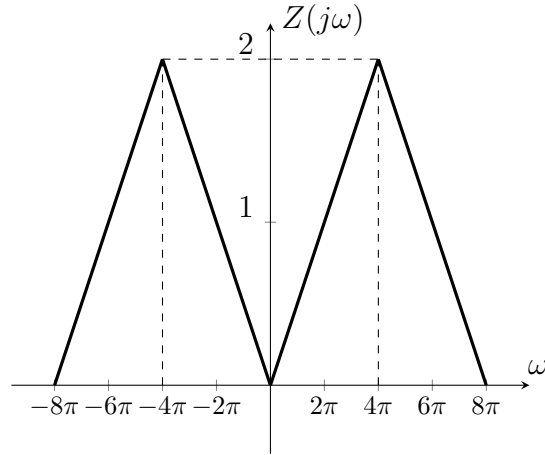

ii)

$$y(t) \longleftrightarrow Y(j\omega) = \text{rect}\left(\frac{\omega+4\pi}{4\pi}\right) + \text{rect}\left(\frac{\omega-4\pi}{4\pi}\right)$$

$$Y(j\omega) = \frac{1}{\pi} \text{rect}\left(\frac{\omega}{4\pi}\right) * \pi[\delta(\omega - 4\pi) + \delta(\omega + 4\pi)]$$

By modulation property of CTFT:

$$\mathcal{F}^{-1}\{Y(j\omega)\} = y(t) = \frac{2\sin(2\pi t)}{\pi t} \cos(4\pi t)$$

Question 4

a)

i)

$$X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} \underbrace{\delta[n]e^{-j\Omega n}}_{\delta[n]e^{-j\Omega 0}} = \sum_{n=-\infty}^{\infty} \delta[n] = 1$$

ii)

$$X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} (2\delta[n-3] - \delta[n-10])e^{-j\Omega n} \stackrel{\text{(by linearity)}}{=} 2 \sum_{n=-\infty}^{\infty} \delta[n-3]e^{-j\Omega n} - \sum_{n=-\infty}^{\infty} \delta[n-10]e^{-j\Omega n}$$

By time-shift property of DTFT:

$$X(e^{j\Omega}) = 2e^{-j3\Omega} - e^{-j10\Omega}$$

iii)

$$X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\Omega n} = \sum_{n=1}^4 \frac{1}{n^2} e^{-j\Omega n} = e^{-j\Omega} + \frac{1}{4}e^{-j2\Omega} + \frac{1}{9}e^{-j3\Omega} + \frac{1}{16}e^{-j4\Omega}$$

iv)

$$\begin{aligned} X(e^{j\Omega}) &= \sum_{n=-\infty}^{\infty} \left(\left(\frac{1}{2} \right)^n u[n] - 3^n u[-n-1] \right) e^{-j\Omega n} \\ \text{(by linearity)} \quad &= \sum_{n=-\infty}^{\infty} \left(\frac{1}{2} \right)^n u[n] e^{-j\Omega n} - \sum_{n=-\infty}^{\infty} 3^n u[-n-1] e^{-j\Omega n} = \sum_{n=0}^{\infty} \left(\frac{1}{2} e^{-j\Omega} \right)^n - \sum_{n=-\infty}^{-1} 3^n e^{-j\Omega n} \\ \sum_{n=0}^{\infty} \left(\frac{1}{2} e^{-j\Omega} \right)^n &= \frac{1}{1 - \frac{1}{2} e^{-j\Omega}} \quad \left(\text{since } \left| \frac{1}{2} e^{-j\Omega} \right| = \frac{1}{2} < 1, \text{ so the expression is convergent} \right) \\ \text{Let } m = -n : \sum_{n=-\infty}^{-1} 3^n e^{-j\Omega n} &= \sum_{m=1}^{\infty} 3^{-m} e^{j\Omega m} = \sum_{m=1}^{\infty} \left(\frac{1}{3} e^{j\Omega} \right)^m = \underbrace{\left[\sum_{m=0}^{\infty} \left(\frac{1}{3} e^{j\Omega} \right)^m \right]}_{\frac{1}{1 - \frac{1}{3} e^{j\Omega}}} - 1 \\ \Rightarrow X(e^{j\Omega}) &= \frac{1}{1 - \frac{1}{2} e^{-j\Omega}} - \left(\frac{1}{1 - \frac{1}{3} e^{j\Omega}} - 1 \right) \end{aligned}$$

v)

Say that, $\hat{x}[n] = \left(\frac{1}{2} \right)^n u[n] - 3^n u[-n-1]$ and $\mathcal{F}\{\hat{x}[n]\} = \hat{X}(e^{j\Omega}) = \frac{1}{1 - \frac{1}{2} e^{-j\Omega}} - \left(\frac{1}{1 - \frac{1}{3} e^{j\Omega}} - 1 \right)$

By time-shift property of DTFT:

$$x[n] = \hat{x}[n-7] \longleftrightarrow X(e^{j\Omega}) = \hat{X}(e^{j\Omega}) e^{-j7\Omega}$$

$$\Rightarrow X(e^{j\Omega}) = \frac{e^{-j7\Omega}}{1 - \frac{1}{2} e^{-j\Omega}} - \left(\frac{e^{-j7\Omega}}{1 - \frac{1}{3} e^{j\Omega}} - e^{-j7\Omega} \right)$$

vi)

Let $x[n]$ be a periodic signal with fundamental period N . Then,

$$\mathcal{F}\{x[n]\} = X(e^{j\Omega}) = \sum_{m=-\infty}^{\infty} \sum_{k=k_0}^{k_0+N-1} a_k 2\pi \delta(\Omega - k \frac{2\pi}{N} - 2\pi m)$$

Note that for this signal if we consider the interval $0 \leq \Omega < 2\pi$, DTFT of the signal will be written as:

$$\mathcal{F}\{x[n]\} = X(e^{j\Omega}) = \sum_{k=0}^2 a_k 2\pi \delta(\Omega - k \frac{2\pi}{3})$$

First, find the DTFS coefficients of $x[n]$: $a_k = \frac{1}{3} \sum_{n=0}^2 x[n] e^{-jk \frac{2\pi}{3} n}$

$$\Rightarrow a_0 = \frac{1}{3} \sum_{n=0}^2 x[n] = \frac{1}{3} + \frac{1}{3} = \frac{2}{3}$$

$$\Rightarrow a_1 = \frac{1}{3} \sum_{n=0}^2 x[n] e^{-j\frac{2\pi}{3}n} = \frac{1}{3} e^{-j\frac{2\pi}{3}} + \frac{1}{3} e^{-j\frac{4\pi}{3}} = \frac{-1}{3}$$

$$\Rightarrow a_2 = \frac{1}{3} \sum_{n=0}^2 x[n] e^{-j\frac{4\pi}{3}n} = \frac{1}{3} e^{-j\frac{4\pi}{3}} + \frac{1}{3} e^{-j\frac{8\pi}{3}} = \frac{-1}{3}$$

$$X(e^{j\Omega}) = \sum_{k=0}^2 a_k 2\pi \delta(\Omega - k\frac{2\pi}{3}) = a_0 2\pi \delta(\Omega) + a_1 2\pi \delta(\Omega - \frac{2\pi}{3}) + a_2 2\pi \delta(\Omega - \frac{4\pi}{3})$$

$$X(e^{j\Omega}) = \frac{2\pi}{3} \left(2\delta(\Omega) - \delta(\Omega - \frac{2\pi}{3}) - \delta(\Omega - \frac{4\pi}{3}) \right)$$

b)

i)

$$x[n] = \frac{1}{2\pi} \int_{\Omega_0}^{\Omega_0+2\pi} \underbrace{X(e^{j\Omega})}_{=1} e^{j\Omega n} d\Omega = \frac{1}{2\pi} \int_{-\pi}^{\pi} e^{j\Omega n} d\Omega = \frac{1}{2\pi j n} (e^{j\pi n} - e^{-j\pi n})$$

$$x[n] = \frac{1}{\pi n} \frac{1}{2j} (e^{j\pi n} - e^{-j\pi n}) = \frac{\sin(\pi n)}{\pi n}$$

Recall that, $\text{sinc}(t) = \begin{cases} \frac{\sin(\pi t)}{\pi t}, & t \neq 0 \\ 1, & t = 0 \end{cases}$

Here, n is an integer. So, $\frac{\sin(\pi n)}{\pi n} = \begin{cases} 1, & n = 0 \\ 0, & \text{otherwise} \end{cases} \Rightarrow x[n] = \delta[n]$

ii)

We know that, $\mathcal{F}\{1\} = 2\pi \sum_{m=-\infty}^{\infty} \delta(\Omega - 2\pi m)$

By frequency-shift property of DTFT:

$$\mathcal{F}\{e^{j\Omega_0 n}\} = 2\pi \sum_{m=-\infty}^{\infty} \delta(\Omega - \Omega_0 - 2\pi m)$$

$$\Rightarrow \mathcal{F}\{e^{j\frac{\pi}{3}n}\} = 2\pi \sum_{m=-\infty}^{\infty} \delta(\Omega - \frac{\pi}{3} - 2\pi m) = 2\pi X(e^{j\Omega})$$

$$\Rightarrow \mathcal{F}^{-1}\left\{ \sum_{m=-\infty}^{\infty} \delta(\Omega - \frac{\pi}{3} - 2\pi m) \right\} = \frac{e^{j\frac{\pi}{3}n}}{2\pi} = x[n]$$

iii)

$$\begin{aligned}x[n] &= \frac{1}{2\pi} \int_{-\pi}^{\pi} X(e^{j\Omega}) e^{j\Omega n} d\Omega = \frac{1}{2\pi} \underbrace{\int_{-\pi}^{-\frac{\pi}{2}} e^{j\Omega n} d\Omega}_{= \int_{\frac{\pi}{2}}^{\pi} e^{-j\Omega n} d\Omega} + \frac{1}{2\pi} \int_{\frac{\pi}{2}}^{\pi} e^{j\Omega n} d\Omega = \frac{1}{2\pi} \int_{\frac{\pi}{2}}^{\pi} e^{j\Omega n} + e^{-j\Omega n} d\Omega \\x[n] &= \frac{1}{\pi} \int_{\frac{\pi}{2}}^{\pi} \cos(\Omega n) d\Omega = \frac{1}{\pi n} \sin(\Omega n) \Big|_{\frac{\pi}{2}}^{\pi} = \frac{\sin(\pi n)}{\pi n} - \frac{\sin(\frac{\pi}{2} n)}{\pi n}\end{aligned}$$

iv)

By frequency-shift property of DTFT:

$$x[n] \longleftrightarrow X(e^{j\Omega})$$

$$x[n] e^{j\frac{\pi}{4}n} \longleftrightarrow X(e^{j(\Omega - \frac{\pi}{4})}) = Y(e^{j\Omega})$$

$$\text{Therefore, } y[n] = x[n] e^{j\frac{\pi}{4}n} = \frac{\sin(\pi n) e^{j\frac{\pi}{4}n}}{\pi n} - \frac{\sin(\frac{\pi}{2}n) e^{j\frac{\pi}{4}n}}{\pi n}$$

Question 5

a)

b)

c)

d)

Question 6