

ncsim: A Lightweight Simulator for Networked Edge Computing with Wireless Interference Modeling

Bhaskar Krishnamachari*, Maya Gutierrez*, and Jared Coleman*[†]

*University of Southern California
bkrishna@usc.edu, mayaguti@usc.edu

[†]Loyola Marymount University
jared.coleman@lmu.edu

Abstract—Evaluating directed acyclic graph (DAG) task schedulers for wireless edge computing requires jointly modeling compute placement and wireless interference, yet many evaluation setups simplify the wireless coupling. This can lead to *rank inversions*: a scheduler selected under an interference-free model need not remain best when concurrent wireless traffic is included. We present *ncsim*, a lightweight discrete-event simulator that combines DAG workflow scheduling with an analytical IEEE 802.11 contention and hidden-interference model in a single Python package. A 108-run factorial experiment on grid networks and DAG workflows finds rank inversions in 6 of 18 scenarios (33.3%). Solo retains single-link MAC overhead, while Full adds concurrent-link wireless effects. Selecting a policy under Solo and executing it under Full incurs a maximum scheduling regret (makespan penalty relative to the best evaluated policy under Full) of 52.3%. Validation includes Bianchi’s published numerical and graphical results and fixed-rate ns-3 experiments. The default model closely tracks homogeneous contention. The scheduler results show how wireless coupling can change policy selection within the stated flow model.

I. INTRODUCTION

Edge and fog computing architectures distribute computation across heterogeneous nodes connected by networks of varying capacity and reliability [1]. Effective task scheduling in these environments requires co-optimizing compute placement and network transport: a task placement that minimizes computation time may incur excessive data transfer costs, while a network-aware placement may underutilize fast processors.

Existing simulation tools address parts of this problem. Network simulators such as ns-3 [2] and OMNeT++ with its network model libraries [3] provide detailed protocol stacks, while SimGrid [4], WRENCH [5], and CloudSim [6] model distributed applications and compute resources. SimGrid also models bandwidth sharing among concurrent flows and within WiFi cells, and offers an ns-3 backend [35], [36]. Edge-specific tools like iFogSim [7] and EdgeCloudSim [8] add domain-specific placement and network models. The combination we study is DAG placement with multihop routes, overlapping carrier-sense neighborhoods, and service rates affected by hidden transmitters in a Python flow simulator.

We present *ncsim*,¹ an open-source, lightweight, flow-

level discrete-event simulator that combines DAG workflow scheduling with analytical 802.11 WiFi models in a single Python package. *ncsim* occupies the space between packet-level network simulators (ns-3, OMNeT++) and application and resource simulators (SimGrid, WRENCH, CloudSim, iFogSim): a configurable environment for comparing scheduler outcomes under explicit wireless assumptions.

To examine the effect on scheduler selection, we use *ncsim* in a 108-run factorial study comparing Solo, which retains single-link MAC overhead, with Full, which adds concurrent-link wireless effects. The scheduler sets that minimize makespan under the two wireless modes are disjoint in 6 of 18 scenarios. Selecting a policy under Solo incurs a maximum makespan penalty of 52.3% under Full, on the 4×4 grid with five tasks and widest-path routing. This comparison isolates concurrent wireless effects from single-link MAC overhead and shows how they change scheduler selection in the flow model.

The contributions are:

- 1) **ncsim simulator**: a modular architecture combining DAG scheduling through SAGA and built-in policies with log-distance path loss, table-based rates, Bianchi contention, service rates affected by hidden transmitters, and multihop routing with dynamic bandwidth sharing.
- 2) **Three validation stages**: internal component and event-engine checks, reproduction of Bianchi’s published results [9], and ns-3 comparisons with measurement settings and approximation-specific errors stated separately.
- 3) **Rank inversion finding**: a 108-run grid factorial yields six rank inversions and a mean scheduling regret of 5.6%.
- 4) **Sensitivity**: a CCR sweep and concurrent-workflow experiment characterize the effects of payload size and workflow count.

Sections II to V survey related work and describe *ncsim*’s architecture, system model, and simulation engine. Section VI validates the WiFi model, and Section VII presents the experimental evaluation. Section VIII concludes.

¹<https://github.com/ANRGUSC/ncsim>

II. RELATED WORK

We situate `ncsim` at the intersection of DAG scheduling research and wireless network simulation. Our target users need a combination of DAG-aware scheduling, wireless CSMA/CA and hidden-terminal modeling, and lightweight parameter sweeps in one tool. Table I summarizes the comparison.

DAG scheduling and workflow systems. DAG scheduling has a rich history in parallel computing, from list-scheduling and dynamic-level scheduling to HEFT and CPOP [11], [12], [13], [10]. Benchmarking and parametric scheduler design tools such as SAGA, PISA, and parametric decomposition enable adversarial search and systematic ablation [14], [15], [16]. Dispersed and edge execution systems (Jupiter, Tactical Jupiter, and throughput-oriented extensions) integrate DAG scheduling with profiling and orchestration [17], [18], [19]. Tactical Jupiter accounts for CSMA interference in its bandwidth estimates and evaluates an 802.11n MANET using hybrid network emulation [18]. Our focus is an analytical flow simulator that couples DAG execution with wireless service rates.

Network simulators and wireless/edge DAG systems. ns-3 [2] and OMNeT++ with network model libraries such as INET [3] provide WiFi and TCP/IP models, but they are packet-level tools: integrating the placement and execution semantics of a DAG requires a workflow layer. Their event counts depend on packet traffic, whereas `ncsim` schedules changes in flow service.

A growing body of edge/IoT scheduling and offloading work tackles heterogeneous devices and mobile edge computing (MEC) offloading [20], [21], [22], [23], [24], [25], [26], [27], [28]. For example, MTEC, LAVEA, and Hetero-Edge use measured network conditions to estimate communication costs [22], [23], [24]. Our flow model explicitly represents CSMA/CA and hidden-terminal effects in 802.11 channels. Related work also examines broader fog-computing opportunities [29], [30] and coded edge computing [31].

Workflow and edge simulators. SimGrid [4] simulates computation and communication in distributed applications. Its flow models allocate rates subject to shared-resource capacity constraints and update ongoing transfers when competing activities change [35]. The native WiFi model of Courageux-Sudan et al. [36] represents an access point and its stations as a shared wireless channel. It accounts for heterogeneous station rates and reduces channel capacity as concurrency increases, using parameters calibrated against ns-3 for the chosen MCS and RTS/CTS settings. The study evaluates throughput agreement and large-scale simulation; its modeled scope excludes hidden nodes and inter-cell interference.

`ncsim` addresses multihop wireless DAG execution with overlapping carrier-sense and hidden-interference neighborhoods. Node positions and RF parameters determine link rates and which links interact; local Bianchi calculations and received interference power determine service as transfers start and finish. This lets a scheduler’s placement and routing choices change the wireless load experienced by other DAG dependencies within one Python simulation. Both tools use

TABLE I: Simulator comparison. WiFi and contention entries describe the available modeling abstraction; the Packets column identifies packet-level simulation. DAG indicates a bundled workflow interface; integrations can extend it. OMNeT++ entries refer to network model libraries; SimGrid entries refer to native flow models, excluding its ns-3 backend.

Tool	DAG	WiFi	Contention	Hidden intf.	Packets
ns-3 [2]	✗	✓	✓	✓	✓
OMNeT++ [3]	✗	✓	✓	✓	✓
SimGrid [4], [36]	✓	✓	✓	✗	✗
WRENCH [5]	via SimGrid models				
CloudSim [6]	cloud resource/application models				
iFogSim [7]	application graphs; abstract transport				
EdgeCloudSim [8]	edge tasks; analytical WLAN delay				
ncsim	✓	✓	✓	✓	✗

flow-level updates, but their native wireless models represent different interactions. SimGrid also offers an ns-3 backend for packet-level networking [35]. WRENCH [5] supplies workflow-management abstractions over SimGrid, while CloudSim [6] models cloud applications and resources.

Edge-specific tools such as iFogSim [7] and Edge-CloudSim [8] add domain-specific workload and placement features. Our companion MILCOM study [37] uses `ncsim` to study locality-aware scheduling and routing.

III. ARCHITECTURE

`ncsim` is organized around a layered discrete-event simulation (DES) engine with pluggable components for scheduling, routing, and interference modeling. Figure 1 illustrates the data flow from scenario specification through simulation to output traces.

A. Design Goals

Four principles guide `ncsim`. **Determinism:** stable event ordering, seeded inputs, and microsecond time quantization support repeatable runs in a recorded software environment. **Modularity:** six abstract base classes (Table III) decouple schedulers, routing, and interference models so swapping one does not touch the others. **Simplicity:** scenarios are declarative YAML; the simulator is a Python package with declarative inputs and pluggable models. **Physical grounding:** link bandwidths are derived from RF parameters (transmit power, frequency, path loss exponent), so link rates are physically consistent with node positions rather than specified as arbitrary constants.

B. Scope and Assumptions

`ncsim` targets macroscopic scheduling decisions using flow-level wireless service and single-slot FIFO compute execution. It models CSMA/CA contention, hidden terminals, and modulation and coding scheme (MCS) selection in static networks. Table II summarizes the modeling scope.

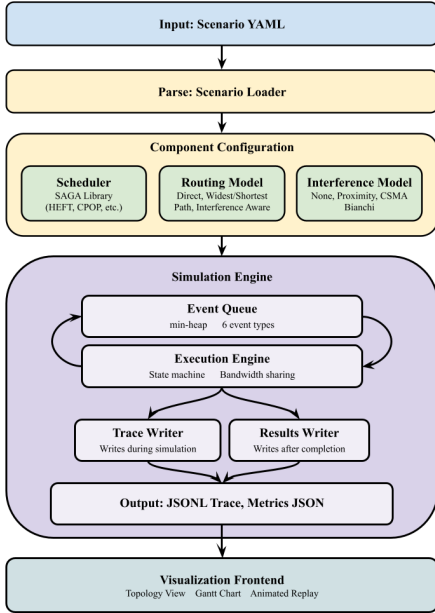


Fig. 1: High-level architecture of `ncsim`.

TABLE II: Modeling scope of `ncsim`. The representation column identifies the abstraction; validation results are reported in Section VI.

Phenomenon	Representation	Scope
CSMA/CA contention	Bianchi	Local saturation
Hidden terminals	SINR	Persistent demand
Rate selection	$1/\ln/ac/ax$ lookup	Heuristic thresholds
Path loss	Log-distance	Static geometry
Pkt-level dynamics	Not modeled	Unresolved
TCP slow-start	Not modeled	No transport stack
Static shadowing	Optional log-normal	Fixed realization
Multi-slot parallelism	Not modeled	One FIFO slot

`ncsim`'s flow-level abstraction targets scheduler evaluation with bulk DAG edges (10 MB-class payloads in the grid experiments), where sustained service rates are useful approximations. It represents dependency payload service rather than a TCP connection: no congestion window, retransmission queue, or transport startup is simulated. The Bianchi component describes homogeneous saturated contention, and its use in overlapping neighborhoods is an approximation. We use deterministic path loss throughout; optional log-normal shadowing is drawn once per node pair and held fixed. Mobility, time-varying fading, and OFDM waveform dynamics are outside this implementation.

C. Key Abstractions

Six abstract base classes (Table III) let researchers plug in their own schedulers, routing models, or interference models without touching the core event engine; every component used in Section VII is itself an instance of these interfaces.

TABLE III: Pluggable abstractions in `ncsim`.

ABC	Implementations
Scheduler	Manual, RoundRobin, 22 SAGA algorithms; optional PEFT and structural base-lines
RoutingModel	Direct, WidestPath, MinimumHop, ShortestPath
InterferenceModel	None, CSMA Bianchi
LinkModel	Static
QueueModel	FIFO
DAGSource	Single, Multi

TABLE IV: Study artifact organization. Folder paths are relative to the study directory; simulator source is at the repository root.

Component	Location
<code>ncsim</code> source identity	MANIFEST.json
Frozen workload and topology inputs	inputs/
Saved workflow and packet observations	results/
ns-3 sources and build instructions	ns3/
Validation, plotting, and analysis	scripts/
LaTeX source and figure dependencies	manuscript/

D. Visualization and Tooling

`ncsim` includes a React/D3 web-based visualization frontend with three views: a **network topology view** showing nodes, links, and active transfers; a **Gantt chart** of task execution and transfer timelines per node; and an **animated replay** with playback controls for observing bandwidth recalculation cascades. Simulation output is written in JSONL trace format (one JSON object per event) for integration with external analysis tools. The command-line interface supports batch execution, facilitating the automated parameter sweeps used throughout Section VII.

E. Artifact Availability

The `ncsim` project repository is <https://github.com/ANRGUSC/ncsim>. Study materials are organized under `artifacts/arxiv-2605.01094/` on the repository's `paper` branch (Table IV). The folder contains the inputs, saved observations, analysis scripts, and manuscript sources. A content-hash manifest identifies these files and the simulator source used with them. Appendix D gives the folder layout and commands for checking the records, generating figures, running the workflow studies, and compiling the paper.

IV. SYSTEM MODEL

The models underlying `ncsim` describe the network and compute infrastructure, the DAG workflow representation, the scheduling and routing frameworks, and the analytical 802.11 WiFi model that captures contention and hidden terminal effects.

A. Network Model

A network consists of *nodes* and directed *links*. Each node v has a compute capacity C_v (compute units per second) and an

optional 2D position (x_v, y_v) used for RF calculations. Each link ℓ from node u to node v has a bandwidth B_ℓ (MB/s) and latency L_ℓ (seconds). Topologies are specified in YAML and can be arbitrary directed graphs.

B. Compute Model

A task t has a compute cost w_t (in compute units). The execution time on node v is w_t/C_v . Each node processes one task at a time using FIFO queuing. Tasks follow a five-state lifecycle: PENDING $\rightarrow$ READY $\rightarrow$ QUEUED $\rightarrow$ RUNNING $\rightarrow$ COMPLETED.

C. DAG Workflow Model

Workflows are modeled as directed acyclic graphs (DAGs) where nodes represent tasks and edges represent data dependencies. Each edge $e = (t_i, t_j)$ carries a data payload of size d_e (in MB) that must be transferred from the node executing t_i to the node executing t_j before t_j can begin. If t_i and t_j are placed on the same node, the transfer is instantaneous (zero cost). DAGs are injected at specified simulation times.

D. Scheduling Framework

The scheduler receives a `NetworkSnapshot`, an immutable view of node capacities, link bandwidths, queue depths, and active transfers, and returns a `PlacementPlan` mapping each task to a node. `ncsim` includes built-in policies and an adapter for SAGA's static schedulers:

- **Manual:** Uses `pinned_to` annotations from the YAML.
- **RoundRobin:** Cycles through nodes, respecting pin constraints.
- **SAGA:** The adapter exposes 22 static scheduling algorithms, including HEFT, CPOP, Min-Min, Max-Min, and Sufferage [10], [15]. PEFT is additionally available when provided by the installed SAGA version. The virtual network uses route bottleneck goodput for reachable node pairs. The adapter retains task placements; execution uses ready-time FIFO, not the processor timelines returned by the scheduling algorithms. A small virtual bandwidth discourages unreachable pairs, while the executor reports any required dependency lacking a usable route as unroutable.

The experiments in Section VII compare HEFT, CPOP, and RoundRobin. The broader scheduler interface supports other comparisons without changing the executor.

E. Routing and Bandwidth Sharing

Four routing models determine the path for data transfers:

- **Direct:** Only allows transfers over explicit single-hop links.
- **WidestPath:** Modified Dijkstra maximizing bottleneck bandwidth.
- **MinimumHop:** Breadth-first search minimizing hop count.
- **ShortestPath:** Dijkstra minimizing configured latency. We use MinimumHop in the experiments because their link latencies are zero.

Multi-hop transfers use pipelined fluid semantics: all route links are occupied during the byte-service phase, the service rate

is their minimum (bottleneck), and configured path latency is paid once before this phase. Routes are selected from clean link goodputs and held fixed during a transfer. For equal bottleneck rates, WidestPath retains the first predecessor found, processing equal-priority nodes by node ID and outgoing links by link ID; it has no secondary hop-count objective. This is not hop-by-hop store-and-forward packet delivery. Same-node dependencies incur zero communication time. When multiple transfers share a link, each receives a fair share:

$$B_{\text{per-flow}}(\ell) = \frac{B_\ell \cdot f(\ell)}{N_\ell} \quad (1)$$

where $f(\ell)$ is the interference factor and N_ℓ is the number of concurrent flows on link ℓ . When a transfer starts or completes, all affected transfers are recalculated and their completion events rescheduled.

F. WiFi / 802.11 Model

The WiFi model replaces static link bandwidths with rates derived from RF parameters, and models contention and hidden terminal interference using path-loss and analytical service models. The physical-layer and MAC models draw on standard 802.11 analysis; path loss and MCS selection are standard; carrier-sensing range and conflict graph construction are adapted from the literature; we integrate Bianchi's established contention analysis with a flow-level effective-rate hidden-interference approximation. The following subsections formalize these mechanisms.

1) *Physical Layer:* The received power at distance d uses log-distance path loss:

$$\text{PL}(d) = \text{PL}(d_0) + 10n \log_{10}\left(\frac{d}{d_0}\right) \quad (2)$$

$$P_{\text{rx}}(d) = P_{\text{tx}} - \text{PL}(d) \quad (3)$$

where $\text{PL}(d_0)$ is the Friis free-space loss at reference distance $d_0 = 1$ m, n is the path loss exponent, and P_{tx} is the transmit power. The signal-to-noise ratio is $\text{SNR} = P_{\text{rx}} - N_0$ (in dB), where N_0 is the noise floor. The path loss exponent n ranges from 2 (free-space) to ≥ 3.5 (dense indoor).

The PHY data rate is selected from the appropriate 802.11 MCS table based on the computed SNR:

$$R_\ell = \max\{r_k : \text{SNR}_\ell \geq \text{SNR}_{\text{min},k}\} \quad (4)$$

If no MCS threshold is met, $R_\ell = 0$. The SNR thresholds are configurable model parameters, not requirements mandated by IEEE 802.11. This selects the highest-rate MCS whose threshold is met, producing a discrete rate staircase, a key feature that continuous-rate models fail to capture.

2) *Carrier Sensing and Conflict Graph:* The carrier sensing range d_{CS} is the maximum distance at which a transmission triggers the clear channel assessment (CCA) mechanism:

$$d_{\text{CS}} = d_0 \cdot 10^{\frac{P_{\text{tx}} - \theta_{\text{CCA}} - \text{PL}(d_0)}{10n}} \quad (5)$$

The conflict graph $G_C = (L, E_C)$ is defined over links. Without RTS/CTS, links sharing an endpoint always conflict;

otherwise two links conflict if either transmitter can sense any node of the other link. With RTS/CTS, any node of one link sensing any node of the other creates a conflict.

3) *CSMA Bianchi Model* (*csma_bianchi*): The dynamic model separates two interference mechanisms. Let $\mathcal{A}$ be the set of currently active links, $\mathcal{C}_\ell = \mathcal{A} \cap \mathcal{N}(\ell)$ the active contending neighbors, and $\mathcal{H}_\ell = (\mathcal{A} \setminus \mathcal{N}(\ell)) \setminus \{\ell\}$ the candidate hidden interferers. Only candidates whose power at the receiver reaches -105 dBm enter the hidden-power sum. An active link is one used by an unfinished backlogged transfer; every hop of a fluid route is active. Multiple flows on the same link share service but do not increase the link-based contender count.

a) *Contention factor*.: The number of contending stations is $n = 1 + |\mathcal{C}_\ell|$. Using Bianchi's saturation throughput analysis [9], the MAC efficiency $\eta(n, R)$ uses the coupled equations for transmission probability τ and collision probability p :

$$\tau = \frac{2}{W_{\min} + 1 + W_{\min} p \sum_{k=0}^{m-1} (2p)^k} \quad (6)$$

$$p = 1 - (1 - \tau)^{n-1} \quad (7)$$

with minimum contention window $W_{\min} = 16$ and maximum backoff stage $m = 6$. We solve numerically via bisection (Section VI-B) to obtain the equilibrium (τ^*, p^*) . Here $W_{\min}$ counts backoff choices ($CW_{\min} + 1$), and the finite-sum form avoids an apparent singularity at $p = 1/2$. For positive PHY rate R , the payload efficiency depends on both contender count and rate:

$$\eta(n, R) = \frac{P_S L / R}{P_I \sigma + P_S T_S(R) + P_C T_C(R)} \quad (8)$$

where $P_I = (1 - \tau)^n$, $P_S = n\tau(1 - \tau)^{n-1}$, $P_C = 1 - P_I - P_S$, L is payload bits, and σ is the idle-slot duration. Rates in Mb/s and times in microseconds make L/R a payload duration. Each contender receives $R\eta(n, R)/(8n)$ MB/s. The numerator counts payload airtime; the denominator includes the full MAC exchange. Appendix A gives the rate-dependent frame timings.

b) *Hidden terminal factor*.: Hidden terminals transmit simultaneously with link ℓ , causing interference at the receiver. The SINR is:

$$\text{SINR}_\ell = 10 \log_{10} \left(\frac{P_{\text{rx}}^{(\text{lin})}}{N_0^{(\text{lin})} + \sum_{j \in \mathcal{H}_\ell} P_j^{(\text{lin})}} \right) \quad (9)$$

A frame's MCS is fixed during its reception. The flow model instead maps persistent offered interference to an effective service rate, using thresholds shifted by a margin:

$$\theta_{\text{eff},k} = \theta_{\text{select},k} - \Delta, \quad \Delta = 5 \text{ dB}. \quad (10)$$

The margin is a phenomenological model parameter, chosen independently of ns-3 receiver calibration. Capture analyses [32], [33], [34] motivate the use of received-power ratios in this approximation. Let R_ℓ^{eff} be the highest rate meeting the shifted SINR threshold, capped at the clean rate R_ℓ . It is zero when no threshold is met. With no active hidden interferer, the margin is bypassed and $R_\ell^{\text{eff}} = R_\ell$. Define

$$f_{\text{HT}}(\ell) = R_\ell^{\text{eff}} / R_\ell, \quad R_\ell > 0. \quad (11)$$

Each active hidden link contributes its transmitter's received power to the sum while the transfer has data remaining. The sum counts links: two active outgoing links from the same transmitter contribute separately, although a single radio sends its frames sequentially. This calculation summarizes concurrent transfer demand without tracking when each radio transmits or waits between packets. The optional fixed-MCS mode in Section VI-C instead estimates how often a hidden transmitter overlaps a reception and reduces goodput when that overlap prevents decoding. It applies to isolated pairs of hidden links and is used in the two-link comparison in Figure 6.

c) *Combined factor*.: The clean solo bandwidth used in Equation (1) is $B_\ell = R_\ell \eta(1, R_\ell) / 8$ for $R_\ell > 0$, and zero otherwise. We set $f(\ell) = 0$ when $R_\ell^{\text{eff}} = 0$. For positive effective rate, the normalized interference factor is

$$f(\ell) = \frac{R_\ell^{\text{eff}} \eta(n, R_\ell^{\text{eff}})}{n R_\ell \eta(1, R_\ell)} \quad (12)$$

so an isolated link has $f(\ell) = 1$. The local Bianchi calculation treats the contenders as homogeneous, using the target link's effective rate to calculate MAC efficiency even when neighboring links have different rates. No positive floor is imposed in the main experiments. Zero-rate transfers pause and are reevaluated when the active set changes.

The Solo mode retains single-link MAC overhead and same-link flow sharing, but disables concurrent-link wireless degradation. Full mode adds Equation (12); both give the scheduler the same clean solo link rates. The raw-PHY mode is available for diagnostics. The factorial comparison uses Solo as its baseline so that both modes include single-link MAC overhead.

V. SIMULATION ENGINE

The discrete-event simulation engine coordinates task execution, data transfer, and interference dynamics through an event-driven architecture.

A. Event Processing

ncsim uses an event-driven DES with a min-heap priority queue. Six event types are processed in priority order at each simulation time:

- 1) DAGINJECT: Invokes scheduler, initializes task states
- 2) TASKCOMPLETE: Frees node, triggers output transfers
- 3) TRANSFERCOMPLETE: Delivers data, checks readiness
- 4) TASKREADY: Starts task or enqueues if node busy
- 5) TASKSTART: Begins execution, schedules completion
- 6) TRANSFERSTART: Acquires link bandwidth, schedules completion

The priority ordering at the same simulation time is chosen for causal correctness: completions are processed before starts, and task completions before transfer completions, so that a freed node is immediately available to any task that becomes ready at the same instant. Stale events are cancelled via lazy deletion and discarded when they reach the head of the queue; all times are rounded to microsecond precision. Stable insertion sequence

breaks remaining ties; this specifies repeatability within the recorded environment.

B. Bandwidth Recalculation Cascade

Wireless interference means that the effective bandwidth of a link depends on which other links are simultaneously active. When a transfer starts or finishes, the engine collects same-link sharers and transfers affected through carrier-sense or hidden-interference dependencies. It deduplicates these flows and updates their progress before replacing their rates:

$$D_q(t) = \max\{0, D_q(t_0) - b_q(t_0)(t - t_0)\}. \quad (13)$$

Here D_q is remaining MB and $b_q(t_0)$ the previously assigned bottleneck rate. Crediting elapsed service at the old rate preserves already-served bytes. The engine then evaluates every hop of each affected route, takes the new bottleneck, cancels obsolete completions, and schedules the remaining work. Transfer completions are rounded upward so unserved bytes are not discarded.

All hops remain active while their transfer is backlogged, including at zero service. Collecting affected flows once suffices because rate changes do not change which links remain active. A subsequent start or finish triggers another expansion. Dense hidden neighborhoods can make this nearly global; a small conflict-graph degree does not bound the work. Heap operations cost $O(\log Q)$ for Q pending events, while refresh cost also depends on affected routes and neighborhoods.

FIFO compute execution reserves the next queued task's node before its start event is processed, preventing two equal-time starts from claiming one processor. A paused transfer can resume after competing traffic ends. If the event queue empties with unfinished wireless backlogs, the run is reported as `blocked_wireless`, a deadlock of this deterministic offered-interference model. It is not a proof of physical infeasibility. Required dependencies with no usable route are `unroutable`; explicit simulation limits and implementation errors have separate statuses. Only completed runs receive a finite makespan. Appendix B gives a worked two-hop example and the event-update checks.

VI. VALIDATION

We evaluate `ncsim`'s flow-level model in three validation stages. **Stage 1 (Internal)**. Controlled experiments check link rates, contention, hidden-interference composition, and event updates against their analytical definitions. **Stage 2 (Literature)**. We reproduce Bianchi's Table III and Figure 6 to check the MAC analytical component [9]. **Stage 3 (Packet comparison)**. We compare with fixed-rate ns-3 contention and separation experiments and distinguish the approximation used for each curve. These stages test implementation consistency, reproduction of a published analytical model, and predictive agreement in specified packet configurations, respectively.

A. Internal Verification

The internal experiments isolate link-rate selection, parallel interference, shared receivers, staggered starts, same-link

TABLE V: Experiment 1: PHY-rate verification versus link length (802.11ax, 5 GHz). Rates exclude MAC overhead.

Dist(m)	SNR(dB)	MCS	Pred(MB/s)	Sim(MB/s)
1	68.58	11	17.925	17.925
12	36.20	9	14.338	14.338
30	24.27	5	8.600	8.600
50	17.61	3	4.300	4.300
75	12.33	2	3.225	3.225
105	7.94	0	1.075	1.075
140	4.19	n/a	0.000	0.000

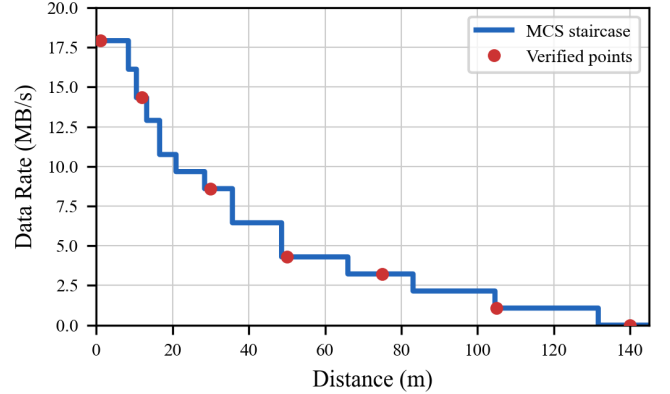


Fig. 2: Experiment 1: PHY data rate vs. link distance showing discrete MCS transitions (802.11ax, 5 GHz, $n=3$). Red dots mark experimentally verified data points from Table V.

sharing, N-way contention, hidden-interference cascades, and combined effects. The numerical examples below exercise the default model; the event-engine regression suite also checks recovery from temporary zero rates, FIFO execution, and local versus global refresh. These checks establish consistency between the model definitions and execution.

1) *Experiment 1: Link Length vs. Data Rate*: A single link between two nodes at varying distances from 1 m to 140 m. Table V shows selected results. The simulated rate matches the analytically predicted MCS-selected rate at every distance. At 140 m the SNR (4.19 dB) falls below MCS 0 (5 dB threshold), correctly yielding zero rate. Figure 2 plots the characteristic staircase pattern: rate is constant within each MCS band and drops discretely at each SNR threshold.

2) *Experiment 2: Parallel Link Separation*: Two parallel 30 m links separated vertically by distances from 5 m to 200 m. Figure 3 illustrates the three interference regimes. At separation ≤ 70 m, the transmitters are within the carrier-sensing range (71.2 m), so the links contend: each receives $8.6 \eta(2, 68.8)/2 = 1.942$ MB/s. The clean PHY rate is 68.8 Mb/s and the solo payload goodput is 3.783 MB/s.

Beyond the sensing boundary, the effective-rate model assigns 2.601 MB/s at 75 m, 3.319 MB/s at 80–100 m, and 3.783 MB/s from 120 m in the tested sweep. All 15 transfer measurements agree with the piecewise analytical calculation to the reported precision. Figure 6 compares this effective-rate prediction with ns-3 and with the optional fixed-capture mode,

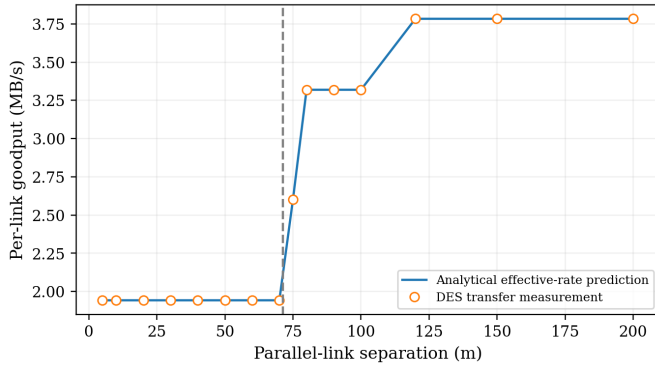


Fig. 3: Experiment 2: effective per-link rate vs. separation for two parallel 30 m links. The sensing boundary is 71.2 m. Points are DES transfer measurements and the line is the analytical prediction.

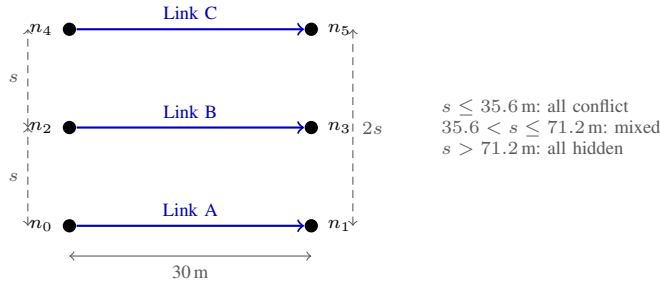


Fig. 4: Experiment 4 topology: three parallel 30 m links at variable separation s . As s increases, the interference regime transitions from all-conflict to mixed (adjacent pairs contend, outer pair A–C are hidden terminals) to all-hidden.

which models the hidden-terminal dip through packet overlap.

3) *Experiment 4: Three Parallel Links*: This experiment extends the two-link topology of Experiment 2 to three parallel 30 m links placed at $y = 0$, $y = s$, and $y = 2s$ (links A, B, C), each carrying a 10 MB transfer. Figure 4 illustrates the topology with separation s as the independent variable.

As s increases, three interference regimes emerge: (i) *all-conflict* ($s \leq 35.6$ m): all three pairs are within d_{CS} , each link gets $8.6 \eta(3, 68.8)/3$ MB/s; (ii) *mixed* ($35.6 < s \leq 71.2$ m): adjacent pairs (A–B, B–C) contend via Bianchi, while the outer pair (A–C at distance $2s$) are hidden terminals, creating asymmetric rates; and (iii) *all-hidden* ($s > 71.2$ m): no conflict-graph edges, each link sees the others purely as hidden terminals. Because A/C and B generally have different rates, one group finishes first, and the remaining links' interference conditions change. The analytical prediction accounts for this multi-phase behavior.

Table VI shows transfer-average rates, including rate changes after one group finishes. All 11 separation cases agree within $4 \mu\text{s}$ in completion time. In the mixed regime, the outer links finish before B: at $s = 70$ m their average rate is 1.942 MB/s versus B's 1.651 MB/s. At 100 m the corresponding rates are 3.319 and 2.790 MB/s. This checks composition of contention

TABLE VI: Experiment 4: Three parallel links at varying separation. In the mixed regime the middle link B contends with both neighbors while outer links A, C contend only with B and see each other as hidden terminals.

s (m)	Regime	Pred R_A	Sim R_A	Pred R_B	Sim R_B
10	all-conf	1.275	1.275	1.275	1.275
35	all-conf	1.275	1.275	1.275	1.275
40	mixed	1.686	1.686	1.521	1.521
50	mixed	1.686	1.686	1.521	1.521
70	mixed	1.942	1.942	1.651	1.651
75	all-hid	2.601	2.601	2.601	2.601
100	all-hid	3.319	3.319	2.790	2.790
150	all-hid	3.783	3.783	3.783	3.783

A=C by symmetry in all cases. Rates in MB/s.

TABLE VII: Reproduction of Bianchi [9] Table III: normalized saturation throughput S for $W=32$, $m=3$.

n	Computed	Published	Rel. Error
2	0.847311	0.8473	0.001%
3	0.836828	0.8368	0.003%

and hidden-power effects with asymmetric completion events.

4) *Additional Validation Experiments*: Five additional experiments validate: (3) two-transmitter shared-receiver topologies, (5) staggered transfer starts with dynamic recalculation, (6) per-link bandwidth sharing with multiple flows, (8) five-link hidden terminal cascades with different data sizes, and (9) combined bandwidth sharing with hidden terminal interference. The regression suite covers these interaction types; the numerical parallel-link checks are also executed by the evidence-generation script.

B. External Validation Against Bianchi (2000)

To check our implementation against an external reference, we reproduce the numerical results from Bianchi's paper [9] using his exact parameters: FHSS 1 Mbps basic access (no RTS/CTS), with slot duration $50 \mu\text{s}$, SIFS $28 \mu\text{s}$, DIFS $128 \mu\text{s}$, propagation delay $1 \mu\text{s}$, payload 8184 bits, MAC header 272 bits, PHY header 128 bits, and ACK 112 bits plus the PHY header.

1) *Table III Reproduction*: Table VII compares our computed normalized saturation throughput S against the values published in Bianchi's Table III for $W=32$, $m=3$. At $n=2$, our solver computes $S = 0.847311$ versus the published 0.8473 (relative error 0.001%). At $n=3$, we compute $S = 0.836828$ versus 0.8368 (relative error 0.003%). These sub-basis-point differences are consistent with rounding in the published table.

We solve the coupled equations (Equations (6) and (7)) by bisection rather than direct fixed-point iteration, which can oscillate when the mapping slope exceeds unity. The solver brackets p on $[0, 1]$, checks an equation residual of at most 10^{-13} , and raises an error if 100 steps do not satisfy that check.

2) *Figure 6 Reproduction*: Figure 5 reproduces Bianchi's Figure 6 throughput curves for $W=32$, $m=5$ and $W=128$, $m=3$ across $n=5$ to $n=50$ stations. The smaller-window curve decreases over this range; the $W=128$ curve reproduces the

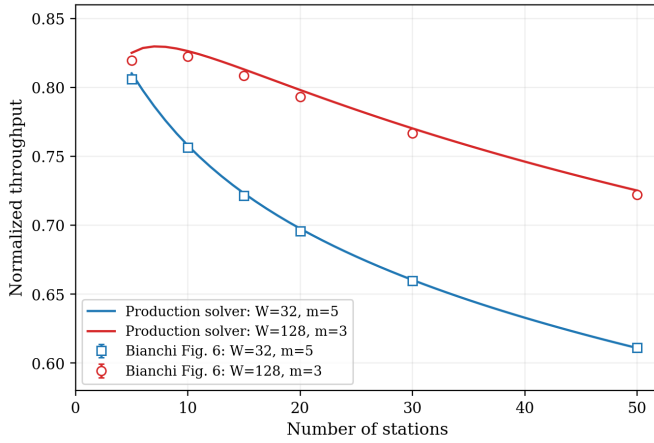


Fig. 5: Reproduction of Bianchi [9] Figure 6: normalized saturation throughput vs. number of stations for two (W, m) configurations. The $W=128$ curve’s non-monotonicity between $n=5$ and $n=10$ is consistent with Bianchi’s published results. Twelve digitized markers are shown with two-pixel reading uncertainty; their maximum relative difference from the solver is 0.66%.

TABLE VIII: N-way Bianchi contention scaling (30 m links at 5 m separation). $\eta(n, 68.8)$ is the payload efficiency at 68.8 Mb/s.

n	$\eta(n)$	$\eta(n)/n$	Pred(MB/s)	Sim(MB/s)
2	0.452	0.226	1.942	1.942
3	0.445	0.148	1.275	1.275
4	0.435	0.109	0.936	0.936
5	0.427	0.085	0.734	0.734
6	0.419	0.070	0.601	0.601
7	0.413	0.059	0.507	0.507
8	0.407	0.051	0.437	0.437

slight non-monotonicity between $n=5$ and $n=10$ consistent with Bianchi’s published results. Twelve marker centers read from Bianchi’s published figure differ from our computed curves by at most 0.66%. The archived image, axis calibration, and marker coordinates are retained; two-pixel reading uncertainty is approximately 0.0017 in normalized throughput. This graphical check has lower precision than the numerical Table III comparison.

3) *N-Way Contention Scaling*: To confirm that the Bianchi model scales correctly within the full simulation loop, we place $n \in \{2, \dots, 8\}$ parallel 30 m links at 5 m separation (all within carrier-sensing range), each carrying a 10 MB transfer.

Table VIII confirms the Bianchi solver produces correct throughput predictions when embedded in the full simulation engine with real RF parameters and dynamic recalculation.

C. Cross-Validation Against ns-3

Stages 1 and 2 establish internal consistency and reproduction of Bianchi’s analytical framework. Stage 3 compares predicted goodput with ns-3.41 packet-level simulation. Two fixed-MCS experiments test homogeneous contention and the transition

to hidden interference. We identify the service approximation used for each predicted curve.

Both experiments use 802.11ax at 5 GHz on a 20 MHz channel, one spatial stream, `ConstantRateWifiManager` with `HeMcs5`, and the settings in Table IX. A-MPDU and A-MSDU are disabled. Each source offers saturated UDP traffic with 1472-byte application payloads. The measurement is total received application payload divided by 29.5 s; traffic starts at 0.5 s and stops at 30 s, with no additional warmup discard. Each point first averages link goodput within each of 20 seeds, then reports the mean and a Student-*t* 95% confidence interval across seeds. This avoids treating correlated links within one run as independent samples.

1) *Experiment 1: Contention Scaling*: We place $n \in \{1, \dots, 8\}$ parallel STA-AP link pairs at 30 m link length and 5 m vertical separation, all well within the 71.2 m carrier-sensing range, creating a complete conflict graph. Each STA sends saturated UDP traffic to its AP. Figure 6(a) overlays `ncsim`’s Bianchi prediction $8.6 \eta(n, 68.8)/n$ MB/s against the ns-3 per-station goodput.

`ncsim`’s Bianchi model accounts for preamble, SIFS, ACK, and inter-frame overhead in the payload efficiency. It tracks ns-3 closely across the station counts: the isolated-link prediction is 3.783 MB/s versus 3.770 MB/s in ns-3, a 0.35% difference. Across the eight settings, mean absolute relative error is 5.1% and the maximum is 8.2% at seven links. Here error is $|\hat{g} - \bar{g}_{\text{ns3}}|/\bar{g}_{\text{ns3}}$, giving each station-count setting equal weight. The seed-level confidence half-widths are at most 0.0025 MB/s. The decreasing curves and small seed variability show consistent agreement across the tested homogeneous contention settings.

2) *Experiment 2: Separation Sweep*: Two parallel 30 m links are placed at 16 separations: 10, 20, 30, 40, 50, 60, 65, 70, 72, 75, 80, 90, 100, 120, 150, and 200 m. Beyond the 71.2 m sensing boundary, simultaneous transmissions can corrupt frames at the receiver.

The optional fixed-MCS mode uses a *capture/overlap approximation*. In the hidden regime it multiplies the solo goodput by a success probability: one if SINR meets the MCS 5 capture threshold, otherwise the modeled idle fraction $1 - a$, where a is the interferer’s saturated data-airtime fraction. Equivalently, the success factor is $(1 - a) + a \mathbf{1}\{\text{SINR} \geq \theta_{\text{decode}}\}$. With a 5 dB margin this predicts 1.50 MB/s just beyond the sensing boundary and recovery to 3.78 MB/s at 120 m. The event engine executes this rule when the fixed-capture option is selected. It holds the clean MCS fixed and uses isolated saturated airtime as an overlap approximation; it does not resolve packet retries or ACK interference. The option supports isolated hidden-link pairs at 20 MHz with RTS/CTS disabled and rejects multiple hidden interferers or mixed hidden and sensed contention.

Figure 6(b) shows this comparison. In the fixed-MCS ns-3 data, per-link means near the hidden boundary are approximately 1.34–1.50 MB/s, recovering to 3.62 MB/s at 120 m and 3.77 MB/s at 200 m. The fixed-capture approximation reproduces this dip and recovery. Across the sixteen settings, its mean and maximum absolute relative errors are 5.3% and 12.2%, respectively, using the packet mean as denominator.

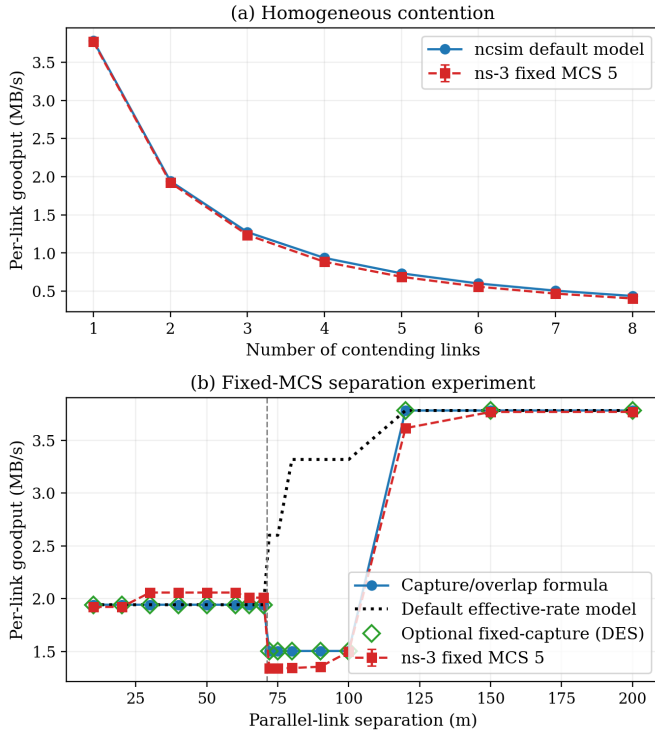


Fig. 6: ns-3 validation (20-seed means and 95% CIs). (a) Homogeneous contention. (b) The optional ncsim fixed-capture mode (diamonds) implements the overlap approximation for two links. Its mean and maximum absolute relative errors across 16 separations are 5.3% and 12.2%. The dotted curve uses the default effective-rate model, which is also used in the workflow experiments.

TABLE IX: Aligned parameters for ns-3 cross-validation.

Parameter	ncsim	ns-3
TX power	20 dBm	TxPowerStart/End = 20
Frequency	5 GHz	Band 5 GHz, ch.36
Channel width	20 MHz	ChannelSettings
Path loss exp.	3.0	Exponent = 3.0
Ref. loss (1 m)	46.4 dB	ReferenceLoss = 46.4
Noise floor	-95 dBm	RxNoiseFigure = 6
CCA threshold	-82 dBm	CcaEdThreshold = -82
CW _{min}	16	MinCw = 15
CW _{max}	1024	MaxCw = 1023
A-MPDU	disabled	MaxAmpduSize = 0
Guard interval	800 ns	GuardInterval = 800

The figure also shows the default effective-rate prediction: 3.319 MB/s at 80 m versus the packet mean 1.343 MB/s, a 2.47-fold ratio. At 120 m the default-model prediction is 3.783 MB/s versus 3.616 MB/s, a 4.6% difference. The two rules therefore have different accuracy near the sensing boundary. All workflow experiments use the default effective-rate rule; the fixed-capture results concern this packet comparison.

The ns-3 simulation scripts, Dockerfile for reproducible builds, and the raw results are included in the evidence artifact, with source hashes and measurement settings (Appendix D).

TABLE X: Scheduler inputs. No scheduler observes interference.

Scheduler	Planner Inputs	Network View	Intf?
Manual	Pin annotations	N/A	No
RoundRobin	Node list	N/A	No
HEFT	DAG, C_v , B_ℓ	Full virtual net [†]	No
CPOP	DAG, C_v , B_ℓ	Full virtual net [†]	No

[†]Route bottleneck solo goodput for reachable pairs; 0.001 MB/s for unreachable.

VII. EXPERIMENTAL EVALUATION

The central question is whether concurrent wireless interference changes scheduler choices. We examine routing interactions (Section VII-B), absolute interference impact (Section VII-C), the 108-run factorial (Section VII-D), and sensitivity to payload size and concurrent workflows (Section VII-E). All numerical results in this section use the default effective-rate model and the execution semantics in Section V.

The Solo baseline includes clean single-link MAC overhead. Both Solo and Full use the same planning bandwidths and placements, so the paired comparison isolates the effect of concurrent wireless service. Minimum-hop routing minimizes hop count on the zero-latency links. The executor credits progress at the assigned rate and enforces FIFO compute capacity.

All experiments use 802.11ax at 5 GHz with a path loss exponent of $n = 3$ (except where explicitly varied), heterogeneous compute capacities (80–300 units/s), 10 MB data payloads per DAG edge, and deterministic seed 42. The grid capacities cycle through 200, 100, 150, 80, 300, 120, 250, 180, 160, 90, 220, 140, 280, 110, 190, and 170 units/s. Horizontal, vertical, and checkerboard diagonal links form bidirectional meshes at 40 m spacing.

Three DAG structures of increasing complexity are used across all experiments:

- **Small (5 tasks):** Fork-join, $T_0 \rightarrow \{T_1, T_2, T_3\} \rightarrow T_4$.
- **Medium (10 tasks):** Diamond, $T_0 \rightarrow \{T_1-T_4\} \rightarrow \{T_5-T_8\} \rightarrow T_9$ with selective cross-links between layers.
- **Large (20 tasks):** Multi-level pipeline, $T_0 \rightarrow 4 \rightarrow 6 \rightarrow 6 \rightarrow 3$ tasks per layer with sparse inter-layer connections.

All tasks have `compute_cost` = 500 and all edges have `data_size` = 10 MB (except where varied in Section VII-E).

A. Scheduler Information and Fairness

Both the interference-free and interference-aware modes present an identical `NetworkSnapshot` to the scheduler, containing the same clean solo-goodput link bandwidths (Table X). No scheduler sees the conflict graph or contention factors; these are runtime phenomena computed *after* the schedule has been committed. Any difference in makespan is therefore attributable to the change in runtime wireless service under a fixed placement. The SAGA algorithms supply placements and the common executor supplies FIFO ordering; the comparison therefore concerns these placement adaptations.

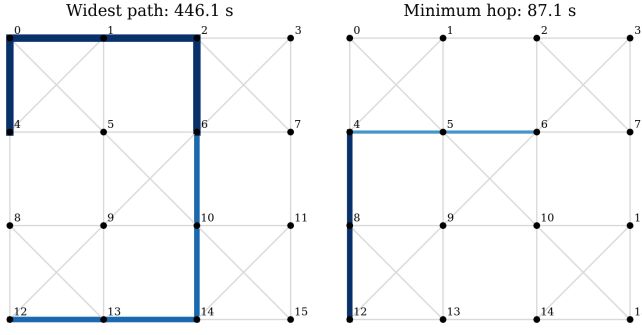


Fig. 7: Route load under widest-path (left) and minimum-hop (right) routing on the 4×4 grid with 20 tasks. Thickness and color show routed dependency counts. Cross-node payload is 130 MB in both cases; route work is 880 versus 260 MB-hops and Full makespan is 446.10 versus 87.07 s.

TABLE XI: Routing comparison: makespan (seconds) for widest-path (W) vs. minimum-hop (M) under HEFT with `csma_bianchi`.

Network	DAG	W (s)	M (s)	Winner
2×2	5	14.87	14.87	Tie
2×2	10	28.49	28.49	Tie
2×2	20	57.36	49.83	Min-hop
3×3	5	8.33	8.33	Tie
3×3	10	27.39	27.39	Tie
3×3	20	112.88	78.73	Min-hop
4×4	5	108.04	21.24	Min-hop
4×4	10	179.43	34.77	Min-hop
4×4	20	446.10	87.07	Min-hop

B. Routing Strategy Comparison

Because multi-hop routing determines contention domains, we first establish how routing strategies interact with interference before evaluating schedulers. We compare widest-path and minimum-hop routing under HEFT scheduling with the interference-aware model across grid mesh networks of three sizes (2×2 , 3×3 , 4×4) and three DAG complexities (5, 10, and 20 tasks). All links use 40 m grid spacing with heterogeneous compute capacities (80–300 units/s).

Figure 7 shows route load for the 4×4 , 20-task case. Both routing configurations send 130 MB across nodes. Widest-path routing uses 880 MB-hops, averaging 6.77 hops per remote dependency, whereas minimum-hop routing uses 260 MB-hops and averages two hops. The former loads eight undirected links, up to 13 routed dependencies per link; the latter uses four links, up to nine dependencies per link. These counts describe the dependencies routed through each link.

Under Full service the makespans are 446.10 s and 87.07 s, respectively, a 5.12-fold difference. The configurations send the same aggregate remote payload but differ in route work and resulting makespan. A widest path optimizes its bottleneck rate without accounting for the additional contention created by its other hops.

Key findings. Minimum-hop routing is faster in five of nine

TABLE XII: Interference impact: makespan (seconds) without interference vs. with Full wireless service, using minimum-hop routing. HEFT and CPOP produce identical placements on the 5-task DAG but diverge as DAG complexity grows.

Net.	DAG	HEFT			CPOP		
		Solo	Full	Slow.	Solo	Full	Slow.
2×2	5T	14.87	14.87	0%	14.87	14.87	0%
2×2	10T	25.26	28.49	13%	23.91	27.54	15%
2×2	20T	31.22	49.83	60%	30.00	53.78	79%
3×3	5T	8.33	8.33	0%	8.33	8.33	0%
3×3	10T	15.72	27.39	74%	14.69	27.17	85%
3×3	20T	24.44	78.73	222%	22.84	62.46	173%
4×4	5T	12.49	21.24	70%	12.49	21.24	70%
4×4	10T	20.50	34.77	70%	20.18	34.77	72%
4×4	20T	29.09	87.07	199%	23.75	94.62	298%

configurations, with four ties. On the 4×4 grid, widest-path makespans are 108.04, 179.43, and 446.10 s for 5, 10, and 20 tasks; minimum-hop gives 21.24, 34.77, and 87.07 s. On the smaller grids the differences are more limited. The effect of routing on wireless load depends on task placement.

C. Interference Impact Analysis

Before asking whether interference changes scheduler *rankings*, we first quantify its effect on absolute makespan. We compare Full with Solo for the nine grid/DAG pairs under minimum-hop routing and report HEFT and CPOP separately in Table XII. The same placement is used in each mode. Across these eighteen policy comparisons, slowdown ranges from zero to 298%. The zero cases are informative: with no overlapping remote demands, changing the concurrent-link model need not change service.

Key findings. The 3×3 , five-task case is colocated on the 300-unit/s node: both modes complete in 8.33 s. At twenty tasks, the same grid sends remote dependencies, and HEFT increases from 24.44 to 78.73 s (222%), while CPOP increases from 22.84 to 62.46 s (173%). On the 4×4 grid with twenty tasks, HEFT increases from 29.09 to 87.07 s and CPOP from 23.75 to 94.62 s. The latter is the largest minimum-hop slowdown in the table, 298%.

These differences depend on placement and temporal overlap, not just the number of network links. They show why absolute prediction error and scheduler-selection error are different questions: substantial slowdown can occur without a change in the best scheduler.

D. Scheduler Comparison and Rank Inversions

The interference impact results above suggest a deeper question: does ignoring interference merely produce inaccurate makespan predictions, or does it lead to wrong *choices* among schedulers? To answer this, we execute a full factorial comparison: 3 networks $\times$ 3 DAGs $\times$ 3 schedulers (HEFT, CPOP, RoundRobin) $\times$ 2 routings $\times$ 2 interference models = 108 simulation runs. All runs use 802.11ax at 5 GHz, heterogeneous compute capacities, and seed 42.

For each of the 18 (network, DAG, routing) triples, let T_p^S and T_p^F be the completed makespans of policy p in Solo

and Full mode. The eligible policy set is fixed to HEFT, CPOP, and RoundRobin; all 108 runs complete. Policies within $\max(10^{-6} \text{ s}, 10^{-6} T_{\min})$ of the minimum form a winning set. We count a *rank inversion* only when the Solo and Full winning sets are disjoint. This avoids treating a change of name within a tie as a different outcome.

For regret, choose the first Solo minimizer in the fixed order HEFT, CPOP, RoundRobin and denote it by $\hat{p}$. Then

$$\rho = \frac{T_{\hat{p}}^F}{\min_{p \in \{H, C, RR\}} T_p^F} - 1. \quad (14)$$

In this experiment tied Solo winners also have equal Full makespans, so the reported regret does not depend on choosing between those tied policies.

Table XIII reports each policy’s Full makespan relative to the best policy in its scenario. The summary statistics are:

- **Rank inversion rate: 33.3%** (6 of 18 triples).
- **Mean relative regret: 5.6%** across all 18 triples; median regret is zero.
- **Maximum relative regret: 52.3%** (4×4 grid, five tasks, widest-path): the Solo-selected HEFT placement takes 108.04 s in Full, versus 70.94 s for RoundRobin.

These statistics summarize the eighteen scenarios in the fixed factorial.

HEFT or CPOP wins under Solo service. One or both is a Solo minimizer in all 18 triples. Their use of compute capacity and route-dependent communication costs offers an advantage over cyclic placement in these inputs. At five tasks they tie; at larger sizes their placements and compute queues can differ.

RoundRobin can win under Full service. On the 4×4 grid with widest-path routing, RoundRobin wins at five and ten tasks, but HEFT wins at twenty tasks. Its benefit in this grid therefore depends on DAG size. At five tasks, HEFT and CPOP take 12.49 s in Solo versus RoundRobin’s 25.58 s. In Full, their 108.04 s makespan exceeds RoundRobin’s 70.94 s. Thus the preferred policy changes even though the same placements and underlying single-link goodputs are used in each mode.

Routing modulates the effect. The five-task 4×4 case has 52.3% regret with widest paths and zero regret with minimum-hop paths. At twenty tasks on that grid, choosing CPOP from Solo gives 19.1% regret with widest paths and 8.7% with minimum-hop paths. Short routes reduce some coupling but do not remove every inversion.

Figure 8 shows all eighteen regret ratios, including the twelve zero-regret cases. Six bars exceed one, and the largest is 1.523. Each bar represents one grid, DAG, and routing combination.

In six of the eighteen tested scenarios, a policy selected under Solo is no longer best among the evaluated policies under Full.

E. Sensitivity Analysis

The results above show that interference can change scheduler rankings. We vary data size per DAG edge to examine communication-to-computation balance, and the number of

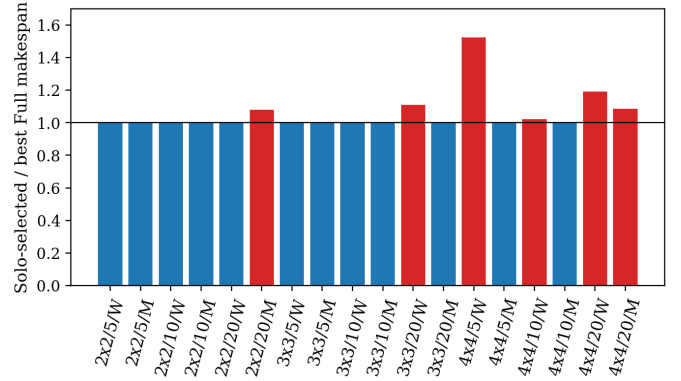


Fig. 8: Scheduling regret ratios. Each bar divides the Full makespan of the Solo-selected policy by the best evaluated-policy makespan under Full (HEFT, CPOP, or RoundRobin). A ratio of 1.0 indicates zero relative regret; red bars mark rank inversions. Labels give grid size/task count/routing, with W for widest-path and M for minimum-hop.

injected DAGs to examine concurrent compute load. The scheduler is rerun when payload size changes, so that sweep includes both placement adaptation and runtime interference effects.

1) Communication-to-Computation Ratio: The communication-to-computation ratio (CCR) determines the relative importance of network transfer time versus compute time. We sweep data size per edge across $\{1, 2, 5, 10, 20, 50, 100\}$ MB on the 3×3 grid with HEFT and minimum-hop routing, testing all three DAG types (5, 10, and 20 tasks). Figure 9 shows the interference slowdown as a function of payload size, the controlled communication-cost parameter.

The sweep shows a non-monotonic pattern. For the twenty-task DAG, slowdown peaks at $3.22 \times$ with 10 MB per edge: Solo makespan is 24.44 s and Full is 78.73 s. At 50–100 MB, HEFT colocates all tasks on the fastest node, eliminates remote payload, and both modes take 33.33 s. For five tasks this collocation occurs from 10 MB, and for ten tasks from 20 MB.

At low payload sizes communication contributes less to completion time. At high sizes the scheduler can avoid it through collocation. Intermediate payloads can therefore create more exposure to wireless coupling. This is a property of these freely placeable synthetic DAGs; memory or sensor-local constraints could prevent complete collocation. We plot the controlled payload size directly to identify the varied communication parameter.

2) Concurrent Workflows and Compute Queuing: As a compute-queuing control, we inject $k \in \{1, 2, 3, 4, 5\}$ identical 5-task fork-join DAGs with 0.5 s stagger on the 3×3 grid (HEFT, minimum-hop). Each DAG is scheduled independently, meaning that HEFT optimizes each workflow without knowledge of the others’ transfers.

Figure 10 gives coincident Solo and Full curves. Each five-task DAG is placed entirely on node n_4 , the 300-unit/s

TABLE XIII: Makespan ratios under `csma_bianchi` relative to the best scheduler for each (network, DAG, routing) triple. A ratio of 1.00 denotes the best among the evaluated policies; higher values show how much worse that scheduler performs. *Solo selection* indicates which scheduler an interference-free evaluation would select. H/C denotes a tied Solo winning set; all grid runs complete.

Net.	DAG	Widest-path				Minimum-hop			
		H	C	RR	Solo↓	H	C	RR	Solo↓
2 × 2	5T	1.00	1.00	2.49	H/C	1.00	1.00	1.83	H/C
2 × 2	10T	1.03	1.00	2.58	C	1.03	1.00	1.58	C
2 × 2	20T	1.00	1.14	1.85	H	1.00	1.08	1.60	C
3 × 3	5T	1.00	1.00	4.03	H/C	1.00	1.00	4.03	H/C
3 × 3	10T	1.01	1.00	8.34	C	1.01	1.00	4.97	C
3 × 3	20T	1.11	1.00	4.37	H	1.26	1.00	4.14	C
4 × 4	5T	1.52	1.52	1.00	H/C	1.00	1.00	3.23	H/C
4 × 4	10T	1.02	1.02	1.00	C	1.00	1.00	3.51	C
4 × 4	20T	1.00	1.19	1.34	C	1.00	1.09	6.00	C

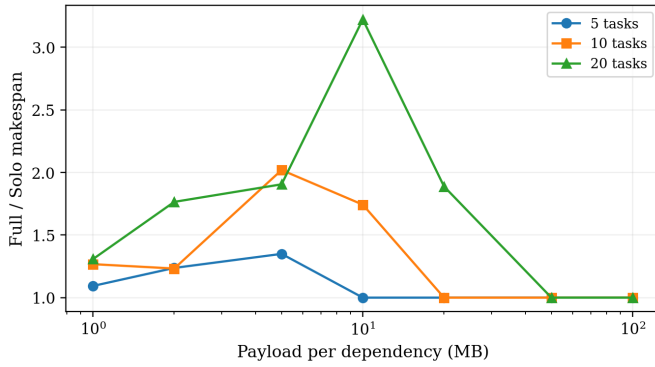


Fig. 9: Interference slowdown vs. payload per dependency (3×3 grid, HEFT, minimum-hop). Slowdown peaks at intermediate payload sizes where transfers are long enough to contend but not so large that the scheduler collapses tasks onto one node. The 20-task DAG reaches $3.22\times$ at 10 MB per edge.

node, so no inter-node transfers are generated. One workflow requires $5(500)/300 = 8.33$ s of serial compute service. With 0.5 s injection spacing the processor remains busy, and five workflows require 41.67 s.

This workload is compute-limited: colocated workflows share processor capacity, so their makespan grows with the queued compute work. Appendix C separately uses prescribed starts and stops of remote traffic to examine dynamic wireless response.

3) *Sensitivity Summary:* Table XIV consolidates the two sweeps. Moderate payloads can expose a distributed placement to interference, while sufficiently large payloads cause communication avoidance in these unconstrained DAGs. The multi-DAG result shows how collocation shifts the shared load to compute. For a given application, wireless load depends on where its tasks are placed and which dependencies cross nodes.

VIII. CONCLUSION AND FUTURE WORK

`ncsim` is a lightweight discrete-event simulator combining DAG workflow scheduling with analytical 802.11 wireless service models. Validation combines internal component checks,

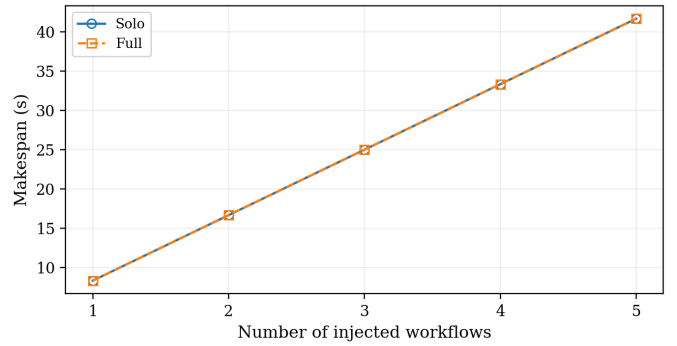


Fig. 10: Multi-DAG makespan scaling on the 3×3 grid with five-task DAGs, HEFT, and minimum-hop routing. Both modes colocate every workflow on the fastest node and give $8.33k$ s makespan. Coincident curves show compute queuing rather than wireless contention.

TABLE XIV: Payload-size and workflow-count sensitivity. The concurrent-workflow case generates no remote communication.

Experiment	Parameter	Observation	Effect
CCR	Edge MB	20 tasks, 10 MB	$3.22\times$ slowdown
Multi-DAG	Count k	all colocated	$8.33k$ s

Bianchi’s published table and figure, and fixed-rate ns-3 experiments. The default model closely matches homogeneous contention, and an optional fixed-capture mode reproduces the hidden-terminal dip and recovery in the two-link fixed-MCS sweep. Additional experiments examine overlapping contention domains and changing traffic demand.

With a solo-MAC baseline, the 108-run grid factorial yields six rank inversions out of eighteen scenarios and a maximum scheduling regret of 52.3%. The routing and CCR studies show how communication demand interacts with placement. The concurrent-workflow case colocates its tasks and gives linear compute scaling. For these freely placeable workloads, the routing and payload sweeps show benefits from reducing routed communication or avoiding remote transfers through collocation.

Scope and limitations. The model uses local homogeneous Bianchi calculations, persistent hidden-interference power, fixed path loss, and pipelined fluid transfers. It does not resolve packet retries, transport feedback, mobility, or station-level transmit scheduling. Ready-time FIFO execution also differs from enforcing a SAGA processor timeline. The default model overestimates service in the tested hidden-interference and overlapping-domain configurations (Section VI-C and Appendix C). The workflow comparisons establish selection sensitivity under this analytical service model; these experiments do not establish packet-level agreement of scheduler rankings.

Future work will examine adaptive rate control and its interaction with hidden interference. Extending the airtime model to account for contention among hidden transmitters in larger multihop networks remains future work. Other directions include receiver-specific service calibration, station-level sharing, interference-aware placement under memory and sensor-local constraints, and dynamic rescheduling. The project repository is <https://github.com/ANRGUSC/ncsim>; artifact organization and reproduction instructions are described in Appendix D.

ACKNOWLEDGMENT

This work was supported in part by Army Research Laboratory under Cooperative Agreement W911NF-17-2-0196 and in part by the National Science Foundation under Award No. 2451267.

AI USE ACKNOWLEDGEMENT

We made extensive use of ChatGPT, Codex, Claude Code, Grok and Gemini for software development, experiment execution, and manuscript preparation. The human authors accept full responsibility for its contents.

APPENDIX A

RF PARAMETERS AND FRAME TIMING

The experiments use 20 dBm transmit power, 5 GHz carrier frequency, 20 MHz channel width, one spatial stream, path-loss exponent three, -95 dBm effective noise floor, and -82 dBm CCA threshold. Hidden-interference contributions below -105 dBm are omitted. Static shadowing is disabled, RTS/CTS is off unless stated, and scenario route latencies are zero. The model's ax rate table is given in Table XV. These thresholds and the 5 dB effective-rate margin are heuristic parameters. The margin acts as a single effective offset to the rate-selection thresholds.

The ax timing model uses a 1472-byte application payload and a 1542-byte PSDU including MAC, LLC/SNAP, IP, UDP, FCS, and delimiter overhead. For $R > 0$ in Mb/s, data-frame duration in microseconds is

$$T_D(R) = 44 + 13.6 \left\lceil \frac{16 + 8(1542) + 6}{13.6R} \right\rceil. \quad (15)$$

The $44 \mu\text{s}$ term is the preamble, and the $13.6 \mu\text{s}$ symbol includes an 800 ns guard interval. The extra bits are service and tail bits. For $W = 16$, $m = 6$, slot $\sigma = 9 \mu\text{s}$, SIFS = $16 \mu\text{s}$, AIFS

TABLE XV: Single-stream ax clean-rate table at 20 MHz. SNR thresholds are model parameters; PHY rates are the rounded values used in execution.

MCS	SNR dB	Mb/s	MCS	SNR dB	Mb/s
0	5	8.6	6	25	77.4
1	8	17.2	7	29	86.0
2	11	25.8	8	32	103.2
3	14	34.4	9	35	114.7
4	18	51.6	10	38	129.0
5	22	68.8	11	41	143.4

$= 43 \mu\text{s}$, ACK duration = $28 \mu\text{s}$, and propagation $\delta = 0.1 \mu\text{s}$, the implemented basic-access durations are

$$T_S = T_D + \text{SIFS} + T_{ACK} + \text{AIFS} + 2\delta, \quad (16)$$

$$T_C = T_D + \text{SIFS} + T_{ACK} + \text{AIFS} + \delta. \quad (17)$$

The collision duration includes an extended inter-frame interval in this approximation. Slot-model propagation is distinct from configured route latency. ACK duration includes legacy OFDM control framing at 24 Mb/s. With RTS/CTS enabled, $T_{RTS} = T_{CTS} = 28 \mu\text{s}$ and

$$T_S^{RTS} = T_S + T_{RTS} + T_{CTS} + 2\text{SIFS} + 2\delta, \quad (18)$$

$$T_C^{RTS} = T_{RTS} + \text{SIFS} + T_{CTS} + \text{AIFS} + \delta. \quad (19)$$

Thus rate changes alter efficiency as well as raw capacity. For example, $\eta(1, 8.6) = 0.834788$ and $\eta(1, 143.4) = 0.279415$. The Bianchi literature comparison instead uses the published FHSS parameters in Section VI-B; the two timing settings are not interchangeable.

The fixed-point regression checks every contender count from 1 to 1000 against the coupled-equation residual. A separate 60-digit decimal solver using the rational expression in the attempt-probability domain checks selected counts, including 8, 20, 50, 100, 101, 256, and 1000. These checks cover the solver used by both runtime and figure generation.

A. Meaning of local conflict shares

For an undirected active conflict graph with degree d_ℓ , the shares $1/(1 + d_\ell)$ are graph-feasible: randomly order vertices and select each vertex preceding all its neighbors. The selected set is independent, and each vertex is selected with probability $1/(1 + d_\ell)$. Time-sharing these sets, and omitting service where necessary, realizes any smaller nonnegative vector. For positive effective rate, the implemented payload service normalized by clean PHY rate satisfies

$$\frac{R_\ell^{\text{eff}}}{R_\ell} \frac{\eta(1 + d_\ell, R_\ell^{\text{eff}})}{1 + d_\ell} \leq \frac{1}{1 + d_\ell}. \quad (20)$$

At zero effective rate, the normalized service is zero by definition. This establishes feasibility under the abstract conflict constraints. DCF service allocation is assessed separately through the overlapping-domain packet comparisons in Appendix C.

TABLE XVI: Worked two-hop transfer and FIFO execution. Both route links of A's transfer are occupied throughout its byte-service phase.

Time (s)	State and service
0–1	A and B compute on distinct nodes.
1–2	A's 4 MB transfer uses $a \rightarrow b \rightarrow c$ at 2 MB/s; 2 MB remains at 2 s.
2–3	B's 1 MB transfer shares $b \rightarrow c$. Each flow gets 1 MB/s. B's transfer finishes at 3 s.
3–3.5	A's last 1 MB receives 2 MB/s; D computes on c from 3 to 4 s.
3.5–5	C becomes ready at 3.5 s, waits for D, then runs from 4 to 5 s.

APPENDIX B EVENT-ENGINE EXAMPLES AND CHECKS

A small example illustrates the pipelined route and FIFO semantics. Nodes a, b, c each provide one compute unit/s; links $a \rightarrow b$ and $b \rightarrow c$ each provide 2 MB/s with zero latency and no wireless degradation. Task A on a requires one unit and produces 4 MB for C on c . Task B on b requires two units and produces 1 MB for D on c . C and D each require one unit. A and B are ready at zero.

The workflow makespan is 5 s. Link $a \rightarrow b$ serves 4 MB and $b \rightarrow c$ serves 5 MB. These values follow from crediting progress before replacing a rate, and reserving the FIFO head before processing its start event. A same-node dependency requires no transfer and only waits for compute availability. A transfer's configured route latency, if positive, is paid once before byte service and is not charged again after a rate update.

The update sequence is:

- 1) Apply a transfer start or finish to route occupancy.
- 2) Collect changed links and active links whose carrier-sense or hidden dependency neighborhoods contain a changed link.
- 3) Collect distinct affected flows and credit elapsed service at their stored old rates using Equation (13).
- 4) Evaluate all links on their routes and assign the new bottlenecks.
- 5) Invalidate old completions; schedule zero remaining work immediately, positive-rate work at its new finish time, and leave zero-rate work paused.

The invariant is that all work before the event time is credited at the old rate before any replacement completion is scheduled.

Tests include fixed-rate chains, fork-join graphs, shared links, temporary blockage followed by recovery, mutually stalled transfers, and nonzero route latency. A global-refresh oracle recomputes every link after each event and agrees with local refresh in multihop/shared/hidden geometries at 20, 80, and 120 m separations, in both Solo and Full mode. The comparison checks task times, rates, remaining bytes, and served byte-hops, not only final makespan. Threshold tests verify isolated-link invariance on both sides of all twelve ax thresholds, with margins 0, 3, 5, and 8 dB and RTS/CTS off and on.

TABLE XVII: Overlapping domains: per-link goodput across twenty seeds. IQR is the interquartile range; p95 is the sample 95th percentile of absolute relative error with packet goodput as denominator.

Link	ncsim MB/s	ns-3 median [IQR]	Error p95
A	1.942	3.17 [3.16, 3.19]	39.5%
B	1.275	0.52 [0.50, 0.53]	166.0%
C	1.942	3.18 [3.16, 3.19]	39.3%

TABLE XVIII: Isolated-link overhead checks, with twenty packet seeds per row.

MCS	RTS	ncsim MB/s	ns-3 median [IQR]	Error p95
0	off	0.897	0.88 [0.88, 0.89]	1.6%
0	on	0.852	0.84 [0.84, 0.84]	1.5%
11	off	5.009	4.99 [4.98, 4.99]	0.6%
11	on	3.852	3.84 [3.84, 3.84]	0.6%

APPENDIX C ADDITIONAL PACKET-LEVEL COMPARISONS

These experiments examine overlapping contention domains, rate-dependent overhead, and changes in traffic demand. All use ns-3.41 and twenty seeds per setting. Error percentiles below describe sample goodput errors within each setting.

A. Overlapping contention domains

Three parallel 30 m links at vertical positions 0, 60, and 120 m give overlapping carrier-sense neighborhoods: B conflicts with A and C, while A and C are hidden relative to one another. This packet experiment forces MCS 5 and measures traffic from 0.5 to 5 s. Table XVII shows lower service for the middle link in both models. The flow model predicts 1.275 MB/s for B versus a packet median of 0.520 MB/s, identifying a service-allocation difference in overlapping contention domains.

B. Rate-dependent overhead

Four isolated-link settings force MCS 0 or MCS 11 with RTS/CTS off or on. The nodes are 1 m apart, providing high SNR for either forced rate, and the control mode is legacy 24 Mb/s. Each run measures five seconds of 1472-byte UDP payload traffic. Table XVIII checks the overhead calculation at two widely separated rates under high-SNR conditions. The four per-setting p95 errors are 0.6–1.6%.

C. Controlled traffic starts and stops

Two ad hoc 30 m links are separated by 40 m (mutual sensing) or 80 m (hidden interference). A offers 200 Mb/s of 1472-byte UDP payloads from 0.5 to 5.5 s, while B offers the same demand from 2 to 4 s. Both force MCS 5, use 24 Mb/s control frames, and disable aggregation and RTS/CTS. Static ARP entries avoid address-resolution startup. Network queue disciplines are removed and each MAC queue is limited to one packet; short and long retry limits are seven and four. These settings bound drainage after source stop rather than assuming an instantaneous empty queue.

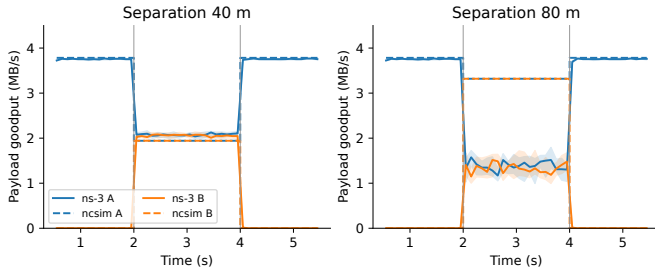


Fig. 11: Controlled UDP demand changes. Lines and bands show packet medians and IQRs; dashed lines show active-set predictions. Vertical lines mark B's source start and stop. The two geometries separate sensing from hidden interference.

Received payload is recorded in 0.1 s bins over 0.5–5.5 s, including transitions and zeros. The before/during/after windows in Table XIX are specified as 1–1.5, 2.5–3.5, and 4.5–5.5 s. B delivers no payload in the final window in any seed. Bins remain part of their seed's time series rather than independent samples.

At 40 m, the flow prediction for A is 3.783, 1.942, and 3.783 MB/s before, during, and after B's demand, compared with packet medians of 3.757, 2.073, and 3.757 MB/s. At 80 m the model predicts 3.319 MB/s during overlap versus packet medians of 1.354 and 1.362 MB/s for A and B. Both models show reduced service when the competing flow starts and recovery after it drains. During hidden-link overlap, the default-model goodput is overestimated by about 2.4 times in this fixed-MCS test.

The main section evaluates 24 configurations (eight contention, sixteen fixed separation), 480 configuration–seed runs, and 1360 measured link observations. The appendix adds one overlapping-domain geometry, four overhead settings, and two dynamic geometries. Eight additional contention settings use a 4.5 s window; their measurements are stored separately from the 29.5 s curve. Packet evidence is reported by configuration rather than collapsed into a single simulator-wide accuracy percentage.

APPENDIX D

ARTIFACT ORGANIZATION AND REPRODUCTION

The study folder is `artifacts/arxiv-2605.01094/` in the `ncsim` repository. Within it, `inputs/` contains frozen workload and topology generators, `results/workflows.` `json` contains the workflow observations, and `results/packet/` contains seed-level packet data. The `ns3/` directory supplies packet-experiment sources and build instructions. `MANIFEST.json` records content hashes, and the `README` specifies the software environment and reproduction commands.

The reported workflow studies comprise 108 grid-factorial executions, 42 payload-sensitivity executions, and ten multi-DAG executions. Source hashes, generator hashes, Python 3.12.10, seed 42, and hash seed zero are recorded. Figures and table rows are generated from these records, and the internal

parallel-link evidence is recomputed using a separate piecewise-fluid calculation and the DES engine.

The Bianchi digitization records twelve manually identified marker centers, source image hash, and pixel-to-axis calibration. Centers are read directly from the plotted markers, independently of the calculated curves. The fixed-MCS separation measurements use traffic from 0.5 to 30 s, with goodput computed over the full 29.5 s interval.

Packet comparisons measure UDP payload goodput under the configurations specified in Section VI-C and Appendix C.

From the study folder, the following commands check the artifact, generate figures and tables, run the workflow studies, validate the optional fixed-MCS mode, and compile the manuscript:

```
python reproduce.py verify
python reproduce.py figures
python reproduce.py workflows
python reproduce.py hidden
python reproduce.py paper
```

Generated files are written to a separate output directory, leaving the saved observations unchanged. Figure generation uses saved workflow and packet records and recomputes the small internal checks; compiling the paper uses the supplied figure files. Packet simulations are run separately using the instructions in `ns3/`. The manifest identifies the default and optional models separately.

REFERENCES

- [1] W. Shi, J. Cao, Q. Zhang, Y. Li, and L. Xu, "Edge Computing: Vision and Challenges," *IEEE Internet of Things Journal*, vol. 3, no. 5, pp. 637–646, Oct. 2016.
- [2] ns-3 Project, "ns-3: A Discrete-Event Network Simulator," <https://www.nsnam.org/>, accessed Mar. 2026.
- [3] A. Varga and R. Hornig, "An Overview of the OMNeT++ Simulation Environment," in *Proc. ICST SIMUTools*, 2008.
- [4] H. Casanova, A. Giersch, A. Legrand, M. Quinson, and F. Suter, "Versatile, Scalable, and Accurate Simulation of Distributed Applications and Platforms," *Journal of Parallel and Distributed Computing*, vol. 74, no. 10, pp. 2899–2917, 2014, doi: 10.1016/j.jpdc.2014.06.008.
- [5] H. Casanova, S. Pandey, J. Oeth, R. Tanaka, F. Suter, and R. Ferreira da Silva, "WRENCH: A Framework for Simulating Workflow Management Systems," in *Proc. WORKS Workshop*, 2018, pp. 74–85, doi: 10.1109/WORKS.2018.00013.
- [6] R. N. Calheiros, R. Ranjan, A. Beloglazov, C. A. F. De Rose, and R. Buyya, "CloudSim: A Toolkit for Modeling and Simulation of Cloud Computing Environments and Evaluation of Resource Provisioning Algorithms," *Software: Practice and Experience*, vol. 41, no. 1, pp. 23–50, 2011, doi: 10.1002/spe.995.
- [7] H. Gupta, A. Vahid Dastjerdi, S. K. Ghosh, and R. Buyya, "iFogSim: A Toolkit for Modeling and Simulation of Resource Management Techniques in the Internet of Things, Edge and Fog Computing Environments," *Software: Practice and Experience*, vol. 47, no. 9, pp. 1275–1296, 2017, doi: 10.1002/spe.2509.
- [8] C. Sonmez, A. Ozgovde, and C. Ersoy, "EdgeCloudSim: An Environment for Performance Evaluation of Edge Computing Systems," *Transactions on Emerging Telecommunications Technologies*, vol. 29, no. 11, e3493, 2018.
- [9] G. Bianchi, "Performance Analysis of the IEEE 802.11 Distributed Coordination Function," *IEEE Journal on Selected Areas in Communications*, vol. 18, no. 3, pp. 535–547, Mar. 2000, doi: 10.1109/49.840210.
- [10] H. Topcuoglu, S. Hariri, and M.-Y. Wu, "Performance-Effective and Low-Complexity Task Scheduling for Heterogeneous Computing," *IEEE Trans. Parallel Distrib. Syst.*, vol. 13, no. 3, pp. 260–274, 2002.
- [11] T. L. Adam, K. M. Chandy, and J. R. Dickson, "A Comparison of List Schedules for Parallel Processing Systems," *Communications of the ACM*, vol. 17, no. 12, pp. 685–690, 1974.

TABLE XIX: Prespecified traffic windows. The twenty seeds per geometry supply within-setting variability; zero-demand windows are retained.

Spacing m	Link	Window s	ncsim MB/s	ns-3 median [IQR] MB/s
40	A	1–1.5	3.783	3.757 [3.750, 3.765]
40	A	2.5–3.5	1.942	2.073 [2.048, 2.083]
40	A	4.5–5.5	3.783	3.757 [3.751, 3.764]
40	B	1–1.5	0.000	0.000 [0.000, 0.000]
40	B	2.5–3.5	1.942	2.060 [2.047, 2.086]
40	B	4.5–5.5	0.000	0.000 [0.000, 0.000]
80	A	1–1.5	3.783	3.757 [3.750, 3.765]
80	A	2.5–3.5	3.319	1.354 [1.319, 1.415]
80	A	4.5–5.5	3.783	3.758 [3.753, 3.765]
80	B	1–1.5	0.000	0.000 [0.000, 0.000]
80	B	2.5–3.5	3.319	1.362 [1.313, 1.407]
80	B	4.5–5.5	0.000	0.000 [0.000, 0.000]

- [12] Y.-K. Kwok and I. Ahmad, “Static Scheduling Algorithms for Allocating Directed Task Graphs to Multiprocessors,” *ACM Computing Surveys*, vol. 31, no. 4, pp. 406–471, 1999.
- [13] G. C. Sih and E. A. Lee, “A Compile-Time Scheduling Heuristic for Interconnection-Constrained Heterogeneous Processor Architectures,” *IEEE Trans. Parallel Distrib. Syst.*, vol. 4, no. 2, pp. 175–187, 1993.
- [14] J. Coleman and B. Krishnamachari, “PISA: An Adversarial Approach to Comparing Task Graph Scheduling Algorithms,” in *Proc. IEEE IPDPS*, pp. 54–66, 2025, doi: 10.1109/IPDPS64566.2025.00014.
- [15] J. Coleman, B. Krishnamachari, and contributors, “SAGA: Scheduling Algorithms Gathered (software),” <https://github.com/anrgusc/saga>, accessed Sept. 2026.
- [16] J. Coleman, R. V. Agrawal, E. Hirani, and B. Krishnamachari, “Parameterized Task Graph Scheduling Algorithm for Comparing Algorithmic Components,” arXiv preprint arXiv:2403.07112, 2024.
- [17] P. Ghosh, Q. Nguyen, P. K. Sakulkar, J. A. Tran, A. Knezevic, J. Wang, Z. Lin, B. Krishnamachari, M. Annamaram, and S. Avestimehr, “Jupiter: A Networked Computing Architecture,” in *Proc. UCC Companion*, 2021, doi: 10.1145/3492323.3495630.
- [18] A. Poylisher, A. Cichocki, K. Guo, J. Hunziker, L. Kant, B. Krishnamachari, S. Avestimehr, and M. Annamaram, “Tactical Jupiter: Dynamic Scheduling of Dispersed Computations in Tactical MANETs,” in *MILCOM 2021*, 2021, pp. 102–107, doi: 10.1109/MILCOM52596.2021.9652937.
- [19] X. Zhao, D. Hu, and B. Krishnamachari, “Design and Experimental Evaluation of Algorithms for Optimizing the Throughput of Dispersed Computing,” arXiv preprint arXiv:2112.13875, 2021.
- [20] S. Suryavansh, C. Bothra, K. T. Kim, M. Chiang, C. Peng, and S. Bagchi, “I-BOT: Interference-Based Orchestration of Tasks for Dynamic Unmanaged Edge Computing,” arXiv preprint arXiv:2011.05925, 2020.
- [21] X. Li, M. Abdallah, S. Suryavansh, M. Chiang, K. T. Kim, and S. Bagchi, “DAG-based Task Orchestration for Edge Computing,” in *Proc. SRDS*, 2022, pp. 23–34.
- [22] X. Li, M. Abdallah, Y.-Y. Lou, M. Chiang, K. T. Kim, and S. Bagchi, “Dynamic DAG-Application Scheduling for Multi-Tier Edge Computing in Heterogeneous Networks,” arXiv preprint arXiv:2409.10839, 2024.
- [23] S. Yi, Z. Hao, Q. Zhang, Q. Zhang, W. Shi, and Q. Li, “LAVEA: Latency-aware Video Analytics on Edge Computing Platform,” in *Proc. SEC*, 2017.
- [24] W. Zhang, S. Li, L. Liu, Z. Jia, Y. Zhang, and D. Raychaudhuri, “Hetero-Edge: Orchestration of Real-time Vision Applications on Heterogeneous Edge Clouds,” in *IEEE INFOCOM*, 2019, pp. 1270–1278.
- [25] L. Lin, P. Li, J. Xiong, and M. Lin, “Distributed and Application-aware Task Scheduling in Edge-clouds,” arXiv preprint arXiv:1902.04362, 2019.
- [26] J. Liang, K. Li, C. Liu, and K. Li, “Joint offloading and scheduling decisions for DAG applications in mobile edge computing,” *Neurocomputing*, vol. 424, pp. 160–171, 2021.
- [27] K. Li, “Energy-Constrained DAG Scheduling on Edge and Cloud Servers with Overlapped Communication and Computation,” *Journal of Grid Computing*, vol. 22, Art. 60, 2024, doi: 10.1007/s10723-024-09775-1.
- [28] L. Long, Z. Liu, J. Shen, and Y. Jiang, “SecDS: A security-aware DAG task scheduling strategy for edge computing,” *Future Generation Computer Systems*, vol. 166, Art. 107627, 2025.
- [29] M. Chiang and T. Zhang, “Fog and IoT: An Overview of Research Opportunities,” *IEEE Internet of Things Journal*, vol. 3, no. 6, pp. 854–864, 2016.
- [30] M. Chiang, S. Ha, C.-L. I, F. Risso, and T. Zhang, “Clarifying Fog Computing and Networking: 10 Questions and Answers,” *IEEE Communications Magazine*, vol. 55, no. 4, pp. 18–20, 2017.
- [31] K. T. Kim, C. Joe-Wong, and M. Chiang, “Coded Edge Computing,” in *IEEE INFOCOM*, 2020, pp. 237–246.
- [32] F. Daneshgaran, M. Laddomada, F. Mesiti, M. Mondin, and M. Zanolò, “Saturation Throughput Analysis of IEEE 802.11 in the Presence of Non Ideal Transmission Channel and Capture Effects,” *IEEE Trans. Communications*, vol. 56, no. 7, pp. 1178–1188, Jul. 2008, doi: 10.1109/TCOMM.2008.060397.
- [33] M. Zorzi and R. R. Rao, “Capture and Retransmission Control in Mobile Radio,” *IEEE J. Sel. Areas Commun.*, vol. 12, no. 8, pp. 1289–1298, Oct. 1994, doi: 10.1109/49.329345.
- [34] Z. Hadzi-Velkov and B. Spasenovski, “Capture Effect in IEEE 802.11 Basic Service Area Under Influence of Rayleigh Fading and Near/Far Effect,” in *IEEE PIMRC*, 2002.
- [35] SimGrid Project, “The SimGrid Models,” documentation, accessed Sept. 2026. <https://simgrid.org/doc/latest/Models.html>.
- [36] C. Courageux-Sudan, L. Guégan, A.-C. Orgerie, and M. Quinson, “A Flow-Level Wi-Fi Model for Large Scale Network Simulation,” in *Proc. ACM MSWiM*, 2022, doi: 10.1145/3551659.3559022.
- [37] M. Gutierrez, J. Coleman, and B. Krishnamachari, “Locality Beats Widest-Path: DAG Scheduling under Wireless Edge Interference,” in *Proc. IEEE MILCOM*, 2026, to appear.