

0.80" Quadruple Digit Numeric Displays

Technical Data Sheet

Model No.: KW4-801XGB

Spec No.: W8041AB Rev No.: V.2 Date: Nov/03/2005 Page: 1 OF 6 Approved: JoJo Checked: Wu Drawn: Sun

Lucky Light Electronics Co., Ltd.

Http://www.luckylight.cn



Features:

- ⋄ 0.80" (inch) digit height.
- Excellent segment uniformity.
- Sold state reliability.
- ♦ Industrial standard size.
- Low power consumption.
- ♦ The product itself will remain within RoHS compliant Version.

Descriptions:

- ♦ The KW4-801XXX series is a lager 20.3mm (0.80") high seven segment display designed for viewing distances up to 7 meters.
- ♦ These displays provide excellent reliability in bright ambient light.
- ♦ These devices are made with white segments and black surface.

Applications:

- Audio equipment.
- Instrument panels.
- ♦ Digital read out display.

Device Selection Guide:

Model No.	Chip Material	Source Color	Description
KW4-801AGB	Cap	Yellow Green	Common Anode
KW4-801CGB	GaP	Yellow Green	Common Cathode


Spec No.: W8041AB Rev No.: V.2 Date: Nov/03/2005 Page: 2 OF 6

Approved: JoJo Checked: Wu Drawn: Sun


Http://www.luckylight.cn Lucky Light Electronics Co., Ltd.




Package Dimension:

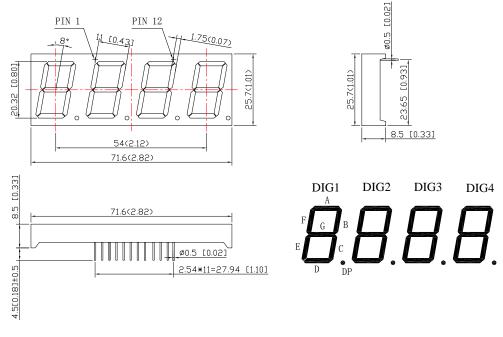

KW4-801AGB

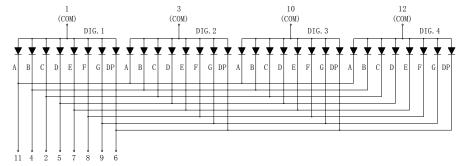

KW4-801CGB

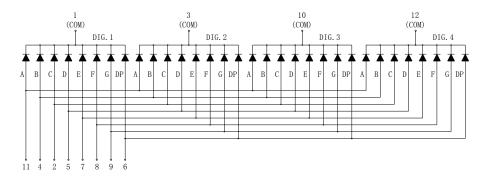

Notes:

1.All dimensions are in millimeters (inches).

2. Tolerance is \pm 0.25 mm (.010") unless otherwise noted.

3. Specifications are subject to change without notice.

Spec No.: W8041AB Rev No.: V.2 Date: Nov/03/2005 Page: 3 OF 6

Approved: JoJo Checked: Wu Drawn: Sun

Lucky Light Electronics Co., Ltd. Http://www.luckylight.cn



Absolute Maximum Ratings at Ta=25℃

Parameters	Symb ol	Max.	Unit	
Power Dissipation Per Segment	PD	70	mW	
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	100	mA	
Forward Current Per Segment	IF	25	mA	
Derating Linear From 50°C		0.4	mA/℃	
Reverse Voltage	VR		V	
Operating Temperature Range	Topr	-40℃ to +80℃		
Storage Temperature Range	Tstg	-40℃ to +100℃		
Soldering Temperature	Tsld	260℃ for 5 Seconds		

Electrical Optical Characteristics at Ta=25℃

Parameters	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Luminous Intensity	Iv	3.0	6.0		mcd	IF=20mA (Note 1)
Peak Emission Wavelength	λр		568		nm	IF=20mA
Dominant Wavelength	λd		572		nm	IF=20mA (Note 2)
Spectral Line Half-Width	Δλ		24		nm	IF=20mA
Forward Voltage	VF		2.2	2.8	٧	IF=20mA
Reverse Current	IR			10	μΑ	VR=5V

Notes:

- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2. The dominant wavelength (λd) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Spec No.: W8041AB Approved: JoJo Rev No.: V.2 Date: Nov/03/2005 Page: 4 OF 6


Checked: Wu Drawn: Sun

Lucky Light Electronics Co., Ltd. Http://www.luckylight.cn




Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

Spectral Radiance (Peak @ 568nm)

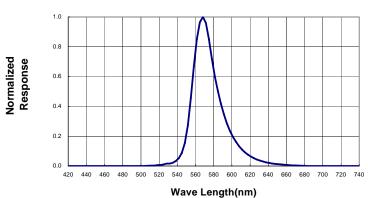


Forward Current vs Forward Voltage

Forward Current IF(mA)



Relative Luminous Intensity vs Forward Current

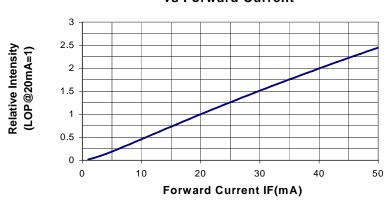

Spec No.: W8041AB Rev No.: V.2 Date: Nov/03/2005 Page: 5 OF 6

Approved: JoJo Checked: Wu Drawn: Sun

Lucky Light Electronics Co., Ltd. Http://www.luckylight.cn



Please read the following notes before using the datasheets:

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30℃ or less and 70%RH or less.

3. Soldering Condition

- 3.1 Pb-free solder temperature profile.
- 3.2 Reflow soldering should not be done more than two times.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260°C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often

started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Spec No.: W8041AB Rev No.: V.2 Date: Nov/03/2005 Page: 6 OF 6

Approved: JoJo Checked: Wu Drawn: Sun

Lucky Light Electronics Co., Ltd. Http://www.luckylight.cn