



Analog input (UG-637 Fig. 8): 75 R termination (R1+R2), gain 0.7, AC coupled by C1. J2 (RCA) and J3 (SMA) are alternative footprints for the same input; fit one.


Crystal 28.63636 MHz, fundamental, CL 20 pF:
 $C = 2(CL - C_s) - C_{pg} = 2(20 - 3) - 4 = 30 \text{ pF} \rightarrow 27 \text{ pF (AN-1260)}$

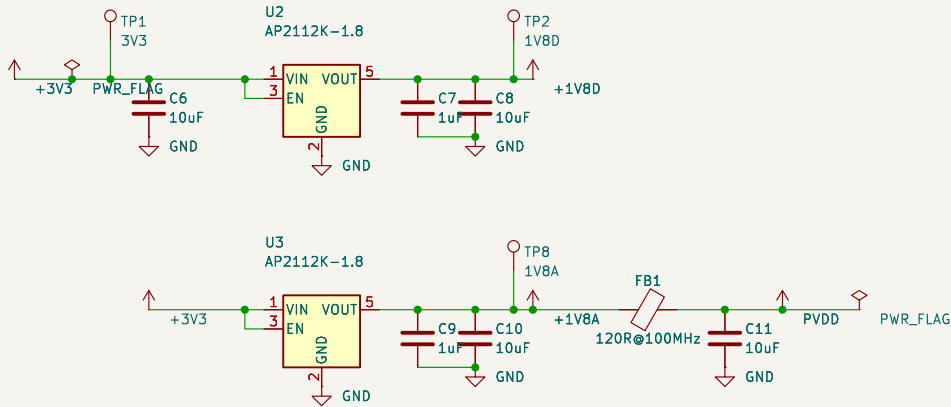


Power: 3.3 V from Pi camera connector (pin 15). Two AP2112K-1.8 LDOs:
U2 -> DVDD+MVDD (~84 mA typ). U3 -> AVDD (~47 mA) and PVDD via FB1 (~12 mA).
UG-637 recommends separate regulated supplies for the analog/PLL group.

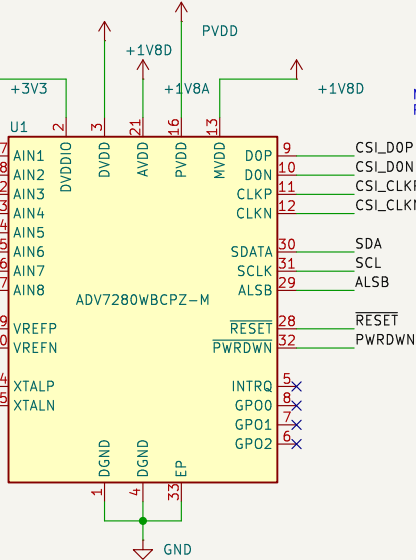


Reset / power-down / address
Overlay adv728x-m sets no reset/powerdown GPIO and does not enable cam1_reg, so RESET and PWRDWN are pulled up on board; JP2/JP3 optionally route CAM_GPIO (Pi pin 11), ALSB=1 -> 7-bit addr 0x21 as in adv7282m-overlay.dts (reg = <0x21>). Close JP1 for 0x20.

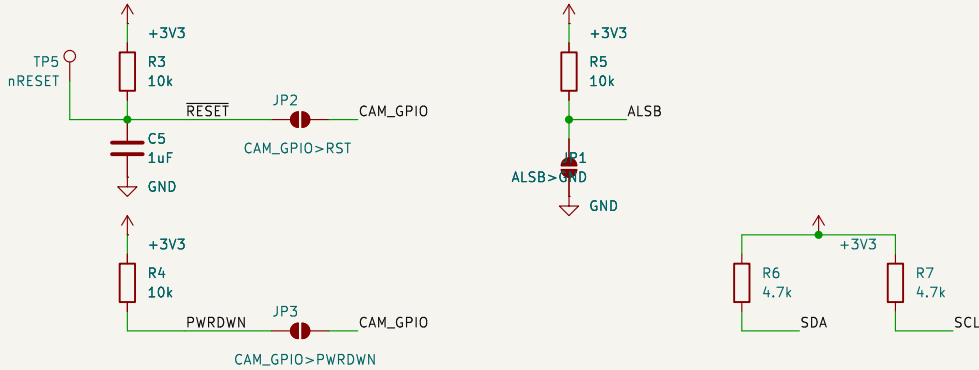


MIPI CSI-2, 1 data lane + clock (216 Mbps interlaced / 432 Mbps I2P).
Route as 100 R differential (2 x 50 R loosely coupled per UG-637), no vias, GND plane under.



Pi 4 J3 (CAMERA) pinout, 1:1 with Camera Module v2.1:
1 GND 2 DON 3 DOP 4 GND 5 D1N(nc) 6 D1P(nc) 7 GND
8 CLKN 9 CLKP 10 GND 11 CAM_GPIO 12 nc 13 SCL0 14 SDA0 15 3V3
I2C on Pi 4 = GPIO44/45 (i2c-csi-dsi); pull-ups to 3V3 exist on the Pi.

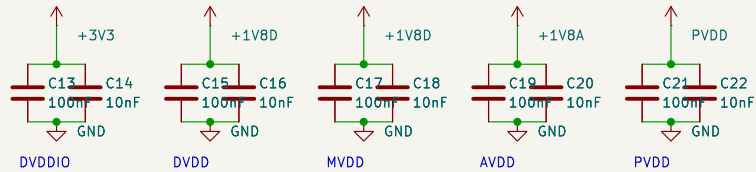

Decoupling per UG-637: 100 nF + 10 nF at each supply pin, same side as U1, via under the 100 nF pad.



Sources: ADV7280 DS Rev.A, UG-637 Rev.A, AN-1260; see docs/requirements.md
Target: Raspberry Pi 4 CSI camera port, dtoverlay=adv728x-m,adv7280m=1

Sheet: /
File: adv7280m-csi2.kicad_sch

Title: CVBS to MIPI CSI-2 video decoder (ADV7280-M) for Raspberry Pi 4

Size: A3	Date: 2026-09-20	Rev: A
KiCad E.D.A. 9.0.9		Id: 1/1