

APPLE II / RP2350B CARRIER
Direct bus; slot-only power

J1
Apple II slot, counter-clockwise numbering

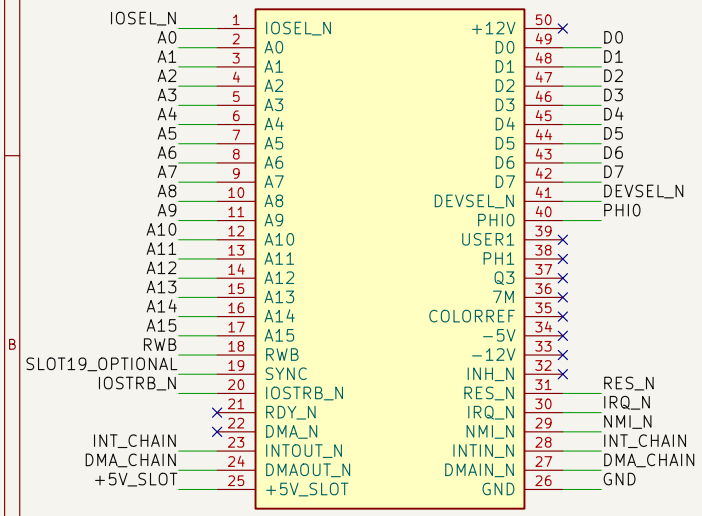

M1
WeAct RP2350B V1.0 (prepared module)

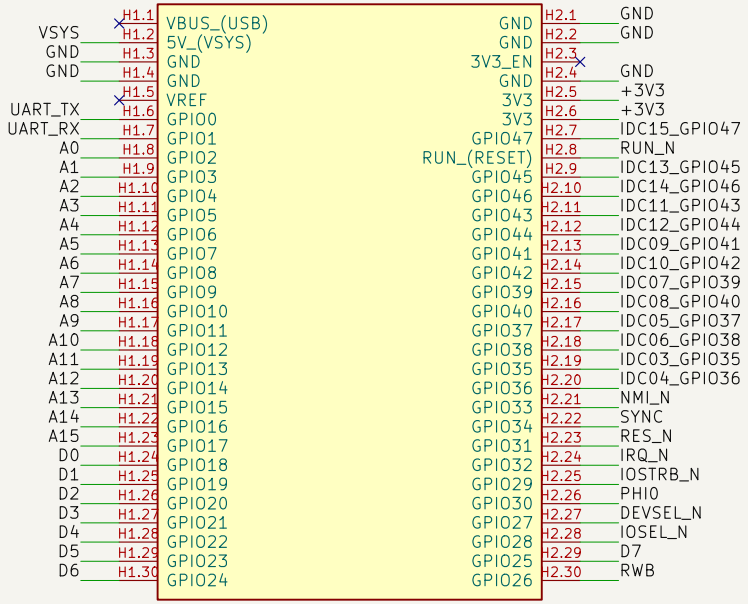

MODULE PREPARATION
Remove R16, R19, R14, U2.
Leave U7/R13/C23 empty.
VBUS: NC; USB data only.
See carrier README.


SIGNAL LABELS
_N = active low.
UART: carrier TX / RX.
H1.n / H2.n: module pins.
JP1: open except slot 7.
IRQ/NMI: low or release.

Slot 25 -> F1/D1 -> VSYS.
5V inputs need powered IOVDD.
RUN is separate from /RES.
No hot-plugging; flash off-host.
Use a 5V fixture at slot 25/26.


JP1
SYNC: OPEN except verified slot 7




J2
Daughterboard IDC20

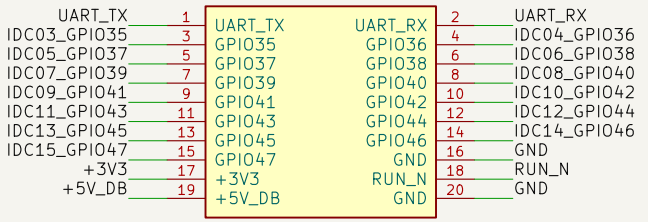


F1
500mA PTC




D1
1N5819




F2
100mA PTC




R4
10k




#FLG01
PWR_FLAG




#FLG02
PWR_FLAG




C8
100nF



C9
10uF



C10
10uF



Schematic prototype: physical qualification pending

Sheet: /
File: a2ext-carrier.kicad_sch

Title: a2ext-carrier

Size: A4	Date: 2026-10-12	**Rev: 0.6**
KiCad E.D.A. 10.0.7		Id: 1/1