



2-way 10A Terminal Block 3.5mm

Order code: **21-3000**

Notes:

Pitch: 3.5mm

Rated voltage/current: UL 300V/10A
VDE 130V/10A

Operation temperatures: -40°C to +105°C

Withstanding voltage: AC1500V/min.

Insulation resistance: 5000M Ω /DC1000V


Wire range: 24 to 18AWG, 1.0mm²

Max. torque value: 2.04kgf·cm

Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				
6	Over 6 to 10	Over 10 to 24	30	Over 30 to 60	Over 60 to 100	Over 100 to 150	Over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

No.	Material	Plating
1	PA66	UL94V-0
2	Phosphor bronze	Ni plated
3	Steel	Cr ³⁺ Zn
4	Brass	SnCe

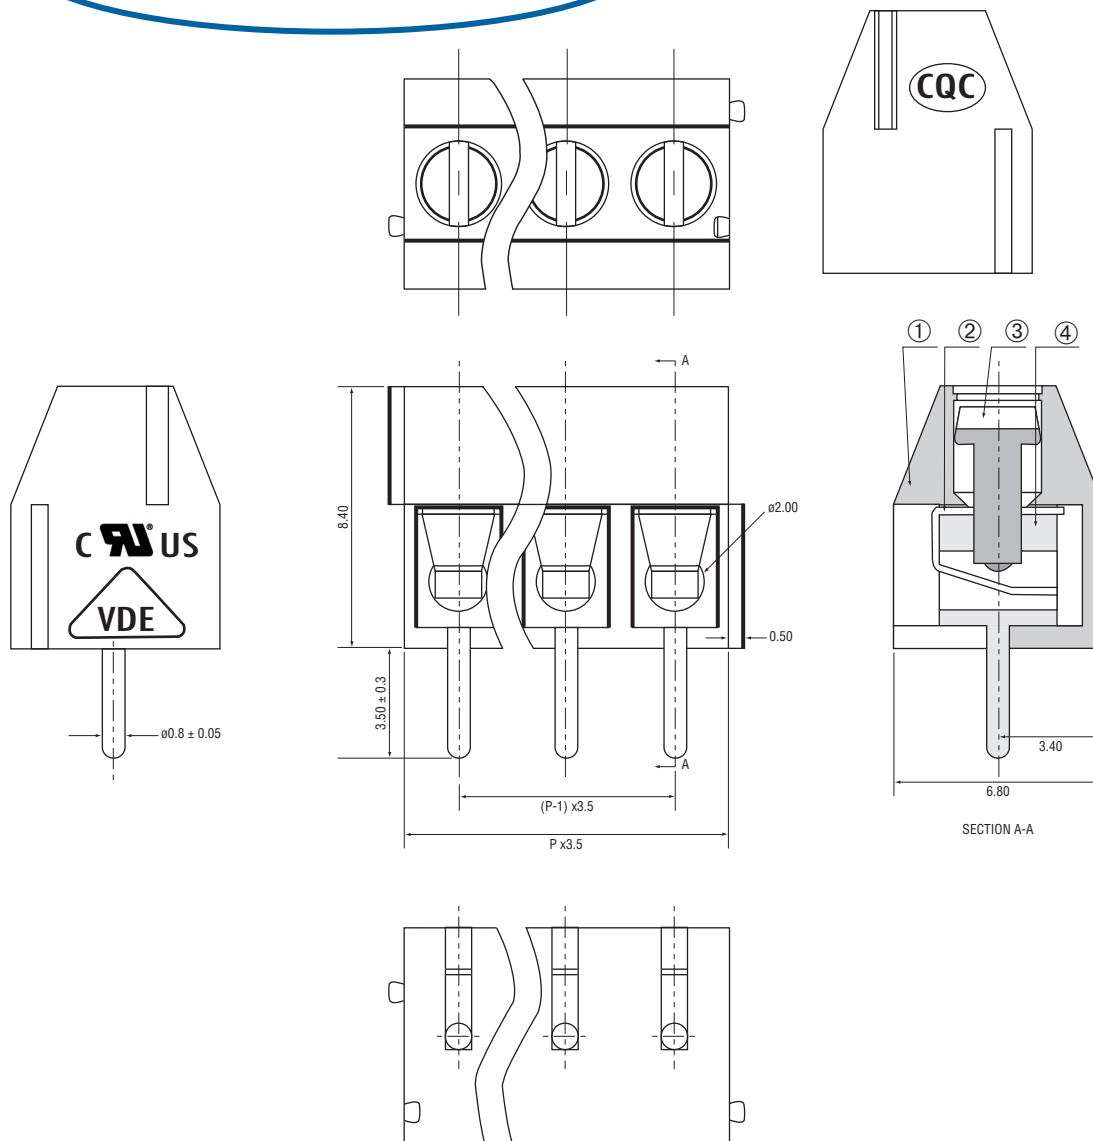

www.rapidonline.com