

Comparison of EKF and UKF State Estimation with Measurement Gating and RK4 Propagation

J.C. Vaught

Department of Mechanical Engineering

University of South Carolina

Columbia, South Carolina, USA

jvaught@sc.edu

Abstract—This report addresses the six required tasks in the EMCH792 final project for the nonlinear kinematic bicycle model. The calibration pass yielded $R_1 = 0.087247$ and $R_2 = 0.006536$ with a constant sample period of 0.100 s. The vanilla rectangular comparison favored the UKF over the EKF, reducing position RMSE from 5.1335 m to 2.8483 m and heading RMSE from 22.1313 deg to 4.6895 deg. A fixed scalar 99% normalized-innovation-squared gate with threshold 6.6349 improved heading RMSE by 16.0203 deg for the EKF and 0.9017 deg for the UKF, but position RMSE increased because repeated y_1 rejections made the gated runs more prediction dominated. Replacing rectangular UKF propagation with RK4 reduced position RMSE by 0.2026 m, while the RK4 runtime increased by only 0.965 ms relative to the rectangular UKF.

Index Terms—Extended Kalman filter, Unscented Kalman filter, Nonlinear state estimation, Measurement gating, Runge-Kutta integration

I. PROBLEM I. CALIBRATION VARIANCE ESTIMATION

The first task was to estimate the two sensor variances from the calibration data and confirm the deployment sample period. The calibration pass produced $R_1 = 0.087247$ for the range-like measurement and $R_2 = 0.006536$ for the cubic heading sensor. The deployment dataset remained uniformly sampled at 0.100 s. The filters were initialized from a zero-centered prior and used the nominal base covariance so that the baseline comparison did not consume the provided truth channels as estimator inputs.

II. PROBLEM II. VANILLA EKF AND UKF WITH RECTANGULAR INTEGRATION

Both filters used the assignment state $x = [x, y, \psi, u]^T$ with steering angle and longitudinal acceleration as inputs, fixed geometry $l_f = l_r = 1$, and the prescribed continuous-time process covariance. The EKF used rectangular Euler prediction with first-order Jacobian linearization for both the process and measurement updates. The UKF used the scaled unscented transform with $\alpha = 10^{-3}$, $\beta = 2$, and $\kappa = 0$, and propagated every sigma point with the selected discrete-time integrator. In every configuration, the two measurements were processed sequentially as scalar updates so that the gating study in Problem IV could test each sensor independently.

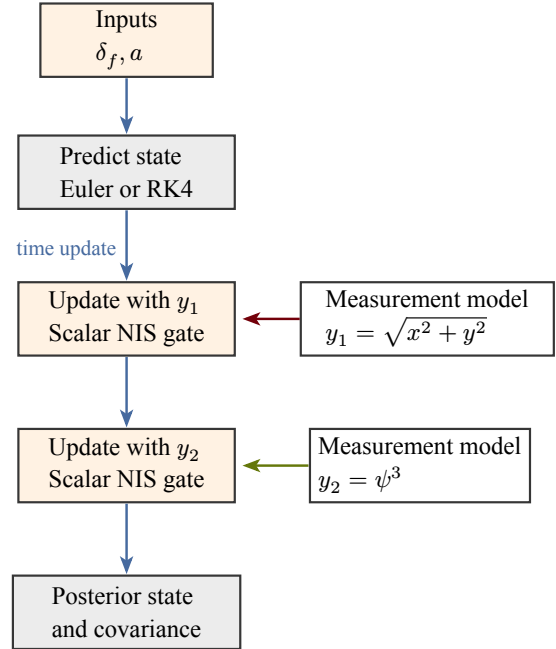


Fig. 1. Standalone CeTZ diagram of the sequential estimation workflow. The figure was authored separately, compiled to PDF, and then imported into the main IEEE-formatted document as a standard image asset.

The ungated rectangular comparison favored the UKF. The EKF rectangular run produced a position RMSE of 5.1335 m with a heading RMSE of 22.1313 deg, while the rectangular UKF reduced these values to 2.8483 m and 4.6895 deg. The same trend appeared in the covariance histories. The rectangular EKF carried an average covariance trace of 0.9432, while the rectangular UKF carried 9.8452. The UKF therefore remained less overconfident on this nonlinear problem, especially under the cubic heading measurement.

III. PROBLEM III. RUNTIME OF THE VANILLA EKF AND UKF

The average runtime study for the vanilla rectangular filters used sixty repeated executions after one warm-up pass per configuration. The EKF remained the cheaper estimator at 2.246 ms per run on average, while the rectangular UKF required 3.750 ms. That extra cost is expected because the

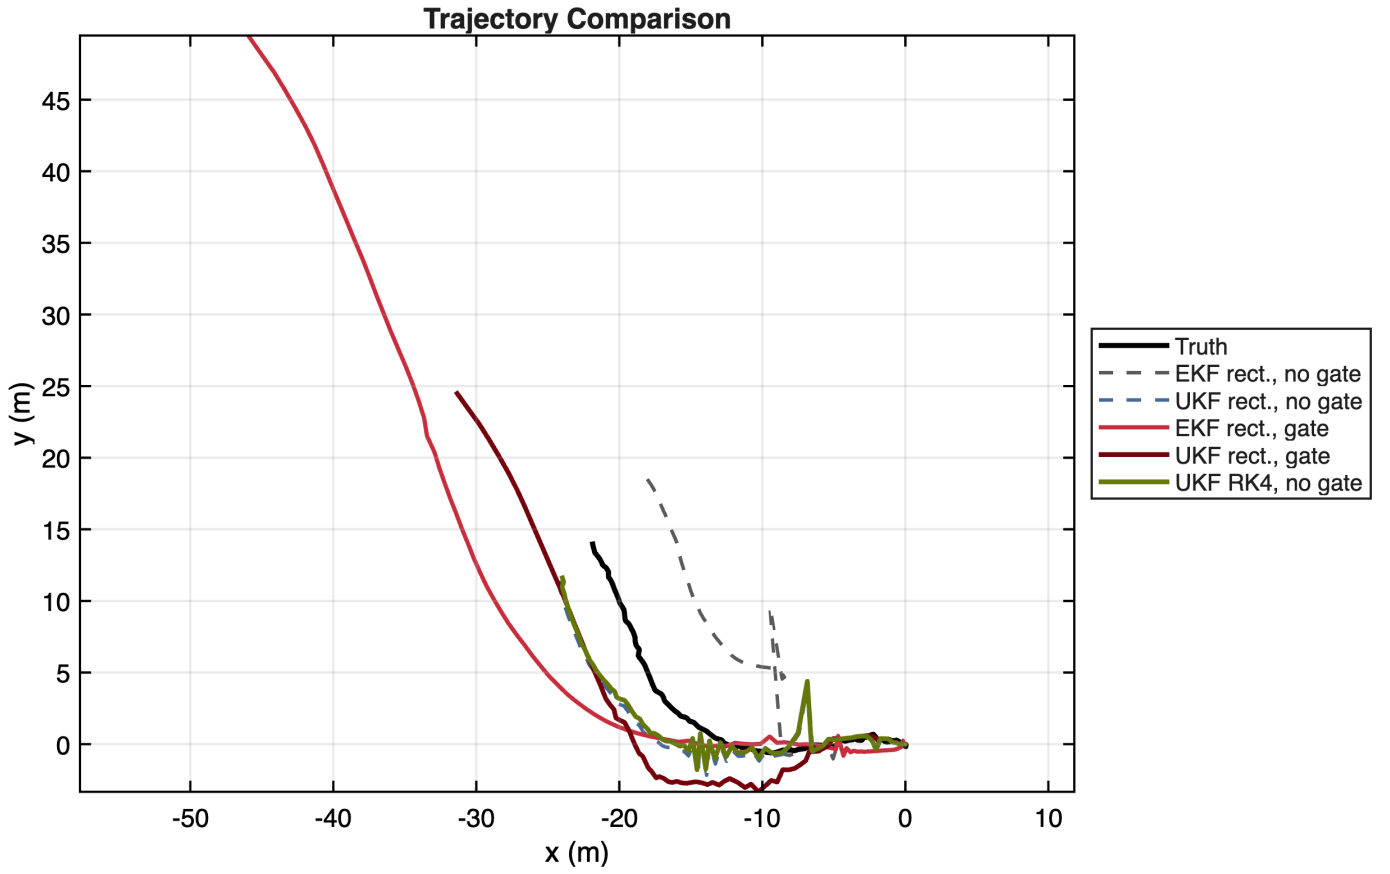


Fig. 2. Trajectory comparison for the rectangular EKF and UKF baselines, the gated rectangular filters, and the ungated RK4 UKF. The vanilla UKF and the ungated RK4 UKF remain closest to the truth trajectory, while the gated runs drift late in the record after repeated measurement rejection.

UKF must propagate and recombine the sigma-point set at every step.

TABLE I

AVERAGE RUNTIME OVER SIXTY REPEATED EXECUTIONS FOR THE VANILLA RECTANGULAR EKF AND UKF.

Configuration	Mean ms	Std ms
EKF rect., no gate	2.246	1.034
UKF rect., no gate	3.750	0.129

IV. PROBLEM IV. MEASUREMENT GATING

Measurement gating was implemented as a scalar normalized innovation squared test on each sensor separately, exactly as requested in the handout. The study used a fixed 99% gate with threshold 6.6349. The gate did what it was supposed to do for the heading-like sensor. The EKF heading RMSE improved by 16.0203 deg and the UKF heading RMSE improved by 0.9017 deg after the strongest y_2 outliers were rejected. However, the position RMSE increased by 11.6843 m for the EKF and by 1.7155 m for the UKF because the gate also rejected many late y_1 measurements. The final rectangular gated runs rejected 73 and 19 range measurements, respectively, which made both filters coast too long on the process model alone.

V. PROBLEM V. UKF WITH RUNGE-KUTTA INTEGRATION

Replacing the rectangular UKF propagation with RK4 improved the ungated UKF accuracy. The rectangular UKF produced a position RMSE of 2.8483 m, while the ungated RK4 UKF reduced that value to 2.6457 m for an improvement of 0.2026 m. The heading RMSE remained nearly unchanged at 4.6895 deg for the rectangular UKF and 4.7116 deg for the RK4 UKF. The main benefit therefore appeared in the planar trajectory and state histories, where the higher-order integrator reduced accumulated discretization error.

VI. PROBLEM VI. RUNTIME OF THE RK4 UKF VERSUS THE RECTANGULAR UKF

The integrator runtime comparison again used sixty repeated executions after one warm-up pass per configuration. The rectangular UKF required 3.615 ms per run on average, while the RK4 UKF required 4.580 ms. The RK4 propagation therefore added 0.965 ms per run relative to the rectangular UKF. That extra cost is small compared with the position-accuracy gain reported in Problem V.

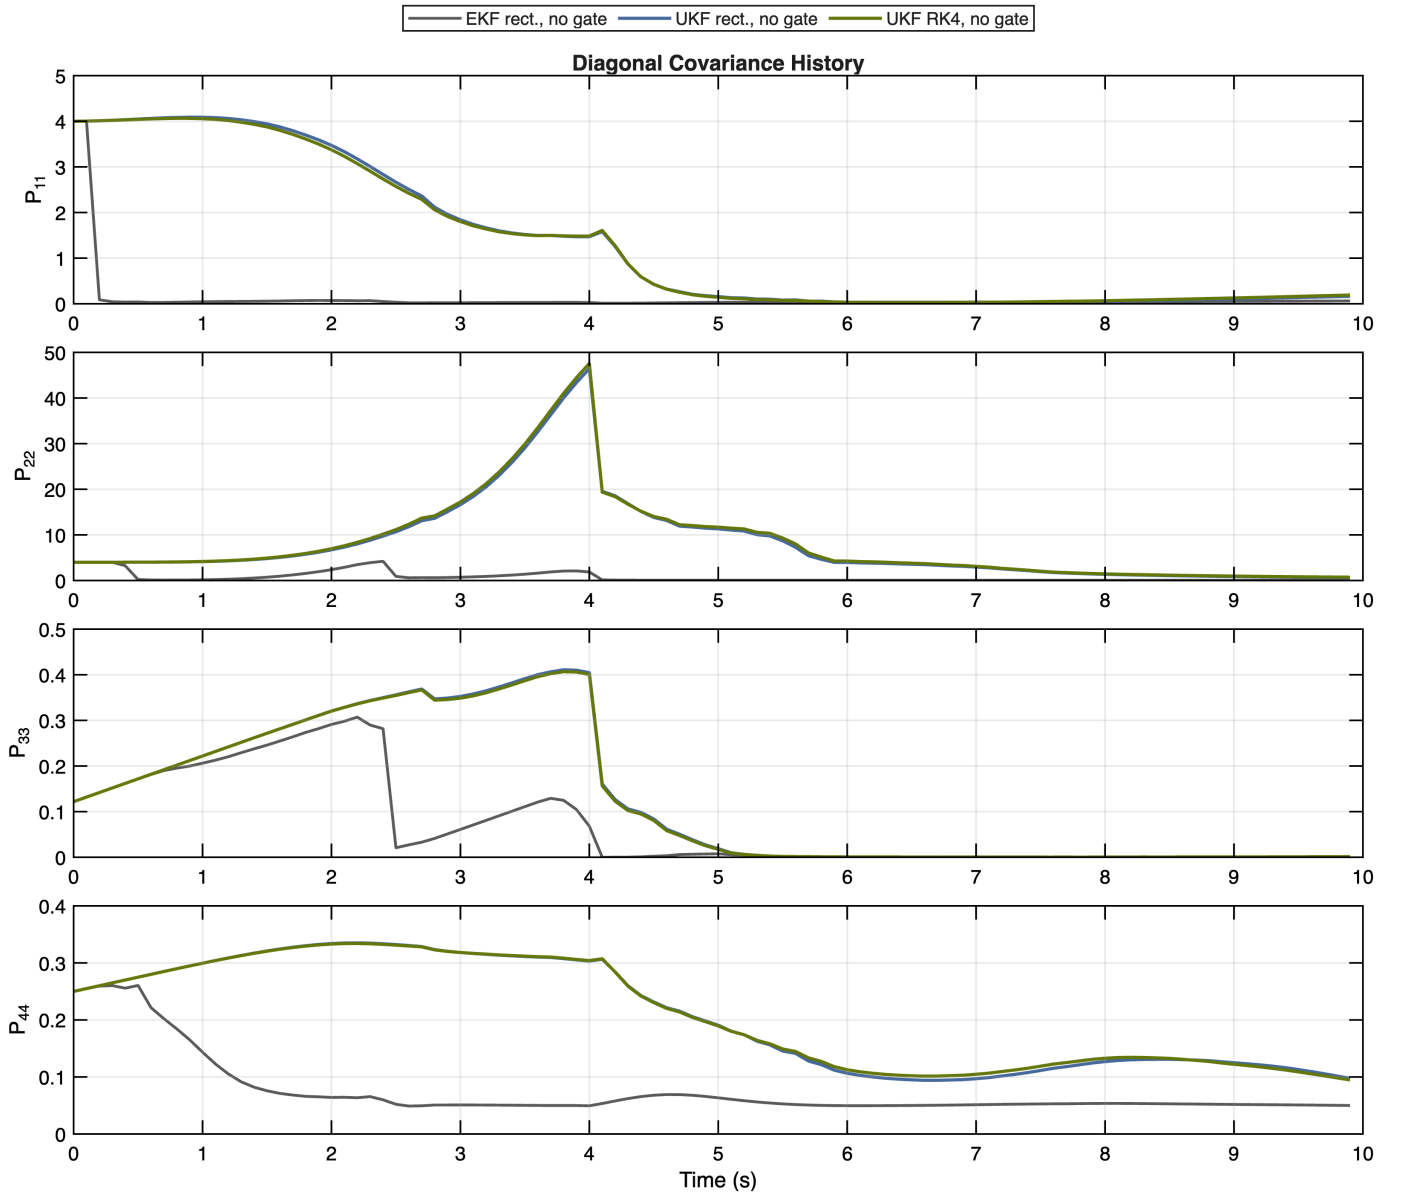


Fig. 3. Diagonal covariance histories for the rectangular EKF, rectangular UKF, and ungated RK4 UKF. The UKF variants retain visibly larger uncertainty than the EKF, which is consistent with their stronger nonlinear treatment.

TABLE II
AVERAGE RUNTIME OVER SIXTY REPEATED EXECUTIONS FOR THE RECTANGULAR
AND RK4 UKF IMPLEMENTATIONS.

Configuration	Mean ms	Std ms
UKF rect., no gate	3.615	0.017
UKF RK4, no gate	4.580	0.014

Taken together, the six required comparisons point to the same conclusion. The vanilla UKF was the stronger baseline on this nonlinear problem, the scalar gate was useful for removing the worst heading-sensor outliers but harmed position accuracy when range updates were rejected too often, and RK4 was the cleanest algorithmic upgrade because it improved the ungated UKF trajectory with only a modest runtime increase.

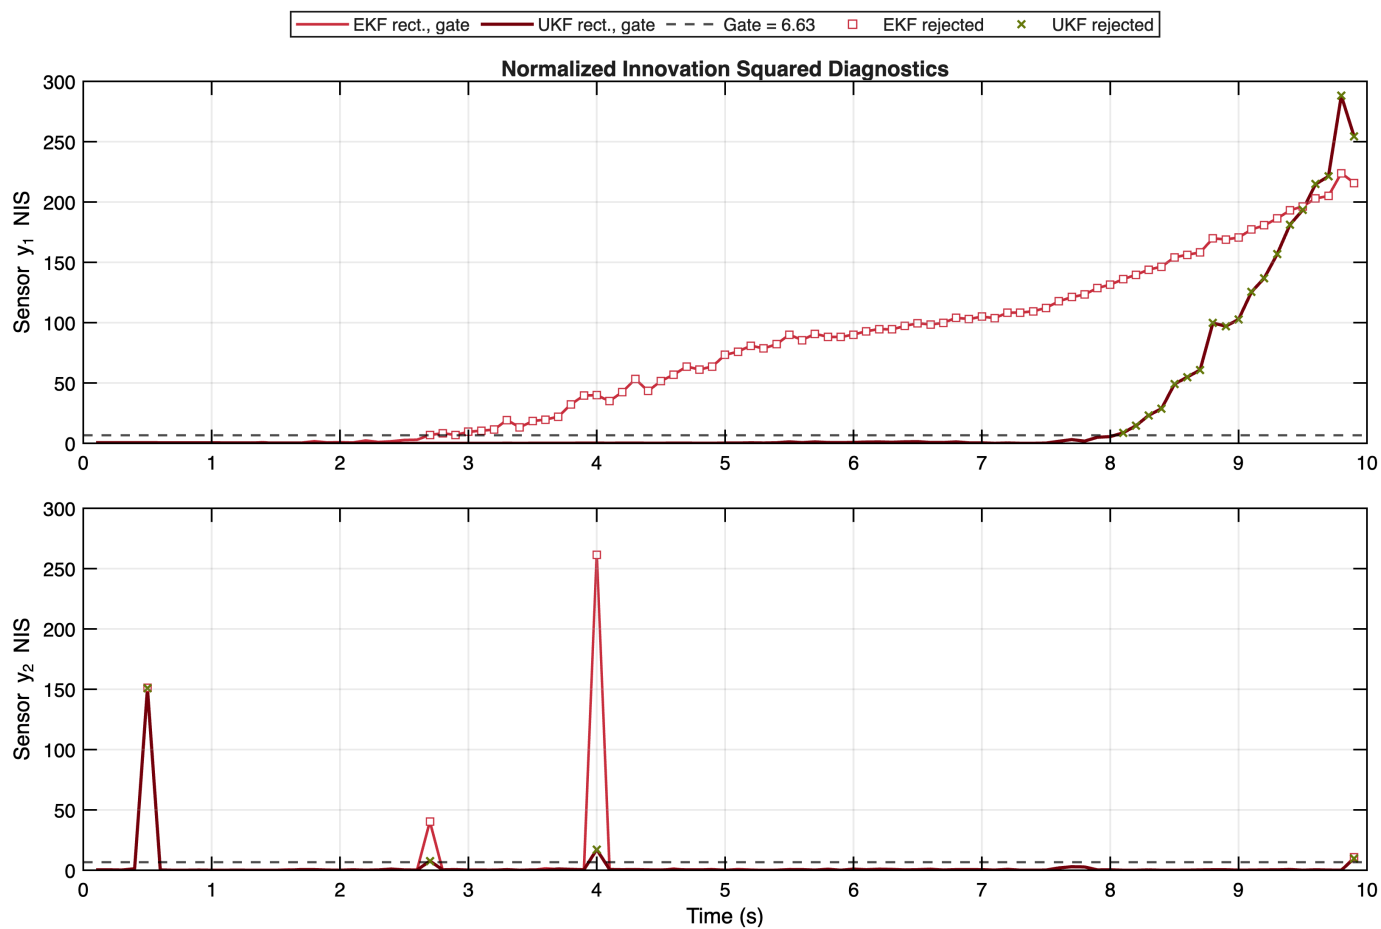


Fig. 4. Normalized innovation squared histories for both scalar sensors. The isolated y_2 spikes are clearly detectable, and the EKF and UKF rejection markers show how the late growth in y_1 residuals drives repeated range-measurement rejection.

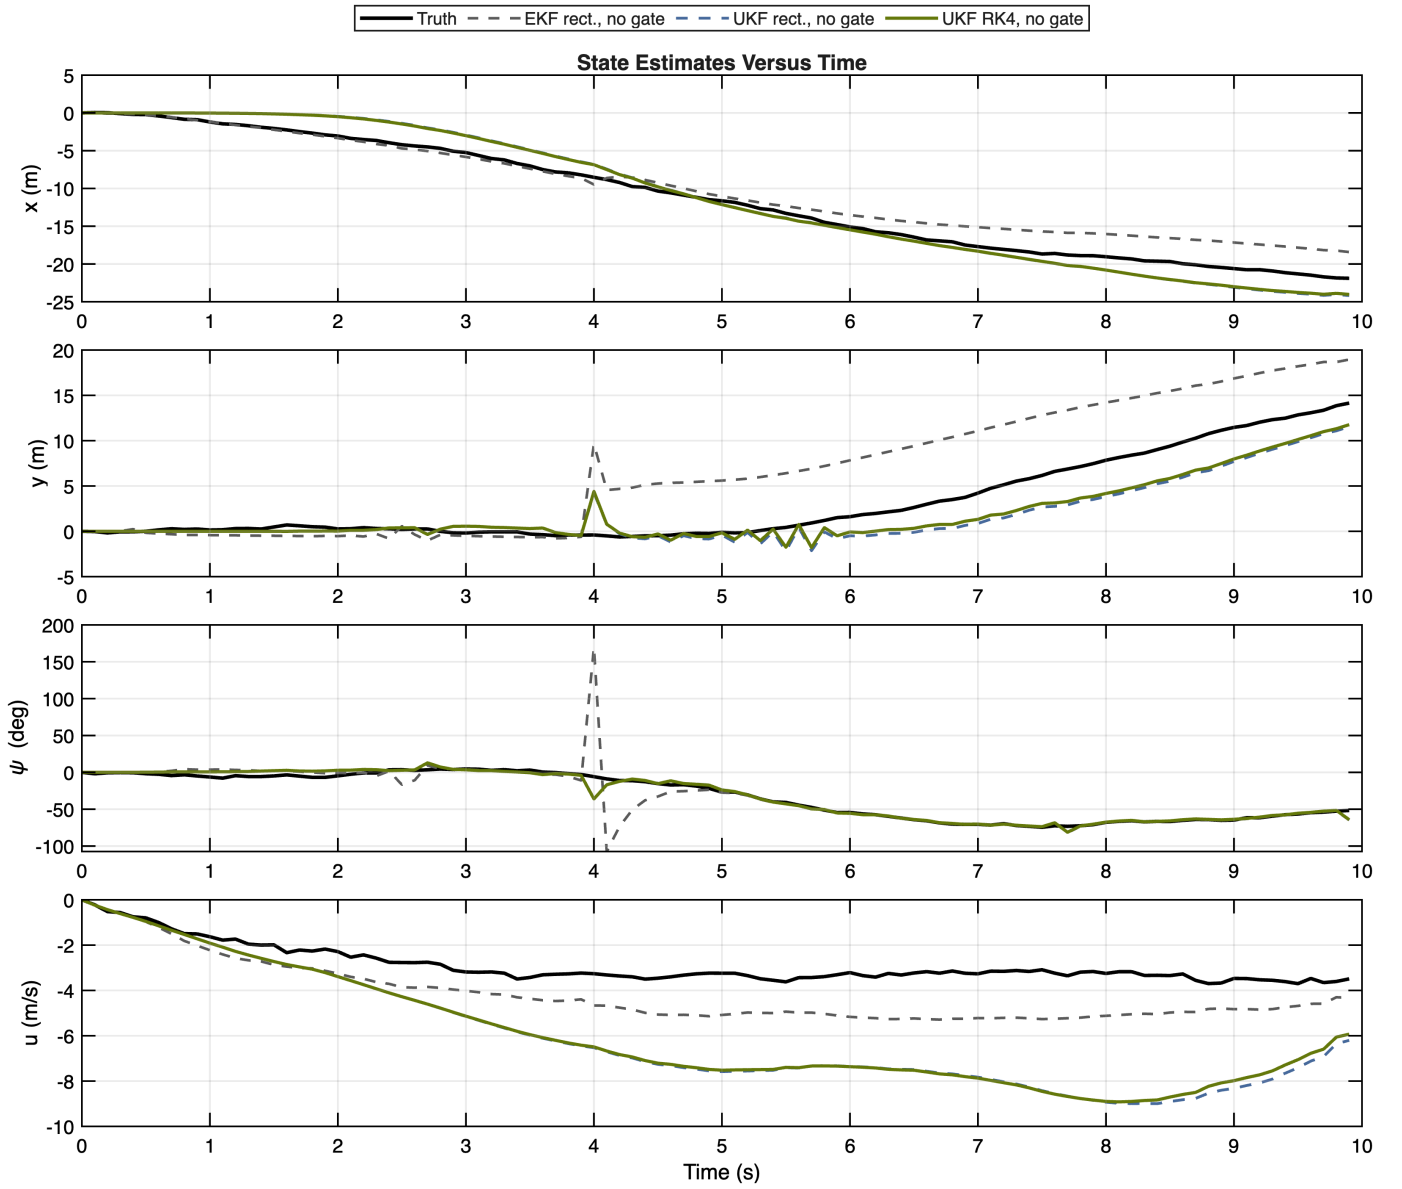


Fig. 5. State estimates versus time for the vanilla rectangular EKF, vanilla rectangular UKF, and ungated RK4 UKF. The RK4 UKF mainly improves the position channels while leaving the heading history close to the rectangular UKF result.

TABLE III
STATE-ESTIMATION ACCURACY, COVARIANCE SUMMARY, AND MEASUREMENT-REJECTION COUNTS FOR ALL EVALUATED CONFIGURATIONS.

Configuration	x	y	psi deg	u	pos.	avg tr(P)	rej y1	rej y2
EKF rect., no gate	1.9084	4.7656	22.1313	1.4067	5.1335	0.9432	0	0
UKF rect., no gate	1.7247	2.2667	4.6895	3.6135	2.8483	9.8452	0	0
EKF rect., gate	10.8599	12.8413	6.1110	6.4933	16.8178	3.5597	73	4
UKF rect., gate	2.8845	3.5367	3.7879	5.5241	4.5638	14.7626	19	4
UKF RK4, no gate	1.6755	2.0475	4.7116	3.5487	2.6457	10.0960	0	0
UKF RK4, gate	3.0439	3.5357	3.7544	5.5725	4.6654	15.1788	20	4