Lab assignment-1

Wireshark

To capture live network packets using Wireshark and identity basic network protocols such as TCP, UDP, IP, and DNS.

1. Capture live network packets

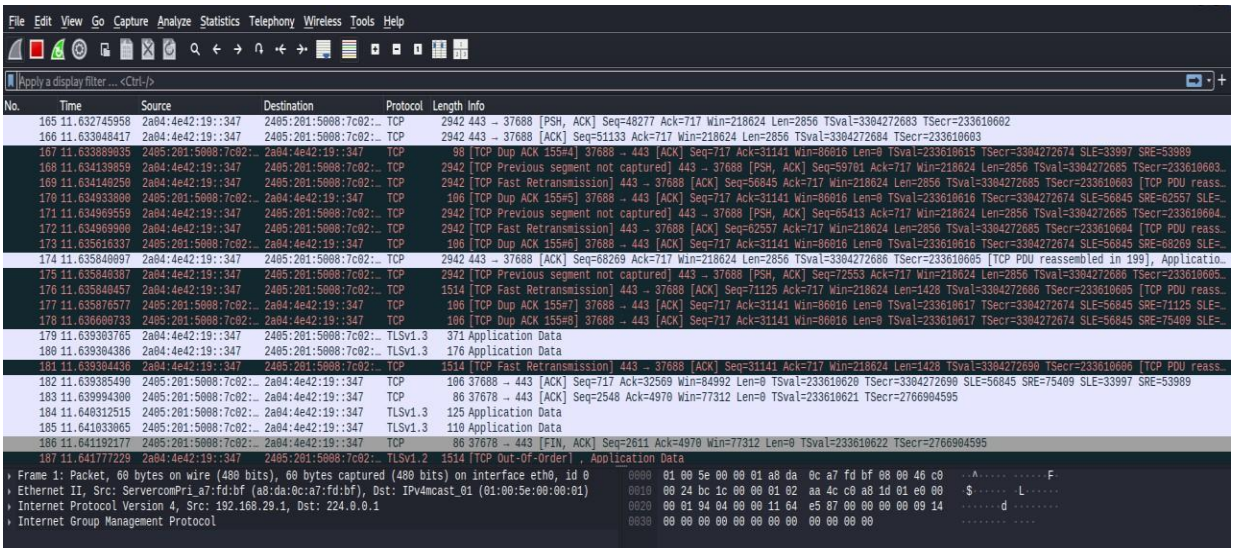

2. Packet Information

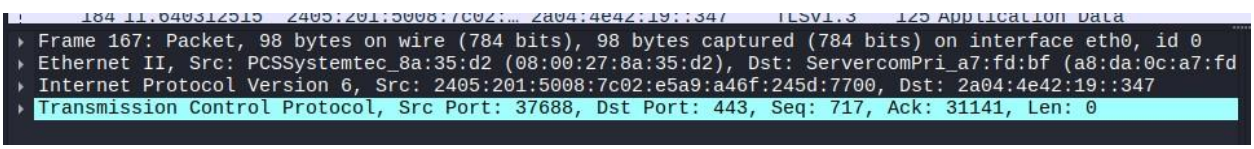

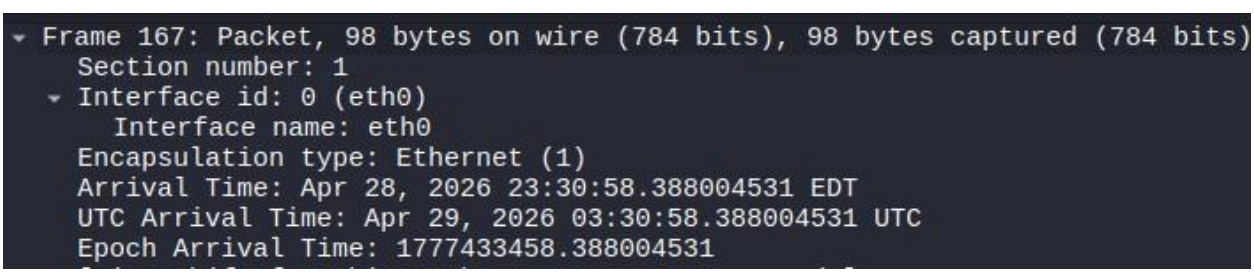

Frame:167

Packet Size: 98 Bytes

Interface used: eth0

```
Ethernet II, Src: PCSSystemtec_8a:35:d2 (08:00:27:8a:35:d2), Dst: ServercomPri_a7:fd:bf
  Destination: ServercomPri_a7:fd:bf (a8:da:0c:a7:fd:bf)
      .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
      .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  Source: PCSSystemtec_8a:35:d2 (08:00:27:8a:35:d2)
      .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
      .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Type: IPv6 (0x86dd)
```

Source MAC Address: 08:00:27:8a:35:d2

Source Device Name: PCSSystemtec_8a:35:d2

Destination MAC Address: a8:da:0c:a7:fd:bf

Protocol Type: IPv6

```
Transmission Control Protocol, Src Port: 37688, Dst Port: 443, Seq: 717, Ack: 31141, Len: 0
    Source Port: 37688
    Destination Port: 443
    [Stream index: 3]
    [Stream Packet Number: 54]
  [Conversation completeness: Complete, WITH_DATA (63)]
    [TCP Segment Len: 0]
    Sequence Number: 717    (relative sequence number)
    Sequence Number (raw): 3091714382
    [Next Sequence Number: 717    (relative sequence number)]
    Acknowledgment Number: 31141    (relative ack number)
    Acknowledgment number (raw): 1793768050
    1011 .... = Header Length: 44 bytes (11)
  Flags: 0x010 (ACK)
    Window: 168
    [Calculated window size: 86016]
    [Window size scaling factor: 512]
    Checksum: 0x9360 [unverified]
    [Checksum Status: Unverified]
```

Source Port: 37688

Destination Port: 443

Sequence Number: 717

Acknowledgment Number: 31141

Header Length: 44 bytes

Window: 168

Calculated Window Size: 86016