


WIFI Smart Circuit Breaker



Function Overview


WIFI Smart On/Off Switch, featuring an advanced structure, reliable performance, and an aesthetically pleasing, compact design, is primarily intended for use in locations with AC 50Hz, voltage below 400V, and a rated operating current of 63A or less. Capable of remote operation, it enables real-time display of electrical parameters such as current, voltage, energy consumption, power, and frequency via mobile devices. With programmable cycling timers, it can be set to initiate or cease power supply. Suitable for protecting lighting, distribution circuits, and equipment in office buildings, residences, and similar structures, it also facilitates infrequent switching and conversion operations.

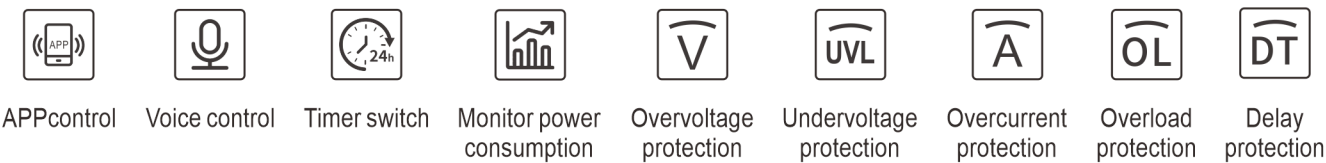

Principal Technical Parameters


Product Name:	WIFI Smart Circuit Breaker	Current setting:	1-63A
Rated voltage:	AC 220V/110V	Protection rating:	400V
Withstand voltage:	AC 80V-300V	Grade:	IP30
wireless network:	Tuya Smart	Executive body:	Relay
Frequency:	50/60Hz	Temperature range:	-40°C-150°C
Overvoltage range:	130-300V	Altitude:	≤2000m
Undervoltage range:	75-210V	Humidity:	<50%at40°C(non-condensing)
Electric power range:	0-9999kW·h	Electrical life:	10000 times
Scheduled settings:	15 sets of timed settings	Maximum power:	15KW
Product dimensions:	18*84*68mm	Packing quantity:	100only
Box dimensions:	465*235*175mm	Box weight:	11KG

Features

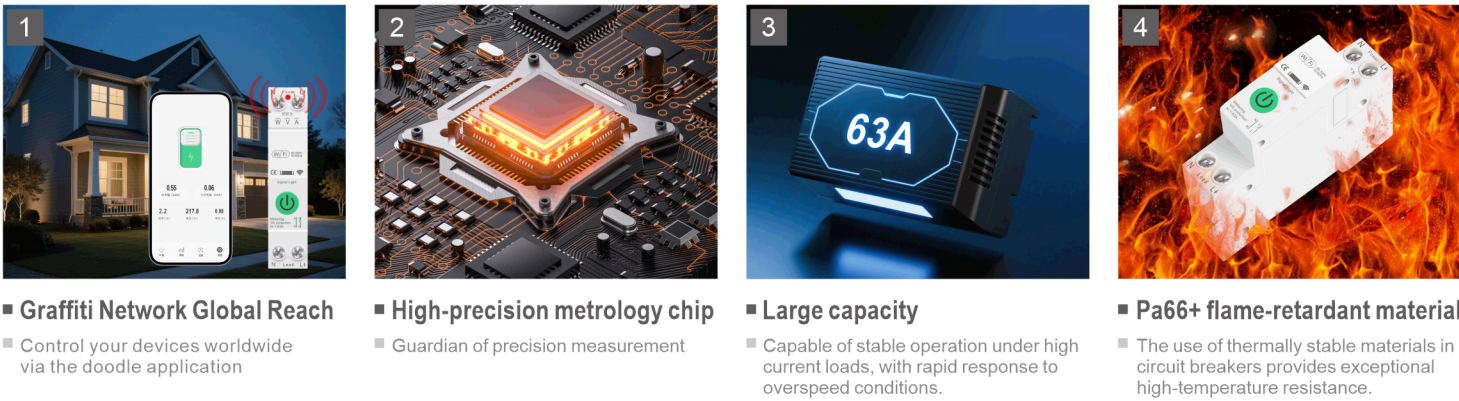


Distribution network configuration steps

Method for connecting to Wi-Fi or performing a reset: Press and hold the power button on the device for 5-10 seconds until the Wi-Fi indicator light flashes. Enable Bluetooth on your mobile phone, then open the Smart Life app. Tap the '+' icon in the top-right corner, select 'Add Device', and wait for the device to appear in the scan. Tap the device, select the desired Wi-Fi network, enter the password, and wait for the device to successfully connect.

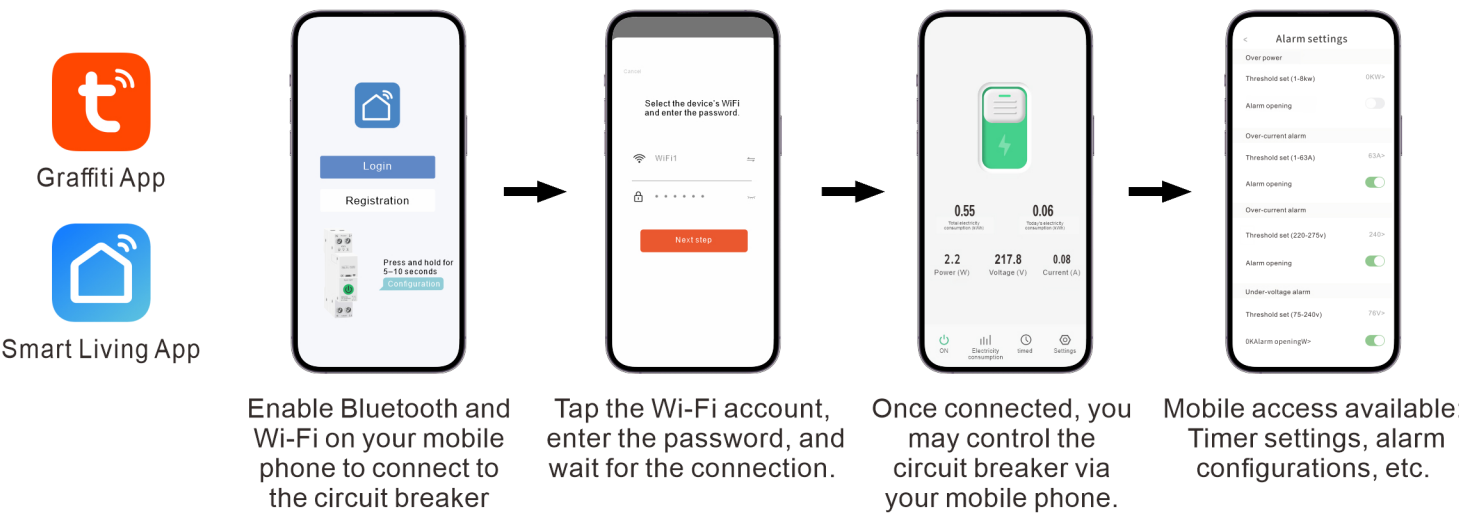

Dimensions and Wiring

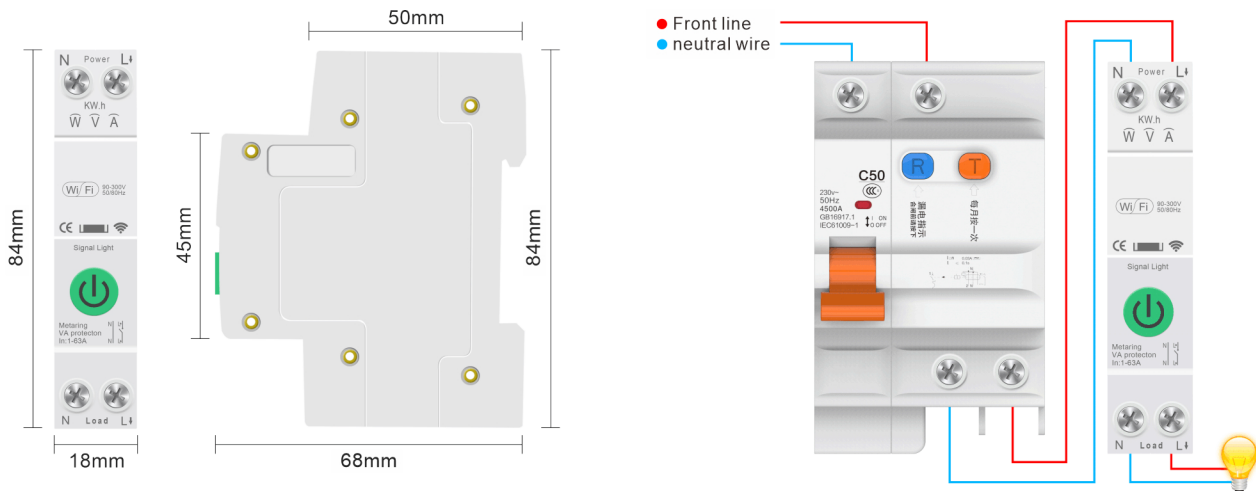



WIFI Smart Circuit Breaker 2P



Function Overview

WIFI 2P Smart On/Off Switch features an advanced structure, reliable performance, and an elegant design. Its spacious interior accommodates high-capacity relays, enabling greater current handling. Primarily designed for AC 50Hz applications with voltages below 400V and rated operating currents up to 63A. It enables remote operation, with mobile applications displaying real-time electrical parameters including current, voltage, energy consumption, power, and frequency. Capable of cyclical timing functions, it allows scheduling of power supply activation or deactivation. Suitable for protecting lighting, distribution circuits, and equipment in office buildings, residences, and similar structures, it may also serve for infrequent switching operations and circuit conversion.

APPcontrol

Voice control

Timer switch

Monitor power consumption

Overvoltage protection

Undervoltage protection

Overcurrent protection

Overload protection

Delay protection

Principal Technical Parameters

Product Name:	WIFI Smart Circuit Breaker 2P	Current setting:	1-63A
Rated voltage:	AC 220V/110V	Protection rating:	400V
Withstand voltage:	AC 80V-300V	Grade:	IP30
wireless network:	Tuya Smart	Executive body:	Single relay/Dual relay
Frequency:	50/60Hz	Temperature range:	-40°C-150°C
Overvoltage range:	130-300V	Altitude:	≤2000m
Undervoltage range:	75-210V	Humidity:	<50%at40°C(non-condensing)
Electric power range:	0-9999kW·h	Electrical life:	10000times
Scheduled settings:	15 sets of timed settings	Maximum power:	15KW
Product dimensions:	36*84*68mm	Packing quantity:	100only
Box dimensions:	450*150*415mm	Box weight:	15KG

Features

Control your devices worldwide via the doodle application

Guardian of precision measurement

Capable of stable operation under high current loads, with rapid response to overspeed conditions.

The use of thermally stable materials in circuit breakers provides exceptional high-temperature resistance.

Distribution network configuration steps

Method for connecting to Wi-Fi or performing a reset:Press and hold the power button on the device for 5-10 seconds until the Wi-Fi indicator light flashes.Enable Bluetooth on your mobile phone, then open the Smart Life app.Tap the '+' icon in the top-right corner, select 'Add Device', and wait for the device to appear in the scan.Tap the device, select the desired Wi-Fi network, enter the password, and wait for the device to successfully connect.

Graffiti App

Smart Living App


Enable Bluetooth and Wi-Fi on your mobile phone to connect to the circuit breaker

Tap the Wi-Fi account, enter the password, and wait for the connection.

Once connected, you may control the circuit breaker via your mobile phone.


Mobile access available: Timer settings, alarm configurations, etc.

Dimensions and Wiring

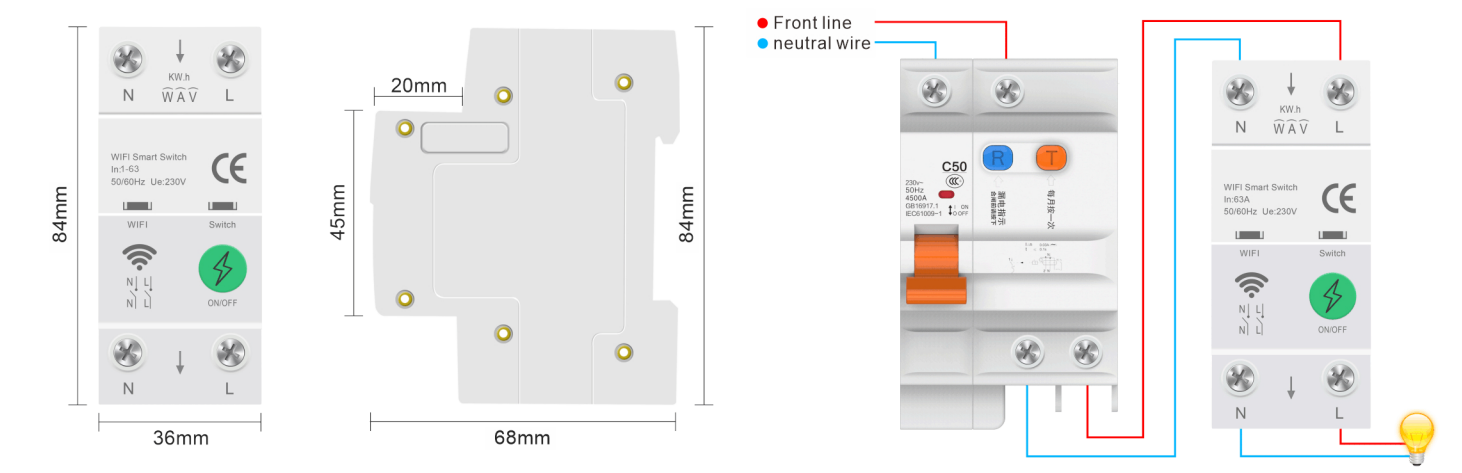




WIFI Earth Leakage Circuit Breaker

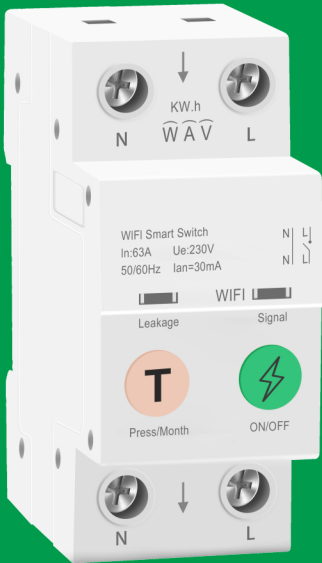

- Function Overview
 - WIFI 2P Smart Earth Leakage Circuit Breaker features an advanced structure, reliable performance, and an elegant design. Its spacious interior accommodates a high-capacity relay, enabling greater current handling. Equipped with earth leakage detection, it is primarily designed for use in AC 50Hz environments with voltages below 400V and rated operating currents up to 63A. It supports remote operation, with mobile applications displaying real-time electrical parameters including leakage current, current, voltage, energy consumption, power, and frequency. Timed cycling functionality allows scheduled activation or deactivation of power supply. This device serves as protection for lighting, distribution circuits, and equipment in office buildings, residences, and similar structures, while also facilitating infrequent switching and conversion of circuits.

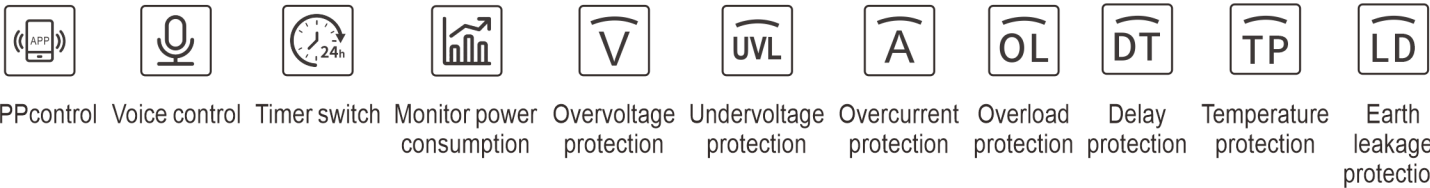


Principal Technical Parameters			
Product Name:	WIFI Earth Leakage Circuit Breaker	Current setting:	1-63A
Rated voltage:	AC 220V/110V	Protection rating:	400V
Withstand voltage:	AC 80V-300V	Grade:	IP30
wireless network:	Tuya Smart	Scope of leakage:	10-99mA
Frequency:	50/60Hz	Temperature range:	-40°C-150°C
Overvoltage range:	130-300V	Altitude:	≤2000m
Undervoltage range:	75-210V	Humidity:	<50%at40°C(non-condensing)
Electric power range:	0-9999kW·h	Electrical life:	10000times
Scheduled settings:	15 sets of timed settings	Maximum power:	15KW
Product dimensions:	36*85*65mm	Packing quantity:	100only
Box dimensions:	450*150*415mm	Box weight:	18KG

Features

- Control your devices worldwide via the doodle application
- Guardian of precision measurement
- Capable of stable operation under high current loads, with rapid response to overspeed conditions.
- Earth leakage protection, precisely monitors leakage current, instantly cuts power to prevent electric shock

Distribution network configuration steps

- Method for connecting to Wi-Fi or performing a reset:Press and hold the power button on the device for 5-10 seconds until the Wi-Fi indicator light flashes.Enable Bluetooth on your mobile phone, then open the Smart Life app.Tap the '+' icon in the top-right corner, select 'Add Device', and wait for the device to appear in the scan.Tap the device, select the desired Wi-Fi network, enter the password, and wait for the device to successfully connect.

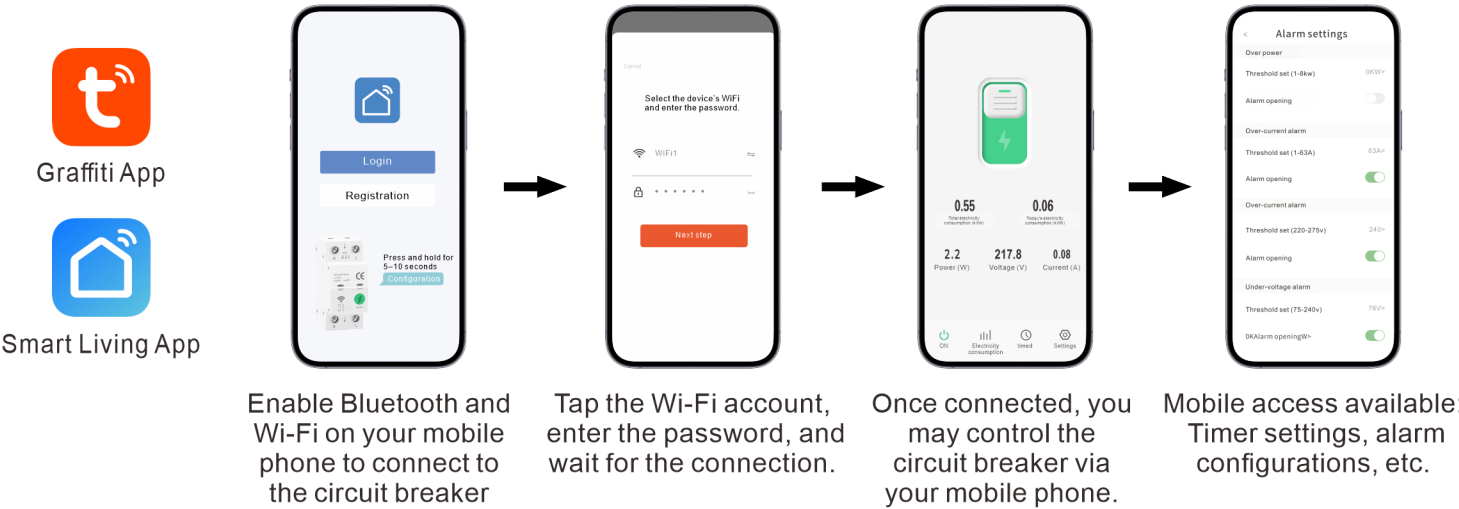

Dimensions and Wiring

