


Product Information

AIR 3268



AIR 3268 B42

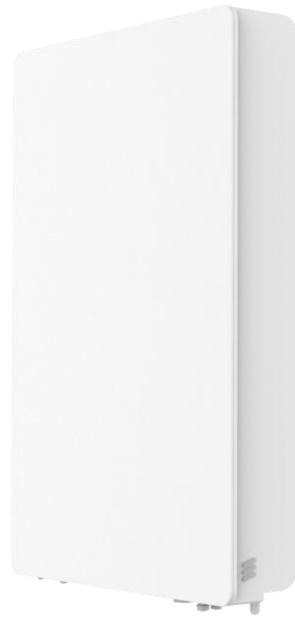


— Antenna Elements	128
— TRX Branches	32T32R
— Antenna configuration	(4x1)x(2x8)
— Operation band:	B42: 3400~3600 MHz
— IBW	200 MHz
— TCBW	Up to 200 MHz
— EIRP	76 dBm
— Output Power	200 W
— Supported RAT	LTE & NR
— Weight	12.5 kg
— Size	~ 539Hx370Wx111Dmm, 22l
— eCPRI link	2*25G
— Operating temperature	-40 to +55°C
— Power Supply	-48 VDC 2-wire
— Power consumption	250 W @ Typical daily average
— Multi-layer MU MIMO:	Up to 16/8 DL/UL layers

AIR 3268 B78Y



— Antenna Elements	128
— TRX Branches	32T32R
— Antenna configuration	(4x1)x(2x8)
— Operation band:	B78Y: 3450~3800 MHz
— IBW	200 MHz
— TCBW	Up to 200 MHz
— EIRP	76 dBm
— Output Power	200 W
— Supported RAT	LTE & NR
— Weight	<15 kg
— Size	~ 539Hx370Wx126Dmm, 25l
— eCPRI link	2*25G
— Operating temperature	-40 to +55°C
— Power Supply	-48 VDC 3-wires
— Power consumption	257W @Typical daily average
— Multi-layer MU MIMO:	Up to 16/8 DL/UL layer



AIR 3268

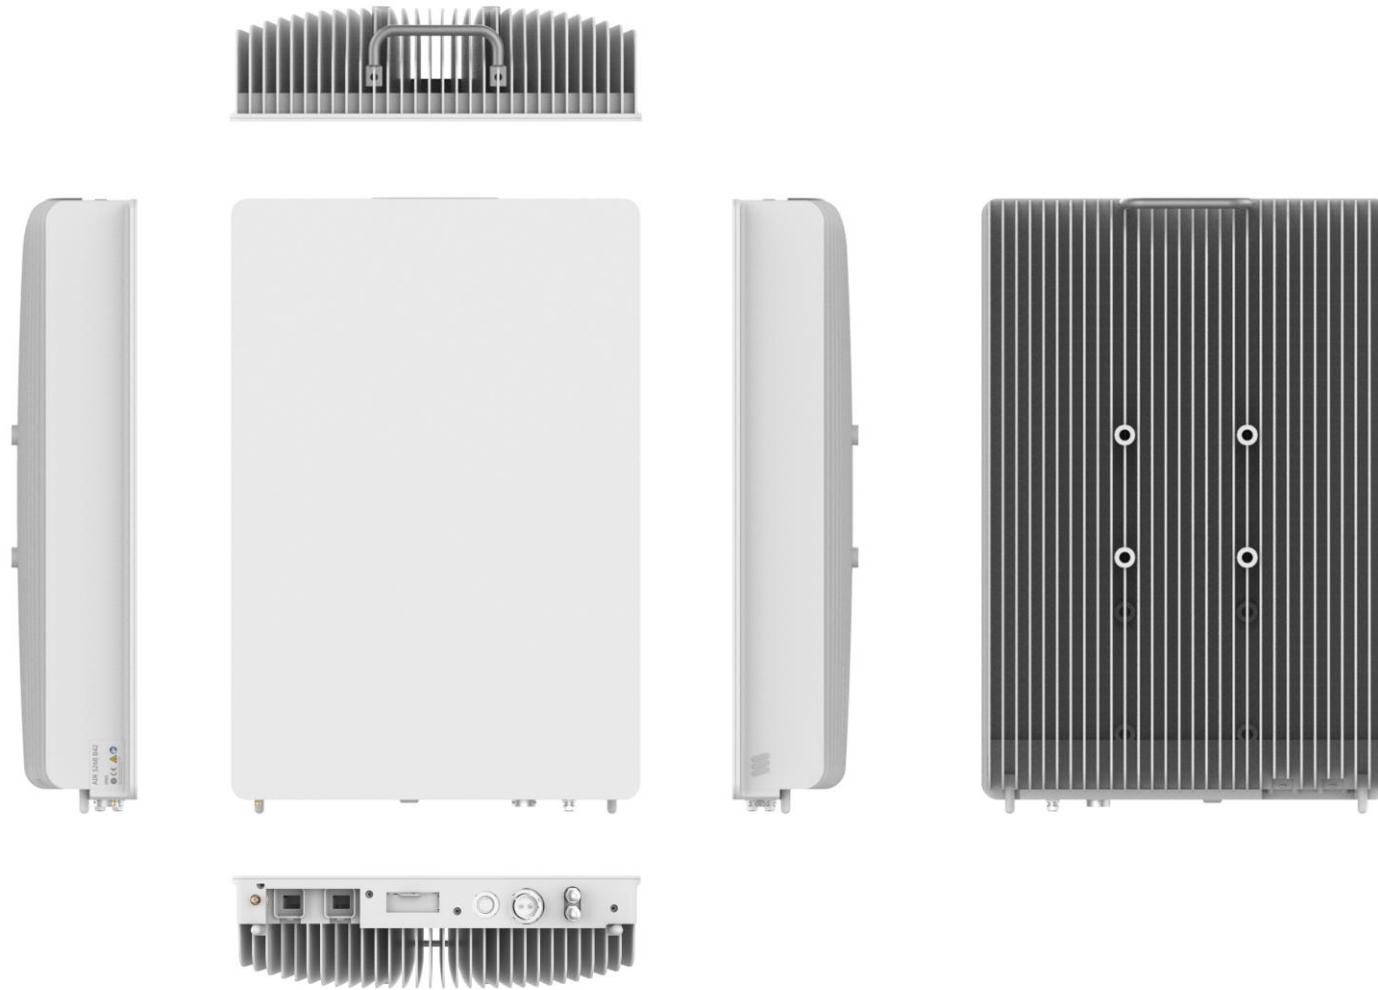


AIR 3268 bracket solution



- Adapted from AAS legacy bracket to mini air bracket (SXX1092157/1) for quicker site installation

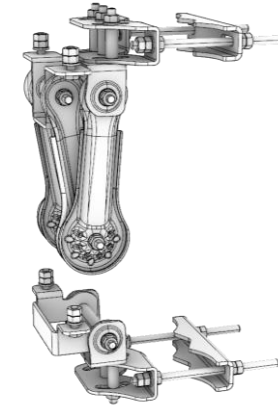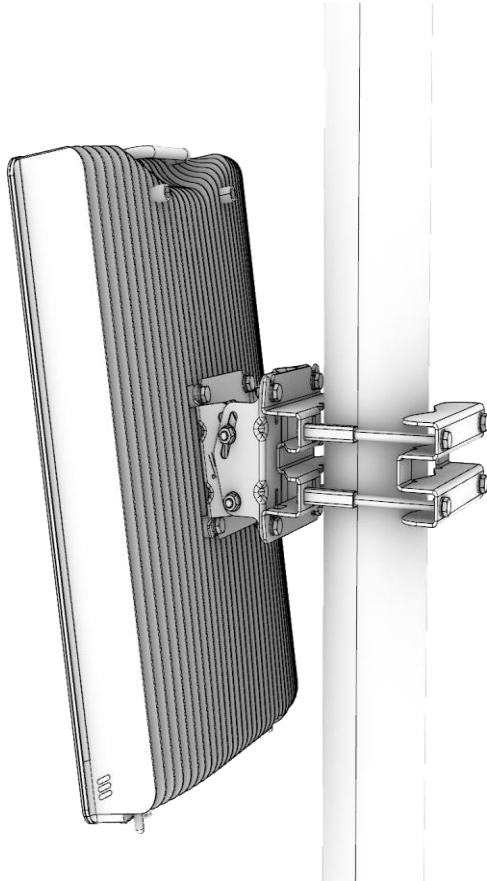

Legacy bracket




Mini bracket
(SXX1092157/1)

AIR 3268 physical interfaces



- eCPRI interface (DATA1 and DATA2) is changed from Fullaxs to PDLC 18.
- The SFP type supports 2x25G (RDH102 75/2).
- All other physical connections are the same as the 6419

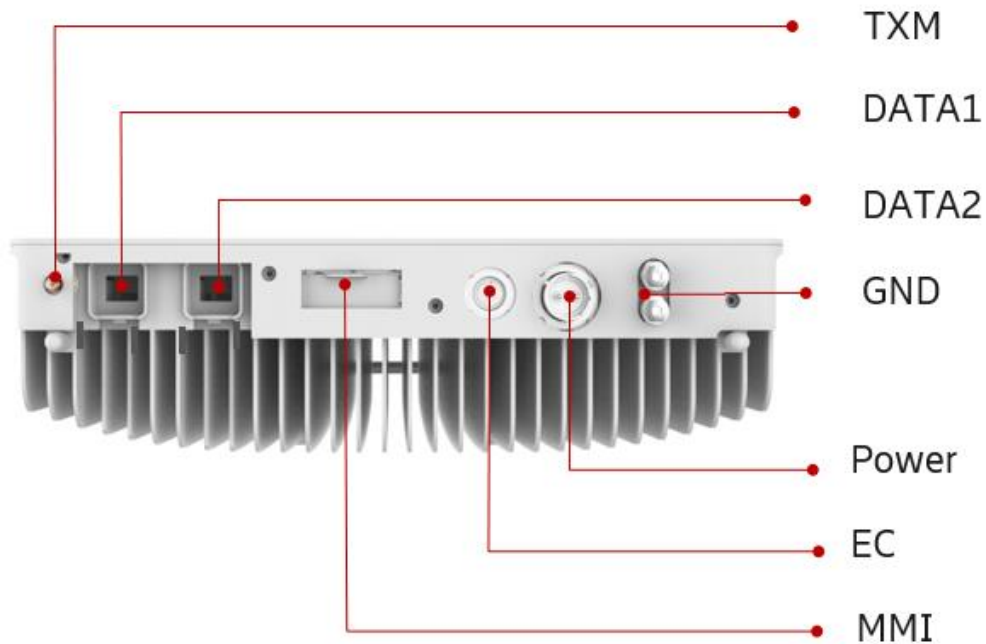

DATA1/2 connector



Fullaxs



PDLC 18

DATA1/2 matching cable



Supported output power configurations



- AIR 3268 HW capability can support the output power configurations following below general rules
- Maximum total output power
 - 200W over 32 TX branches
- Maximum PSD (Power Spectrum Density)
 - 4W/MHz over 32 TX branches
 - E.g. maximum 80W total output power for a 20MHz NR carrier over 32 TX branches
- Minimum total output power
 - 20W over 32 TX branches
- The total output power can be divided between different RATs and carriers as long as the difference between each configured carrier power within any RAT and between different RATs is within 6 dB, for carriers on the same branch as well as on different branches.
- Each output power configuration is to be released with a configuration support from RAN SW.
- With 30kHz NR sub-carrier spacing

Physical Dimension and Weight



Dimension (HxWxD mm)	without protruding	with protruding
B42	539 x 370 x 111	567 x 370 x 118
B78Y	539 x 370 x 126	567 x 370 x 133

AIR 3268	Weight without* Mounting Kit (kg)	Mounting Bracket Kit (kg)
B42	<13 Kg	3.2
B78Y	<15 Kg	3.2

Power Consumption



- Site fuse dimensioning
 - Minimum 25 A
- Power consumption according to ETSI TS 102 706 Version 1.3.1
- Estimated “Typical” power consumption at room temperature & mid-band & DL:UL = 75%:25%
- Estimation based on NR only

Bands	Typical daily average	ETSI Low Load (~6%)	ETSI Average Load	ETSI Busy hour Load (~52%)	Max Load (100%)
B42	250	220	390	510	800
B78Y	257	225	415	550	870

