

Heaven's Light is Our Guide
Rajshahi University of Engineering and Technology



Course Code
ECE 3208

Course Title
Communication Engineering Sessional

Experiment Date: February 25, 2025,
Submission Date: April 22, 2025

Lab Report 6:
Study of Digital Modulation (ASK, FSK, PSK)

Submitted to
Dr. Md. Kamal Hosain
Professor
Dept of ETE, RUET

Submitted by
Md. Tajim An Noor
Roll: 2010025

Contents

Theory	1
Required Apparatus	2
Diagrams	2
Procedure	3
Matlab Simulation	3
Code	3
Output	6
Experimental Output	6
Matlab Output	7
Discussion and Conclusion	7
References	8

Study of Digital Modulation (ASK, FSK, PSK)

Theory

Digital modulation transforms digital symbols into waveforms compatible with the transmission medium by varying the carrier signal's amplitude, frequency, or phase according to the digital data. The goal is to efficiently transmit data while maintaining signal integrity and minimizing errors. Common types include Amplitude Shift Keying (ASK), Frequency Shift Keying (FSK), and Phase Shift Keying (PSK) [1].

Amplitude Shift Keying (ASK)

Amplitude Shift Keying (ASK) is a type of digital modulation where the amplitude of the carrier signal is varied in accordance with the binary data. The general form of an ASK signal is:

$$s(t) = \begin{cases} A \cos(2\pi f_c t) & \text{if } m(t) = 1 \\ 0 & \text{if } m(t) = 0 \end{cases}$$

where A is the amplitude, f_c is the carrier frequency, and $m(t)$ is the message signal [2].

Frequency Shift Keying (FSK)

Frequency Shift Keying (FSK) is a type of digital modulation where the frequency of the carrier signal is varied according to the binary data. The general form of an FSK signal is:

$$s(t) = \begin{cases} A \cos(2\pi f_1 t) & \text{if } m(t) = 1 \\ A \cos(2\pi f_2 t) & \text{if } m(t) = 0 \end{cases}$$

where A is the amplitude, f_1 and f_2 are the frequencies for binary 1 and 0 respectively, and $m(t)$ is the message signal [3].

Phase Shift Keying (PSK)

Phase Shift Keying (PSK) is a type of digital modulation where the phase of the carrier signal is varied according to the binary data. The general form of a PSK signal is:

$$s(t) = A \cos(2\pi f_c t + \theta)$$

where A is the amplitude, f_c is the carrier frequency, and θ is the phase shift. For Binary PSK (BPSK), the phase shift θ is:

$$\theta = \begin{cases} 0 & \text{if } m(t) = 1 \\ \pi & \text{if } m(t) = 0 \end{cases}$$

where $m(t)$ is the message signal [4].

Required Apparatus

- ETEK DCS-6000-06 (ASK Modulation & Demodulation Kit)
- ETEK DCS-6000-07 (FSK Modulation & Demodulation Kit)
- ETEK DCS-6000-08 (PSK(BPSK) Modulation & Demodulation Kit)
- Oscilloscope
- Connecting Wires
- Power Supply
- Signal Generator (To make Square Waves to offset to mimic digital signal)

Diagrams

Circuit Diagram of ASK System

Figure 1: Circuit Diagram of ASK System

Circuit Diagram of FSK System

Figure 2: Circuit Diagram of FSK System

Circuit Diagram of PSK System

Figure 3: Circuit Diagram of PSK System

Procedure

1. The ASK Modulation & Demodulation Kit (ETEK DCS-6000-06) was connected to the power supply.
2. The signal generator was connected to the input of the ASK modulator to generate a square wave signal.
3. The modulated ASK signal was observed on the oscilloscope.
4. The output of the ASK modulator was connected to the input of the ASK demodulator.
5. The demodulated signal was observed on the oscilloscope and compared with the original input signal.
6. The above steps were repeated for the FSK Modulation & Demodulation Kit (ETEK DCS-6000-07) and PSK(BPSK) Modulation & Demodulation Kit (ETEK DCS-6000-08).

Observation

- In ASK, the amplitude of the carrier signal changes with the binary data: present for 1, absent for 0.
- In FSK, the frequency of the carrier signal changes with the binary data: f_1 for 1, f_2 for 0.
- In PSK, the phase of the carrier signal changes with the binary data: 0 for 1, π for 0.
- For ASK demodulation, the demodulated signal closely matches the original binary data by detecting the carrier signal's presence or absence, but it wasn't perfect.

Matlab Simulation

Code:

```
1 % Parameters
2 fs = 10000;           % Sampling frequency
```

```

3  t = 0:1/fs:1;           % Time vector for 1 second
4  f_carrier = 100;        % Further lowered Carrier frequency
5  bit_rate = 10;          % Bit rate
6  bits = [1 0 1 1 0 1 0 0 1 0]; % Input digital signal
7
8  % Generate input digital signal (square wave)
9  samples_per_bit = round(fs / bit_rate); % Ensure samples_per_bit is
    ↪ an integer
10 t = 0:1/fs:(length(bits) * samples_per_bit - 1) / fs; % Adjust t to
    ↪ match input_signal length
11 input_signal = repelem(bits, samples_per_bit);
12
13 % ASK Modulation
14 carrier_signal = sin(2 * pi * f_carrier * t); % Generate carrier
    ↪ signal
15 ask_signal = input_signal .* carrier_signal; % Modulate carrier with
    ↪ input signal
16
17 % FSK Modulation
18 f1 = 50; % Further lowered frequency for bit 0
19 f2 = 150; % Further lowered frequency for bit 1
20 fsk_signal = (input_signal == 0) .* sin(2 * pi * f1 * t) +
    ↪ (input_signal == 1) .* sin(2 * pi * f2 * t);
21
22 % PSK Modulation
23 psk_signal = sin(2 * pi * f_carrier * t + pi * input_signal);
24
25 % ASK Demodulation
26 ask_demodulated = ask_signal .* carrier_signal; % Multiply with
    ↪ carrier signal
27 [b, a] = butter(6, f_carrier/(fs/2)); % Low-pass filter
    ↪ design
28 ask_demodulated = filter(b, a, ask_demodulated); % Apply low-pass
    ↪ filter
29 ask_demodulated = ask_demodulated > 0.25; % Thresholding for
    ↪ binary signal
30
31 % Plotting
32 figure;
33
34 % Plot input digital signal
35 subplot(5,1,1);
36 plot(t, input_signal, 'LineWidth', 1.5); % Thicker line
37 title('Input Digital Signal');
38 xlabel('Time (s)');

```

```

39 ylabel('Amplitude');
40
41 % Plot ASK signal
42 subplot(5,1,2);
43 plot(t, ask_signal, 'LineWidth', 1.5); % Thicker line
44 title('ASK Modulated Signal');
45 xlabel('Time (s)');
46 ylabel('Amplitude');
47
48 % Plot FSK signal
49 subplot(5,1,3);
50 plot(t, fsk_signal, 'LineWidth', 1.5); % Thicker line
51 title('FSK Modulated Signal');
52 xlabel('Time (s)');
53 ylabel('Amplitude');
54
55 % Plot PSK signal
56 subplot(5,1,4);
57 plot(t, psk_signal, 'LineWidth', 1.5); % Thicker line
58 title('PSK Modulated Signal');
59 xlabel('Time (s)');
60 ylabel('Amplitude');
61
62 % Plot ASK demodulated signal
63 subplot(5,1,5);
64 plot(t, ask_demodulated, 'LineWidth', 1.5); % Thicker line
65 title('ASK Demodulated Signal');
66 xlabel('Time (s)');
67 ylabel('Amplitude');

```

Output

Experimental Output

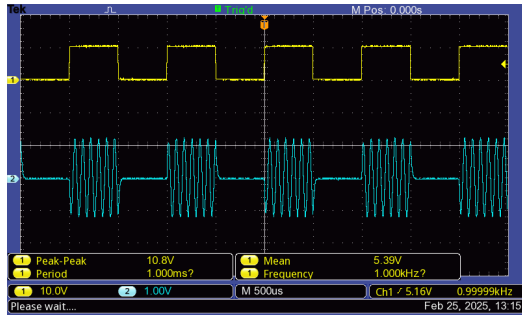


Figure 4: ASK Modulation; Message (Yellow), Modulated Signal (Blue)

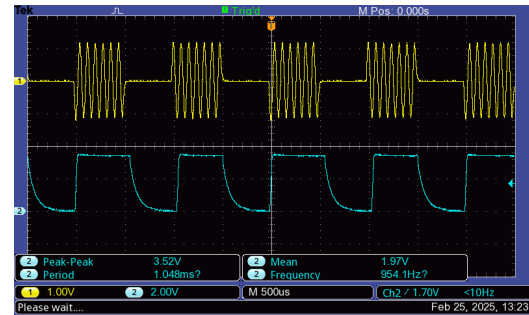


Figure 5: ASK Demodulation; Modulated Signal (Yellow), Demodulated Signal (Blue)

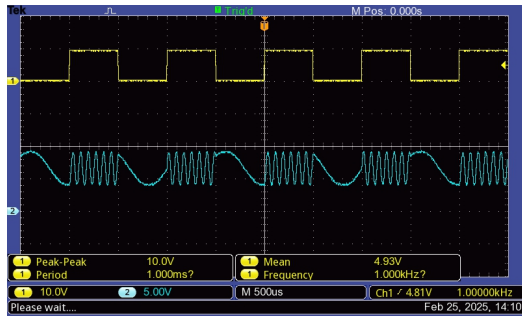


Figure 6: FSK Modulation 1; Message (Yellow), Modulated Signal (Blue)

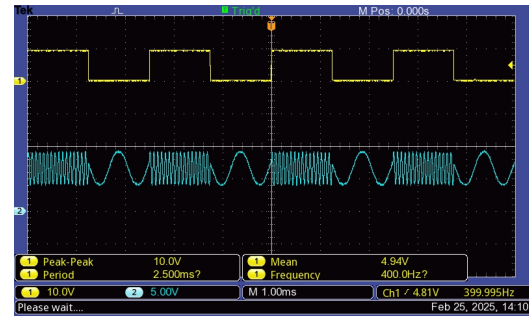


Figure 7: FSK Modulation 2; Message (Yellow), Modulated Signal (Blue)

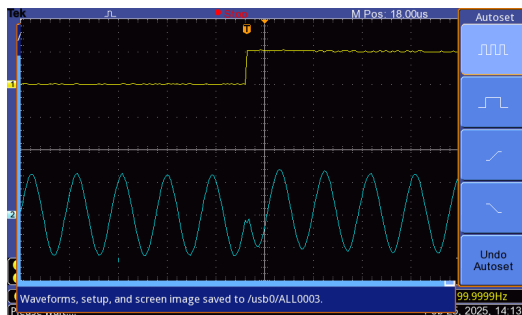


Figure 8: PSK Modulation 1; Message (Yellow), Modulated Signal (Blue)

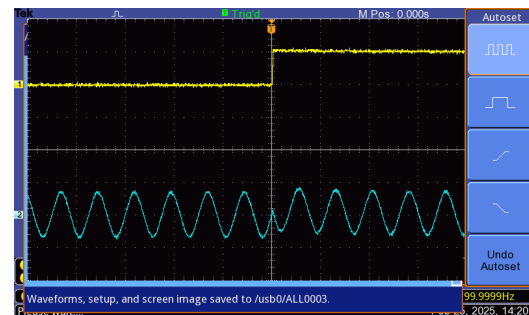


Figure 9: PSK Modulation 2; Message (Yellow), Modulated Signal (Blue)

Matlab Simulation Output

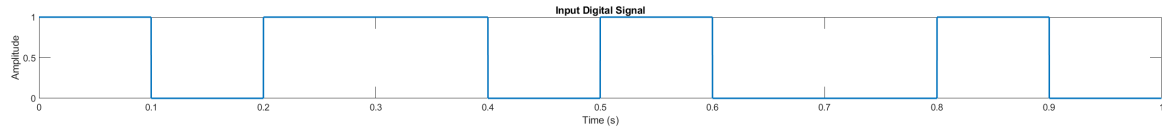


Figure 10: Digital Message Signal

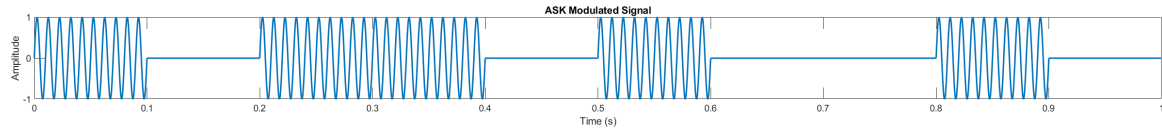


Figure 11: ASK Modulated Signal

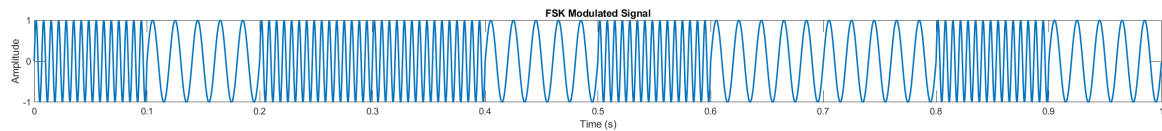


Figure 12: FSK Modulated Signal

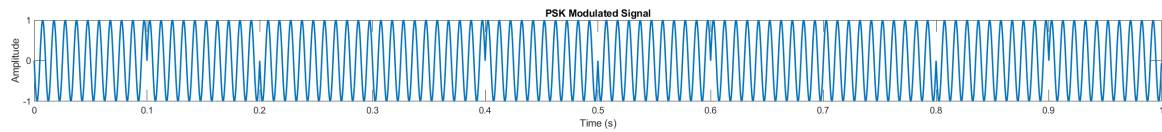


Figure 13: PSK Modulated Signal

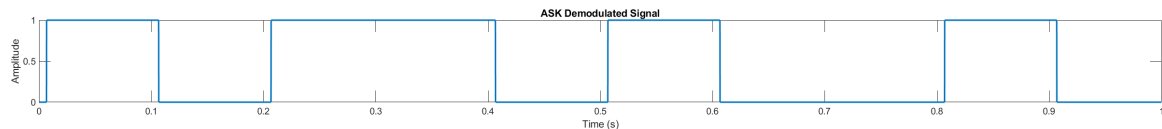


Figure 14: ASK Demodulated Signal

Discussion and Conclusion

The experiment aimed to study digital modulation techniques: Amplitude Shift Keying (ASK), Frequency Shift Keying (FSK), and Phase Shift Keying (PSK). Using specific modulation and demodulation kits, we observed the modulated and demodulated signals on an oscilloscope and compared them with the original input signals.

In ASK, the carrier signal's amplitude changed with the binary data, present for 1 and absent for 0. In FSK, the frequency changed, with f_1 for 1 and f_2 for 0. In

PSK, the phase changed, with 0 for 1 and π for 0. For ASK demodulation, the demodulated signal matched the original binary data by detecting the carrier signal's presence or absence. However, a slight curve in the demodulated message signal indicated it was not a perfect digital signal.

In conclusion, the experiment demonstrated the principles of ASK, FSK, and PSK modulation and demodulation. The oscilloscope observations confirmed the theoretical expectations. The slight imperfection in the ASK demodulated signal suggests minor distortions in real-world implementations, which should be considered in practical applications. Overall, the experiment provided valuable insights into digital modulation techniques and their practical implications.

References

- [1] J. G. Proakis and M. Salehi, *Digital Communications*. McGraw-Hill, 2007.
- [2] B. Sklar, *Digital Communications: Fundamentals and Applications*. Prentice Hall, 2001.
- [3] S. Haykin, *Communication Systems*. Wiley, 2001.
- [4] B. Lathi and Z. Ding, *Modern Digital and Analog Communication Systems*. Oxford University Press, 2009.