

RP-600 Firmware Update


Please download the following files

- Utility:
ftp://ftp.partner-tech.eu/Printer/RP-600/Utility/RP-600_Printer_Utility_V1.18.zip
- Firmware-file:
ftp://ftp.partner-tech.eu/Printer/RP-600/Firmware/RP-600_FV1031_POSMV1.3_MAIN.zip


You require a USB cable Typ A => A





1. Connect the printer over USB
2. Start the utility and select "Port Set".

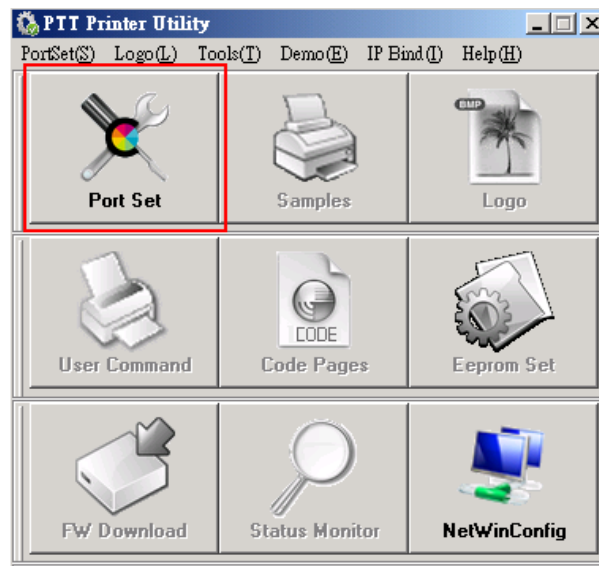

3. Change the "Port Type" to USB and press "OK"

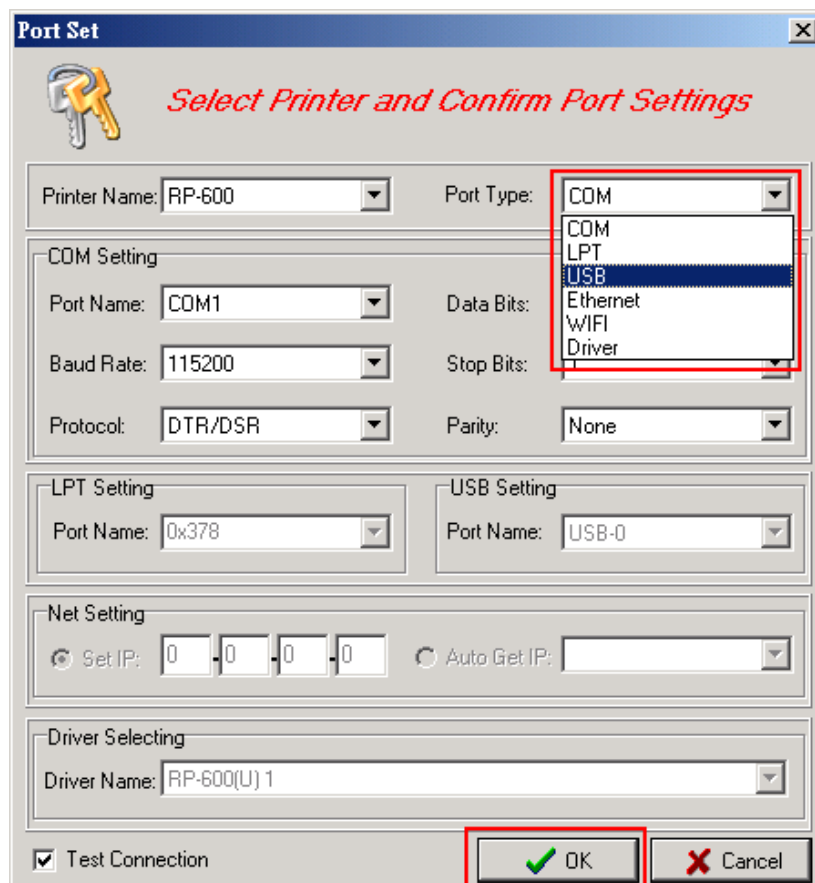

4. Select "Eeprom Set" and load the settings from the RP-600.

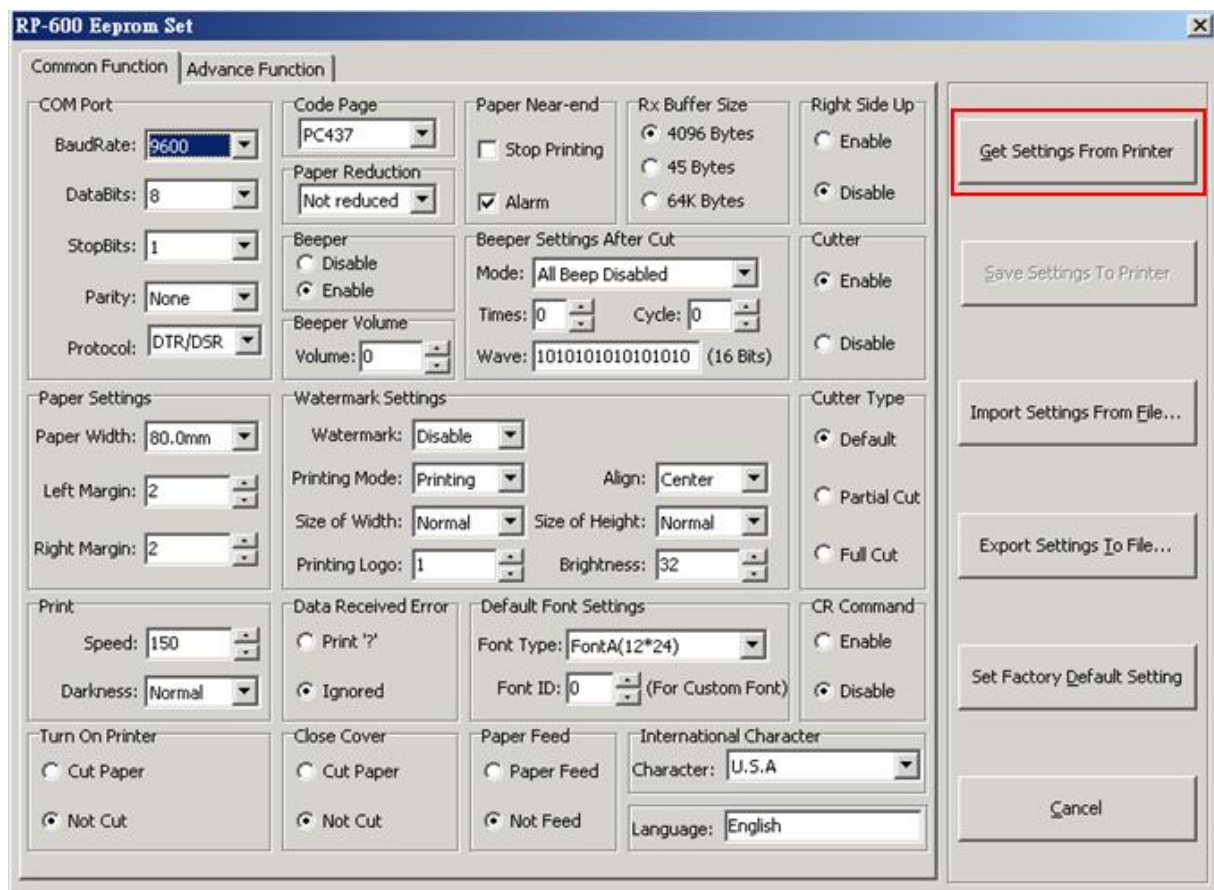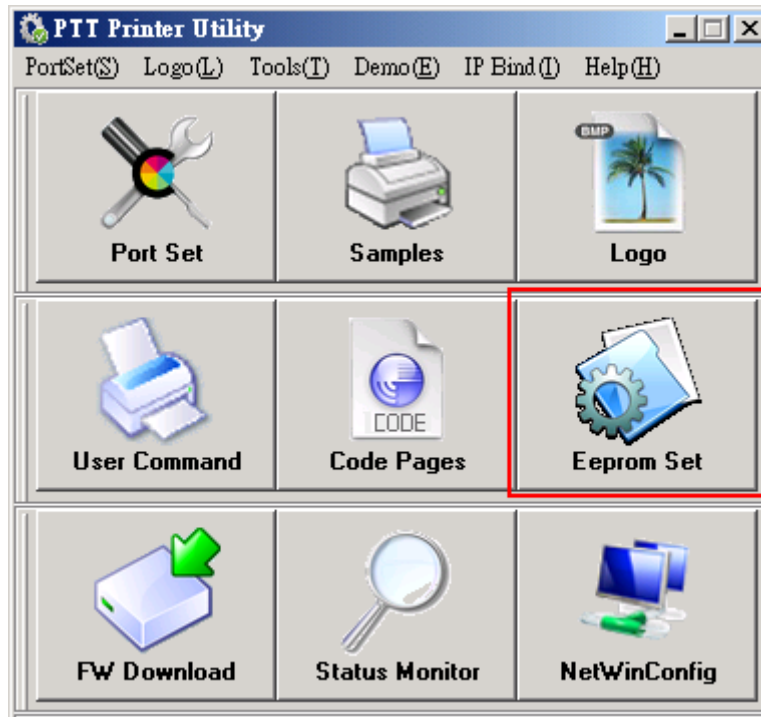

5. Change the option „Close Cover“ to „Cut Paper“ and save these settings back to the RP-600 and close these window.

RP-600 Eeprom Set

Common Function | **Advance Function**

COM Port
BaudRate: 115200
DataBits: 8
StopBits: 1
Parity: None
Protocol: DTR/DSR

Code Page
PC437

Paper Reduction
Not reduced

Paper Near-end
☐ Stop Printing
☒ Alarm

Rx Buffer Size
☐ 4096 Bytes
☐ 45 Bytes
☒ 64K Bytes

Right Side Up
☐ Enable
☒ Disable

Beeper
☐ Disable
☒ Enable

Beeper Volume
Volume: 38

Beeper Settings After Cut
Mode: All Beep Disabled
Times: 14 Cycle: 255
Wave: 1111111111111111 (16 Bits)

Cutter
☒ Enable
☐ Disable

Paper Settings
Paper Width: 80.0mm
Left Margin: 4
Right Margin: 4

Watermark Settings
Watermark: Disable
Printing Mode: Always Align: Center
Size of Width: Normal Size of Height: Normal
Printing Logo: 2 Brightness: Set printer watermark

Cutter Type
☒ Default
☐ Partial Cut
☐ Full Cut

Print
Speed: 230
Darkness: Normal

Data Received Error
☒ Print '?'
☐ Ignored

Default Font Settings
Font Type: FontA(12*24)
Font ID: 0 (For Custom Font)

CR Command
☐ Enable
☒ Disable

Turn On Printer
☐ Cut Paper
☒ Not Cut



Close Cover
☐ Close Cover
☒ Cut Paper
☐ Not Cut

Paper Feed
☒ Paper Feed
☐ Not Feed

International Character
Character: U.S.A
Language: Traditional Chinese

Get Settings From Printer
Save Settings To Printer
Import Settings From File...
Export Settings To File...
Set Factory Default Setting
Cancel

6. Select the option „FW Download“ and choose the firmware-file (Please unzip the downloaded zip-file first).

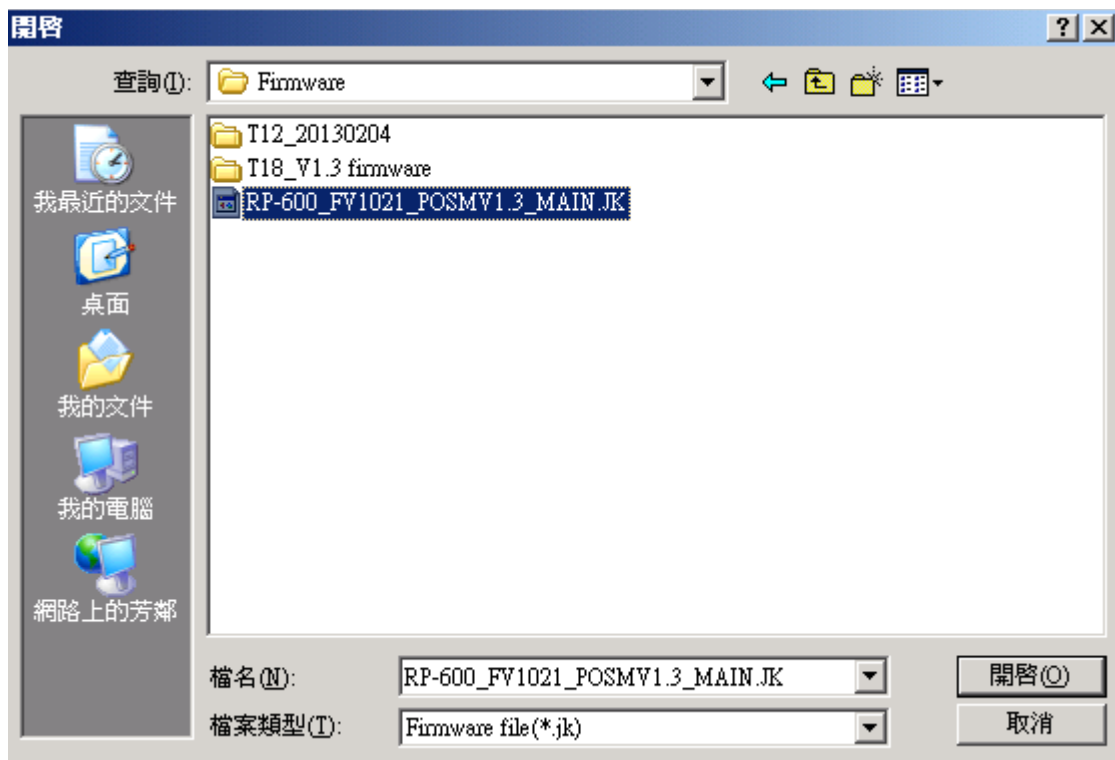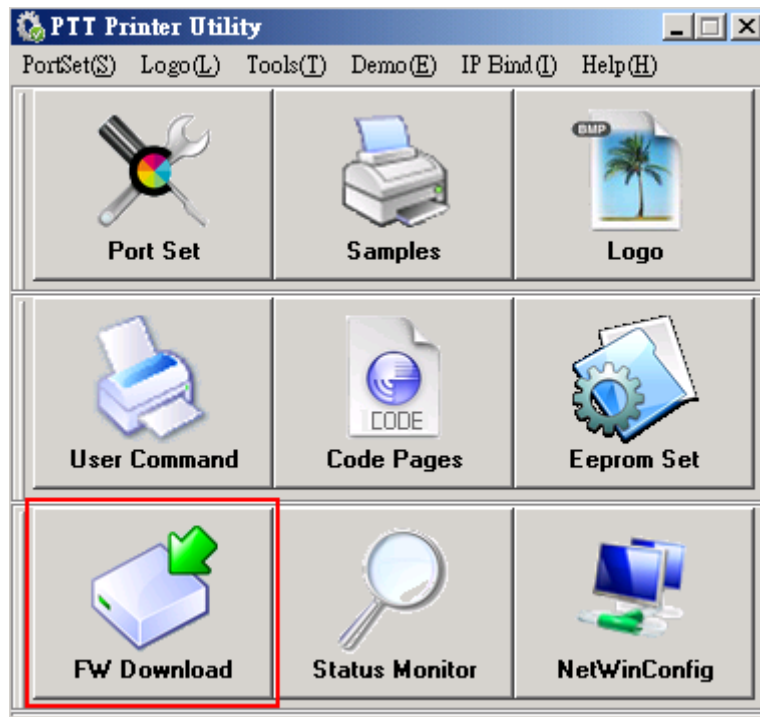

- The upload process will take 2-3 minutes until it is finished. Please confirm and compare firmware-version after the update-process by printing a self-test with the installed firmware-version.

