

PRECISION IMU CARRIER

ARK ADIS16507

Precision 6-DoF MEMS IMU carrier based on the ADIS16507-3

EXPOSED INTERFACES

SPI

The USA-built ARK ADIS16507 is a compact carrier for the Analog Devices ADIS16507-3 precision MEMS IMU. It provides a factory-calibrated triaxial gyroscope (± 2000 °/s) and triaxial accelerometer (± 40 g) over SPI, with onboard 3.3 V regulation from a 5 V supply.

The 11-pin JST-GH connector matches the ARK PAB SPI pinout for direct use with ARK flight controllers and carriers.

01 KEY FEATURES

- ADIS16507-3 precision MEMS IMU
- Gyro: ± 2000 °/s
- Accel: ± 40 g (± 392 m/s²)
- Factory calibrated sensitivity, bias, and alignment
- SPI interface with data-ready
- Onboard 3.3 V LDO from 5 V input
- 11-pin JST-GH matching ARK PAB SPI pinout
- Includes cable

02 SPECIFICATIONS

ELECTRICAL


Supply voltage	5 V
Supply current	~41 mA average
IMU supply	3.3 V (onboard LDO)
Interface	SPI

ENVIRONMENTAL

Operating temperature	-40 °C to +85 °C
IMU operating temperature	-40 °C to +105 °C
IMU storage temperature	-65 °C to +150 °C
IMU mechanical shock	2000 g, 0.5 ms $\frac{1}{2}$ sine, any axis, unpowered

MECHANICAL

Dimensions	22.5 × 25.0 × 7.1 mm
Weight	4 g

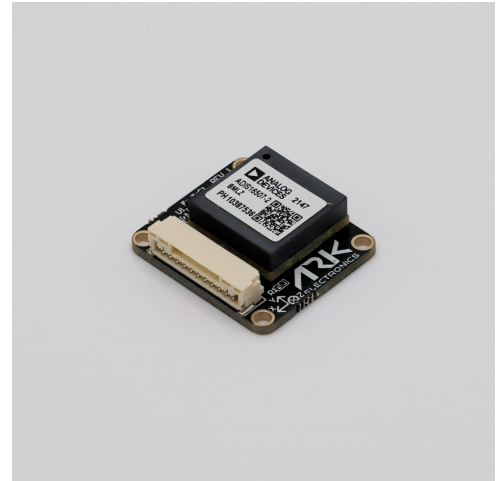

AT A GLANCE

IMU	ADIS16507-3
Gyro	± 2000 °/s
Accel	± 40 g
Interface	SPI
Supply	5 V
Dimensions	22.5 × 25 × 7.1 mm
Weight	4 g
Hardware rev	Rev 1

COMPLIANCE & SOURCING

- Designed and manufactured in the USA
- FCC compliant

ORDERING & RESOURCES

STORE	arkelectron.com/product/ark-adis16507/
CAD	github.com/ARK-Electronics/ark-hardware

03 CONNECTOR PINOUT

PIN	SIGNAL	NOTES
1	VDD_5V	5 V supply
2	SPI_SCK	
3	SPI_MISO	
4	SPI_MOSI	
5	SPI_nCS	
6	NC	
7	SPI_nSYNC	
8	SPI_DRDY	Data ready
9	NC	
10	SPI_nRESET	Reset, 10 kΩ pull-up to 3.3 V
11	GND	

Connector: 11-pin JST-GH (SM11B-GHS-TB). Matches the ARK PAB SPI pinout (nCS2 / DRDY2 unused). Signals are 3.3 V.

04 NOTES

- Factory calibrated over –40 °C to +85 °C. Extended exposure outside –40 °C to +105 °C can degrade calibration accuracy.
- IMU environmental ratings are the ADIS16507 absolute maximum ratings. No vibration survival limit is specified.
- SPI-compatible data communications with programmable operation and control.
- Includes 11-pin JST-GH cable.

ARK-DS-ARK-ADIS16507 | Issue 2026-09 | Compiled from the ARK ADIS16507 Carrier Production schematic Rev 1, the Production bill of materials, manufacturing documentation, and ARK Electronics published documentation. IMU dynamic ranges per ADIS16507-3BMLZ; IMU environmental ratings per the Analog Devices ADIS16507 data sheet Rev. A. Specifications are subject to change without notice. © 2026 ARK Electronics LLC.