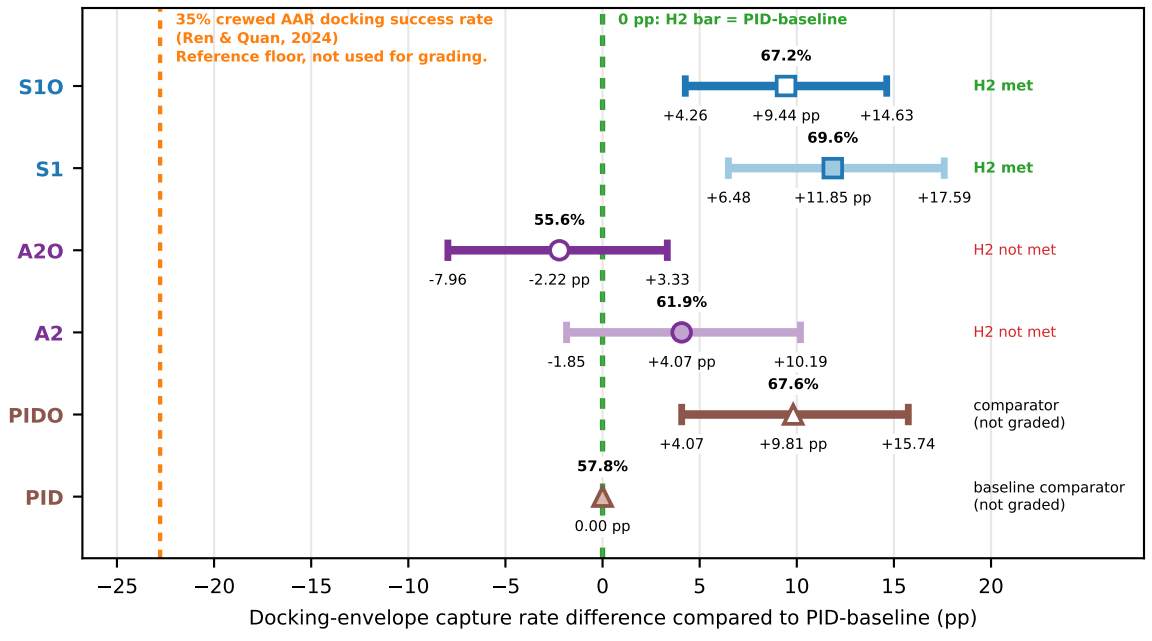

H2: Capture Rate Comparison, Light Turbulence. Note. Capture = truth and perception both inside M3b for 3.0 s (the "Decision Rules" section). Marker: each arm's same-seed difference in docking-envelope captures from the PID-baseline, σ = 0.25, nine wind stages pooled. Hollow markers and dark shades: includes 0.25 m PTA offset (S1O, A2O, PIDO). Filled markers and light shades: does not include PTA (S1, A2, PID). The arm's capture rate is printed above its marker. Whiskers: its CI, ends labeled. Dotted green line: H2 bar and the PID-baseline comparator, which is why it is 0 pp. Right of the green line means improvement in performance over the baseline. Dotted orange line: crewed AAR docking success rate, drawn at 35% minus the PID-baseline's rate, a reference floor not used for grading (Ren & Quan, 2024).