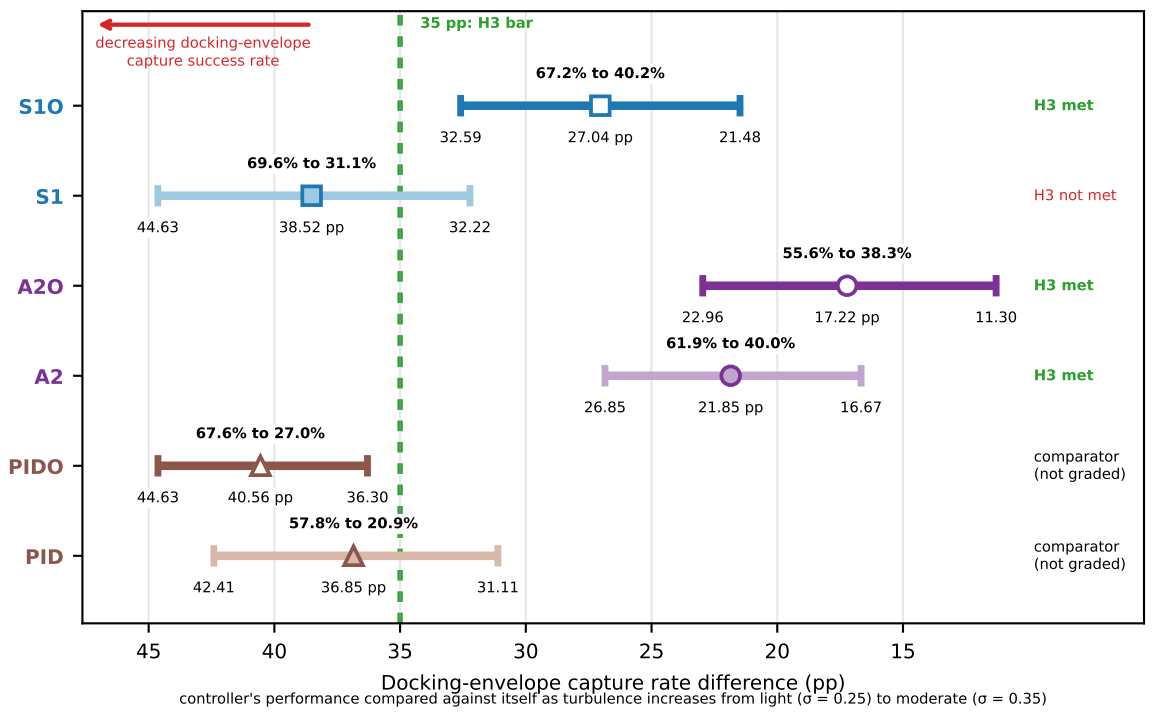

H3: Capture Decrease, Light to Moderate Turbulence. Note. Capture = truth and perception both inside M3b for 3.0 s (the "Decision Rules" section). Marker: each arm's same-seed decrease in docking-envelope captures from light (σ = 0.25) to moderate (σ = 0.35) turbulence. Nine wind stages pooled for both turbulence levels and compared, printed as positive number. Hollow markers and dark shades: includes 0.25 m PTA offset (S1O, A2O, PIDO). Filled markers and light shades: does not include PTA (S1, A2, PID). Whiskers: its CI, ends labeled. Capture rates at both turbulence levels printed above the marker. Dotted green line: H3 bar of 35 pp. X-axis reversed, so larger decrease in captures are to the left, right of green line means capture rate success is degrading less in an atmospheric environment with 40% increase in gust intensities.