helion microsystems

Multi-Protocol USB Interface PCB
User Manual

Description

The helion microsystems HU-320 represents the simplest and quickest path to USB connectivity. This PCB replaces a microcontroller amd USB interface hardware to provide many industry standard interfaces, as well as various peripheral features such as PWM, LCD and EEPROM.

Communication with a USB host is acheived through a driverless HID (human interface device) class.
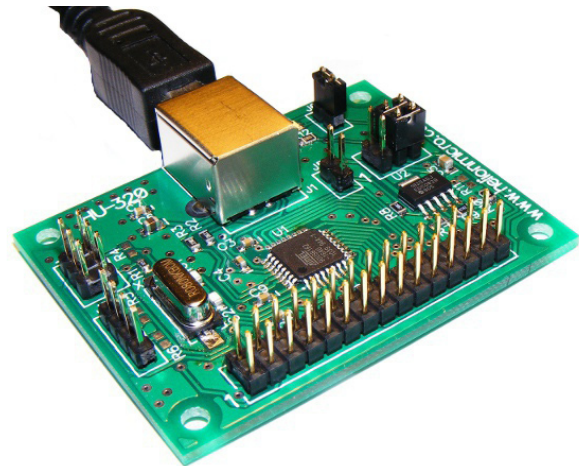
A fully documented API (application programming interface) is available to ensure full functionality is available in the minimum development time.

Features

*   Driverless USB2.0 Interface
*   Serial Peripheral Interface (SPI)
*   Inter-IC Interface (I2C/SMBUS)
*   UART
*   20 General Purpose Digital IO Pins
*   Event Counter
*   Pulse Width Modulation Generator
*   Buffered System Clock Output
*   HD44780 LCD Interface
*   512 Bytes User EEPROM
*   .NET API Software
*   3.0-5.5V Operation
*   Internal 3.3V USB Pad Regulator

Connector Pinout

PB0 - SS	1	2	PB1 - SCK
PB2 - MOSI	3	4	PB3 - MISO
PB4 - T-CLK	5	6	PB5 - SDA
PB6 - SCL	7	8	PB7 - OC-C
+5V	9	10	+5V
GND	11	12	GND
PSU VOUT	13	14	+3.3V
PD0	15	16	PD1
PD2 - RXD	17	18	PD3 - UART TXD
PD4	19	20	PD5
PD6	21	22	PD7
VCC	23	24	GND
RESET	25	26	PC2
PC4	27	28	PC5 - OC-B
PC6 - OC-A	29	30	CLOCK OUT

Maximum Ratings

Parameter	Value	Unit
Operating temperature	-55 - 125	°C
Storage temperature	-65 - 150	°C
Max operating voltage	6.0	V
IO pin current	30	mA
VCC / GND current	180	mA

Multi-Protocol USB Interface PCB
User Manual

Pin Description

#	Pin Name	General	Extended
1	PB0	GPIO	SPI Slave select
2	PB1	GPIO	SPI Clock (SCK)
3	PB2	GPIO	SPI Master out slave in (MOSI)
4	PB3	GPIO	SPI Master in slave out (MISO)
5	PB4	GPIO	Timer input clock
6	PB5	GPIO	I2C Data (SCL)
7	PB6	GPIO	I2C Clock (SCL)
8	PB7	GPIO	Timer output compare C (PWM)
9	+5V		
10	+5V		
11	GND		
12	GND		
13	PSU VOUT		Output from linier PSU
14	+3.3V		Output from IC's internal regulator (low current)
15	PD0	GPIO	
16	PD1	GPIO	
17	PD2	GPIO	Serial port receive (UART RX)
18	PD3	GPIO	Serial port transmit (UART TX)
19	PD4	GPIO	
20	PD5	GPIO	
21	PD6	GPIO	
22	PD7	GPIO	
23	VCC		
24	GND		
25	RESET		
26	PC2	GPIO	
27	PC4	GPIO	
28	PC5	GPIO	Timer output compare B (PWM)
29	PC6	GPIO	Timer output compare A (PWM)
30	CLOCK OUT		8MHz buffered clock output

Multi-Protocol USB Interface PCB
User Manual

Feature Description

USB 2.0 HID interface
The HU-320 provides a driverless HID interface to the PC. This type of interface has benefits over a virtual comport device class, as the specific port number does not need to be found by the user, nor does a driver need to be installed. The device can be uniquely identified using a USB PID/VID as well as a five digit serial number, this allows many devices to be attached to the same PC. All devices are shipped with unique serial numbers. Devices can be ordered with any combination of USB PID/VID, serial number, manufacturer and product strings etc.

Software library
A .NET software component is available to download from www.helionmicro.com. Using this library, the user requires no knowledge of USB interface software or firmware in order to develop a USB interface for an electronic product.

The library exposes all functions of the HU-320 through a very simple structure. Simply create an instance of the object and all hardware functions can be accessed though the available methods. All methods are documented with Intellisense, so referring to the software manual is very rare. Visual C# or VB .NET express editions are free from Microsoft and the ideal development platform.

SPI
The HU-320 includes a Serial Peripheral Interface (SPI) port capable of transfers at up to 4Mbps. All four SPI operation modes are configurable as well as byte order (MSB/LSB first). Any of the IO pins may be used as chip-select signals for the SPI slaves, and are toggled automatically by the SPI function.

The SPI port is also able to act as an SPI slave for transfers at low speed. See the communication interrupt section in the software manual for more information.

I2C master
The HU-320 provides an I2C master interface operating at the standard rate of 100kHz. This interface is compatible with SMBUS and allows communication with many industry standard ICs.

UART
The HU-320 is able to provide communication through a logic-level UART interface. With the addition of an IC such as a MAX232 or MAX485, the IC is able to communicate with other hardware via RS232 or RS422/485. The UART block features separate 64 byte receive and transmit buffers. Available baud rates range from 2400bps to 1Mbps, covering all standard rates between. (1Mbps, 500kbps, 250kbps, 125kbps, 115.2kbps, 76.8kbps, 57.6kbps, 38.4kbps, 19.2kbps, 14.4kbps, 9600bps, 4800bps, 2400bps). One or two stop bits may be selected.

GPIO
20 general purpose digital IO pins are available. Each pin may be individually configured. When set as input, the pin may be at high impedance (Z-state) or may be configured with a internal pull-up resistor. When set as output, each pin may sink or source 20mA, allowing LEDs, transistors etc to be driven directly. (Note: The total IO pin current should not exceed 150mA in either direction) Many of the GPIO pins are shared with other functions, however when these functions are not enabled, the pins default to GPIO operation.

Timers & PWM

A 16bit timer is implemented on the HU-320. This timer can be configured to give a high speed PWM signal for motor control or digital-analog conversion, or it can be used to count edges from an external source.

When configured as a PWM source, two outputs are available. Each output is constrained to the same period, however the duty-cycle and polarity for each is adjustable individually. This allows for driving of bridge type motor controllers etc, or just two separate loads.

When configured for event counting, a digital signal can be applied to pin 18 (T-CLK). Upon each transition in the configured direction, the internal timer register is updated. The value of this register may be requested by software.

LCD

A HD44780 LCD interface is built into the HU-320, character LCDs up to 40x4 are able to be driven with a simple interface. ASCII and non-standard character sets are supported.

EEPROM

512 bytes of user configurable EEPROM is available for storage of hardware specific information, calibration curves etc. This memory is non-volatile, and has a minimum endurance of 100,000 write cycles.

Application Hints

USB

The USB D+ and D- lines require 22Ω resistors in series with the pins on the IC. The USB signal traces should be kept as short as possible

Power supply

All power supply pins should be bypassed with 0.1uF capacitors as close as possible to the pin. The capacitors should have a good low-impedance path to ground. Pin 27 (UCAP) is wired to the internal 3.3V regulator required for USB operation, this pin must be bypassed to with a 1uF capacitor in order to ensure quality of this power supply.

Table 1 shows the required connections to be made when selecting a power supply paradigm. USB bus power or self powered options are available for a range of voltages.

Topology	VCC	UVCC
USB Power 5V IO	USB VBUS	USB VBUS
USB Power 3V IO	UCAP	USB VBUS
Self Power 3.6-5.5V IO	3.6-5.5V PSU	3.6-5.5V PSU
Self Power 3.0-3.6V IO	3.0-3.6V PSU	NC

Table 1: Power supply connection options

Reset Pin

The reset pin should not be required in normal operation. If used, the USB interface will be disrupted, causing the device to be disconnected. This should only be used in special circumstances. The reset pin should be tied to VCC through 50-100kΩ, with a 10nF capacitor to ground.

Multi-Protocol USB Interface PCB
User Manual

I2C pull-ups

The I2C bus operates as a wired-OR type of arrangement. Thus, each node can either set or release the bus state. At the hardware level, this means an open-collector pin can pull the line low, or can release it to high impedance. As each node only drives low, pull-up resistors are required to set a high state. 1.5 kΩ resistors to VCC are suggested for both SCL and SDA pins. As the bus idles at high impedance, very little power is consumed by these pull-up resistors.

GPIO pin circuit

Each IO pin is represented by the circuit shown below. Each output pin can be configured as an input or an output. When configured as an input, the pin may be set by software as high impedance, or with a weak pull-up to VCC. When configured as an output, the pin will switch to either ground or VCC, and is capable of sinking or sourcing 20mA.
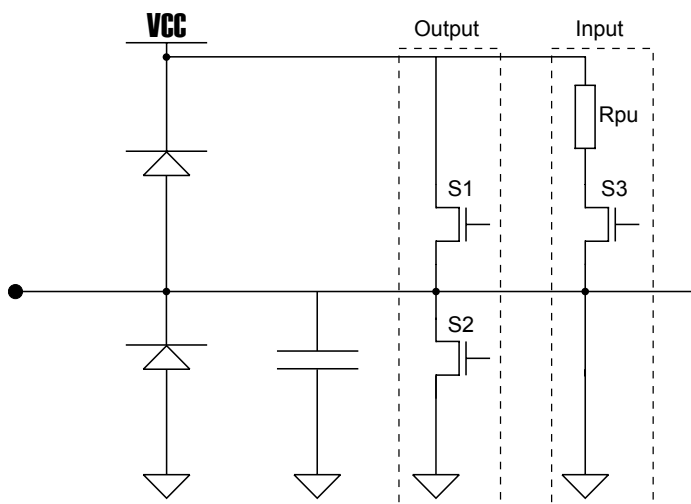
Clock Source

For USB compliance, this IC requires an 8MHz +/- 0.25% clock. To achieve this, a high quality crystal oscillator is recommended. Ceramic resonators may not achieve this accuracy under all conditions. 12-22pF capacitors are recommended for C1 and C2.

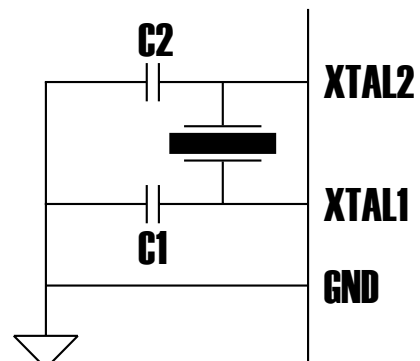A buffered clock output (8MHz) is provided on pin 22 for supplying a clock to any other components.

Figure 4: Crystal oscillator circuit

Figure 3: GPIO pin circuit

Multi-Protocol USB Interface PCB
User Manual

Electrical Characteristics

Parameter	Min	Typ	Max	Unit
Input low voltage	0.5	-	(0.2)Vcc	V
Input high voltage	0.6	-	Vcc+0.5	V
Output low voltage (@ 10mA pin current)	-	-	0.7	V
Output high voltage (@ 20mA pin current)	-	-	Vcc-0.7	V
Active current draw	-	7	8.5	mA
USB series resistors		22		Ohms
USB D+ internal pullup	900	-	1500	Ohms

Disclaimer

The information in this document is provided in connection with Helion Microsystems' products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Helion Micro products. Except as set forth in Helion Microsystems' terms and conditions of sale located on Helion Microsystems' web site, Helion Microsystems assumes no liability whatsoever and disclaims any express, implied or statutory warranty relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or non-infringement. In no event shall Helion Microsystems be liable for any direct, indirect, consequential, punitive, special or incidental damages (including, without limitation, damages for loss of profits, business interruption, or loss of information) arising out of the use or inability to use this document, even if Helion Microsystems has been advised of the possibility of such damages. Helion Microsystems makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Helion Microsystems does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Helion Microsystems products are not suitable for, and shall not be used in, automotive applications. Helion Microsystems' products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life

Contact Information

www.helionmicro.com