



Page 1 — LEFT wall (mic / pad / phones / volume)

Viewed from OUTSIDE the left wall. Left end of template = corner shared with the BLANK (north) wall. Board top at 15 mm below rim. Rev 2: centers f
QuadPreRecorder Rev A / Hammond 1590F — PRINT AT 100% SCALE (no 'fit to page')

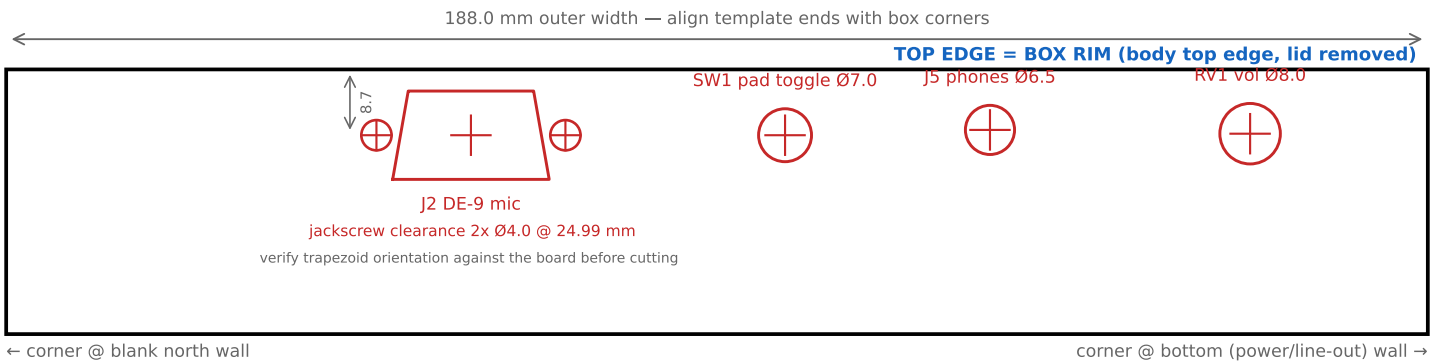


Feature centers from LEFT end of template: J2 = 61.46 SW1 = 103.00 J5 = 130.10 RV1 = 164.50 mm
Centerline depths below rim: J2 = 8.7 (7.8 if EU-style DE-9 is fitted) SW1 = 8.65 J5 = 8.0 RV1 = 8.5 mm.
REV 2 NOTE: J2 moved from 67.0 (was centered on pin 1, not the shell) and RV1 from 162.0 (was the pin-1 anchor, not the shaft). If you drilled from Rev 1 of this template, re-check those two before mounting.
If you change the board depth from 15 mm, shift ALL depths on every wall by the same amount.

SW1 is the E-Switch 100SP 1/4-40 wall toggle: Ø7.0 clearance, no keyway, 8.9 mm bushing through a ~5.5 mm wall — nut + lockwasher outside. WARNING: wall thickens toward the floor.
D-sub mating shells project 6.17 mm — the J2 shell should end ~flush with the outer face.




Page 2 — RIGHT wall (DB-25 debug connectors)

Viewed from OUTSIDE the right wall (mirrored): RIGHT end of template = corner shared with the BLANK (north) wall. Rev 2: centers from routed-board
QuadPreRecorder Rev A / Hammond 1590F — PRINT AT 100% SCALE (no 'fit to page')

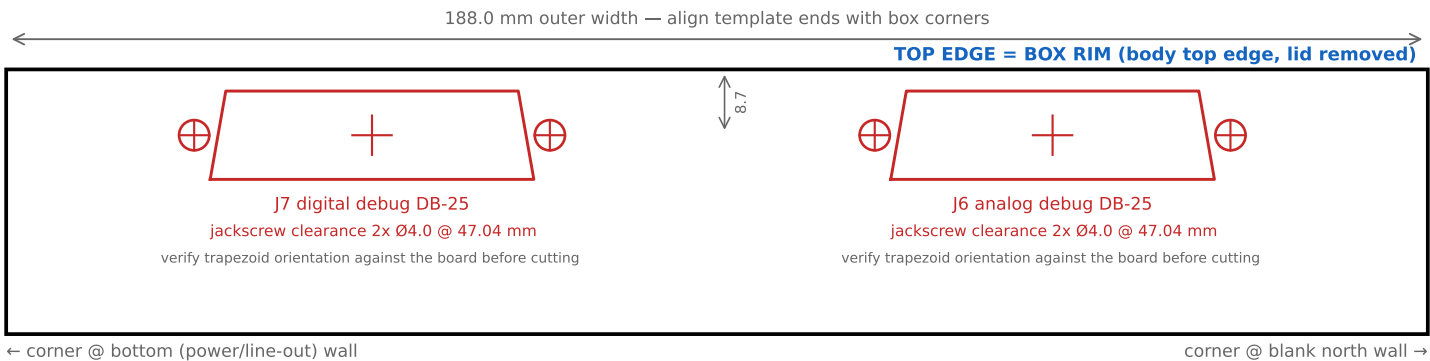


Feature centers from LEFT end of template: J7 = 48.38 J6 = 138.38 mm; both centerlines 8.7 mm below rim.
Cutout 42.8 x 11.68 mm, 10° sloped sides, R2.4 corners (standard front-mount DB-25 punch).
REV 2 NOTE: Rev 1 placed these cutouts on the connectors' pin-1 anchor — 16.6 mm off. These centers are the true shell midpoints measured from the routed board. Do not use Rev 1 for this wall.

Centerline assumes 6.3 mm US-style right-angle DB-25s (matches the LD09-family BOM parts).
Confirm the purchased part's centerline height before cutting.

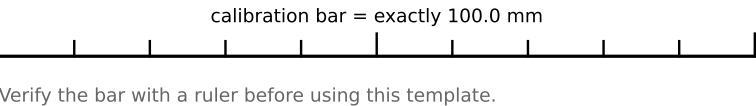


Page 3 — BOTTOM wall (9 V power + 1/4-inch line out)

Viewed from OUTSIDE the bottom wall: LEFT end of template = corner shared with the RIGHT (debug) wall, RIGHT end = corner shared with the LEFT (QuadPreRecorder Rev A / Hammond 1590F — PRINT AT 100% SCALE (no 'fit to page'))

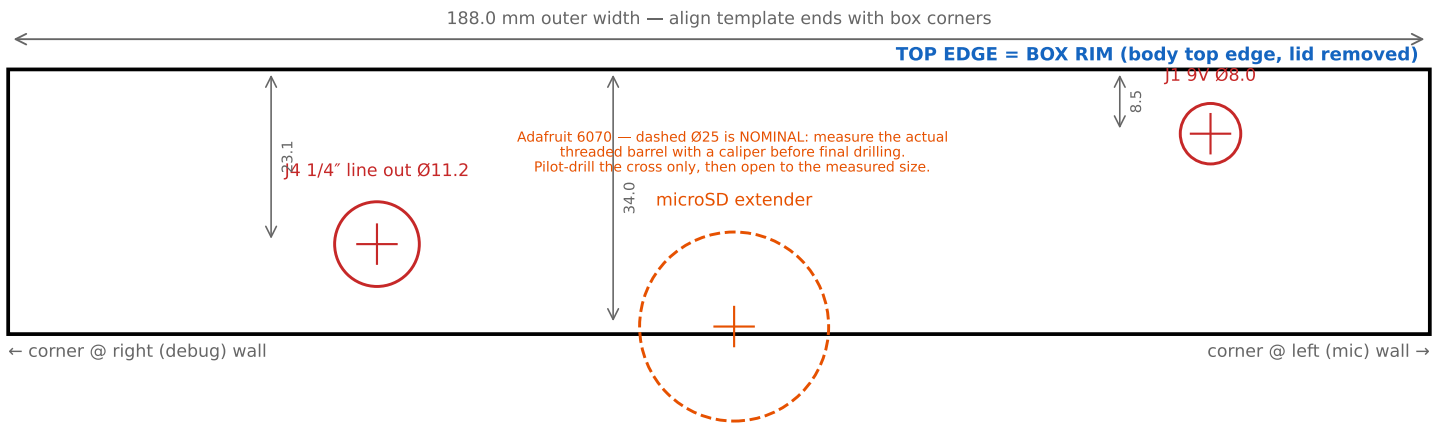


Feature centers from LEFT end of template: J4 = 48.77 microSD = 96.00 J1 = 159.00 mm.
Depths below rim: J4 = 23.1 (bottom-side mount) microSD = 34.0 (below the board) J1 = 8.5 mm.
REV 2 NOTES: this wall now carries J1 (moved off the left wall) and this view is drawn correctly mirrored (Rev 1 was flipped left-for-right AND used J4's pad column, 7.2 mm from the true bushing axis). Do not use Rev 1 for this wall.
REV 4: microSD extender added. Wall is ~7.8 mm thick at 34 mm depth — within the 6070's 16 mm panel rating. Its 18 cm flex plugs into the Teensy 4.1's own card slot (bottom side, SW corner). Neutrik NRJ6HF bushing is 8.9 mm long; wall is ~6.9 mm thick at that depth, leaving ~2 mm of thread. If the nut will not seat, spot-face the outside ~1 mm, or run without the nut (the jack is PCB-anchored).

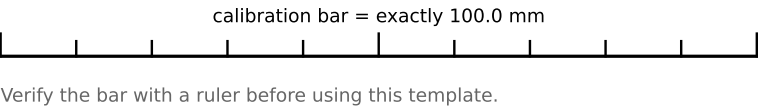


Page 4 — LID Rev 3 (TFT window + control row below it), 188 x 188

Viewed from OUTSIDE the closed lid. LEFT edge = left (mic) wall side; TOP edge = blank north wall side. Rev 3: REC/GAIN moved below the display and
QuadPreRecorder Rev A / Hammond 1590F — PRINT AT 100% SCALE (no 'fit to page')

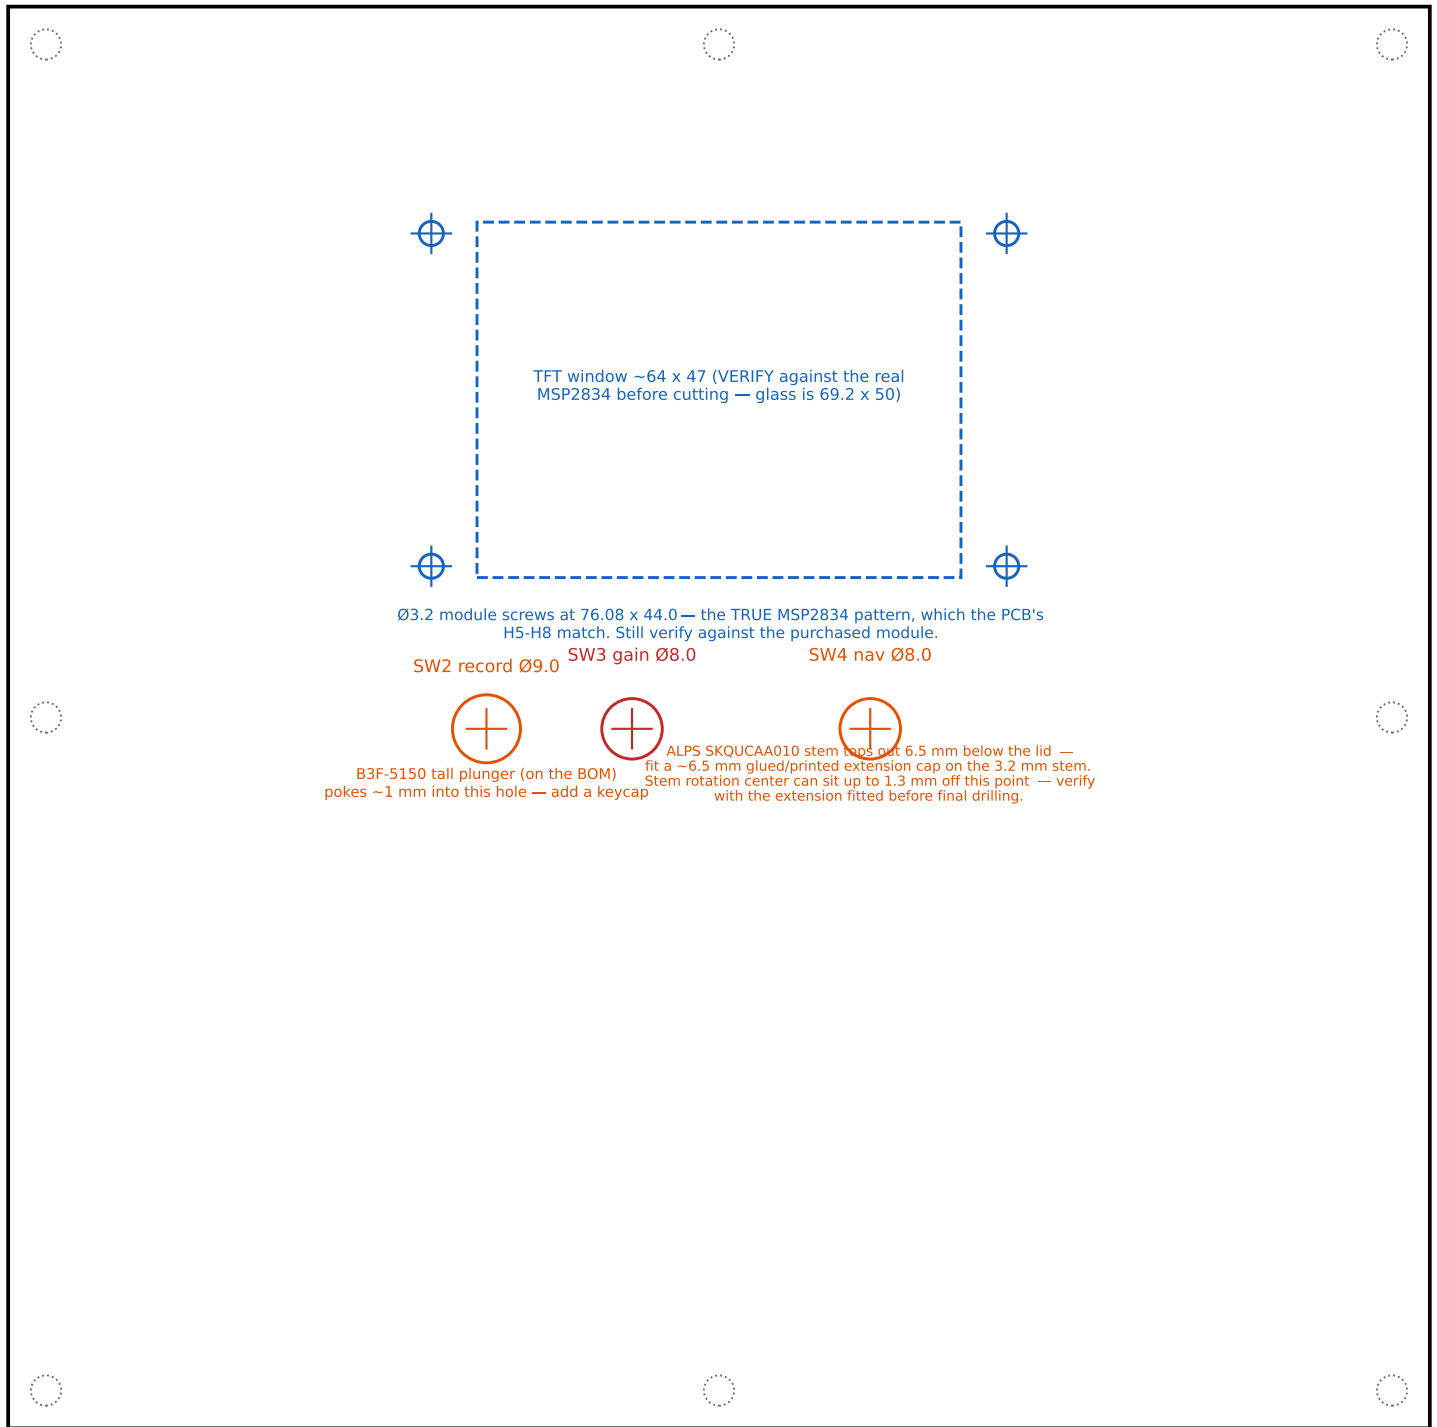

dotted Ø4 = existing lid screw holes (do not drill)

Control-row centers from the lid's top-left corner (left = mic wall, top = blank wall):
SW2 record (63.25, 95.5) SW3 gain (82.5, 95.5) SW4 5-way nav (114.0, 95.5) TFT pattern center (94.0, 52.0)
REV 3 NOTES: these are measured actuator centers, not footprint anchors — Rev 2's lid page drew REC/GAIN on their anchors (~6-7 mm off) AND at the old north-edge location. Discard all earlier lid prints.
The pad switch is SW1, a toggle on the LEFT WALL (page 1) — there is no lid slot.



Verify the bar with a ruler before using this template.