

E-Series

Euro Battery Connector / Euro-Batteriestecker

Connectors for Industrial Vehicles / Stecker Für Industriefahrzeuge

- Up to 400A • Meets or Exceeds EN1175:2020, VDE 0623-589 • RoHS Compliant
- Acid & Impact Resistant • Industrial Applications
- Bis zu 400A • Erfüllt oder übertrifft EN1175:2020, VDE 0623-589 • RoHS-konform
- Säure-und schlagfest • Industrieanwendungen



ANDERSON
POWER™

EURO BATTERY CONNECTOR

The Anderson™ family of Euro Battery Connectors (EBC) are expertly designed for ease of use and incorporate an innovative contact carrier to simplify assembly. The EBC connectors include the industry standard 80, 160, and 320 sizes, all in accordance with VDE 0623-589. Design and materials offer performance that meets or exceeds all the requirements of EN1175:2020. All Materials chosen are RoHS compliant and selected to ensure years of reliability in adverse industrial environments. These attributes make the EBC connectors the ideal choice for a wide range of industrial applications in Material Handling, Battery Charging, Utility Vehicles, Motive Power, and Sweepers/Scrubbers amongst many others.



KEY ATTRIBUTES

Safety Agency Approvals

EN1175:2020  File No. E26226

Meets VDE 0623-589, completely compatible with DIN 43589-1

Offers interface compatibility for housings, contacts and air tubes.

Voltage Keying

EBC connectors offer keys for Dry-Cell, Wet-Cell, and Universal applications coded for 24/36/48/72/80 and 96 volts DC applications.

Sturdy Advanced Polymer Housings

Provide superior resistance to impact, acid and temperature extremes.

Silver Plated Copper Contacts

Provide excellent conductivity and superior mating cycle performance.



SPECIFICATIONS

ELECTRICAL

Current Ratings (Amperes)

Wire Size:	E80			E160			E320		
	EN1175	CNR	USR	EN1175	CNR	USR	EN1175	CNR	USR
10 mm²	N/A	70	90	N/A	N/A	N/A	N/A	N/A	N/A
16 mm²	80	90	120	80	90	120	N/A	N/A	N/A
25 mm²	120	110	140	120	120	160	N/A	N/A	N/A
35 mm²	160	120	160	160	140	180	N/A	N/A	N/A
50 mm²	N/A	N/A	N/A	250	160	220	250	165	220
75 mm²	N/A	N/A	N/A	N/A	N/A	N/A	N/A	200	260
95 mm²	N/A	N/A	N/A	N/A	N/A	N/A	400	260	340

NOTE: All auxiliary contacts regardless of wire size are rated to a Min 20 amps when tested to EN1175:2020 testing requirements.

- EN1175:2020 allows for maximum temperature rise = 65°C (above 25±5°C ambient)
- CNR allows for maximum temperature rise = 30°C
- USR allows for total temperature (based on min. 25°C ambient) = 75°C

Voltage Rating

	EBC 80			EBC 160			EBC 320		
	EN1175	CNR	USR	EN1175	CNR	USR	EN1175	CNR	USR
AC / DC	150V	600V	600V	150V	600V	600V	150V	600V	600V
DWV (AC)	2000	2200	2200	2000	2200	2200	2000	2200	2200

Wire Range	EBC 80		EBC 160		EBC 320	
	mm²	AWG	mm²	AWG	mm²	AWG
Power- Min.	10	8	16	6	50	1/0
Power- Max.	35	2	50	1/0	95	4/0
Upper Aux.- Min.	1.5	18	4	12	4	12
Upper Aux.- Max.	2.5	14	4	12	4	12
Lower Pilot Aux.- Min.	1.5	18	6	10	6	10
Lower Pilot Aux.- Max.	2.5	14	6	10	6	10

Average Initial Contact Resistance Across Mated Connector Micro-ohms







	EBC 80	EBC 160	EBC 320
Avg. Contact Resistance- Power	176	95	77
Avg. Contact Resistance- Aux.	1100	920	1000

Operating Temperature (all Series):-20 to 105°C

MECHANICAL MATERIALS

Life Cycle - Per EN1175:2020				EBC 80 - EBC 160 - EBC 320	
	EBC 80	EBC 160	EBC 320	Housings	PBT/PC Blend
No Load	>5000	>5000	>5000	Contacts	Copper Alloy
Under Load (Hot Plug at 96V)	5 at 400A	5 at 625A	5 at 1000A	Contact Plating Power (min.)	Silver Plating - 6 microns
				Contact Plating Auxiliary (min.)	Silver Plating - 6 microns
Miscellaneous Data	EBC 80	EBC 160	EBC 320	Hardware	Steel, Zinc Chromate
Avg. Mating Force N (lb)	68 (15.3)	170 (38.2)	71 (16.0)		
Contact Retention N (lb)	134(30) min	445(100) min	445(100) min		
Degree of Protection	IP23	IP23	IP23		
Acid Resistance per EN1175:2020 (1.40g/cm³ at 20°C)	Passed	Passed	Passed		
Air Tube Max Pressure Bar (PSI)	0.8 (11.6)	0.8 (11.6)	0.8 (11.6)		
Flammability	UL94 V0				






TEMPERATURE CHARTS

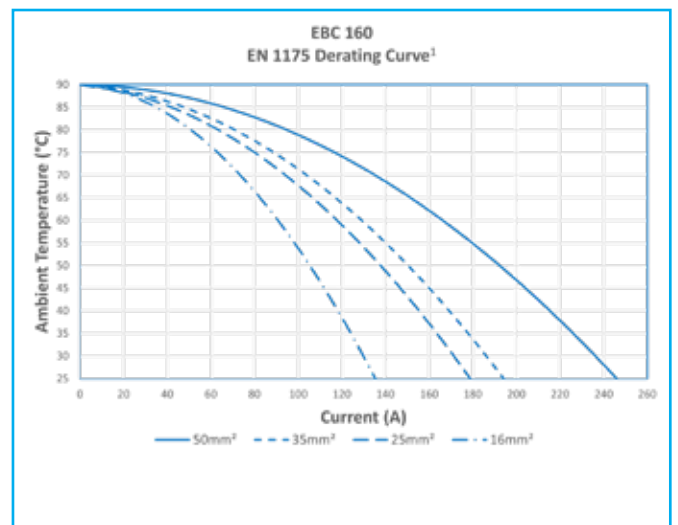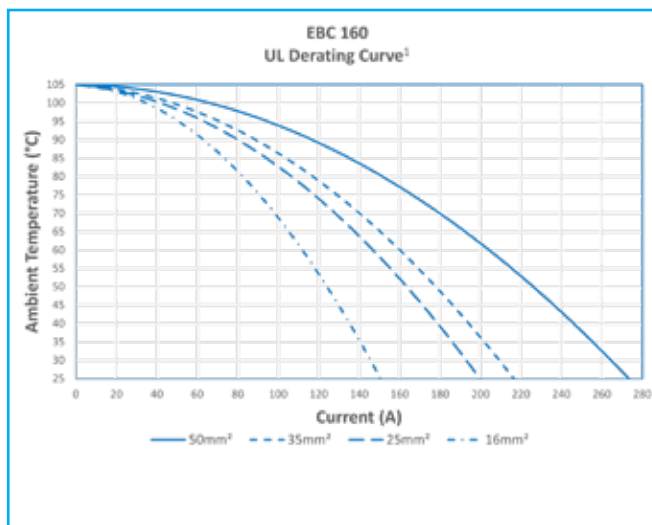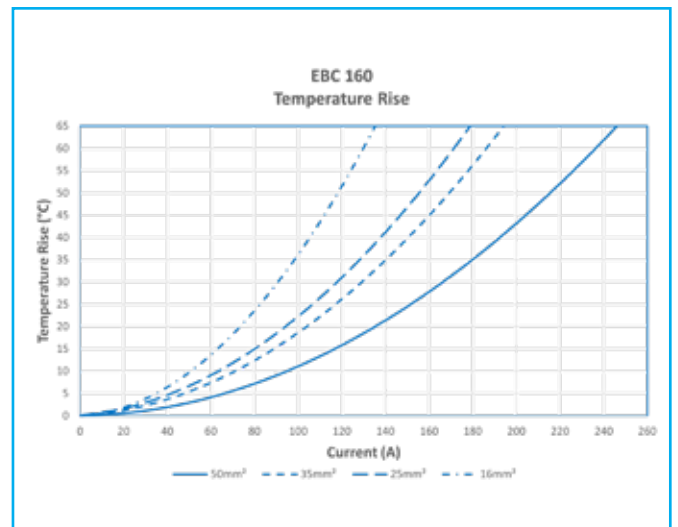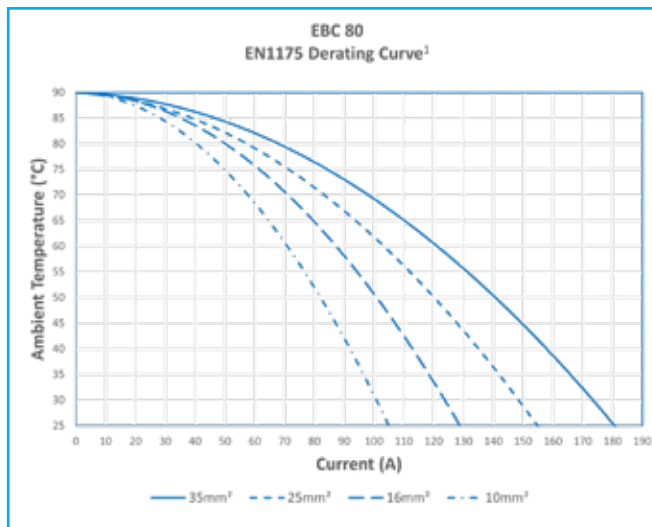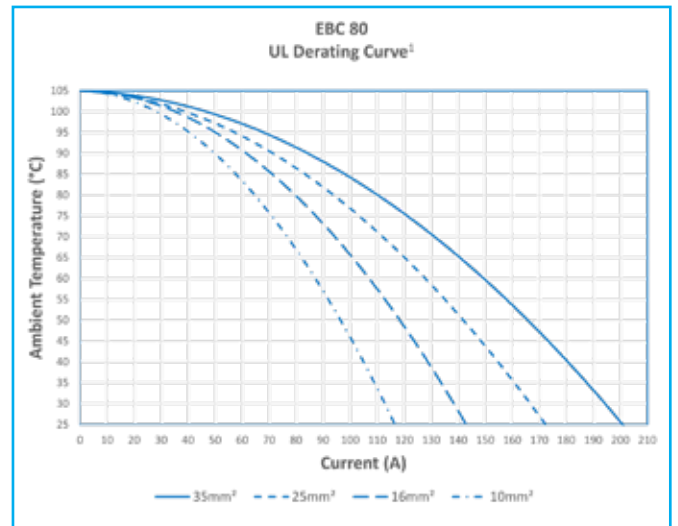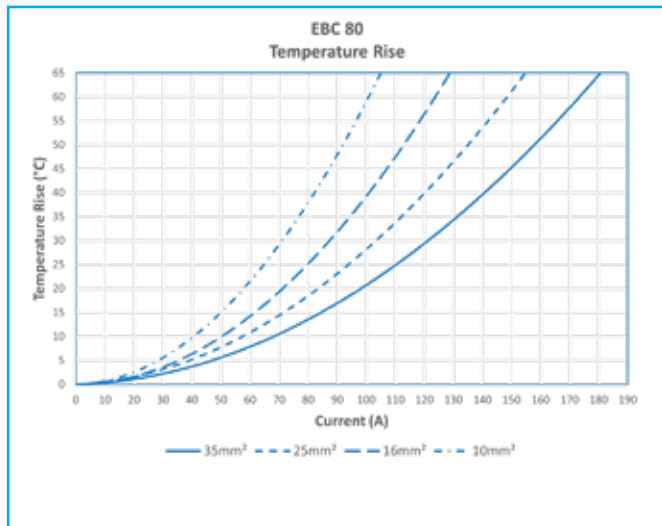


¹ 0.8 Derating per IEC 60512-3

NOTE 1: Temperature ratings based on power contacts energized only.


NOTE 2: Temperature rise charts are based on a 25°C ambient temperature.

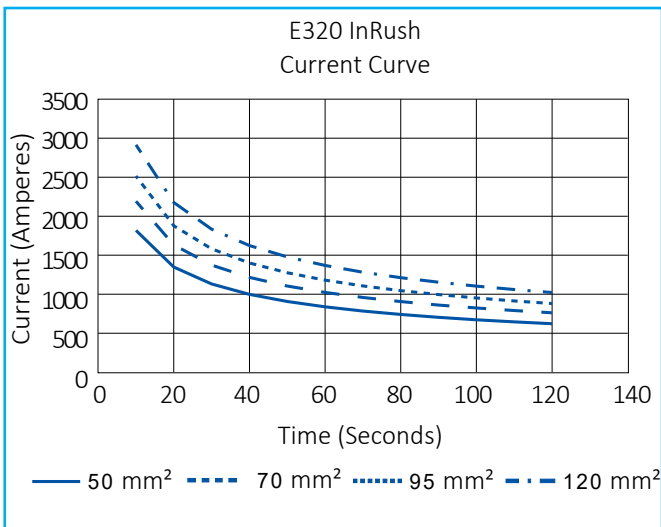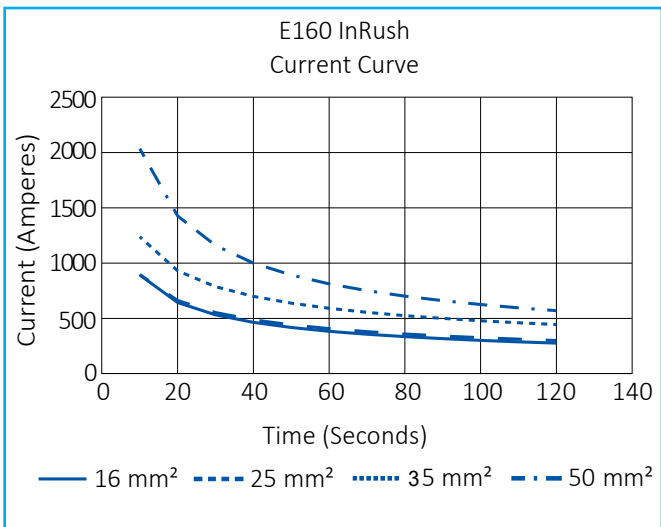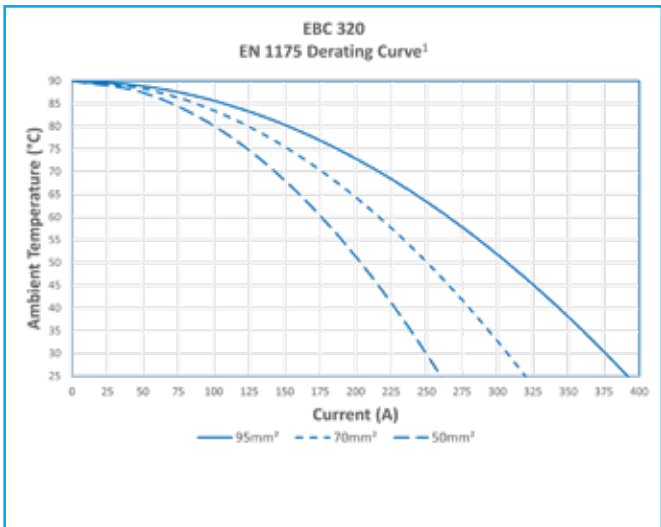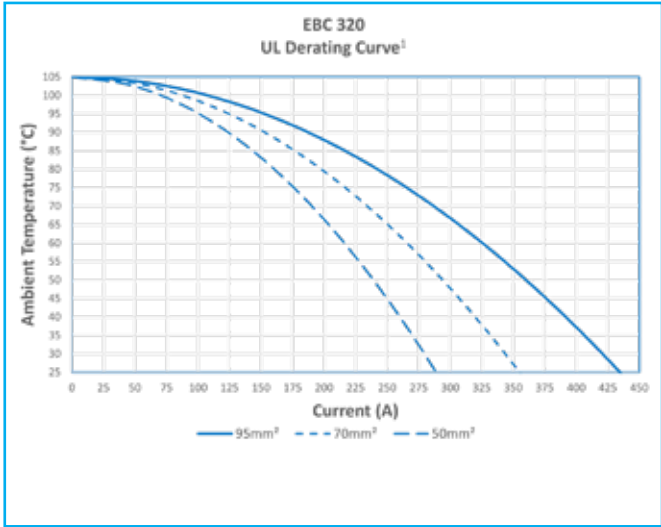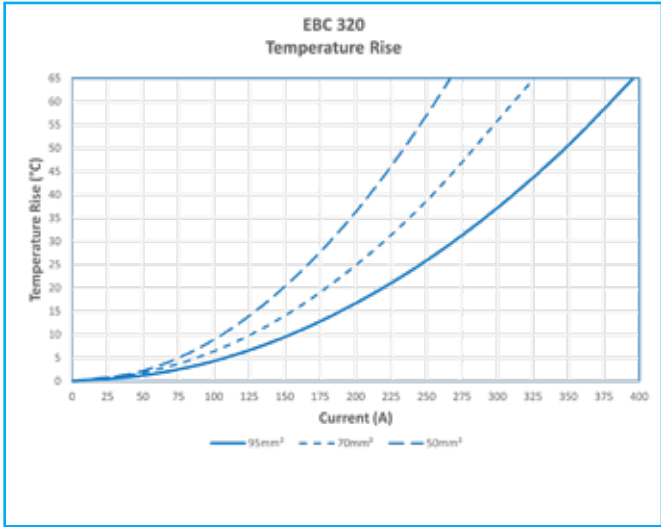

ORDERING INFORMATION

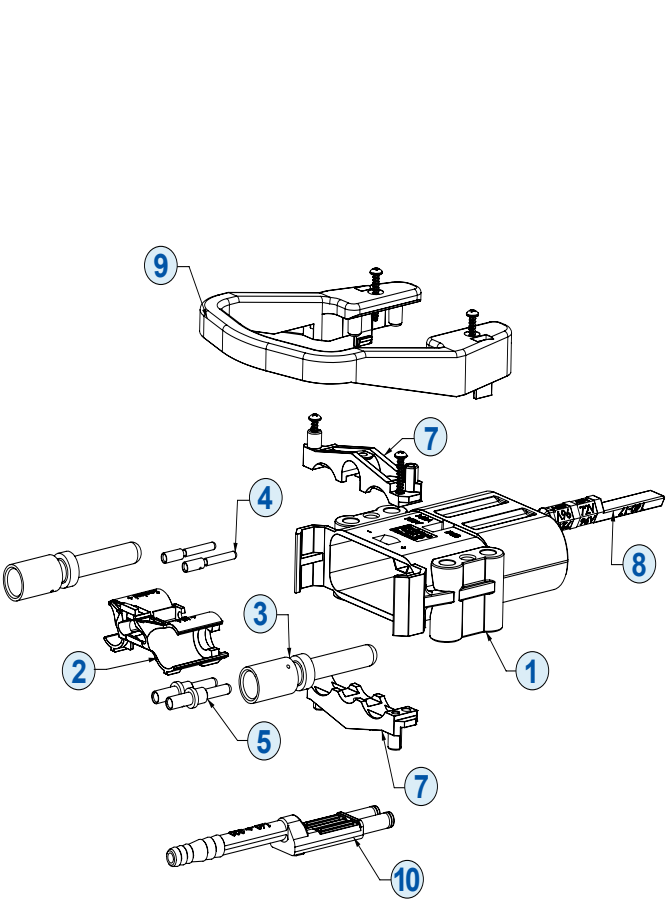

Male Connector

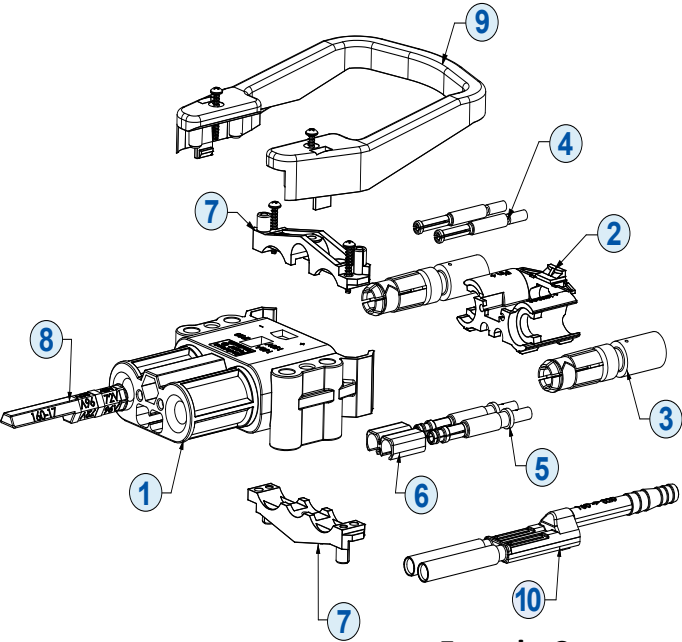

Female Connector

Components

Item Number	Description	EBC 80		EBC 160		EBC 320	
		Male	Female	Male	Female	Male	Female
3	Power Contacts						
	10 mm ² (8 AWG)	80-1010	80-1110	N/A	N/A	N/A	N/A
	16 mm ² (6AWG)	80-1016	80-1116	160-1016	160-1116	N/A	N/A
	25 mm ² (4 AWG)	80-1025	80-1125	160-1025	160-1125	N/A	N/A
	35 mm ² (2 AWG)	80-1035	80-1135	160-1035	160-1135	N/A	N/A
	50 mm ² (1 AWG to 1/0)	N/A	N/A	160-1050	160-1150	320-1050	320-1150
	70 mm ² (2/0 to 3/0)	N/A	N/A	N/A	N/A	320-1070	320-1170
	95 mm ² (3/0 to 4/0)	N/A	N/A	N/A	N/A	320-1095	320-1195
4	Upper Auxiliary Contact	E80-32	E80-33	E160-32	E160-33	E320-34	E320-35
5	*Lower Auxiliary Contact	E80-30	E80-31	160-12	160-13	160-12	160-13
8	Voltage Coding Pins						
	Grey Coding Pin- wet (160 and 320 use same Coding Pins)	80-9	80-9	160-9	160-9	160-9	160-9
	Green Coding Pin- dry (160 and 320 use same Coding Pins)	80-17	80-17	160-17	160-17	160-17	160-17
	**Yellow Coding Pin- univ (160 and 320 use same Coding Pins)	80-19	Not Used	160-19	Not Used	160-19	Not Used
	Blue Coding Pin- Type II dry (160 and 320 use same Coding Pins)	80-22M	80-22F	160-22M	160-22F	160-22M	160-22F
	Red Coding Pin- Type II wet (160 and 320 use same Coding Pins- Contact Factory)	80-23M	80-23F	160-23M	160-23F	160-23M	160-23F
9	***Handle- High Profile w/screws	N/A	N/A	E320-89	E320-89	E320-89	E320-89
	***Handle- Low Profile w/screws	E80-89	E80-89	E160-89	E160-89	E160-89	E160-89
	Handle Red- Low Profile w/screws	80-8-R	80-8-R	N/A	N/A	N/A	N/A
10	*Air Tube	E80-20	E80-21	E160-20	E160-21	E320-20	E320-21
1	Housing Only	EP80-1	EP80-2	EP160-1	EP160-2	EP320-1	EP320-2
2	Contact Holder	80-5B	80-5B	EP160-5	EP160-5	EP320-5	EP320-5
6	Supplemental Lower Pilot Aux Holder	Not Used	Not Used	Not Used	EP320-38	Not Used	EP320-38
7	Cable Clamps with w/screws	EP80-67	EP80-67	EP160-67	EP160-67	EP320-67	EP320-67
1+2+7+8	Male Housing with Contact Holder and Cable Clamp w/screws (Gray Key) - Individual Pack	E80400-0009		E16400-0009		E32400-0009	
1+2+6+7+8	Female Housing with Contact Holder and Cable Clamp w/screws- (Grey Key)- Individual Pack	E80500-0009		E16500-0009		E32500-0009	
1+2+7+8	Male Housing with Contact Holder and Cable Clamp w/screws (Green Key)- Individual Pack	E80400-0209		E16400-0209		E32400-0209	
1+2+6+7+8	Female Housing with Contact Holder ****Lower Pilot Aux Holder, Cable Clamp w/ screws- (Green Key)- Individual Pack	E80500-0209		E16500-0209		E32500-0209	
1+2+7+8	Male Housing with Contact Holder and Cable Clamp w/screws (Yellow Key)- Individual Pack	E80400-0309		E16403-0309		E32400-0309	
1+2+7+8	Male Housing with Contact Holder and Cable Clamp w/screws (Blue Key) - Individual Pack	E80400-0409		E16400-0409		E32400-0409	
1+2+6+7+8	Female Housing with Contact Holder ****Lower Pilot Aux Holder, Cable Clamp w/ screws- (Blue Key)- Individual Pack	E80500-0409		E16500-0409		E32500-0409	
1+2+7+8	Male Housing with Contact Holder and Cable Clamp w/screws (Red Key) - Individual Pack	E80400-0509		E16400-0509		E32400-0509	
1+2+6+7+8	Female Housing with Contact Holder ****Lower Pilot Aux Holder, Cable Clamp w/ screws- (Red Key)- Individual Pack	E80500-0509		E16500-0509		E32500-0509	

*Lower pilot auxiliary contacts use the same housing location as air tubes so they can not be used together

**Universal yellow coding key is only used on male connectors

***EBC 160 and EBC 320 handles work with both the EBC 160 and EBC 320 series connectors

****No lower pilot auxiliary holder required on EBC 80 size connectors

PART NUMBER CONFIGURATOR

EBC 80 Connector Part Number Selection

Series	Gender	Main Contact	Handle	Coding Key	Auxiliary Contacts & Air Tubes	Packing
E80	4 or 5	25 -	1	0	2	9
4	Male					9 Individual
5	Female					8 Bulk
00	None - Order Separately				0 None	
10	10 mm ² (8 AWG)				1 (2) Lower Pilot Auxiliary Contacts	
16	16 mm ² (6 AWG)				2 (2) Upper Auxiliary Contacts	
25	25 mm ² (4 AWG)				4 (2) Lower Pilot Auxiliary Contacts & (2) Upper Auxiliary Contacts	
35	35 mm ² (2 AWG)					
0	No		0	Grey, Wet Cell	5 Air Tube	
1	Black		2	Green, Dry Cell	6 Air Tube & (2) Upper Auxiliary Contacts	
2	Red		3	Yellow, Universal (use with male housing only)		
			4	Blue, Type II Dry Cell, High Power Coding Pin		
			5	*Red, Type II Wet Cell, High Power Coding Pin		

EBC 160 Connector Part Number Selection

Series	Gender	Main Contact	Handle	Coding Key	Auxiliary Contacts & Air Tubes	Packing
E16	4 or 5	25 -	1	0	2	9
4	Male					9 Individual
5	Female					8 Bulk
00	None - Order Separately				0 None	
16	16 mm ² (6 AWG)				1 (2) Lower Pilot Auxiliary Contacts	
25	25 mm ² (4 AWG)				2 (2) Upper Auxiliary Contacts	
35	35 mm ² (2 AWG)				4 (2) Lower Pilot Auxiliary Contacts & (2) Upper Auxiliary Contacts	
50	50 mm ² (1/0 AWG to 1 AWG)					
0	No		0	Grey, Wet Cell	5 Air Tube	
1	Black		2	Green, Dry Cell	6 Air Tube & (2) Upper Auxiliary Contacts	
			3	Yellow, Universal (use with male housing only)		
			4	Blue, Type II Dry Cell, High Power Coding Pin		
			5	*Red, Type II Wet Cell, High Power Coding Pin		

EBC 320 Connector Part Number Selection

Series	Gender	Main Contact	Handle	Coding Key	Auxiliary Contacts & Air Tubes	Packing
E32	4 or 5	50 -	1	0	2	9
4	Male					9 Individual
5	Female					8 Bulk
00	None - Order Separately				0 None	
50	50 mm ² (1/0 AWG to 1 AWG)				1 (2) Lower Pilot Auxiliary Contacts	
70	70 mm ² (2/0 AWG to 3/0 AWG)				2 (2) Upper Auxiliary Contacts	
95	95 mm ² (3/0 AWG to 4/0 AWG)				4 (2) Lower Pilot Auxiliary Contacts & (2) Upper Auxiliary Contacts	
0	No					
1	Black		0	Grey, Wet Cell	5 Air Tube	
			2	Green, Dry Cell	6 Air Tube & (2) Upper Auxiliary Contacts	
			3	Yellow, Universal (use with male housing only)		
			4	Blue, Type II Dry Cell, High Power Coding Pin		
			5	*Red, Type II Wet Cell, High Power Coding Pin		

*Not available at this time, contact factory.


Packaging: Individual (Kits) - all components for a complete connector are packaged together in individual bags within one box Bulk (Kits) - all components required are packaged separately by part number selected in one bag/box.

Handles: EBC 80 comes with the low profile T handle • EBC 160 come with the low profile handle • EBC 320 come with the high profile handle.


DRAWINGS

Housing Dimensions							
		EBC 80		EBC 160		EBC 320	
		mm	in	mm	in	mm	in
Male Housings	A	68.0	2.68	83.5	3.29	89.5	3.52
	B	74.4	2.93	103.8	4.09	123.5	4.86
	C	26.1	1.03	33.4	1.31	40.8	1.61
Female Housings	A	68.0	2.68	83.5	3.29	89.5	3.52
	B	73.8	2.91	104.0	4.09	117.0	4.61
	C	26.1	1.03	32.6	1.28	37.6	1.48


Male Front View




Male Top View




Male Side View

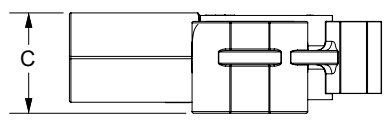


Female Front View



Female Top View




Female Side View




Dimensions of Housings With Handles			
		EBC 80	
		mm	in
Male Housings	D	68.0	2.68
	E	41.2	1.62
	F	110.6	4.35
Female Housings	D	70.0	2.76
	E	41.2	1.62
	F	110.6	4.35

EBC 80 Male Housing with Handle

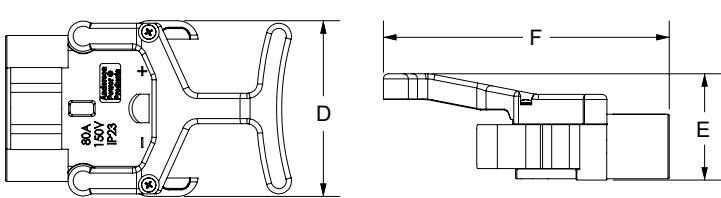


EBC 80 Female Housing with Handle

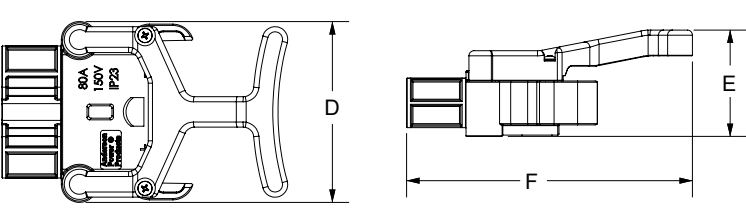


EBC 160 Handles

		Low Profile		High Profile				Low Profile		High Profile	
		mm	in	mm	in			mm	in	mm	in
Male Housings	D	101	4.0	106	4.2	Female Housings	D	101	4.0	106	4.2
	E	46	1.8	64	2.5		E	46	1.8	64	2.5
	F	168	6.6	167	6.6		F	173	6.8	172	6.8


Male Housing Low Profile Handle

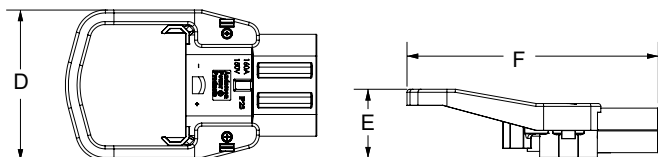


Male Housing High Profile Handle

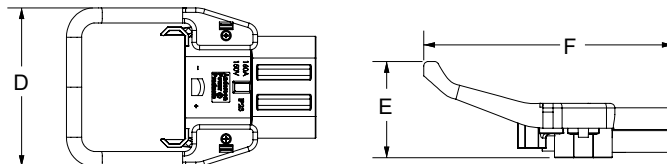

Female Housing Low Profile Handle

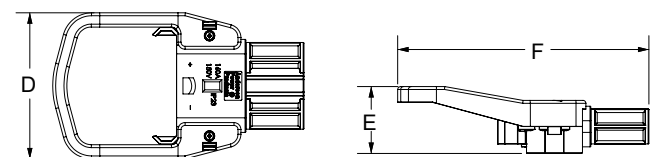


Female Housing High Profile Handle

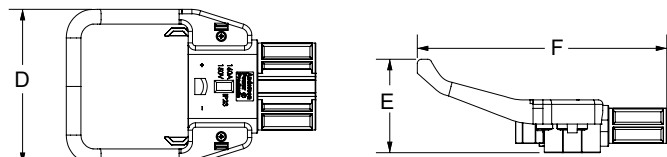


EBC 320 Handles

		Low Profile		High Profile				Low Profile		High Profile	
		mm	in	mm	in			mm	in	mm	in
Male Housings	D	101	4.0	106	4.2	Female Housings	D	101	4.0	106	4.2
	E	54	2.1	72	2.8		E	53	2.1	71	2.8
	F	175	6.9	174	6.9		F	171	6.7	173	6.8


Male Housing Low Profile Handle

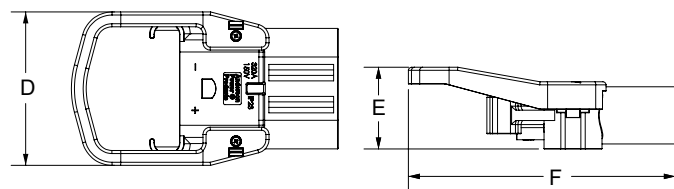


Male Housing High Profile Handle

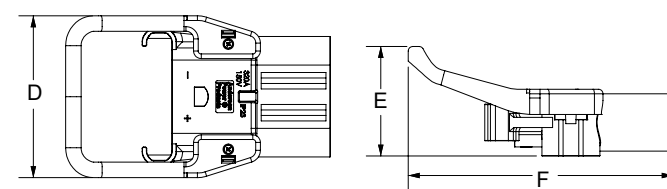


Female Housing Low Profile Handle

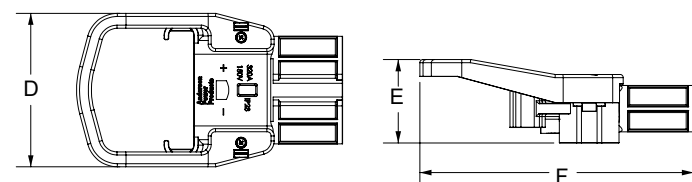


Female Housing High Profile Handle

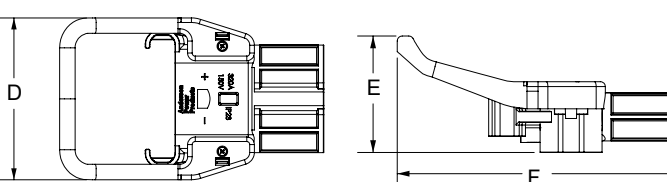


Latch Plate 160 & 320
P/N: A320LP-MK

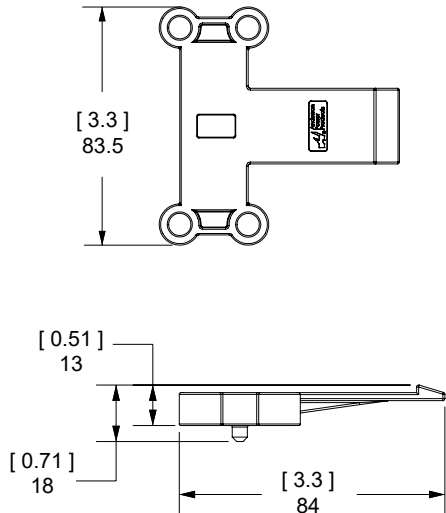

Latch Plate on
EBC 160 & 320 Male Housing


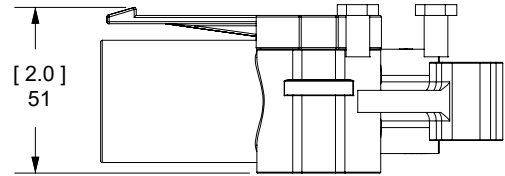


Handle & Lever Assembly
on EBC 160 & 320 Female Housing:
P/N: A320HL-MK

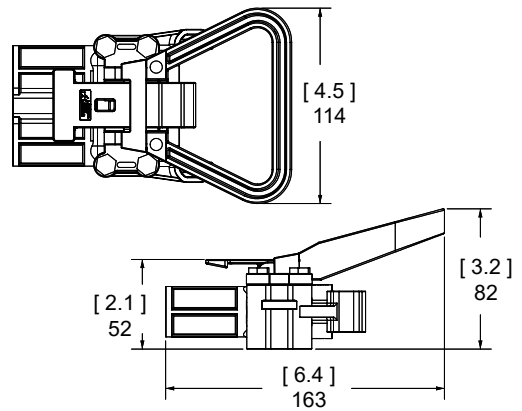


MANUAL RELEASE FOR EBC 160 & 320


P/N: 994G4

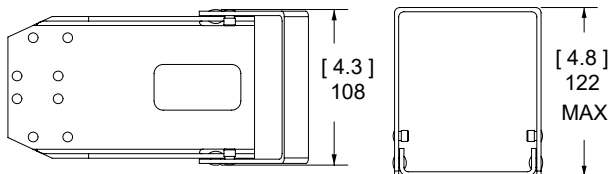

Battery Bracket
P/N: 993G4




Manual Release with Connectors

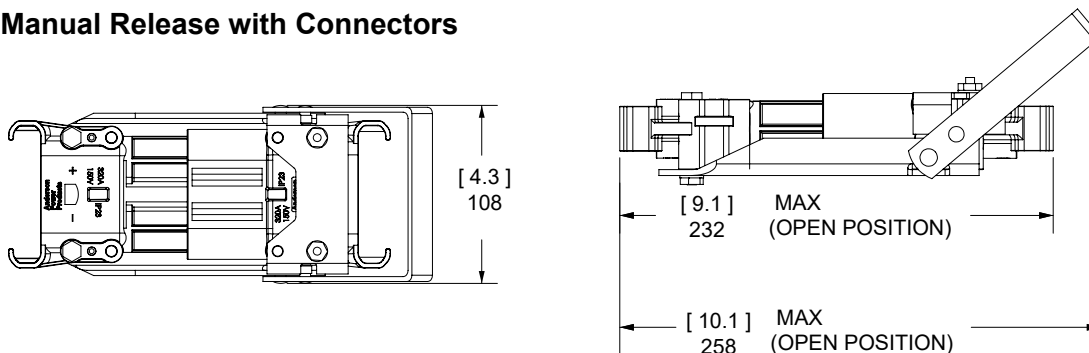


DOUBLE STACK for E160 & 320

Charger Truck Side Part Number 994G6

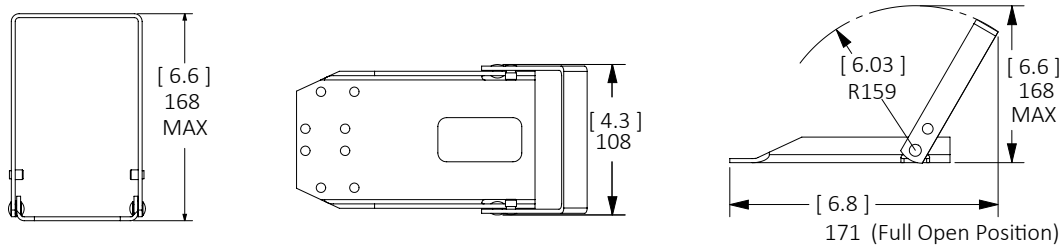

Battery Bracket Part Number 993G6 Double Stack with Connectors

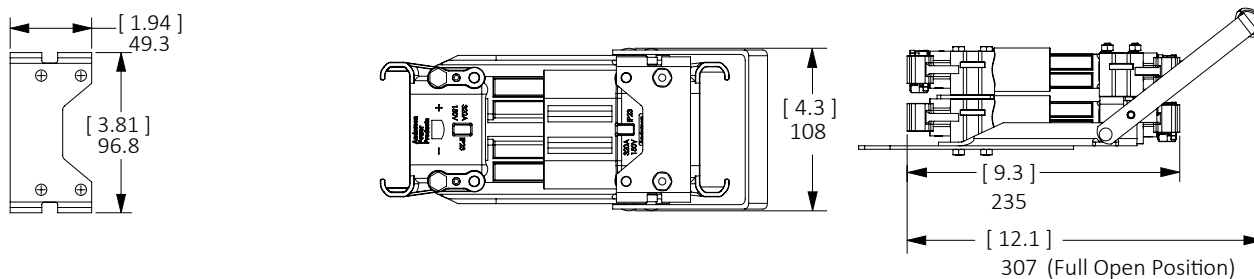

Manual Release and Double Stack Bracket

Part Number	Description
993G4	Manual Release Battery Bracket
993G6	Din 320 (A/E) Double Stack Battery Bracket Series
994G4	Manual Release for A160 & 320
994G6	Din 320 (A/E) Double Stack Truck Charger Bracket Series



Manual Release



Double Stack


Contacts

Series	Wire Size		OD		ID	
	Metric	AWG	mm	in	mm	in
EBC 80	10 mm ²	6 to 8	6.0	0.24	4.5	0.18
EBC 80 / 160	16 mm ²	4 to 6	8.4	0.33	6.0	0.24
	25 mm ²	2 to 4	11.0	0.43	8.0	0.31
	35 mm ²	1 to 2	12.5	0.49	9.0	0.35
EBC 160 / 320	50 mm ²	1 to 1/0	14.5	0.57	11.0	0.43
EBC 320	70 mm ²	2/0 to 3/0	17.0	0.67	13.0	0.51
	95 mm ²	3/0 to 4/0	19.8	0.78	15.0	0.59


Male

Female

Male Power Contact




Female Power Contact

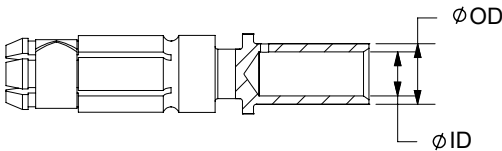


Upper Auxiliaries							Lower Pilot Auxiliaries					
Series	Wire Size		OD		ID		Wire Size		OD		ID	
	mm ²	AWG	mm	in	mm	in	mm ²	AWG	mm	in	mm	in
EBC 80	2.5	14 to 18	3.9	0.15	2.2	0.09	2.5	14 to 18	3.9	0.15	2.2	0.09
EBC 160 / 320	4	12	4.1	0.16	2.9	0.11	6.0	10	5.0	0.20	3.9	0.15


Upper Auxiliary Pin

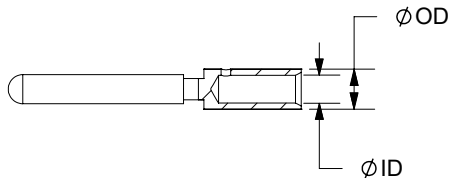


Upper Auxiliary Socket

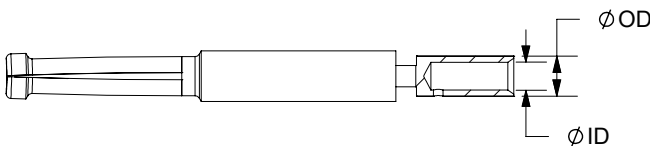

Lower Pilot Auxiliary Pin

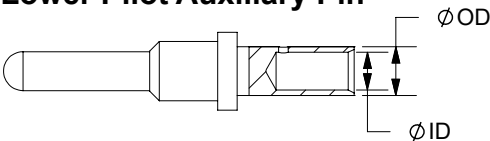


Lower Pilot Auxiliary Socket

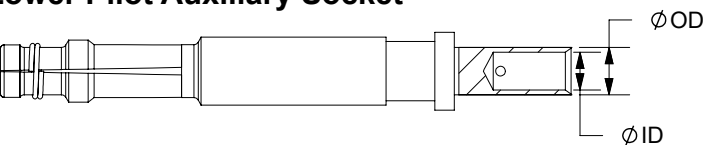


Female Twin Air Tube							Male Twin Air Tube					
Series	G		H		J		G		H		J	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
EBC 80	102	4.0	15.8	0.62	13.0	0.51	87	3.4	15.8	0.62	13.0	0.51
EBC 160 / 320	154	6.1	17.8	0.70	13.9	0.55	125	4.9	17.8	0.70	14.0	0.55

Female Air Tube

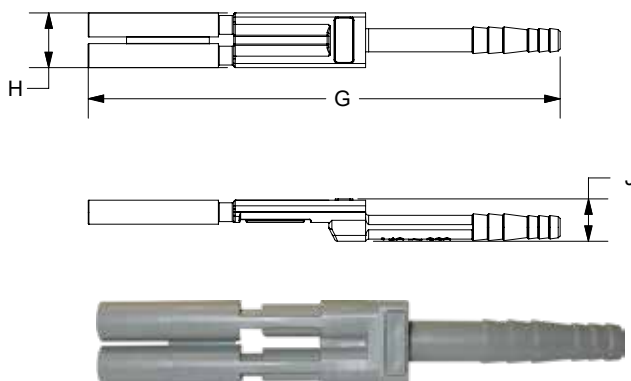


Male Air Tube

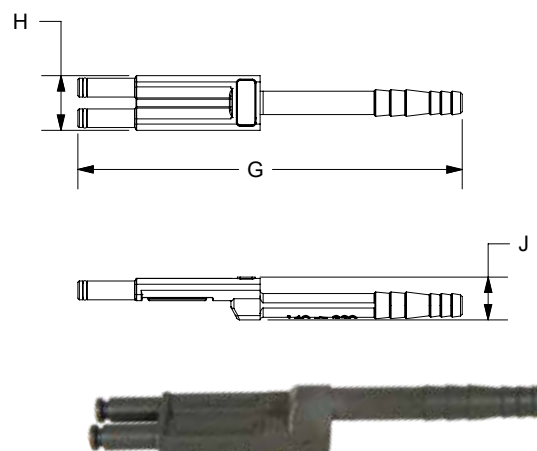

Wet / Dry Voltage Key					Universal Voltage Key			
Series	K		L		K		L	
	mm	in	mm	in	mm	in	mm	in
EBC 80	8.0	0.31	45	1.77	8.0	0.31	46	1.8
EBC 160 / 320	9.3	0.37	69	2.72	11.8	0.46	69	2.7

Wet / Dry Voltage Key - Grey or Green

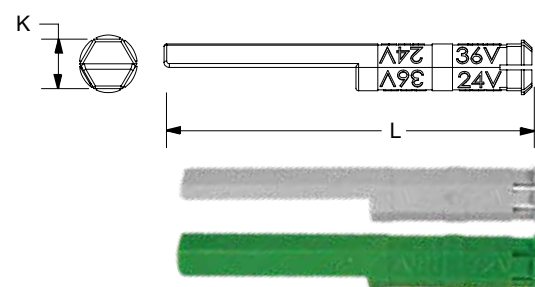


Keying Plug	Identification	Assembled In
	Used for Wet Cell Battery /Charger – Color Grey	Battery Receptacle and Charging Plug
	Used for Dry Cell Battery/Charger – Color Green	Battery Receptacle and Charging Plug
	Used for Vehicle only – Yellow (Universal)	Vehicle Plug only- used when vehicle may use wet or dry cell batteries.
	Used for Type II Dry Cell Battery/Charger – Color Blue	Battery Receptacle and Charging Plug
	Used for Type II Wet Cell Battery/Charger – Color Red* *Not available, contact factory	Battery Receptacle and Charging Plug

Universal Voltage Key - Yellow

(use with male housing only)

Universal (Yellow) voltage keys are to be used exclusively at the vehicle side to permit both the use of wet-cell and dry-cell batteries.

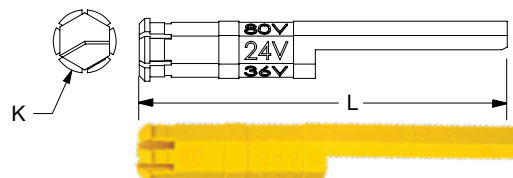

Type II Dry Cell Battery/Charger Key - Blue

(Male & Female)



Type II Wet Cell Battery/Charger Key - Red

(Male & Female)



TOOLING INFORMATION

EBC Series, E160, & E320 - Hydraulic Tooling									
Wire Size		Part Numbers		Loose Piece Contact Crimp Tools					
mm ²	AWG	Power Contact	Hydraulic Hand Bench Tool	+	Die	or	Hydraulic Hand Bench Tool		
10 mm ²	8 to 6	80-1010	1387G3		1322G16		N/A		
		80-1110							
N/A	6	80-1016			1322G9				
		80-1116							
16 mm ²	N/A	80-1016			1322G10	1368 Series			
		80-1116							
25 mm ²	4 to 2	80-1025			1322G12				
		80-1125							
35 mm ²	2 to 1	80-1035	N/A		1322G15				
		80-1135							
16 mm ²	6 to 4	160-1016	1387G3		1322G9				
		160-1116							
25 mm ²	4 to 2	160-1025			1322G12				
		160-1125							
35 mm ²	2 to 1	160-1035			1322G7				
		160-1135							
50 mm ²	1 to 1/0	160-1050			1322G4				
		160-1150							
		320-1050							
		320-1150							
70 mm ²	2/0 to 3/0	320-1070			1322G3 (K) * 1322G2				
		320-1170							
95 mm ²	3/0 to 4/0	320-1095			1322G1				
		320-1195							
Pilot/Auxiliary Contacts									
All		Pins	Solder Only						
		Sockets							

* Use 1322G3 with K stranded wire only.



1387G3



1368



1368-NL

EBC Series E80, E160, & E320 - Pneumatic Tooling

Wire Size		Part Numbers		Loose Piece Contact Crimp Tools					
mm ²	AWG	Power Contact	Pneumatic Bench Tool	+	Die	+	Locator (Single Crimp)		
10 mm ²	8 to 6	80-1010	1387G2		13003G20		1304G34		
		80-1110							
16 mm ²	6 to 4	80-1016			1303G19				
		80-1116							
25 mm ²	4 to 2	80-1025	N/A		N/A		N/A		
		80-1125							
35 mm ²	2 to 1	80-1035							
		80-1135							
mm ²	AWG	Power Contact	Pneumatic Bench Tool	+	Die	+	Locator (Double Crimp)		
16 mm ²	6 to 4	160-1016	1387G2		1303G14		1304G21 Sockets 1304G20 Pins		
		160-1116							
25 mm ²	4 to 2	160-1025			1303G13				
		160-1125							
35 mm ²	2 to 1	160-1035							
		160-1135							
50 mm ²	1 to 1/0	160-1050			1303G8	1304G29 Pins 1304G18 Sockets			
		160-1150							
		320-1050							
		320-1150							
70 mm ²	2/0 AWG	320-1070			1303G11				
		320-1170							
95 mm ²	3/0 AWG	320-1095			1303G3				
	4/0 AWG	320-1195							
Pilot/Auxiliary Contacts									
All		All Crimp Pins	Solder Only						
		All Crimp Sockets							



1387G1 & 1387G2

EURO-BATTERIESTECKER

Die Euro-Batteriestecker (Euro Battery Connectors, EBC) der Anderson™-Familie wurden fachkundig mit dem Ziel der einfachen Bedienbarkeit konzipiert und weisen einen innovativen Kontaktträger auf, der die Montage vereinfacht. Die EBC-Stecker liegen in den industriellen Standardgrößen 80, 160 und 320 vor, die alle der Norm VDE 0623-589 entsprechen. Design und Materialien bieten Leistungsmerkmale, die alle Anforderungen der Norm EN1175:2020 erfüllen oder übertreffen. Alle ausgewählten Materialien sind RoHS-konform und wurden so ausgewählt, dass jahrelange Zuverlässigkeit in schwierigen Industrieumgebungen gewährleistet wird. Dank dieser Attribute sind die EBC-DIN-Stecker die richtige Wahl für eine breite Palette an industriellen Einsatzmöglichkeiten bei Materialhandhabung, Batterieaufladung, Nutzfahrzeugen, Antriebstechnik, Kehrmaschinen und vielen weiteren Anwendungen.



HAUPTMERKMALE

Sicherheitszertifizierungen

EN1175:2020  File No. E26226

Erfüllt VDE 0623-589, völlig kompatibel mit DIN 43589-1

Bietet Schnittstellenkompatibilität für die Gehäuse, die Kontakte und die Luftadapter.

Spannungscodierstifte

EBC-Stecker bieten Codierstifte für Trockenzellen-, Nasszellen und universelle Anwendungen, die für DC-Anwendungen mit 24/36/48/72/80 und 96 Volt codiert sind.

Stabile, moderne Polymer-Gehäuse

Bieten überragenden Widerstand bei Schlag-, Säure- und Temperaturbelastungen.

Versilberte Kupferkontakte

Bieten hervorragende Leitfähigkeit und überragende Steckzyklen.



SPEZIFIKATIONEN

Elektrische Werte

Stromstärke (Ampere)

Kabelquerschnitt:	E80			E160			E320		
	EN1175	CNR	USR	EN1175	CNR	USR	EN1175	CNR	USR
10 mm ²	N/V	70	90	N/V	N/V	N/V	N/V	N/V	N/V
16 mm ²	80	90	120	80	90	120	N/V	N/V	N/V
25 mm ²	120	110	140	120	120	160	N/V	N/V	N/V
35 mm ²	160	120	160	160	140	180	N/V	N/V	N/V
50 mm ²	N/V	N/V	N/V	250	160	220	250	165	220
75 mm ²	N/V	N/V	N/V	N/V	N/V	N/V	N/V	200	260
95 mm ²	N/V	N/V	N/V	N/V	N/V	N/V	400	260	340

HINWEIS: Alle Hilfskontakte, unabhängig von der Drahtgröße, sind für mindestens 20 A ausgelegt, wenn sie gemäß EN1175:2020 Prüfanforderungen verwendet werden

- EN1175:2020-Ermöglicht einen maximalen Temperaturanstieg = 65 °C (über 25 ± 5 °C Umgebungstemperatur)
- CNR- Ermöglicht einen maximalen Temperaturanstieg =30°C
- USR- Ermöglicht eine Gesamttemperatur (basierend auf einer Umgebungstemperatur von mindestens 25 °C) = 75 °C

Betriebsspannung

	EBC 80			EBC 160			EBC 320		
	EN1175	CNR	USR	EN1175	CNR	USR	EN1175	CNR	USR
AC / DC	150V	600V	600V	150V	600V	600V	150V	600V	600V
DWV (AC)	2000	2200	2200	2000	2200	2200	2000	2200	2200

Kabelbereich	EBC 80		EBC 160		EBC 320	
	mm ²	AWG	mm ²	AWG	mm ²	AWG
Strom – Min.	10	8	16	6	50	1/0
Strom – Max.	35	2	50	1/0	95	4/0
Oberer Hilfs.- Min.	1.5	18	4	12	4	12
Oberer Hilfs.- Max.	2.5	14	4	12	4	12
Unterer Führungs-/Hilfs.- Min.	1.5	18	6	10	6	10
Unterer Führungs-/Hilfs.- Max.	2.5	14	6	10	6	10

Durchschnittlicher Anfangskontaktwiderstand in zusammengefügttem Steckeranschluss – Mikroohm

	EBC 80	EBC 160	EBC 320
Durchschn. Kontaktwiderstand – Strom	176	95	77
Durchschn. Kontaktwiderstand – Hilfs.	1100	920	1000

Betriebstemperatur (alle Serien): -20 bis 105 °C

Mechanische Werte

Lebenszyklus - Für EN1175:2020







	EBC 80	EBC 160	EBC 320
Keine Belastung	>5000	>5000	>5000
Unter Belastung (Hot-Plugging bei 96 V)	5 bei 400 A	5 bei 625 A	5 bei 1000 A
Versch. Daten	EBC 80	EBC 160	EBC 320
Durchschn. Steckkraft N (lb)	68 (15,3)	170 (38,2)	71 (16,0)
Kontakthaltung N (lb)	134 (30) min	445 (100) min	445 (100) min
Schutzgrad	IP23	IP23	IP23
Säurebeständigkeit gemäß EN1175:2020	Bestanden	Bestanden	Bestanden
Max. Druckbelastung in Bar (PSI) Luftadapter	0,8 (11,6)	0,8 (11,6)	0,8 (11,6)
Entflammbarkeit	UL94 V0		

Materialien

EBC 80 - EBC 160 - EBC 320

Gehäuse	PBT/PC-Blend
Kontakte	Kupferlegierung
Kontaktbeschichtung – Strom (min.)	Versilbert – 6 Micron
Kontaktbeschichtung – Hilfs. (min.)	Versilbert – 6 Micron
Hardware	Stahl, Zinkchromat

TEMPERATURTABELLEN

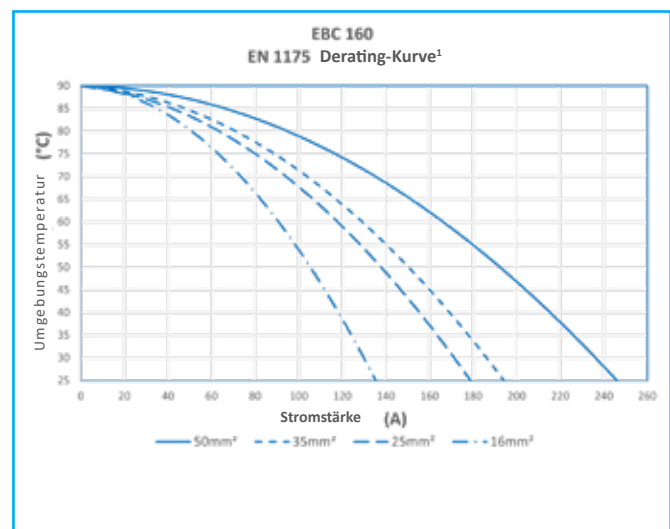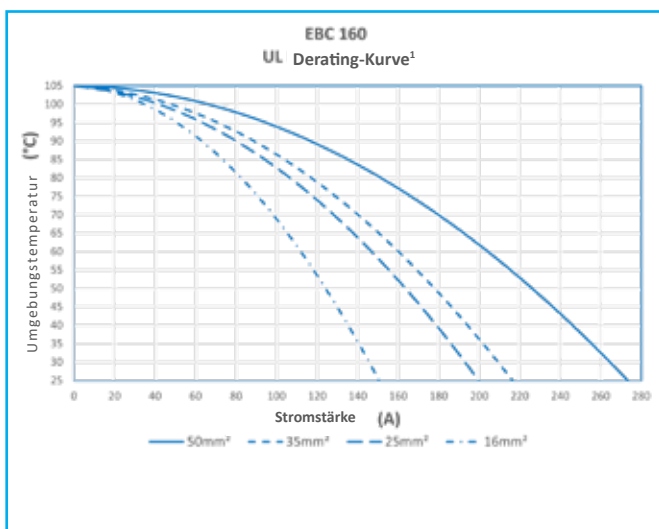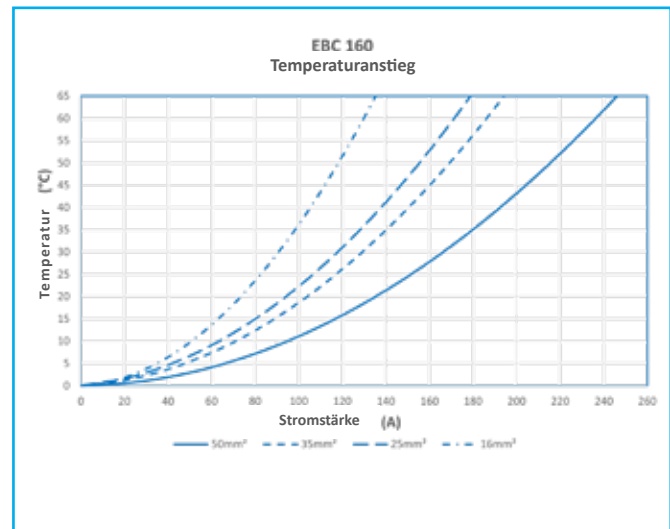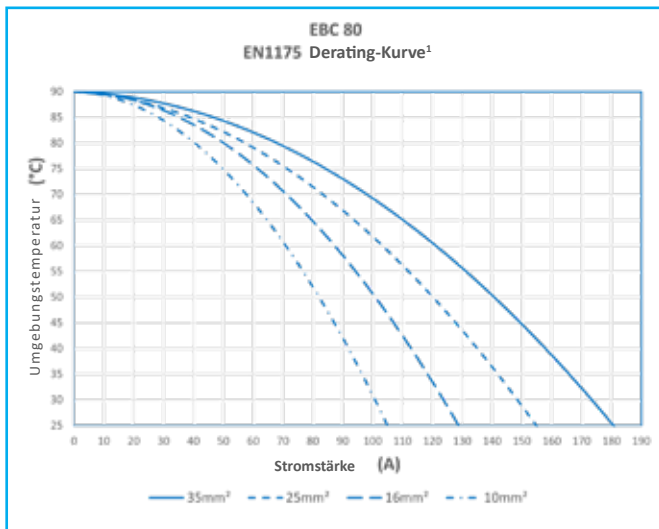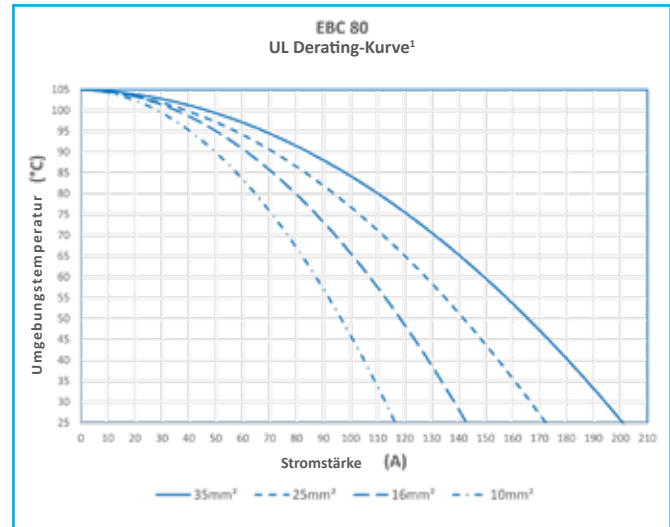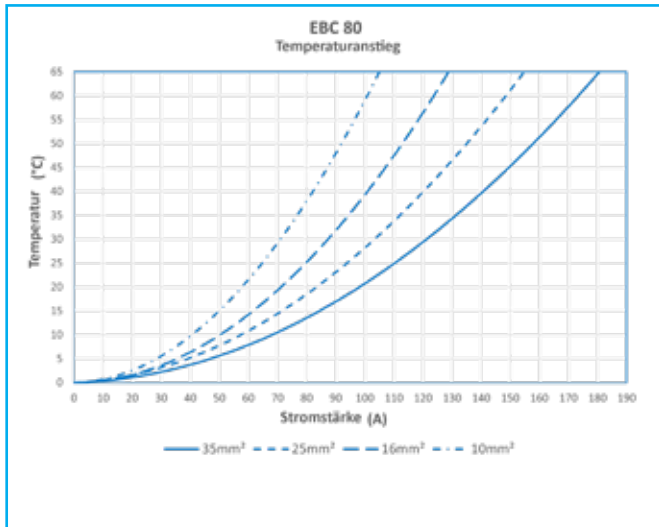

¹ 0,8 Derating pro IEC 60512-3

HINWEIS 1: Temperaturwerte basieren nur auf Kontakten mit eingeschalteter Spannungsversorgung.

HINWEIS 2: Temperaturanstiegsdiagramme basieren auf einer Umgebungstemperatur von 25 °C.

