

Cisco Packet Tracer Network Configuration Project.

Configured routing, IP addressing, and ACL security rules for Admin, Sales, and HR departments in a simulated enterprise network.

Oluwatosin Fagbayimu

CSC26-04-NA-19

07.05.2026

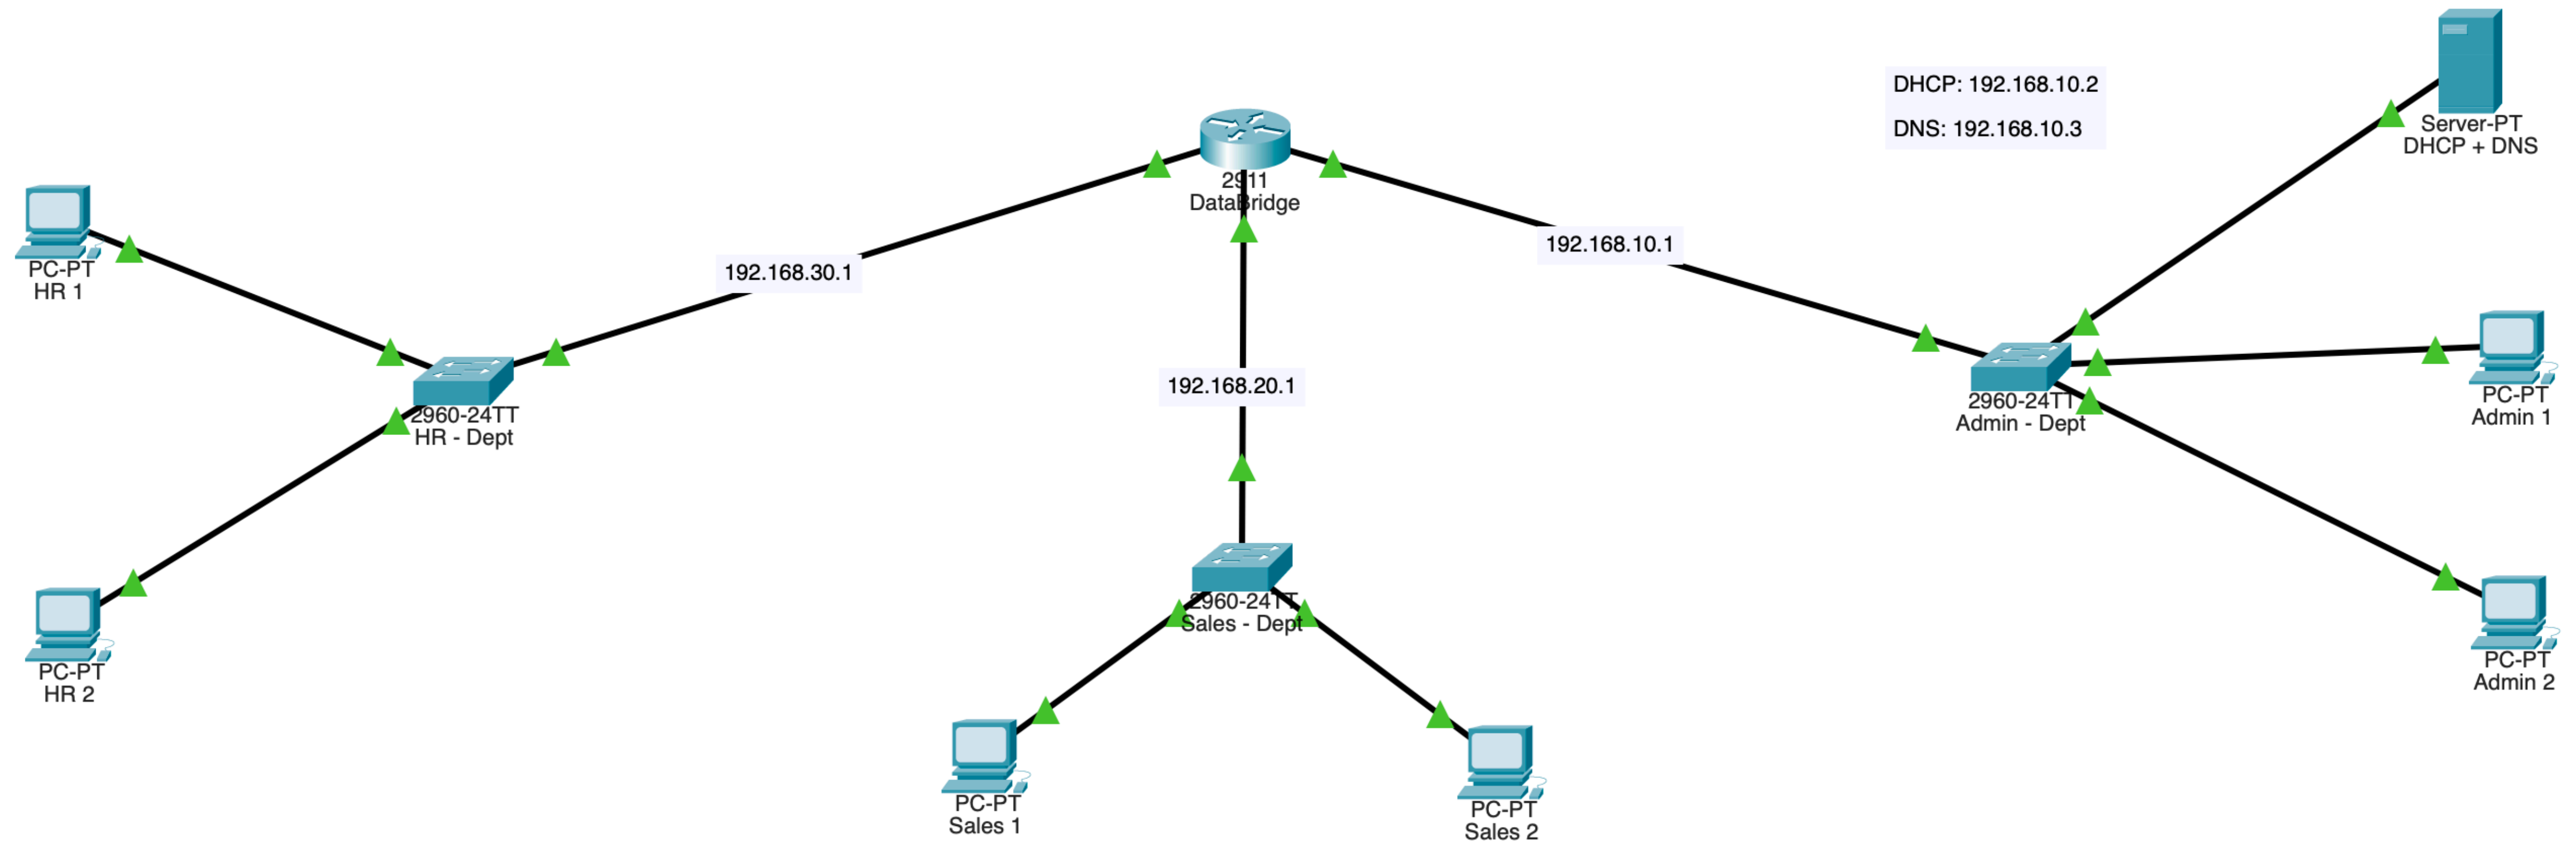


Figure 4: Cisco Packet Tracer network topology for the Admin, Sales, and HR departments with router-based inter-network communication and ACL security configuration.

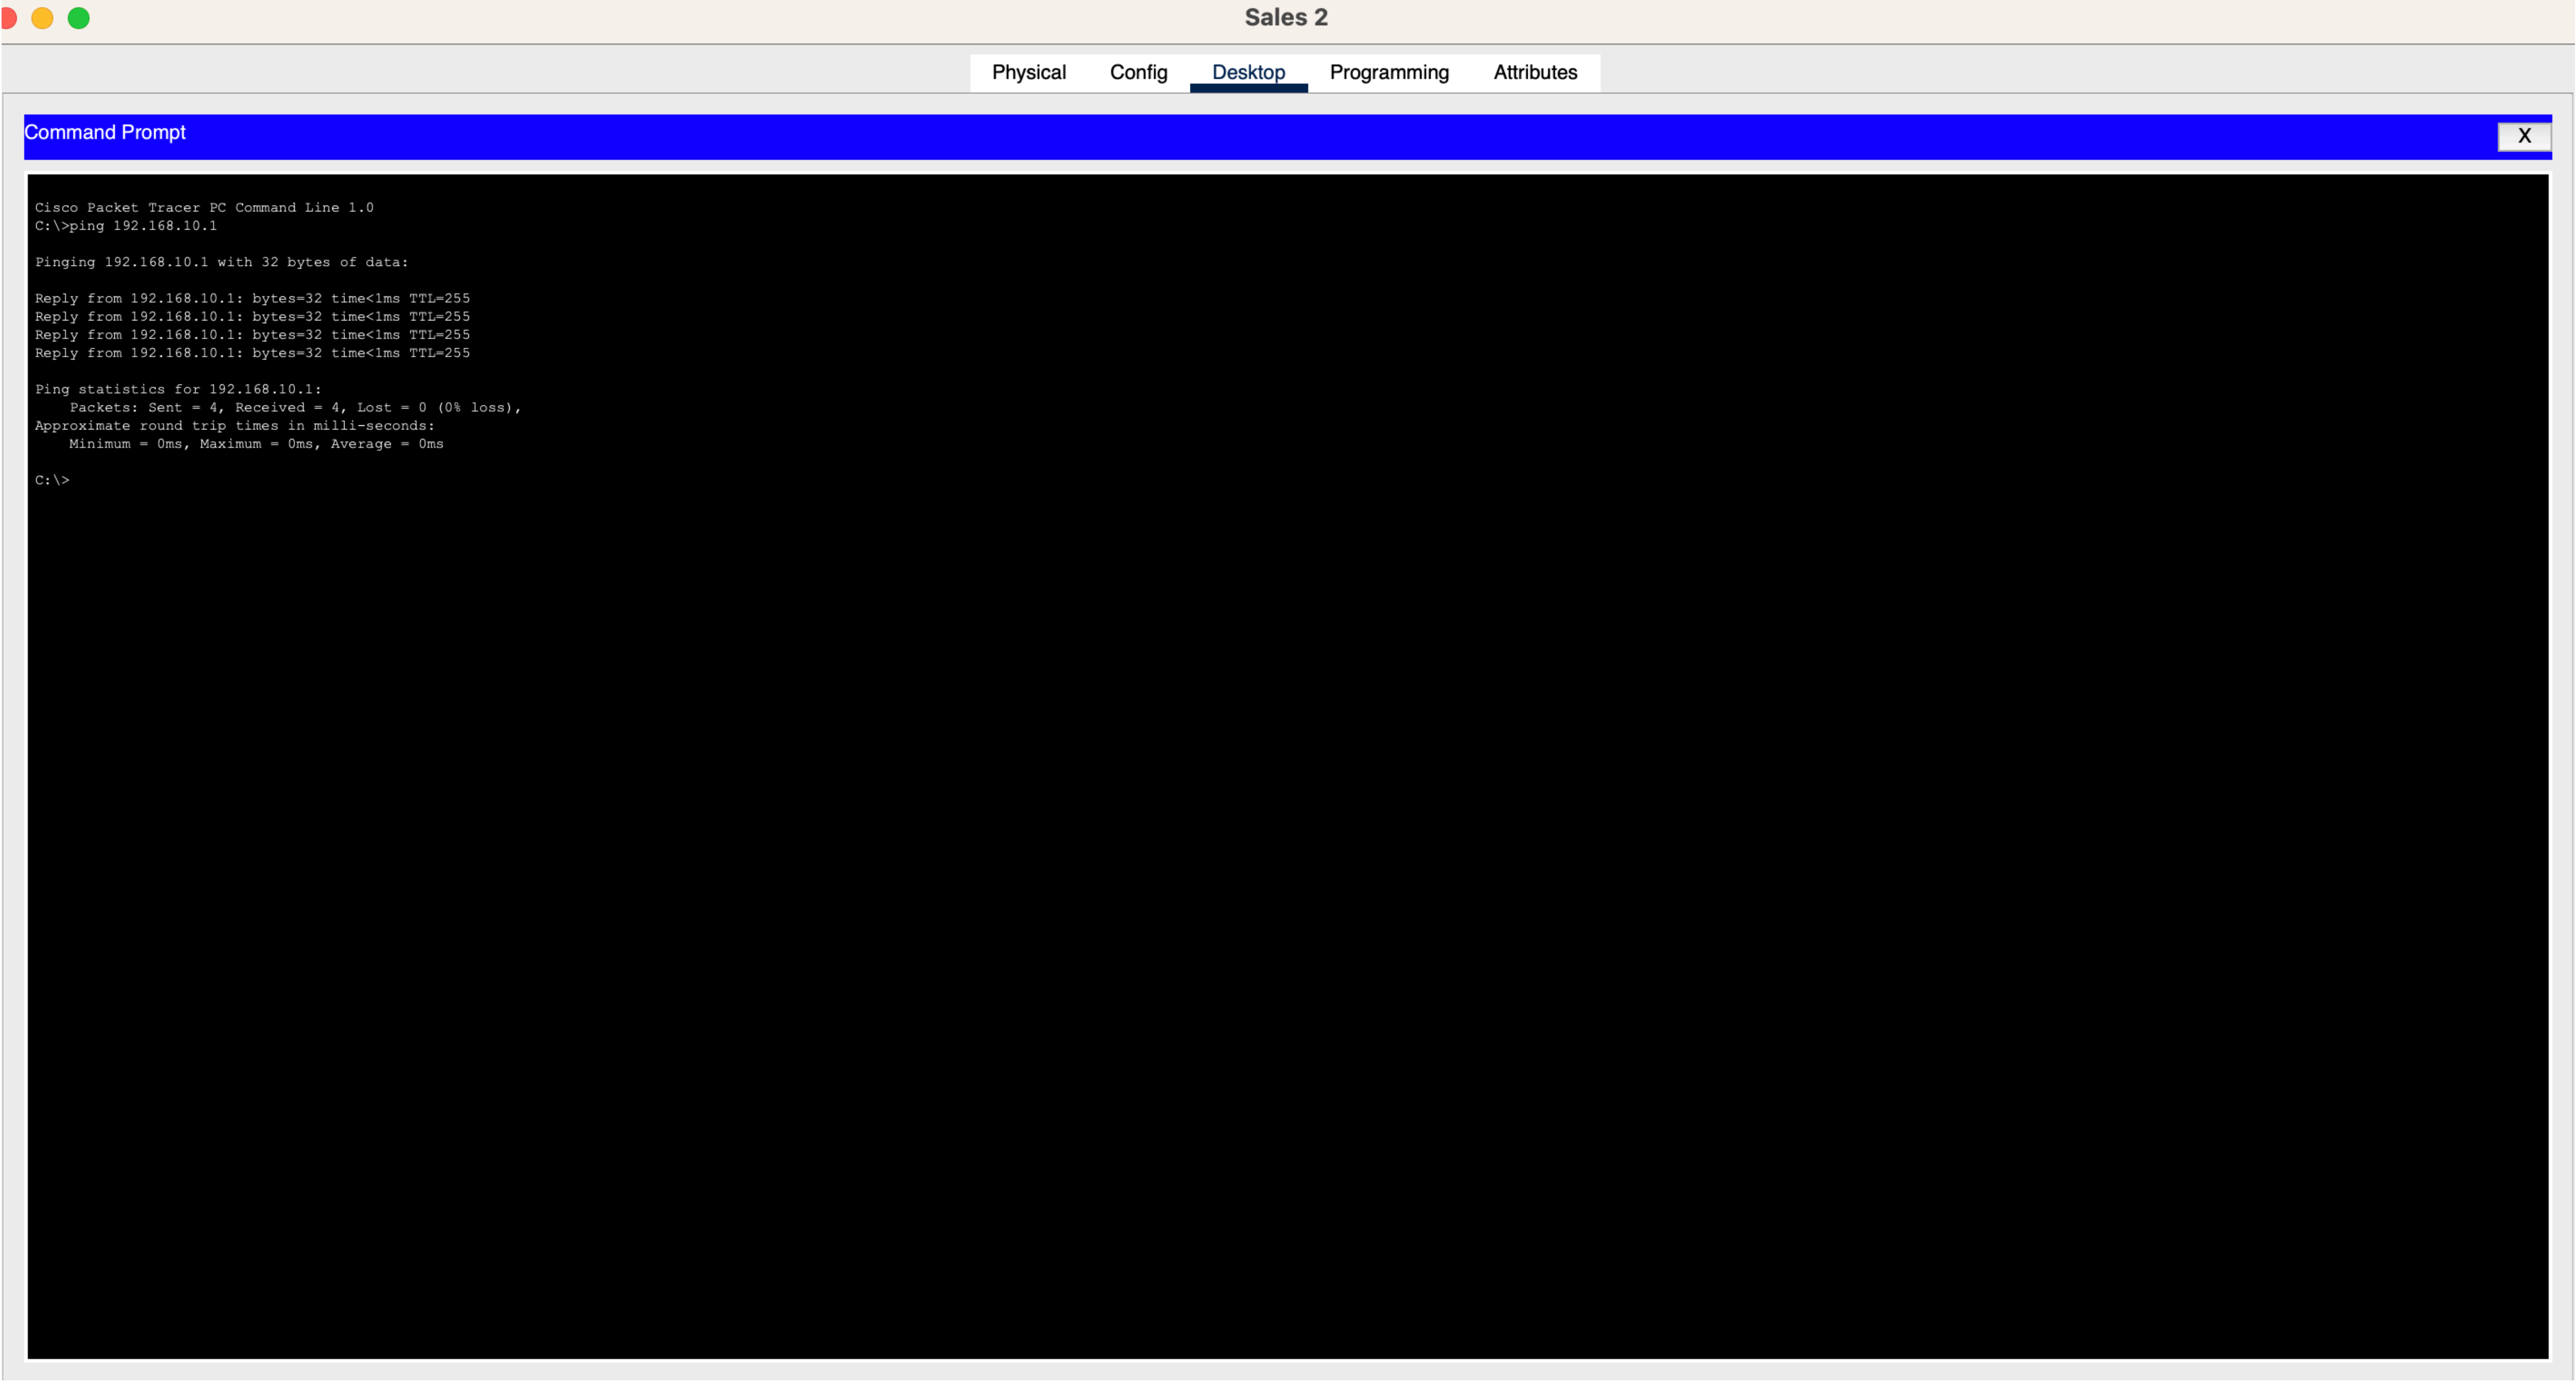


Figure 1: Successful ping from Sales - Department to Admin - Department Output.

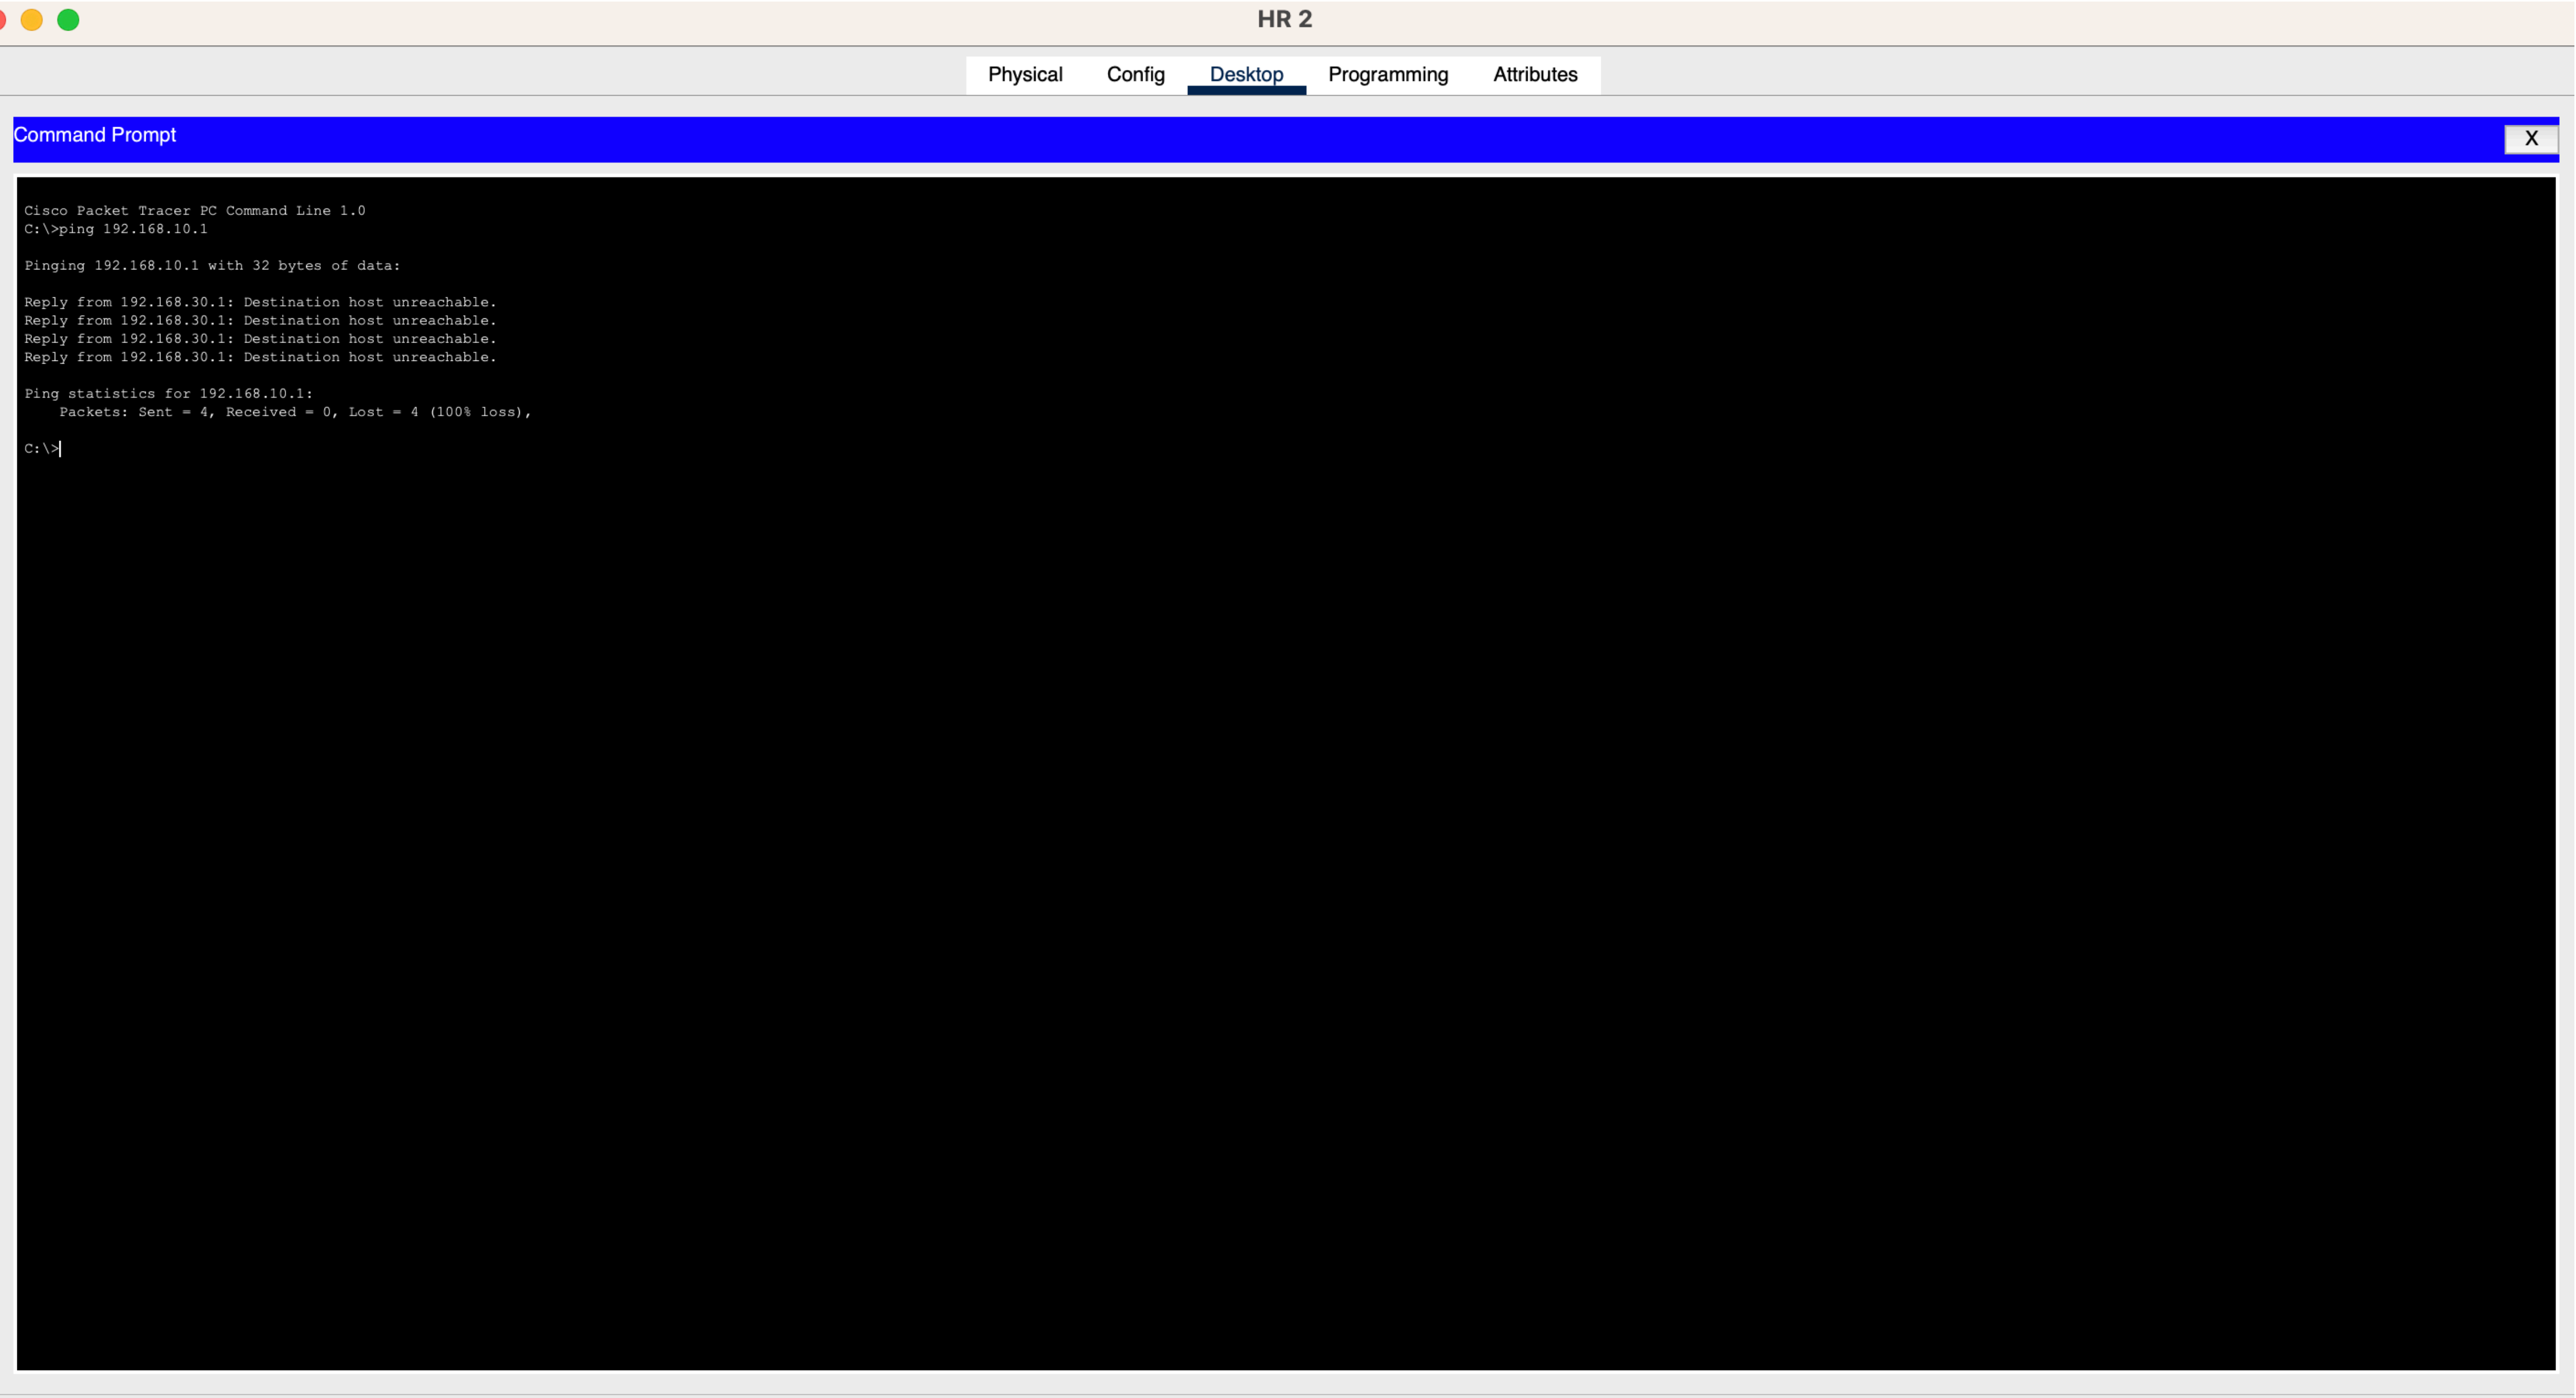


Figure 2: Failed ping from HR - Department to Admin - Department Output.

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/2, changed state to up
exit
databridge(config)#end
databridge#
%SYS-5-CONFIG_I: Configured from console by console
show ip interface brief
Interface                IP-Address      OK? Method Status          Protocol
GigabitEthernet0/0       192.168.10.1    YES manual up              up
GigabitEthernet0/1       192.168.20.1    YES manual up              up
GigabitEthernet0/2       192.168.30.1    YES manual up              up
Vlan1                    unassigned      YES unset  administratively down down
databridge#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
databridge(config)#interface GigabitEthernet0/1
databridge(config-if)#ip helper-address 192.168.10.2
databridge(config-if)#exit
databridge(config)#interface GigabitEthernet0/2
databridge(config-if)#ip helper-address 192.168.10.2
databridge(config-if)#exit
databridge(config)#end
databridge#
%SYS-5-CONFIG_I: Configured from console by console

databridge con0 is now available

Press RETURN to get started.

databridge>enable
databridge#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
databridge(config)#ip access-list extended HR-ACL
databridge(config-ext-nacl)#deny ip 192.168.30.0 0.0.0.255 192.168.10.0 0.0.0.255
databridge(config-ext-nacl)#permit ip 192.168.30.0 0.0.0.255 192.168.20.0 0.0.0.255
databridge(config-ext-nacl)#permit ip any any
databridge(config-ext-nacl)#exit
databridge(config)#interface GigabitEthernet0/2
databridge(config-if)#ip access-group HR-ACL in
databridge(config-if)#exit
databridge(config)#end
databridge#
%SYS-5-CONFIG_I: Configured from console by console
show access-lists
Extended IP access list HR-ACL
 10 deny ip 192.168.30.0 0.0.0.255 192.168.10.0 0.0.0.255
 20 permit ip 192.168.30.0 0.0.0.255 192.168.20.0 0.0.0.255
 30 permit ip any any
databridge#
```

Figure 3: ACL command Output.