

1. Description


1.1. Project

Project Name	Alinea_STM32_474RE
Board Name	NUCLEO-G474RE
Generated with:	STM32CubeMX 5.6.0
Date	04/12/2020

1.2. MCU

MCU Series	STM32G4
MCU Line	STM32G4x4
MCU name	STM32G474RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

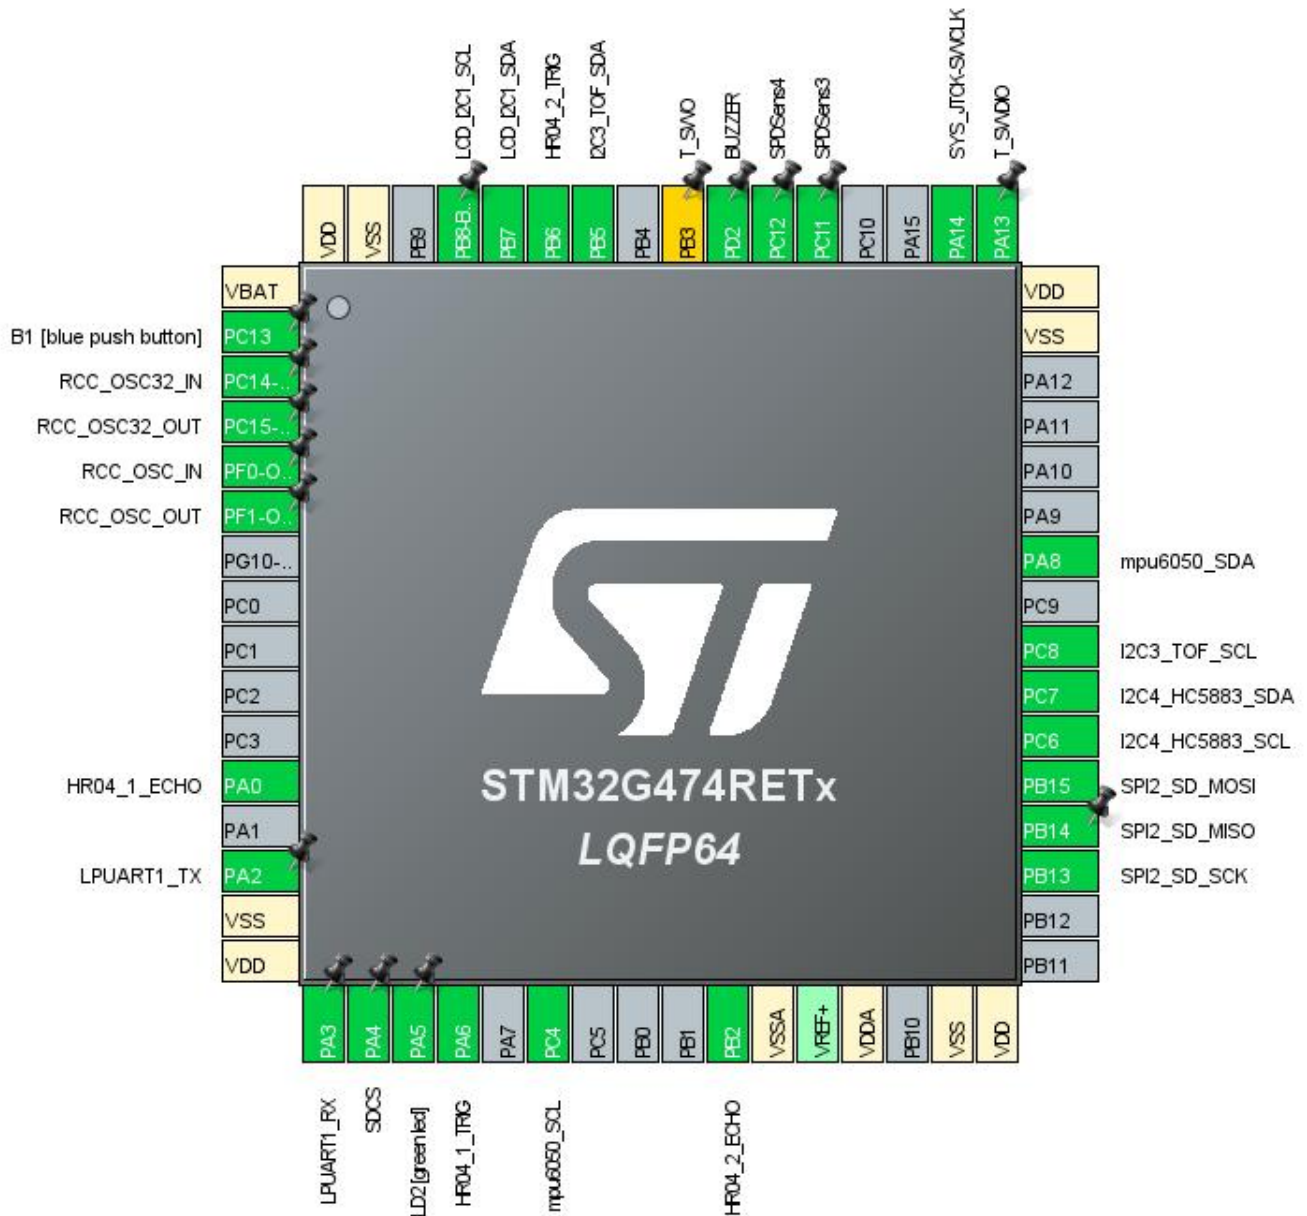

3. Pins Configuration


Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [blue push button]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PF0-OSC_IN	I/O	RCC_OSC_IN	
6	PF1-OSC_OUT	I/O	RCC_OSC_OUT	
12	PA0	I/O	TIM2_CH1	HR04_1_ECHO
14	PA2	I/O	LPUART1_TX	
15	VSS	Power		
16	VDD	Power		
17	PA3	I/O	LPUART1_RX	
18	PA4 *	I/O	GPIO_Output	SDCS
19	PA5 *	I/O	GPIO_Output	LD2 [green led]
20	PA6	I/O	TIM16_CH1	HR04_1_TRIG
22	PC4	I/O	I2C2_SCL	mpu6050_SCL
26	PB2	I/O	TIM5_CH1	HR04_2_ECHO
27	VSSA	Power		
29	VDDA	Power		
31	VSS	Power		
32	VDD	Power		
35	PB13	I/O	SPI2_SCK	SPI2_SD_SCK
36	PB14	I/O	SPI2_MISO	SPI2_SD_MISO
37	PB15	I/O	SPI2_MOSI	SPI2_SD_MOSI
38	PC6	I/O	I2C4_SCL	I2C4_HC5883_SCL
39	PC7	I/O	I2C4_SDA	I2C4_HC5883_SDA
40	PC8	I/O	I2C3_SCL	I2C3_TOF_SCL
42	PA8	I/O	I2C2_SDA	mpu6050_SDA
47	VSS	Power		
48	VDD	Power		
49	PA13	I/O	SYS_JTMS-SWDIO	T_SWDIO
50	PA14	I/O	SYS_JTCK-SWCLK	
53	PC11	I/O	GPIO_EXTI11	SPDSens3
54	PC12	I/O	GPIO_EXTI12	SPDSens4
55	PD2 *	I/O	GPIO_Output	BUZZER
56	PB3 **	I/O	SYS_JTDO-SWO	T_SWO
58	PB5	I/O	I2C3_SDA	I2C3_TOF_SDA

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
59	PB6	I/O	TIM16_CH1N	HR04_2_TRIG
60	PB7	I/O	I2C1_SDA	LCD_I2C1_SDA
61	PB8-BOOT0	I/O	I2C1_SCL	LCD_I2C1_SCL
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

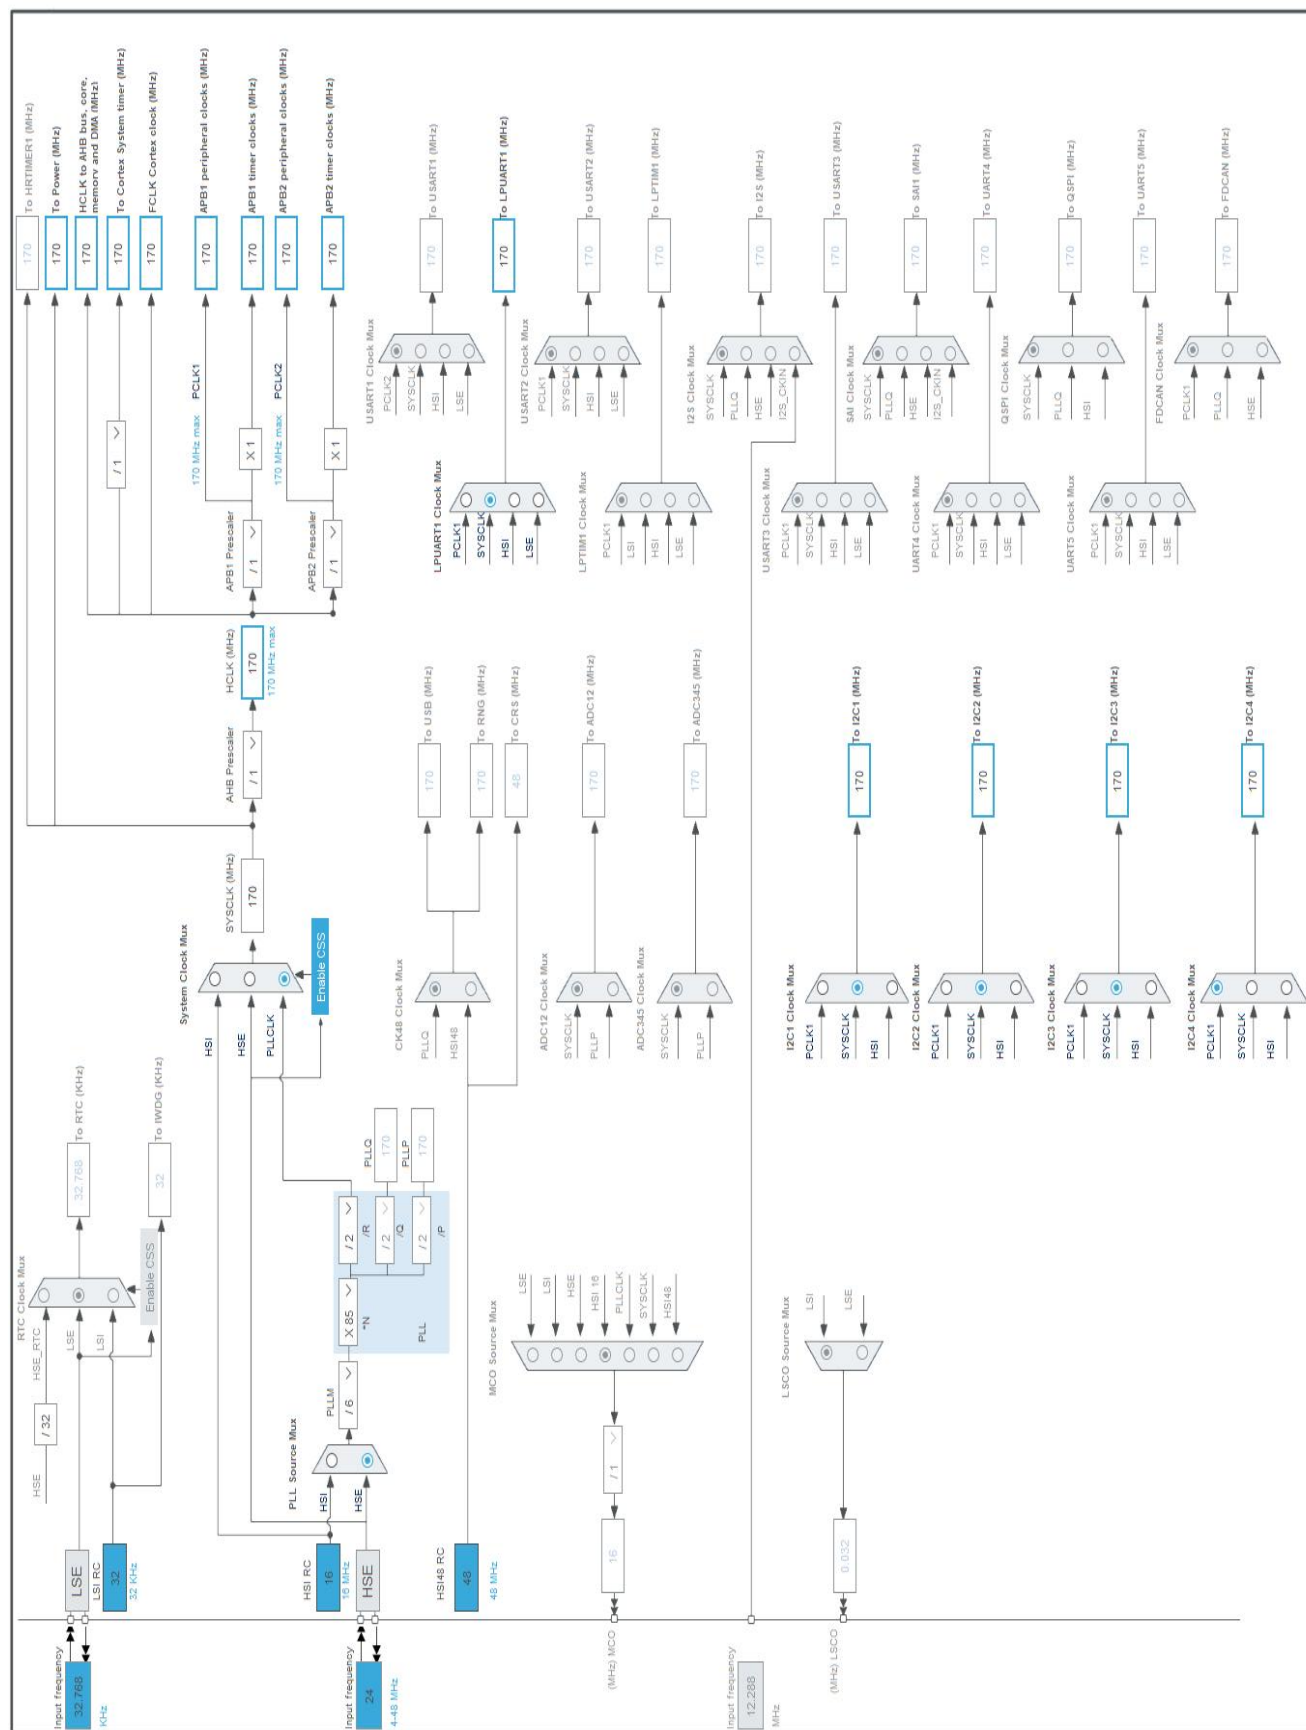

5. Software Project

5.1. Project Settings

Name	Value
Project Name	Alinea_STM32_474RE
Project Folder	F:\Documents\STM32CubeWSP\alinea\STM32_G474RE
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_G4 V1.2.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32G4
Line	STM32G4x4
MCU	STM32G474RETx
Datasheet	DS12288_Rev0

6.2. Parameter Selection

Temperature	25
Vdd	3.0

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP1
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-Boost	NoRange
Fetch Type	FLASH/DualBank/ART	NA
CPU Frequency	170 MHz	0 Hz
Clock Configuration	HSE BYP PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	29.5 mA	80.5 μ A
Duration	0.1 ms	0.9 ms
DMIPS	213.0	0.0
Ta Max	124.25	129.98
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	3.02 mA
Battery Life	1 month, 16 days, 9 hours	Average DMIPS	212.5 DMIPS

6.6. Chart

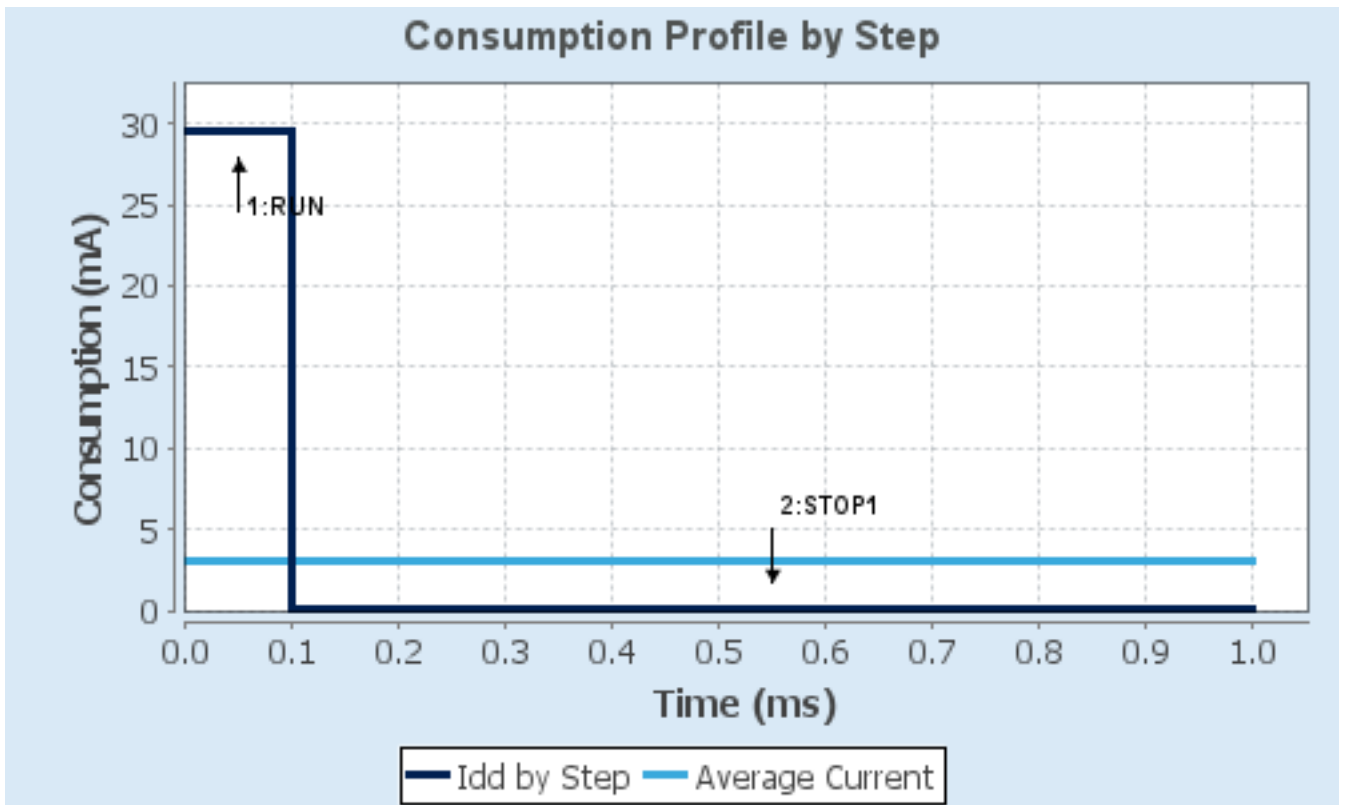

7. IPs and Middleware Configuration

7.1. GPIO

7.2. I2C1

I2C: I2C

7.2.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x30A0A7FB *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.3. I2C2

I2C: I2C

7.3.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x30A0A7FB *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.4. I2C3

I2C: I2C

7.4.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Fast Mode *
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x10802D9B *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.5. I2C4

I2C: I2C

7.5.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Fast Mode *
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0

Analog Filter	Enabled
Timing	0x10802D9B *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.6. LPUART1

Mode: Asynchronous

7.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Single Sample	Disable
Prescaler	clock /1
Fifo Mode	FIFO mode disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

7.7. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.7.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	8WS (7 CPU cycle)

RCC Parameters:

HSI Calibration Value	64
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1 boost
-------------------------------	---------------------------------------

Peripherals Clock Configuration:

Generate the peripherals clock configuration	TRUE
--	------

7.8. SPI2

Mode: Full-Duplex Master

7.8.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	4 *
Baud Rate	42.5 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

7.9. SYS

Debug: Serial Wire

Timebase Source: TIM20

mode: save power of non-active UCPD - deactive Dead Battery pull-up

7.10. TIM2

Clock Source : Internal Clock

Channel1: Input Capture direct mode

mode: One Pulse Mode

7.10.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	170-1 *
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 32 bits value)	1000000 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Pulse On Compare (Common for Channel 3 and 4):

Pulse Width Prescaler	0
Pulse Width	0

Input Capture Channel 1:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	4 *

7.11. TIM5

Clock Source : Internal Clock

Channel1: Input Capture direct mode

mode: One Pulse Mode

7.11.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	172-1 *
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 32 bits value)	1000000 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Pulse On Compare (Common for Channel 3 and 4):

Pulse Width Prescaler	0
Pulse Width	0

Input Capture Channel 1:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

7.12. TIM16

mode: Activated

Channel1: PWM Generation CH1 CH1N

7.12.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	170-1 *
Counter Mode	Up
Dithering	Enable *
Integer Counter Period (AutoReload Register - 12 bits value)	100-1 *
Fractionnal_Period /16	0
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Break And Dead Time management - BRK Configuration:

BRK State	Disable
-----------	---------

BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable
- COMP3	Disable
- COMP4	Disable
- COMP5	Disable
- COMP6	Disable
- COMP7	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off
DeadTime Preload	Disable
Dead Time	0
Asymmetrical DeadTime	Disable
Falling Dead Time	0

PWM Generation Channel 1 and 1N:

Mode	PWM mode 2 *
Pulse (12 bits value)	90 *
Fractionnal_Pulse /16	0
Output compare preload	Enable
Fast Mode	Enable *
CH Polarity	High
CHN Polarity	High
CH Idle State	Reset
CHN Idle State	Reset

7.13. FATFS

mode: User-defined

7.13.1. Set Defines:

Version:

FATFS version	R0.12c
---------------	--------

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
------------------------------	----------

FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_EXPAND (Use f_expand function)	Disabled
USE_CHMOD (Change attributes function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_EXFAT (Support of exFAT file system)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
FS_REENTRANT (Re-Entrancy)	Enabled
FS_TIMEOUT (Timeout ticks)	1000
USE_MUTEX	Disabled
SYNC_t (O/S sync object)	osSemaphoreId_t
FS_LOCK (Number of files opened simultaneously)	2

7.13.2. Advanced Settings:

User Defined:

Diskio code	User
-------------	------

7.14. FREERTOS

Interface: CMSIS_V2

7.14.1. Config parameters:

API:

FreeRTOS API CMSIS v2

Versions:

FreeRTOS version 10.2.1

CMSIS-RTOS version 2.00

MPU/FPU:

ENABLE_MPU Disabled

ENABLE_FPU Disabled

Kernel settings:

USE_PREEMPTION Enabled

CPU_CLOCK_HZ SystemCoreClock

TICK_RATE_HZ 1000

MAX_PRIORITIES 56

MINIMAL_STACK_SIZE **256 ***

MAX_TASK_NAME_LEN 16

USE_16_BIT_TICKS Disabled

IDLE_SHOULD_YIELD Enabled

USE_MUTEXES Enabled

USE_RECURSIVE_MUTEXES Enabled

USE_COUNTING_SEMAPHORES Enabled

QUEUE_REGISTRY_SIZE 8

USE_APPLICATION_TASK_TAG Disabled

ENABLE_BACKWARD_COMPATIBILITY Enabled

USE_PORT_OPTIMISED_TASK_SELECTION Disabled

USE_TICKLESS_IDLE Disabled

USE_TASK_NOTIFICATIONS Enabled

RECORD_STACK_HIGH_ADDRESS Disabled

Memory management settings:

Memory Allocation Dynamic / Static

TOTAL_HEAP_SIZE **4096 ***

Memory Management scheme heap_4

Hook function related definitions:

USE_IDLE_HOOK Disabled

USE_TICK_HOOK Disabled

USE_MALLOC_FAILED_HOOK Disabled

USE_DAEMON_TASK_STARTUP_HOOK Disabled

CHECK_FOR_STACK_OVERFLOW Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS Disabled

USE_TRACE_FACILITY Enabled

USE_STATS_FORMATTING_FUNCTIONS Disabled

Co-routine related definitions:

USE_CO_ROUTINES Disabled

MAX_CO_ROUTINE_PRIORITIES 2

Software timer definitions:

USE_TIMERS Enabled

TIMER_TASK_PRIORITY 2

TIMER_QUEUE_LENGTH 10

TIMER_TASK_STACK_DEPTH 512

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY 15

LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY 5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE size_t

USE_POSIX_ERRNO Disabled

7.14.2. Include parameters:

Include definitions:

vTaskPrioritySet Enabled

uxTaskPriorityGet Enabled

vTaskDelete Enabled

vTaskCleanUpResources **Enabled ***

vTaskSuspend Enabled

vTaskDelayUntil Enabled

vTaskDelay Enabled

xTaskGetSchedulerState Enabled

xTaskResumeFromISR Enabled

xQueueGetMutexHolder Enabled

xSemaphoreGetMutexHolder Disabled

pcTaskGetTaskName Disabled

uxTaskGetStackHighWaterMark Enabled

xTaskGetCurrentTaskHandle Disabled

eTaskGetState Enabled

xEventGroupSetBitFromISR Disabled

xTimerPendFunctionCall Enabled

xTaskAbortDelay Disabled

xTaskGetHandle	Disabled
uxTaskGetStackHighWaterMark2	Disabled

7.14.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT	Disabled
----------------------	----------

Project settings (see parameter description first):

Use FW pack heap file	Enabled
-----------------------	---------

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	Low	LCD_I2C1_SDA
	PB8-BOOT0	I2C1_SCL	Alternate Function Open Drain	Pull-up	Low	LCD_I2C1_SCL
I2C2	PC4	I2C2_SCL	Alternate Function Open Drain	Pull-up	Low	mpu6050_SCL
	PA8	I2C2_SDA	Alternate Function Open Drain	Pull-up	Low	mpu6050_SDA
I2C3	PC8	I2C3_SCL	Alternate Function Open Drain	Pull-up	Low	I2C3_TOF_SCL
	PB5	I2C3_SDA	Alternate Function Open Drain	Pull-up	Low	I2C3_TOF_SDA
I2C4	PC6	I2C4_SCL	Alternate Function Open Drain	Pull-up	High *	I2C4_HC5883_SCL
	PC7	I2C4_SDA	Alternate Function Open Drain	Pull-up	High *	I2C4_HC5883_SDA
LPUART1	PA2	LPUART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA3	LPUART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PF1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI2_SD_SCK
	PB14	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI2_SD_MISO
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI2_SD_MOSI
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	T_SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM2	PA0	TIM2_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	HR04_1_ECHO
TIM5	PB2	TIM5_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	HR04_2_ECHO
TIM16	PA6	TIM16_CH1	Alternate Function Push Pull	No pull-up and no pull-down	High *	HR04_1_TRIG
	PB6	TIM16_CH1N	Alternate Function Push Pull	No pull-up and no pull-down	High *	HR04_2_TRIG
Single	PB3	SYS_JTDO-	n/a	n/a	n/a	T_SWO

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
Mapped Signals		SWO				
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	Pull-down *	n/a	B1 [blue push button]
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SDCS
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [green led]
	PC11	GPIO_EXTI11	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	SPDSens3
	PC12	GPIO_EXTI12	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	SPDSens4
	PD2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	BUZZER

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
TIM2 global interrupt	true	5	0
EXTI line[15:10] interrupts	true	5	0
TIM5 global interrupt	true	5	0
TIM20 update interrupt	true	0	0
LPUART1 global interrupt	true	5	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/38/39/40/41	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 update interrupt and TIM16 global interrupt	unused		
I2C1 event interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
I2C1 error interrupt	unused		
I2C2 event interrupt / I2C2 wake-up interrupt through EXTI line 24	unused		
I2C2 error interrupt	unused		
SPI2 global interrupt	unused		
FPU global interrupt	unused		
I2C4 event interrupt / I2C4 wake-up interrupt through EXTI line 42	unused		
I2C4 error interrupt	unused		
I2C3 event interrupt / I2C3 wake-up interrupt through EXTI line 27	unused		
I2C3 error interrupt	unused		

* User modified value

9. Predefined Views - Category view : Current

Middleware

FATFS ✓FREERTOS ✓

System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing	Utilities
DMA		TIM2 ✓	I2C1 ✓				
GPIO ⚠		TIM5 ✓	I2C2 ✓				
NVIC ✓		TIM16 ✓	I2C3 ✓				
RCC ✓			I2C4 ✓				
SYS ✓			LPUART1 ✓				
			SPI2 ✓				

10. Software Pack Report

10.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	FreeRTOS	0.0.1	Class : RTOS Group : Core Version : 10.2.0