

1. Description


1.1. Project

Project Name	Alinea_STM32_474RE
Board Name	NUCLEO-G474RE
Generated with:	STM32CubeMX 5.6.0
Date	04/02/2020

1.2. MCU

MCU Series	STM32G4
MCU Line	STM32G4x4
MCU name	STM32G474RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

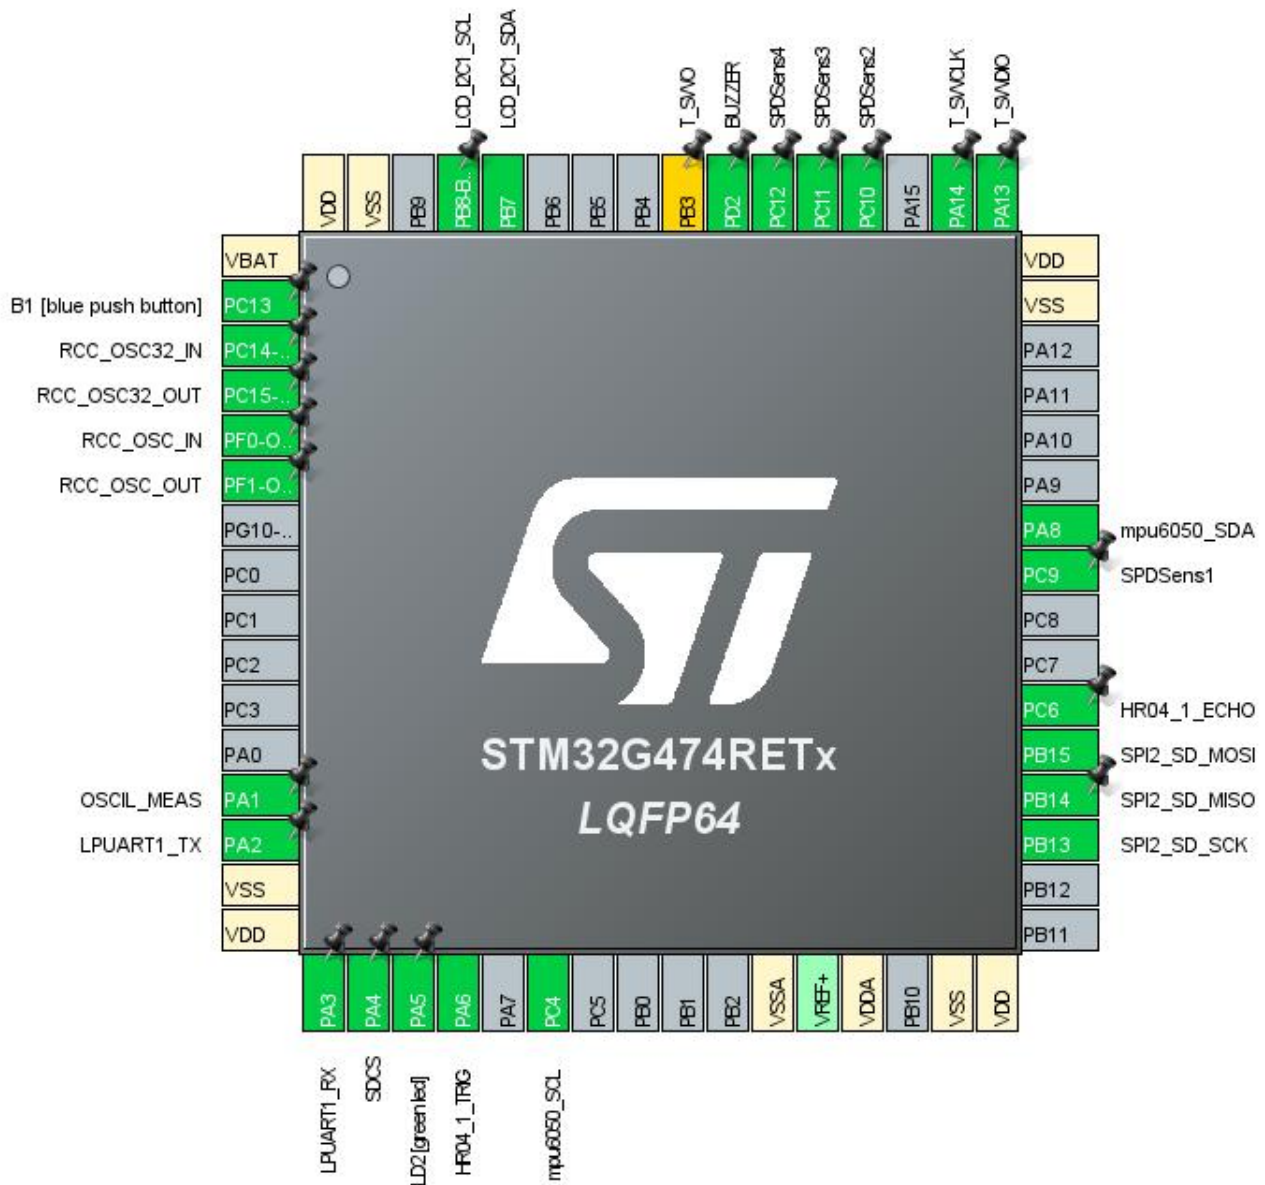

3. Pins Configuration


Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [blue push button]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PF0-OSC_IN	I/O	RCC_OSC_IN	
6	PF1-OSC_OUT	I/O	RCC_OSC_OUT	
13	PA1 *	I/O	GPIO_Output	OSCIL_MEAS
14	PA2	I/O	LPUART1_TX	
15	VSS	Power		
16	VDD	Power		
17	PA3	I/O	LPUART1_RX	
18	PA4 *	I/O	GPIO_Output	SDCS
19	PA5 *	I/O	GPIO_Output	LD2 [green led]
20	PA6	I/O	TIM16_CH1	HR04_1_TRIG
22	PC4	I/O	I2C2_SCL	mpu6050_SCL
27	VSSA	Power		
29	VDDA	Power		
31	VSS	Power		
32	VDD	Power		
35	PB13	I/O	SPI2_SCK	SPI2_SD_SCK
36	PB14	I/O	SPI2_MISO	SPI2_SD_MISO
37	PB15	I/O	SPI2_MOSI	SPI2_SD_MOSI
38	PC6 *	I/O	GPIO_Input	HR04_1_ECHO
41	PC9	I/O	GPIO_EXTI9	SPDSens1
42	PA8	I/O	I2C2_SDA	mpu6050_SDA
47	VSS	Power		
48	VDD	Power		
49	PA13	I/O	SYS_JTMS-SWDIO	T_SWDIO
50	PA14	I/O	SYS_JTCK-SWCLK	T_SWCLK
52	PC10	I/O	GPIO_EXTI10	SPDSens2
53	PC11	I/O	GPIO_EXTI11	SPDSens3
54	PC12	I/O	GPIO_EXTI12	SPDSens4
55	PD2 *	I/O	GPIO_Output	BUZZER
56	PB3 **	I/O	SYS_JTDO-SWO	T_SWO
60	PB7	I/O	I2C1_SDA	LCD_I2C1_SDA
61	PB8-BOOT0	I/O	I2C1_SCL	LCD_I2C1_SCL

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

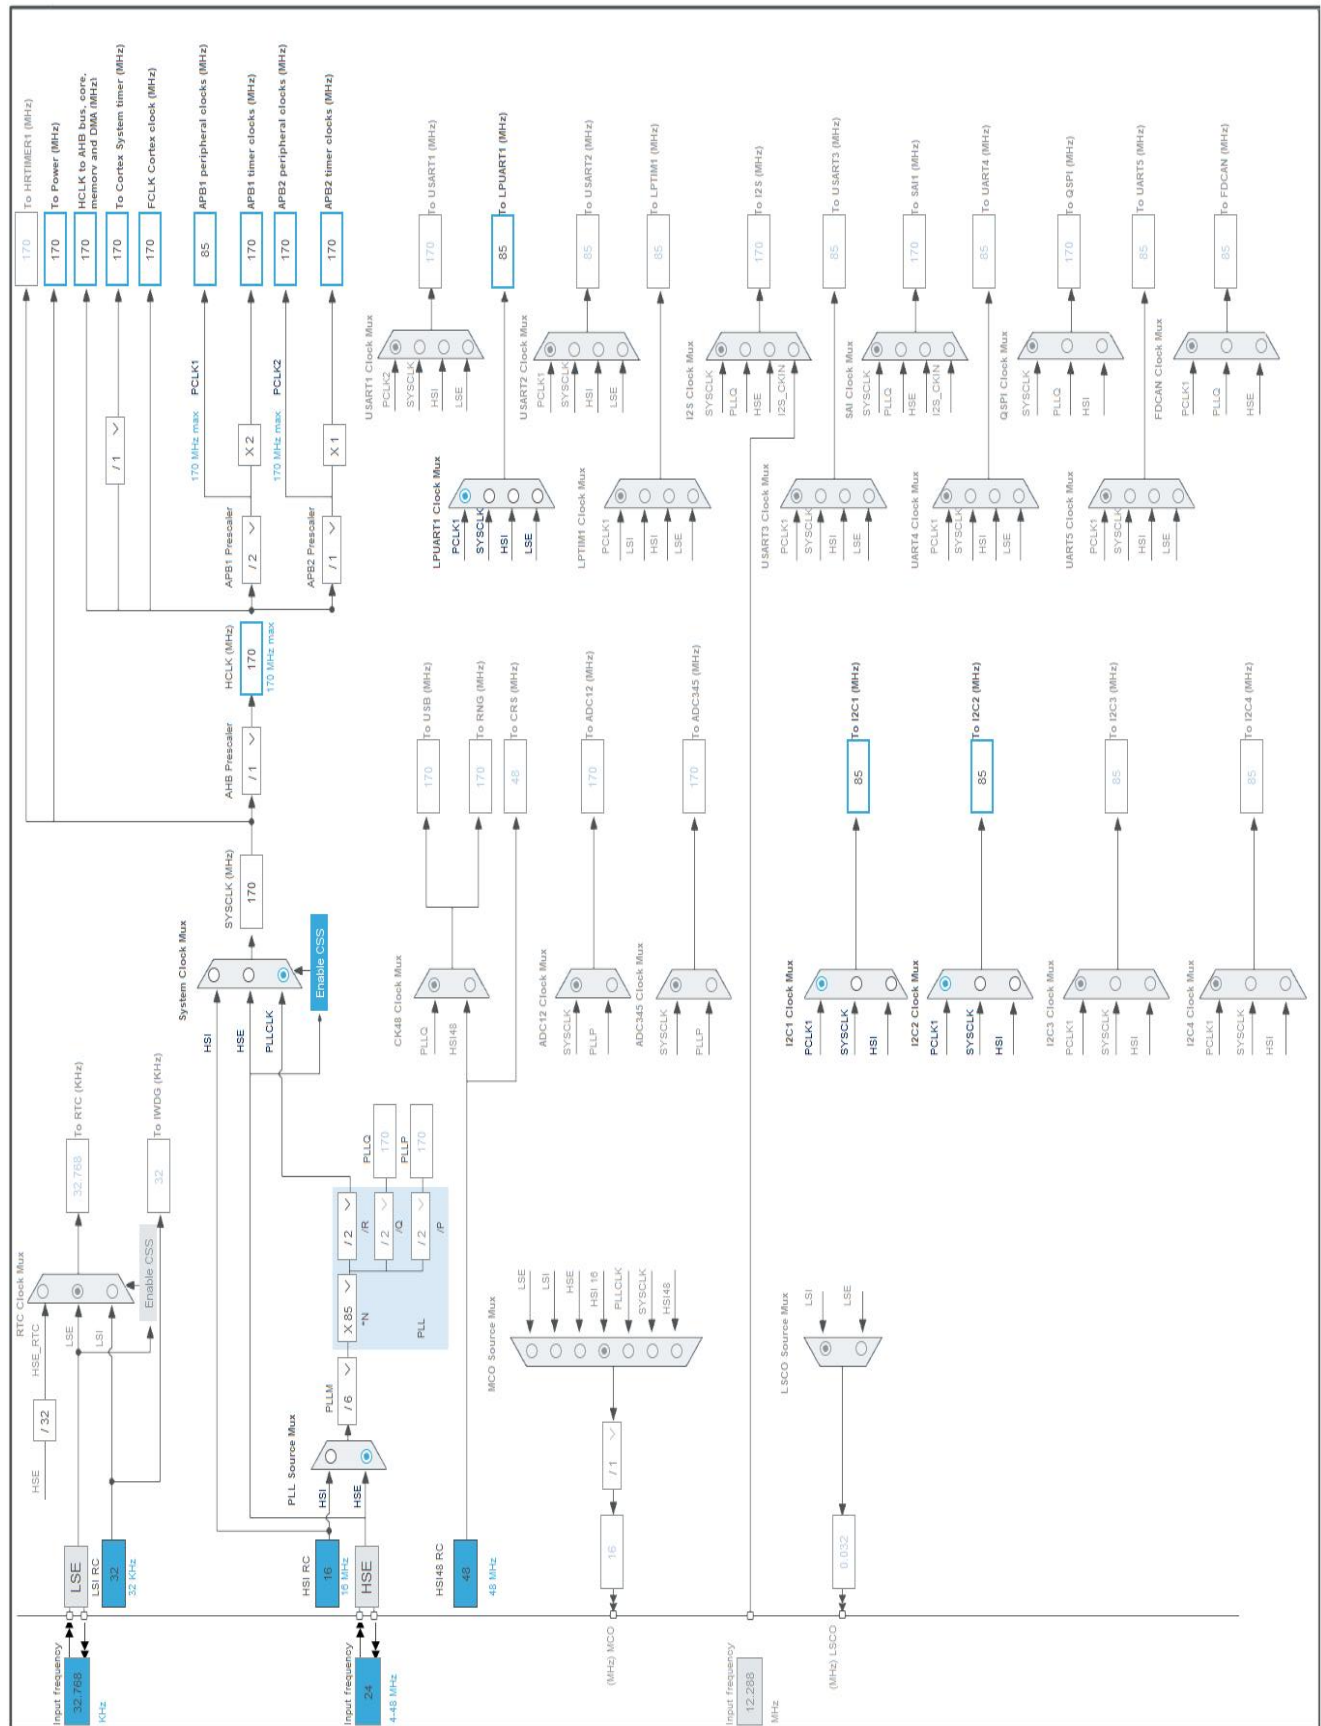

5. Software Project

5.1. Project Settings

Name	Value
Project Name	Alinea_STM32_474RE
Project Folder	F:\Documents\STM32CubeWSP\alinea\STM32_G474RE
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_G4 V1.2.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32G4
Line	STM32G4x4
MCU	STM32G474RETx
Datasheet	DS12288_Rev0

6.2. Parameter Selection

Temperature	25
Vdd	3.0

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP1
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-Boost	NoRange
Fetch Type	FLASH/DualBank/ART	NA
CPU Frequency	170 MHz	0 Hz
Clock Configuration	HSE BYP PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	29.5 mA	80.5 μ A
Duration	0.1 ms	0.9 ms
DMIPS	213.0	0.0
Ta Max	124.25	129.98
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	3.02 mA
Battery Life	1 month, 16 days, 9 hours	Average DMIPS	212.5 DMIPS

6.6. Chart

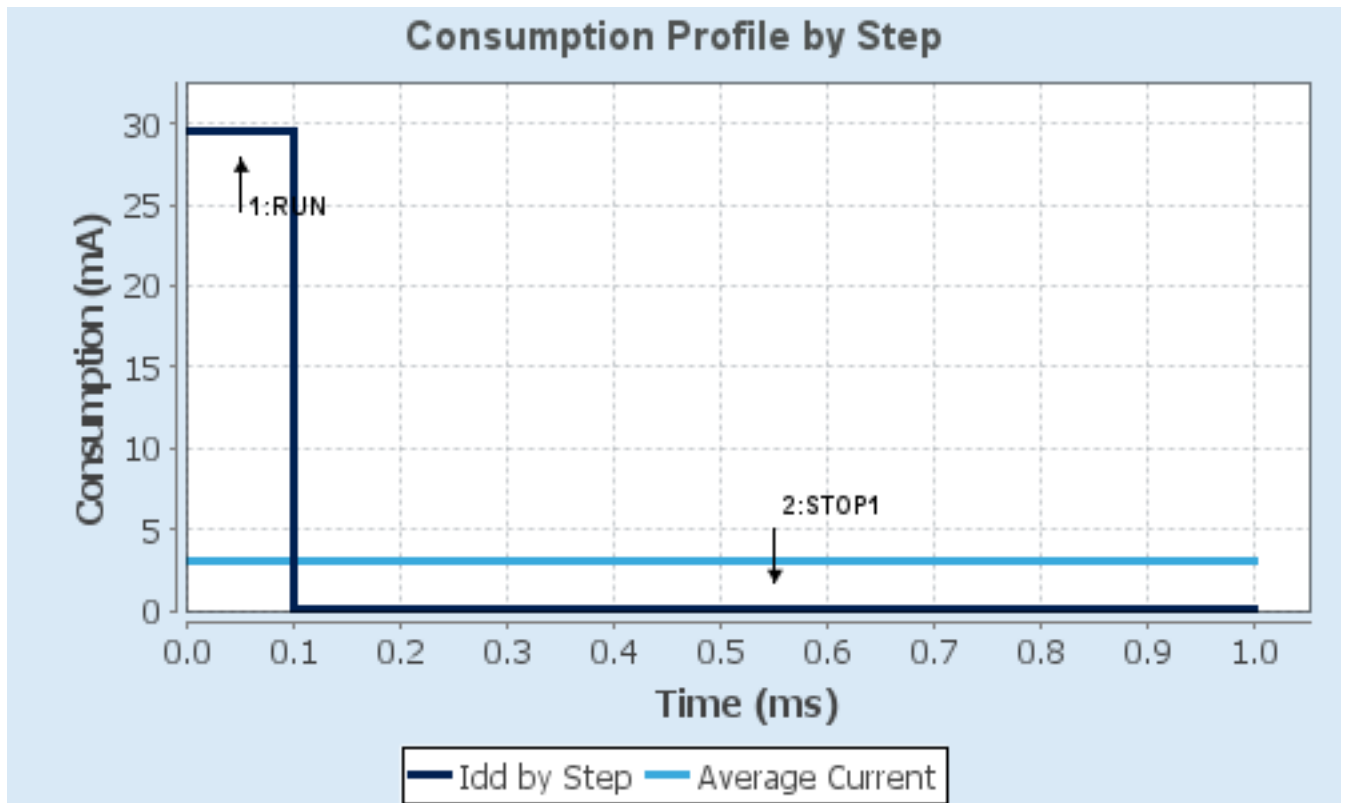

7. IPs and Middleware Configuration

7.1. GPIO

7.2. I2C1

I2C: I2C

7.2.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x10A0A6FB *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.3. I2C2

I2C: I2C

7.3.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x10A0A6FB *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.4. LPUART1

Mode: Asynchronous

7.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Single Sample	Disable
Prescaler	clock /1
Fifo Mode	FIFO mode disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

7.5. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.5.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	8WS (7 CPU cycle)
RCC Parameters:	
HSI Calibration Value	64
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
Power Parameters:	
Power Regulator Voltage Scale	Power Regulator Voltage Scale 1 boost
Peripherals Clock Configuration:	
Generate the peripherals clock configuration	TRUE

7.6. SPI2

Mode: Full-Duplex Master

7.6.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	4 *
Baud Rate	21.25 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

7.7. SYS

Debug: Serial Wire

Timebase Source: TIM20

mode: save power of non-active UCPD - deactive Dead Battery pull-up

7.8. TIM16

mode: Activated

Channel1: PWM Generation CH1

mode: One Pulse Mode

7.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 16 bits value)	1719 *
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable
- COMP3	Disable
- COMP4	Disable
- COMP5	Disable
- COMP6	Disable
- COMP7	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

PWM Generation Channel 1:

Mode	PWM mode 2 *
Pulse (16 bits value)	65535 *
Output compare preload	Enable
Fast Mode	Enable *
CH Polarity	High

CH Idle State

Reset

7.9. FATFS

mode: User-defined

7.9.1. Set Defines:

Version:

FATFS version R0.12c

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_EXPAND (Use f_expand function)	Disabled
USE_CHMOD (Change attributes function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_EXFAT (Support of exFAT file system)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
FS_REENTRANT (Re-Entrancy)	Enabled
FS_TIMEOUT (Timeout ticks)	1000
USE_MUTEX	Disabled

SYNC_t (O/S sync object)	osSemaphoreId_t
FS_LOCK (Number of files opened simultaneously)	2

7.9.2. Advanced Settings:

User Defined:

Diskio code	User
-------------	------

7.10. FREERTOS

Interface: CMSIS_V2

7.10.1. Config parameters:

API:

FreeRTOS API	CMSIS v2
--------------	----------

Versions:

FreeRTOS version	10.2.1
CMSIS-RTOS version	2.00

MPU/FPU:

ENABLE_MPU	Disabled
ENABLE_FPU	Disabled

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	56
MINIMAL_STACK_SIZE	256 *
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Enabled
USE_COUNTING_SEMAPHORES	Enabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	4096 *
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Enabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Enabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	512

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE	size_t
USE_POSIX_ERRNO	Disabled

7.10.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Enabled *
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled

xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Enabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Enabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Enabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Enabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled
uxTaskGetStackHighWaterMark2	Disabled

7.10.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT	Disabled
----------------------	----------

Project settings (see parameter description first):

Use FW pack heap file	Enabled
-----------------------	---------

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB7	I2C1_SDA	Alternate Function Open Drain	Pull-up	Low	LCD_I2C1_SDA
	PB8-BOOT0	I2C1_SCL	Alternate Function Open Drain	Pull-up	Low	LCD_I2C1_SCL
I2C2	PC4	I2C2_SCL	Alternate Function Open Drain	Pull-up	Low	mpu6050_SCL
	PA8	I2C2_SDA	Alternate Function Open Drain	Pull-up	Low	mpu6050_SDA
LPUART1	PA2	LPUART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA3	LPUART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PF1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI2_SD_SCK
	PB14	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI2_SD_MISO
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI2_SD_MOSI
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	T_SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	T_SWCLK
TIM16	PA6	TIM16_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	HR04_1_TRIG
Single Mapped Signals	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	T_SWO
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	Pull-down *	n/a	B1 [blue push button]
	PA1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OSCIL_MEAS
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SDCS
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [green led]
	PC6	GPIO_Input	Input mode	Pull-down *	n/a	HR04_1_ECHO
	PC9	GPIO_EXTI9	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	SPDSens1

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PC10	GPIO_EXTI10	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	SPDSens2
	PC11	GPIO_EXTI11	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	SPDSens3
	PC12	GPIO_EXTI12	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	SPDSens4
	PD2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	BUZZER

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
EXTI line[9:5] interrupts	true	5	0
EXTI line[15:10] interrupts	true	5	0
TIM20 update interrupt	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/38/39/40/41	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 update interrupt and TIM16 global interrupt	unused		
I2C1 event interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
I2C1 error interrupt	unused		
I2C2 event interrupt / I2C2 wake-up interrupt through EXTI line 24	unused		
I2C2 error interrupt	unused		
SPI2 global interrupt	unused		
FPU global interrupt	unused		
LPUART1 global interrupt	unused		

* User modified value

9. *Predefined Views - Category view : Current*

Middleware

FATFS

FREERTOS

System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing	Utilities
DMA		TIM16	I2C1				
GPIO			I2C2				
NVIC			LPUART1				
RCC			SPI2				
SYS							

10. Software Pack Report

10.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	FreeRTOS	0.0.1	Class : RTOS Group : Core Version : 10.2.0