

Benchmarking Dynamic Frequency Estimators for Low-Inertia IBR Grids: A Latency–Robustness Trade-off Analysis

Jorge Luis Mayorga Taborda, Yessica Africano Rodriguez, Fernando Jimenez

Department of Electrical and Electronics Engineering

Universidad de los Andes

Bogotá, Colombia

jl.mayorga236@uniandes.edu.co, ya.africano1030@uniandes.edu.co,

fjimenez@uniandes.edu.co

Abstract—Frequency estimation for relay and monitoring functions is more demanding in inverter-based resource (IBR) grids than in classical synchronous systems because fast ramps, phase jumps, harmonics, ringdown, and out-of-band components may overlap within the same local event. This paper presents a Monte Carlo benchmark of 16 estimators over 34 scenarios with 60 runs per estimator–scenario pair in a local, non-time-synchronized measurement setting. The scenario set covers IEEE-style ramps, magnitude steps, modulation, phase jumps, out-of-band interference, and IBR-specific composite stress. No single estimator dominates all disturbance families. The second-order generalized-integrator PLL (SOGI-PLL) leads ramps, the extended Kalman filter (EKF) leads magnitude steps and out-of-band cases, and the robust adaptive EKF (RA-EKF) leads modulation. The IBR multi-event case splits RMSE and trip-risk leadership between the phase-locked loop (PLL) and the interpolated DFT (IPDFT). The hardest cases are the IBR multi-event sequence, the 60° phase jumps, and the noisy ringdown variants. The benchmark therefore shows that isolated compliance-style tests do not fully capture the disturbance dependence that matters for protection-oriented frequency measurement in IBR-dominated grids.

Index Terms—Frequency Estimation, IBR Grids, Low-Inertia Systems, Monte Carlo Benchmark, Relay Protection.

I. INTRODUCTION

Frequency estimation sits on the critical path of relaying, under-frequency load shedding, disturbance monitoring, and converter supervision in low-inertia grids. In inverter-based resource (IBR) systems, the problem is not limited to slow electromechanical drift. Converter-dominated dynamics can compress the disturbance timescale and mix mechanisms that standard tests often separate. Harmonics, abrupt phase jumps, fast RoCoF segments, out-of-band components, and short ringdown intervals can arrive within the same protection decision window [1]–[3]. Recent IBR-focused studies also show that converter control interactions and mixed disturbances can reshape the observable frequency response itself [4], [5]. An estimator that performs well in a textbook sinusoidal test can therefore still generate large transient error or non-negligible trip-risk when these effects overlap.

This paper studies local, non-time-synchronized frequency measurement for relay and monitoring functions rather than

PMU time-stamp quality. The practical question is not whether one estimator is universally best, but how rankings shift across disturbance families once standard compliance-style tests are combined with composite IBR stress.

The estimator families used in practice already reveal a tension between accuracy, latency, and disturbance tolerance. Windowed spectral methods reject steady harmonic content but pay observation delay [6], [7]. PLL variants are light enough for embedded deployment but can slip under abrupt phase discontinuities [8], [9]. Kalman-filter variants can track fast transients when the state model remains valid [10], [11]. Reduced-order and data-driven methods offer another point on the cost-accuracy curve, but their behavior under relay-oriented composite stress is even less standardized [12], [13]. What remains unclear is how the ranking of these families changes once the benchmark moves beyond isolated standard tests.

We therefore frame the contribution as a benchmark study rather than as a single-estimator paper. The central questions are practical: which estimators lead the standard disturbance families, which IBR stress cases reorder the ranking, and which methods remain attractive once CPU cost and trip-risk are considered alongside RMSE.

The benchmark analyzed here covers 16 estimators and 34 scenarios grouped into 10 disturbance families, mixing IEEE- and NERC-style disturbances with IBR-specific harmonics, ringdown, and multi-event stress. The main result is a disturbance-dependent map of trade-offs rather than a universal winner: SOGI-PLL leads ramps, EKF leads magnitude steps and out-of-band interference, RA-EKF leads modulation, and the IBR multi-event case splits RMSE and trip-risk leadership between PLL and IPDFT. That scenario dependence, rather than any single ranking, is the main message of the paper.

A. Related Work

This paper addresses local frequency measurement for relay and monitoring functions, not synchronized phasor time stamping. Standards and many published benchmark studies

still center on isolated disturbance classes. IEC/IEEE 60255-118-1 and the earlier IEEE C37.118.1 define dynamic tests around ramps, magnitude steps, modulation, and a limited set of phase events [14], [15]. Ting et al. extend that logic to low-inertia frequency measurement methods and show clear trade-offs between tracking speed and disturbance rejection even under a carefully chosen set of simulated events [13]. Wright et al. further show that phase steps can produce false RO-COF signatures, which is precisely the kind of measurement ambiguity that simple compliance views do not resolve [9].

Recent IBR-focused studies widen rather than close this gap. Low-inertia surveys and system studies show that converter penetration changes both the spatial distribution and the time scale of frequency dynamics [1]–[3]. Related benchmark proposals for hybrid islanded or grid-forming systems emphasize interaction-driven behavior, but they do not provide a broad estimator comparison over standard PMU tests, composite IBR stress, trip-risk, and compute cost in one frame [4], [5]. That is the limitation this paper addresses. A method that performs well on a clean standard test may fail under conditions that the test never probes.

The estimator families themselves are not the missing piece. Window-based methods trade harmonic rejection against observation delay [6], [7]. PLL variants are cheap enough for embedded deployment but can lose phase alignment under abrupt discontinuities [8], [9]. Kalman-filter variants can improve transient tracking when their state model matches the event [10], [11]. Reduced-order and data-driven methods add further cost-accuracy trade-offs [12]. What is missing is not the estimator families but the comparison protocol: a broad benchmark that keeps scenario family, trip-risk, and compute cost in view at the same time. The contribution of this paper is therefore a benchmark study that preserves standard families, adds composite IBR stress, and compares accuracy, transient risk, and compute cost within one reporting framework.

II. METHODOLOGY

The benchmark compares 16 frequency estimators on a common dynamic test set in a local, non-time-synchronized measurement setting, using waveform generation at 1 MHz and estimator outputs at 10 kHz. The estimator pool spans zero-crossing, windowed spectral, PLL-based, Kalman-filter, adaptive, and reduced-order designs: ZCD, IpDFT, TFT, RLS, PLL, SOGI-PLL, SOGI-FLL, Type-3 SOGI-PLL, LKF2, EKF, UKF, RA-EKF, TKEO, Prony, ESPRIT, and Koopman (RK-DPMU). This mix is broad enough to expose the main trade-offs of interest in protection and monitoring: accuracy, transient risk, settling behavior, and computational burden.

The study contains 34 benchmark scenarios. Rather than read the benchmark as a flat scenario list, we group the scenarios by disturbance family. Table I summarizes the resulting ten-family structure, and Fig. 1 shows representative ground-truth signals for six of those families.

The family structure reflects distinct physical stress modes. Ramps probe sustained RoCoF tracking. Magnitude steps and modulation probe frequency-amplitude decoupling. Phase

TABLE I
BENCHMARK SCOPE USED IN THIS STUDY. COUNTS REFER TO BENCHMARK SCENARIOS.

Family	Count	Stress tested
IEEE ramps	9	Sustained RoCoF from 0.25 to 20 Hz/s
Mag. steps	7	1% to 50% magnitude changes
Modulation	3	Nominal, AM, and FM tracking
Phase jumps	3	IEEE 20° and IEEE/NERC 60° re-lock tests
OOB interference	1	Spectral rejection under off-nominal content
Single-tone	1	Deterministic steady-state control case
IBR harmonics	3	Small, medium, and large harmonic stress
IBR ringdown	5	Power-imbalance ringdown with noise sweep
IBR multi-event	1	Composite phase jump, ramp, harmonics, and ringdown
Freq. step	1	Isolated frequency-step control case

jumps probe re-lock behavior and transient overshoot. Out-of-band interference and IBR harmonics probe spectral leakage. Ringdown and multi-event cases combine these effects under changing noise and transient recovery, which makes them the strongest stress tests in the benchmark. Figure 1 illustrates that difference directly: some benchmark families are isolated compliance-style events, whereas others stack abrupt discontinuities, ramps, and oscillatory recovery inside the same record.

All estimators are evaluated as local relay-class frequency trackers from the same decimated 10 kHz data stream; the study does not assess PMU time-stamping or synchrophasor compliance. Each estimator–scenario pair is tuned via scenario-wise parameter search across 100 trials and then evaluated over 60 Monte Carlo runs. The study therefore contains 544 estimator–scenario summaries derived from 32,640 Monte Carlo records. Let $e[k] = \hat{f}[k] - f_{\text{true}}[k]$. We track RMSE = $\sqrt{N^{-1} \sum_k e[k]^2}$, the maximum peak error $\max_k |e[k]|$, trip-risk duration $T_{\text{trip}} = \Delta t \sum_k \mathbf{1}\{|e[k]| > 0.5\}$, settling time, and CPU time per sample. CPU time is interpreted as a relative computational-cost indicator rather than a device latency. For any metric m , the family summary is $\bar{m}_F = |F|^{-1} \sum_{s \in F} \bar{m}_s$, where $\bar{m}_s$ is the scenario mean over the 60 realizations. This prevents dense families from dominating the comparison. Unless stated otherwise, frequency errors are reported in mHz in the tables and discussion.

III. SIMULATION RESULTS AND BENCHMARKING

A. No Single Estimator Dominates the Standard Scenario Families

The standard disturbance families do not yield a single ranking (Table II). SOGI-PLL gives the lowest mean RMSE on IEEE ramp cases (19.4 mHz). EKF dominates the magnitude-step family (0.388 mHz) and out-of-band interference (13.6 mHz), and RA-EKF leads the modulation family (17.8 mHz). Zero-trip-risk ties are common in ramps, magnitude steps, and modulation, which means those families separate the estimators mainly by accuracy rather than by protection-oriented risk. The margins are often small: the

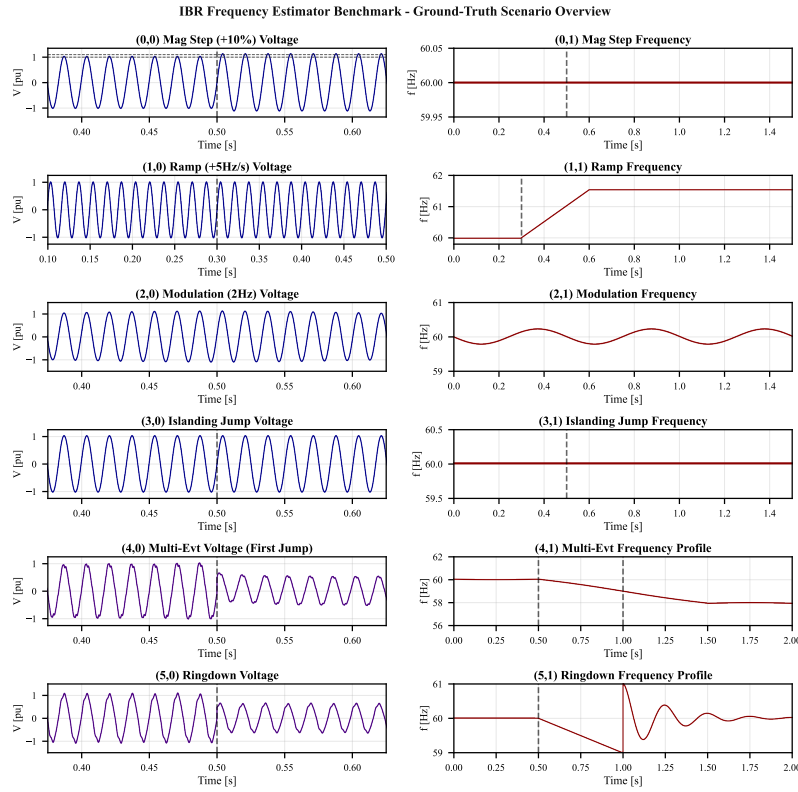


Fig. 1. Representative benchmark scenarios. Each row shows the voltage waveform and true frequency trajectory for six disturbance families: 10% magnitude step, 3 Hz/s ramp, modulation, 60° phase jump, IBR multi-event, and IBR power-imbalance ringdown. Dashed lines mark disturbance onset. The benchmark therefore combines clean standard tests with composite IBR events that stack several stressors in one record.

TABLE II
CORE DISTURBANCE-FAMILY COMPARISON FOR THE BENCHMARK STUDY. RMSE VALUES ARE REPORTED IN mHz AND COMPUTED AS FAMILY MEANS OF SCENARIO MEANS. THE UNCERTAINTY TERM IS THE MEAN WITHIN-SCENARIO MONTE CARLO STANDARD DEVIATION FOR THE WINNING ESTIMATOR. Δ IS THE RMSE GAP BETWEEN THE WINNER AND THE RUNNER-UP.

Family	Count	RMSE winner	RMSE [mHz]	Runner-up	Δ [mHz]	Lowest T_{trip} [s]
IEEE ramps	9	SOGI-PLL	19.4 ± 6.4	Koopman	2.7	0 (multiple)
Mag. steps	7	EKF	0.388 ± 0.143	RA-EKF	1.45	0 (multiple)
Modulation	3	RA-EKF	17.8 ± 21.4	Koopman	13.7	0 (multiple)
Phase jumps	3	SOGI-FLL	174 ± 67.5	PLL	4.03	ZCD: 0.0194
OOB interf.	1	EKF	13.6 ± 11.1	RA-EKF	7.35	EKF, RA-EKF: 0
IBR harmonics	3	EKF	70.5 ± 27.3	TFT	4.13	TFT, Prony: 0.00947
IBR ringdown	5	UKF	313 ± 23.2	EKF	6.67	ESPRIT: 0.0989
IBR multi-event	1	PLL	173.5 ± 66.7	UKF	2.74	IpDFT: 0.0439

ramp-family gap between SOGI-PLL and Koopman is only 2.7 mHz, while the gap between EKF and RA-EKF in magnitude steps is 1.45 mHz.

The scenario-level winners show the same fragmentation. Across the 34 benchmark scenarios, nine different estimators win at least one scenario on RMSE, and no estimator wins more than 10 of them. Even inside the ramp family, SOGI-PLL wins six of the nine RMSE scenarios while RA-EKF takes the other three. The magnitude-step family is the clearest exception: EKF wins all seven magnitude-step scenarios and the family mean as well.

Table II also distinguishes a winner from a decisive winner. In the magnitude-step family, EKF's 1.45 mHz lead over RA-

EKF is about one order of magnitude larger than the winner's mean within-scenario spread (0.143 mHz), so the aggregate advantage is meaningful. By contrast, the ramp, modulation, phase-jump, harmonic, ringdown, and out-of-band families all have family-level margins that are smaller than or comparable to the same spread. Those families should therefore be read as closely contested rather than dominated by a single method.

Trip-risk is even less discriminating in the clean standard cases. In 23 of the 34 scenarios, the minimum trip-risk is zero, often shared by 10 to 13 estimators in the ramp and magnitude-step families. In those cases, trip-risk is useful mainly as a pass/fail screen, while RMSE and peak error carry most of the ranking information.

Phase jumps behave differently. SOGI-FLL gives the lowest mean RMSE across the phase-jump family (174 mHz), but ZCD gives the lowest mean trip-risk (0.0194 s). The protection and accuracy metrics therefore point to different designs. In the 60° phase-jump case, ZCD keeps trip-risk below the leading low-RMSE methods, but only with much larger error excursions. Even within the standard test set, RMSE and trip-risk are not interchangeable objectives.

B. Composite IBR Stress Reorders the Ranking

The broadest change appears when the disturbance becomes composite. The hardest benchmark scenarios, measured by median RMSE across estimators, are the IBR multi-event sequence (826 mHz), the IEEE and NERC 60° phase jumps (675 mHz and 637 mHz), and the noisy IBR ringdown scenarios (474–528 mHz). These are precisely the cases where the usual standard test intuition starts to fail.

The scale change is itself important. The easiest family in Table II, magnitude steps, stays below 1 mHz, whereas the IBR multi-event scenario reaches 826 mHz median RMSE across estimators and the noisy ringdown family sits near half a hertz. The benchmark therefore spans roughly three orders of magnitude in error severity: the median RMSE of the IBR multi-event case is about 1.55×10^3 times that of the single-tone case. That spread explains why rankings inferred from clean standard tests do not transfer directly to composite IBR stress.

The IBR multi-event sequence is the clearest example. PLL gives the lowest RMSE of 173.5 mHz. UKF trails by only 2.74 mHz on the family mean. EKF remains nearly tied in the scenario readout at 176.4 mHz while reducing trip-risk to 0.0874 s. IpDFT yields the lowest trip-risk (0.0439 s) but at the cost of a much larger peak error (2550 mHz). The ranking therefore depends on the deployment objective: minimizing average error, minimizing time above the trip threshold, or bounding transient severity.

The same pattern appears in the other IBR-specific families. EKF gives the lowest mean RMSE across the harmonic family (70.5 mHz), but TFT and Prony give the lowest mean trip-risk there (0.00947 s). In the ringdown and noise family, UKF gives the lowest mean RMSE (313 mHz), whereas ESPRIT gives the lowest mean trip-risk (0.0989 s) at a far higher computational cost. These results argue against a single global ranking. Scenario family is part of the problem definition, not a *post hoc* qualifier.

The scenario-level results make that split sharper. Among the 12 scenarios with a unique trip-risk winner, nine differ from the RMSE leader. Those disagreements concentrate in the 60° phase jumps and in the harmonic, ringdown, and multi-event IBR cases. The harmonic family is especially instructive: TFT wins two of the three individual harmonic scenarios, and RA-EKF wins the third. Yet EKF still achieves the best family-average RMSE because it stays consistently close to the scenario leaders across all three stress levels.

Composite stress also changes which metric carries the practical decision. In magnitude steps and clean ramps, many

leading estimators already tie at zero trip-risk, so RMSE is the useful separator. In the multi-event, phase-jump, and ringdown families, RMSE, trip-risk, and peak excursion split across different estimators. That metric split, not just the change in rank order, is the core reason a single scalar ranking fails to describe protection-relevant behavior.

C. Global Rankings Are Useful Only as Secondary Evidence

Family-by-family reading is the main analysis, but the global summaries still help when they are interpreted carefully. The interpretation depends on the aggregation rule. Mean-rank summaries across the 34 benchmark scenarios favor TFT on RMSE (4.38) and peak error (4.32), with RA-EKF close behind on both (4.62 and 4.59). Simple averaging over the 34 benchmark scenarios instead favors RA-EKF and EKF, with mean RMSE values of 116 mHz and 123 mHz, followed by UKF at 131 mHz. That difference is informative rather than contradictory: mean rank rewards repeated near-front finishes, whereas raw averaging is driven more strongly by the hardest disturbance families.

Consistency statistics make that distinction concrete. EKF is the most frequent accuracy leader, with 10 outright RMSE wins, 19 RMSE top-three finishes, and 20 peak-error top-three finishes across the 34 benchmark scenarios. TFT wins only two RMSE scenarios, yet it reaches the RMSE top three in 16 scenarios and the peak-error top three in 17, which explains its strong mean-rank position. Trip-risk favors a different group again: IpDFT and ESPRIT enter the trip-risk top three in 25 and 24 scenarios, respectively. Global summaries are therefore best read as screening tools, not as substitutes for family-level evidence.

The MAE versus CPU Pareto front contains EKF, RA-EKF, SOGI-FLL, SOGI-PLL, and ZCD, indicating that neither accuracy nor cost alone determines the admissible set. As secondary evidence, the study also includes ANOVA and Kruskal-Wallis tests at the family level on RMSE, MAE, peak error, trip-risk, settling time, and CPU time; both tests reject the null hypothesis of equal family-level distributions for all six metrics (all $p < 10^{-16}$). These tests are coarse and do not replace the scenario-family analysis, but they support the claim that the observed ranking differences are not confined to one metric.

ZCD remains on the MAE versus CPU Pareto front because its cost is negligible, not because its transient accuracy remains competitive under phase jumps or multi-event stress. The practically relevant low-cost region is therefore narrower than the raw Pareto set suggests.

For deployment decisions within this benchmark, the recommendation remains scenario-dependent. SOGI-PLL is the strongest choice when ramp RMSE is the main objective, EKF is strongest on magnitude-step and out-of-band families, RA-EKF is strongest on modulation, and PLL is the lowest-RMSE option in the composite IBR event. None of those statements can be promoted to a universal recommendation or certification-style hierarchy, because the lowest trip-risk in the same family may belong to a different method. That

conditional reading is stronger than a flat ranked list because it keeps both the disturbance family and the operating objective in view.

D. Cost Keeps Fast Embedded Methods in the Discussion

CPU cost changes the ranking again. Figure 2 gathers representative time-domain cases together with the global summaries. EKF and RA-EKF occupy the best global accuracy region with mean CPU costs of $0.813\ \mu\text{s}$ and $1.61\ \mu\text{s}$ per sample. SOGI-PLL and SOGI-FLL remain much cheaper ($0.0867\ \mu\text{s}$ and $0.0348\ \mu\text{s}$) and therefore stay relevant for embedded protection even when they lose some accuracy. Window-based methods such as TFT and IpDFT improve global trip-risk relative to some loop methods, but they do so at about $3\text{--}4\ \mu\text{s}$ per sample. ESPRIT reaches the trip-risk top three almost as often as IpDFT, but at $2838\ \mu\text{s}$ per sample instead of $3.68\ \mu\text{s}$. Koopman and ESPRIT therefore occupy a substantially higher-cost region, with mean costs of $390\ \mu\text{s}$ and $2838\ \mu\text{s}$, without a matching global RMSE gain. The time-domain panels illustrate the same point: the estimator that performs best in the ramp case is not the one that best manages the multi-event or ringdown case.

Taken together, the results identify two practically relevant operating regions in this dataset. EKF and RA-EKF occupy the low-error middle-cost region: they are not the cheapest estimators, but they remain competitive across the widest range of families once composite IBR stress is included. SOGI-PLL and SOGI-FLL occupy the low-cost embedded region: they keep sub-microsecond cost while remaining credible on ramps and selected phase-jump conditions. Window-based methods such as TFT and IPDFT remain useful when lower trip-risk justifies extra compute, but the more expensive reduced-order methods do not show a broad enough error advantage in this benchmark to justify routine deployment.

IV. CONCLUSION

This paper examined frequency estimation for low-inertia IBR grids through a broad Monte Carlo benchmark in a local relay-class measurement setting rather than through a small set of isolated tests. The main finding is disturbance dependence: estimator rankings move with the scenario family and with the metric used to read them. SOGI-PLL is strongest on ramps, EKF on magnitude steps and out-of-band interference, RA-EKF on modulation, and the IBR multi-event case splits RMSE and trip-risk winners between PLL and IPDFT. The hardest scenarios are the IBR multi-event sequence, the 60° phase jumps, and the noisy ringdown variants, which expose error patterns that do not appear in cleaner standard tests. More broadly, nine different estimators win at least one RMSE scenario, and among the 12 scenarios with a unique trip-risk winner, nine have a trip-risk winner that differs from the RMSE winner.

The benchmark should therefore be read as evidence that isolated compliance-style tests are necessary but not sufficient for protection-oriented evaluation in IBR-dominated settings. It does not establish a universal estimator hierarchy, but it

does show which rankings change once composite IBR stress is introduced.

For practice, estimator choice should remain tied to the protection objective and computational budget. Model-based estimators, especially EKF and RA-EKF in this dataset, remain competitive across the widest range of families. Fast loop-based methods remain attractive under tight computational budgets, and selected window-based methods still matter when lower trip-risk under composite stress justifies higher cost.

The study is limited to the disturbance set and relative computational-cost measurements presented here. Hardware-in-the-loop validation and wider coverage of converter control interactions are the natural next steps.

REFERENCES

- [1] F. Milano, F. Dörfler, G. Hug, D. J. Hill, and G. Verbič, "Foundations and challenges of low-inertia systems (invited paper)," in *2018 Power Systems Computation Conference (PSCC)*, 2018, pp. 1–25.
- [2] B. Pinheiro, M. C. Llerena Velasquez, G. Faria, A. F. C. Aquino, D. Issicaba, and D. Dotta, "Evaluation of the impact of IBR on the frequency dynamics in the Brazilian Power System," *Sustainable Energy, Grids and Networks*, vol. 43, p. 101827, 2025.
- [3] I. Ponce, C. Rahmann, and P. Pourbeik, "Identification of weak frequency areas in low inertia systems," *IEEE Access*, vol. 13, pp. 90262–90272, 2025.
- [4] R. Bernal and F. Milano, "A complex frequency-based control for inverter-based resources," *Journal of Modern Power Systems and Clean Energy*, vol. 13, no. 5, pp. 1630–1641, 2025.
- [5] P. Zoghby, B. Marinescu, and A. Rossé, "A new benchmarking method for the study of dynamic interactions in island power systems with hybrid conventional and inverter-based resources controlled in grid-forming mode," in *2024 International Conference on Renewable Energies and Smart Technologies (REST)*, Prishtina, Kosovo, 2024.
- [6] D. Belega and D. Dallet, "An improved DFT-based method for the accurate measurement of frequency, amplitude, and phase of power system signals," *IEEE Transactions on Instrumentation and Measurement*, vol. 63, no. 2, pp. 364–371, 2014.
- [7] F. J. Platas-García and J. A. de la O Serna, "Dynamic phasor estimation using a Taylor–Fourier multisignal model," *IEEE Transactions on Instrumentation and Measurement*, vol. 60, no. 6, pp. 2112–2121, 2011.
- [8] S. Golestan, J. M. Guerrero, and J. C. Vasquez, "Three-phase PLLs: A review of recent advances," *IEEE Transactions on Power Electronics*, vol. 32, no. 3, pp. 1894–1907, 2017.
- [9] P. S. Wright, P. N. Davis, K. Johnstone, G. Rietveld, and A. J. Roscoe, "Field measurement of frequency and RoCoF in the presence of phase steps," *IEEE Transactions on Instrumentation and Measurement*, vol. 68, no. 6, pp. 1688–1695, 2019.
- [10] R. Ferrero, P. A. Pegoraro, and S. Toscani, "Dynamic synchrophasor estimation by extended Kalman filter," *IEEE Transactions on Instrumentation and Measurement*, vol. 69, no. 7, pp. 4818–4826, 2020.
- [11] H. R. Chamorro, A.-J. Guel-Cortez, Y. Africano, F. Jimenez, R. Tonkoski, and W. Martinez, "Grid frequency estimation based on extended Kalman filter in connected AC microgrids," in *2021 IEEE 30th Int. Symp. on Industrial Electronics (ISIE)*, 2021, pp. 1–6.
- [12] M. Netto and L. Mili, "A robust data-driven Koopman Kalman filter for power systems dynamic state estimation," *IEEE Transactions on Power Systems*, vol. 33, no. 6, pp. 7228–7237, 2018.
- [13] J. Ting, B. Wang, R. W. Kenyon, and A. Hoke, "Evaluating methods for measuring grid frequency in low-inertia power systems," in *2022 IEEE Kansas Power and Energy Conference (KPEC)*, 2022, NREL/CP-6A40-83784.
- [14] IEEE Power and Energy Society, "IEEE standard for synchrophasor measurements for power systems (C37.118.1-2011, amendment C37.118.1a-2014)," IEEE Std C37.118.1, 2011.
- [15] IEC and IEEE, "IEC/IEEE international standard 60255-118-1: Synchrophasor measurements for power systems," IEC/IEEE 60255-118-1:2018, 2018.

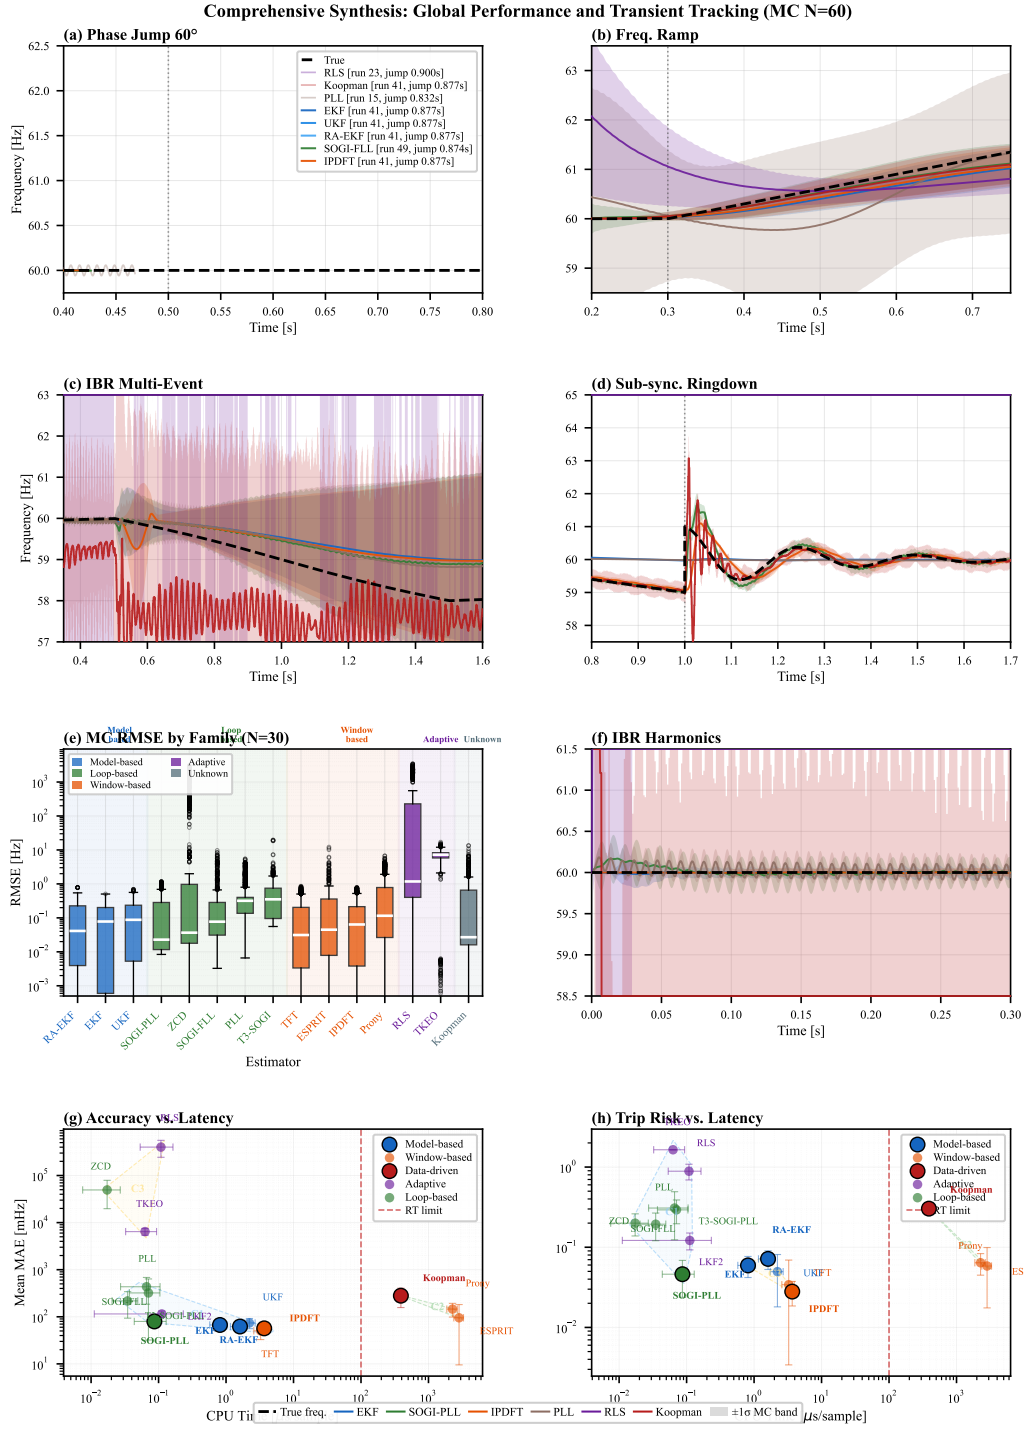


Fig. 2. Representative benchmark views. Panels (a)–(d) and (f) show single-scenario responses summarized over the same 60 Monte Carlo runs used throughout the paper; panels (e), (g), and (h) summarize all 34 benchmark scenarios. (a) Phase jump. (b) Ramp. (c) IBR multi-event. (d) Ringdown. (e) RMSE distributions by estimator family. (f) Harmonic stress. (g) Global mean MAE versus CPU time. (h) Global mean trip-risk versus CPU time. The figure reinforces why the benchmark should be read by disturbance family and operating objective rather than by a single scalar score.