


1 THE PROBLEM: SAFE SG → GFL TRANSITION

A replacement is local hardware, but stability is a property of the closed grid and its controller architecture.

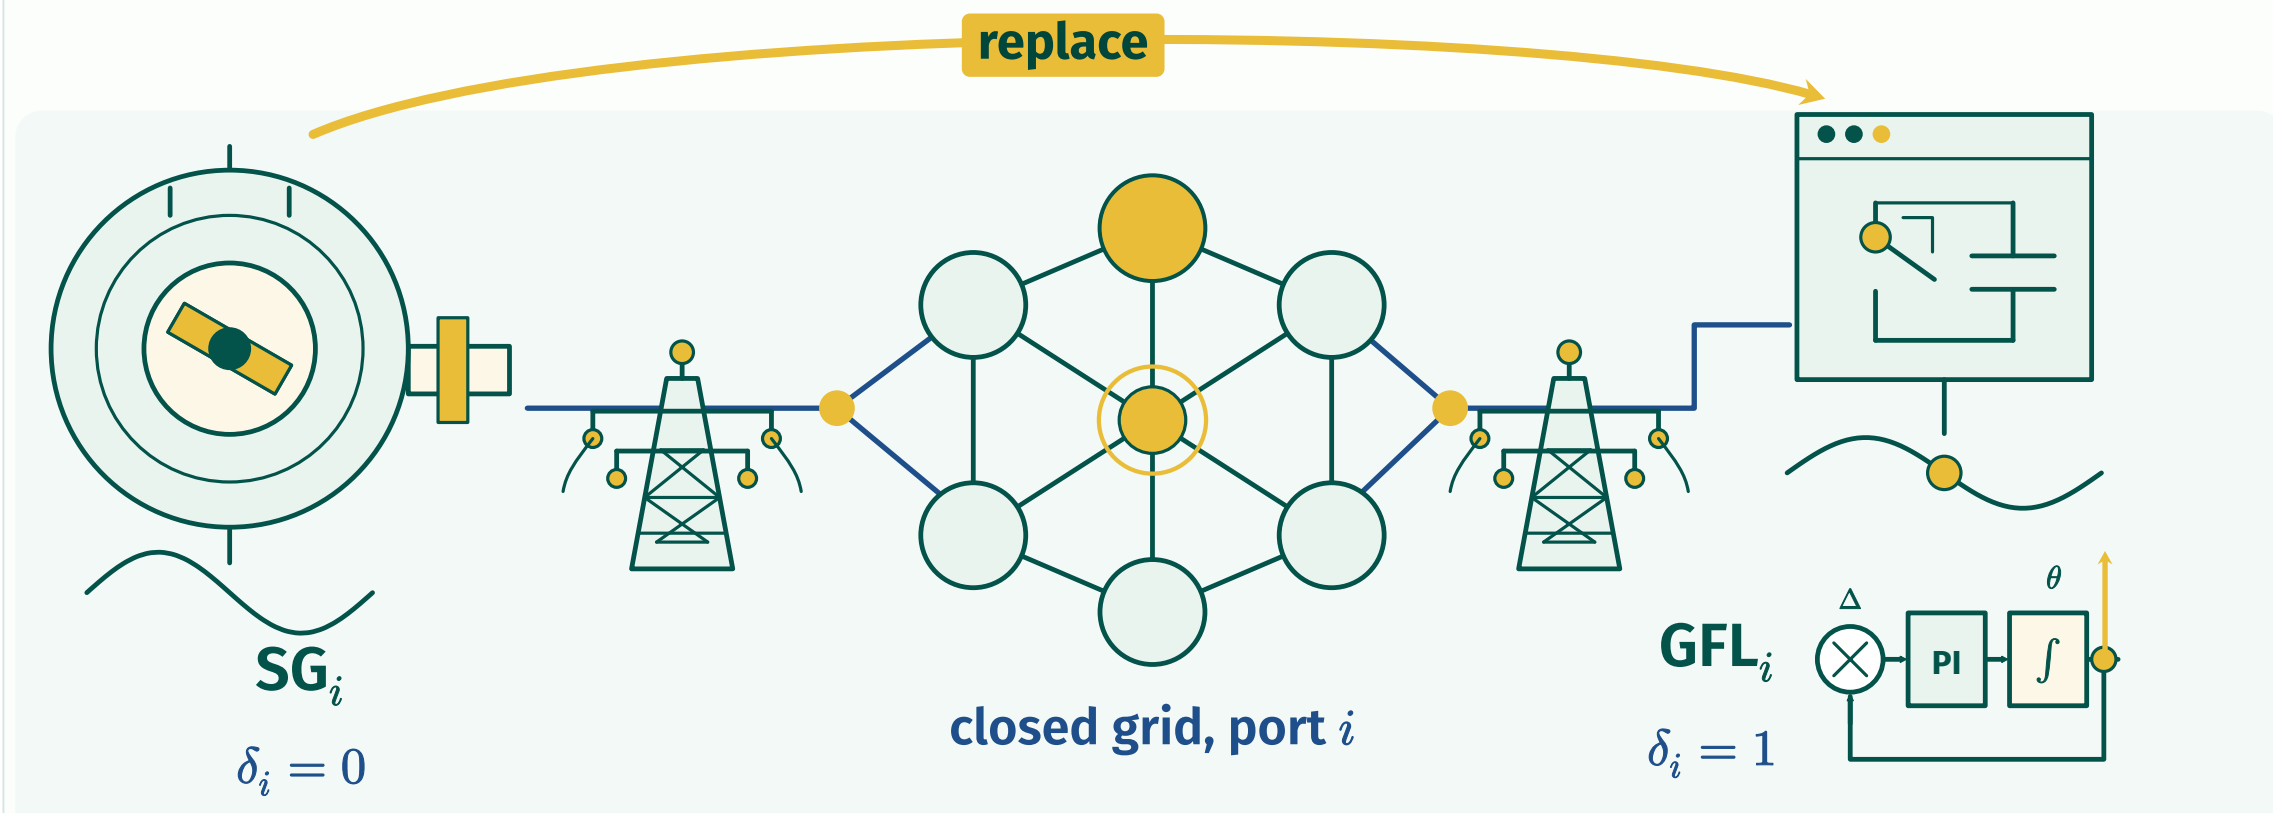

A safe SG → GFL transition is a portfolio-controller co-design problem.

Engineering objective

$$\max_{S, K} \sum_{i \in S} P_i^0 \quad \text{s.t.} \quad \alpha_{\perp}(S, K) \leq -\sigma_{\text{req}}, \quad K \in \mathcal{K}_n$$

P_i^0 SG, dispatch $\alpha_{\perp}$ rightmost non-gauge root σ_{req} decay margin $\mathcal{K}_n$ gains using $\leq n$ hops

- Choose portfolio δ
- Choose radius $n: K \in \mathcal{K}_n$
- Design gains K_p, K_I
- Verify grid spectrum, events

Report the largest independently verified portfolio found. Certified global optimality is future work.


→ Model it

4 EXACT NETWORK CLOSURE: LOCAL × COLLECTIVE

$$T_S(s) = T_0(s) + \sum_{i \in S} E_i \Delta Y_i(s) E_i^T$$

$$\Delta Y_i = E_i^T [T_{\{i\}}(s) - T_0(s)] E_i, \quad \mathcal{K} = E^T T_0^{-1} E = \mathcal{K}_d + \mathcal{K}_o$$

A Two devices, one network

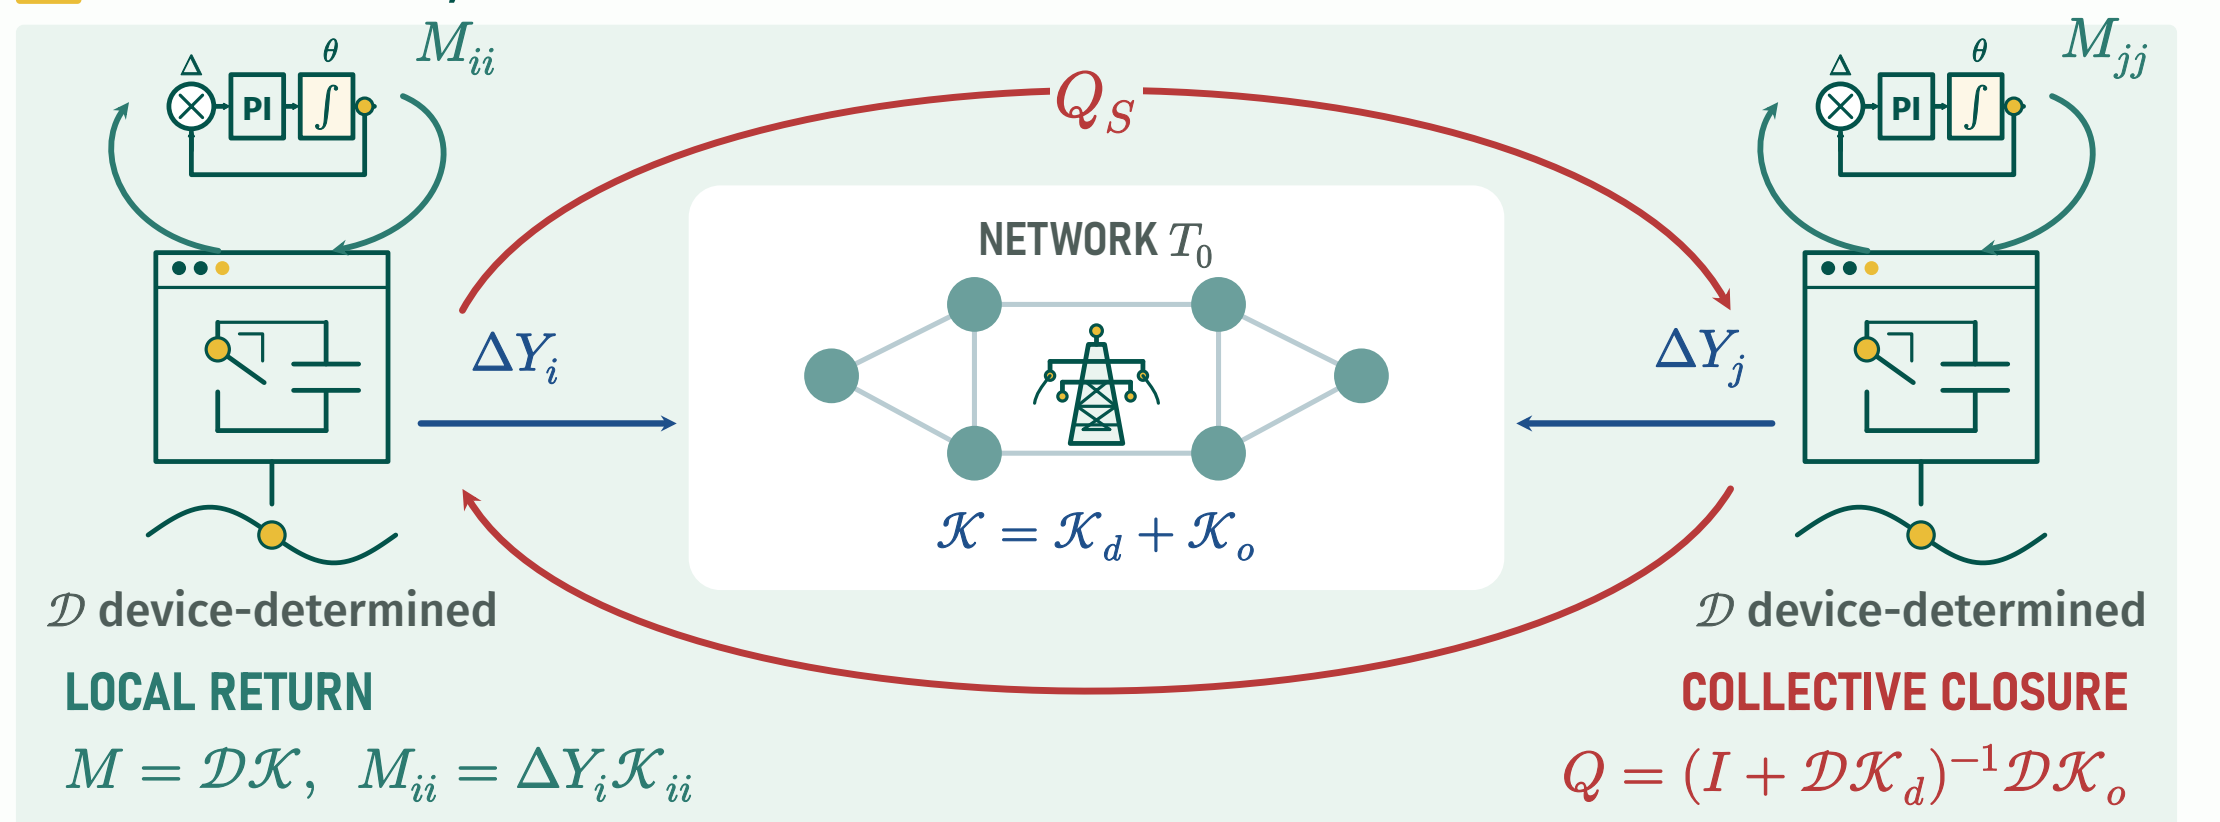

$$\det(I + M_S) = \prod_{i \in S} \det(I + M_{ii}) \cdot \det(I + Q_S)$$


EXACT

Audit: stored boundary $H_4 = \{30, 33, 35, 37\}$, $f \approx 0.7064$ Hz
 $\min_i \sigma_{\min}(I + M_{ii}) = 0.4892$, $\sigma_{\min}(I + Q_{H_4}) = 4.39 \times 10^{-8}$
 Delayed full IEEE-39, 44 ms: $\text{eig}(Q) = -1$ at every unstable root, all $|L_i| \geq 0.011$.

Nothing failed locally. The network closed the destabilizing loop.

→ Who can repair it?

7 INFORMATION RADIUS AND N-HOP CONTROL

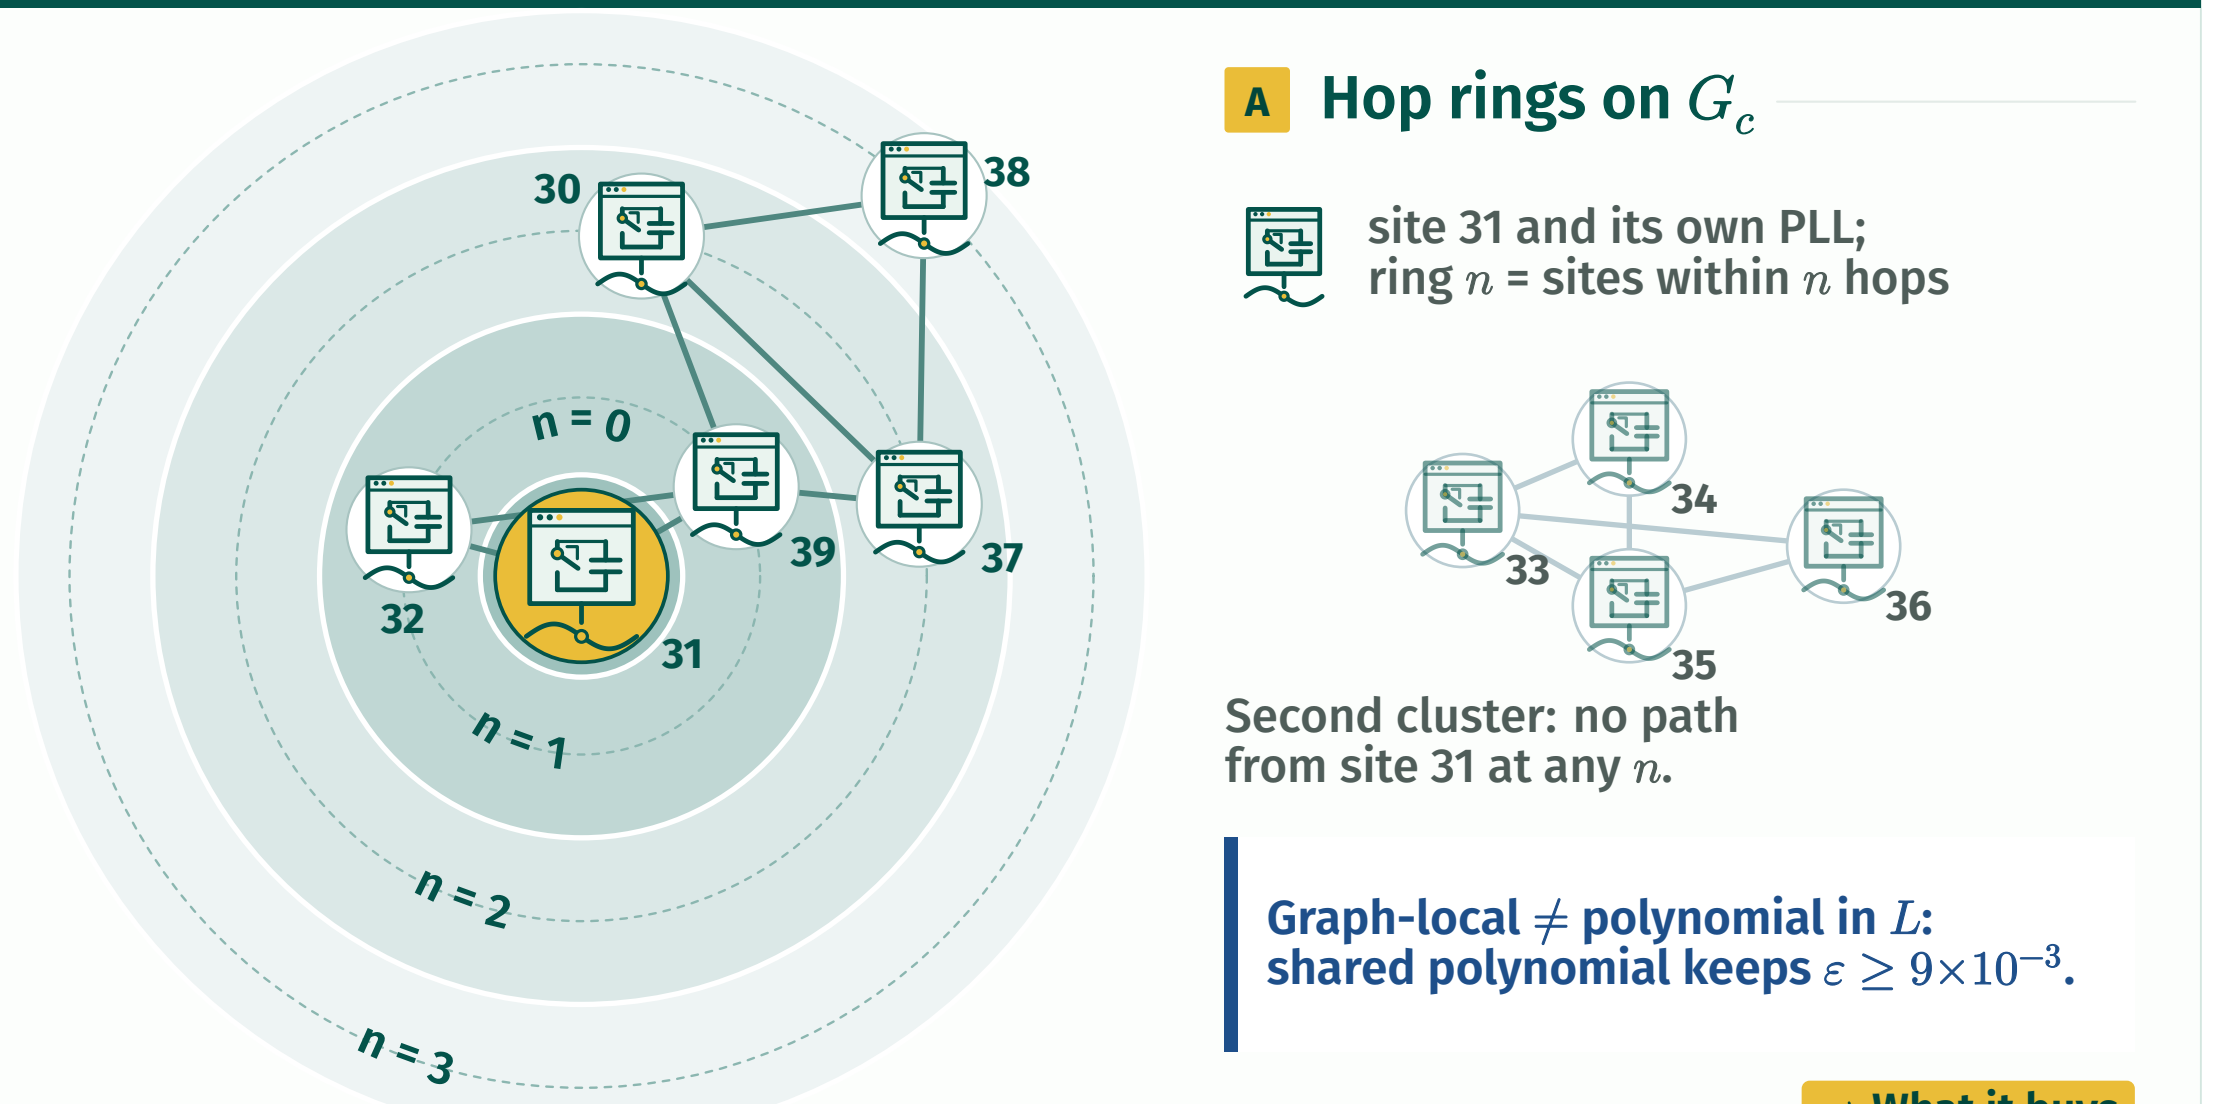

A Hop rings on G_c

site 31 and its own PLL;
ring n = sites within n hops

Second cluster: no path from site 31 at any n .

Graph-local $\neq$ polynomial in L ;
shared polynomial keeps $\epsilon \geq 9 \times 10^{-3}$.

→ What it buys

EXACT

$$\mathcal{N}_i^{(n)} = \{j : \text{dist}_{G_c}(i, j) \leq n\}$$

$$C_i^{(n)} k_i = b_i, \quad \epsilon_i(n) = \|(I - C_i C_i^+) b_i\| / \|b_i\|$$

$$\mathcal{K}_n \subset \mathcal{K}_{n+1} \Rightarrow \epsilon(n+1) \leq \epsilon(n)$$

free n -hop class only

$$\dot{\xi}_i = \sum_{j \in \mathcal{N}_i^{(n)}} k_{i,j} e_j(t - \tau_j)$$

$$t_f \dot{\omega}_i = \xi_i - \omega_i + \sum_{j \in \mathcal{N}_i^{(n)}} k_{p,i,j} e_j(t - \tau_j)$$

- local $n=0$
- polynomial in L
- free n -hop
- dense benchmark

MAIN CONTRIBUTIONS

- Minimal replacement blockers:** the H_4 witness is unstable although all its proper subsets are stable.
- Exact closure factorization** of the network return into a local and a collective part.
- Beyond nodal damping:** self-energy and signed damping redistribution.

- Grid-embedded PLL gain synthesis** and exact delay transport.
- Information radius on the full IEEE-39:** authority grows, safety must still be verified.

2 MODEL: DAE → TRANSVERSE STABILITY

$$E(x, \delta) \dot{x} = f(x, z; \delta, K, \tau)$$

$$0 = g(x, z; \delta)$$

x states, z network, δ portfolio, K gains, τ delays
equilibrium: $f(x^*, z^*) = 0$, $g(x^*, z^*) = 0$

$$\begin{bmatrix} \Delta \dot{x} \\ 0 \end{bmatrix} = \begin{bmatrix} f_x & f_z \\ g_x & g_z \end{bmatrix} \begin{bmatrix} \Delta x \\ \Delta z \end{bmatrix}$$

$$A = f_x - f_z g_z^{-1} g_x$$

Schur complement, g_z invertible

$$A_{\perp} = Z^T A Z$$

Z : orthonormal basis of $\gamma^{\perp}$ (gauge $A\gamma = 0$)

$$\alpha_{\perp}(S, K) = \max \text{Re } \sigma(A_{\perp})$$

With PLL delay, $\alpha_{\perp}$ is the rightmost root of $\det \Delta_{\perp}(s)$;
 $\Delta(s) = sI - A_0 - B E(s) C$, exact exponentials.

≤ 0 STABLE

> 0 UNSTABLE



→ Where it fails

5 BEYOND NODAL DAMPING: EFFECTIVE OPERATORS

A Exact Schur self-energy **EXACT**

$$S_r(s) = sI - A_{rr} - A_{rc}(sI - A_{cc})^{-1} A_{cr}$$

$$T(s) = s^2 M + s D_0 + L + \Pi(s)$$

r kept, c eliminated


B Even/odd split $\Pi = \Pi_e + \Pi_o$ **PROPOSED**

$$L_{\text{eff}} = L + \Pi_e(0), \quad D_{\text{eff}} = D_0 + \Pi_o(s)/s$$


$$M_{\text{eff}} = M + [\Pi_e(s) - \Pi_e(0)]/s^2$$

$$T = s^2 M_{\text{eff}} + s D_{\text{eff}} + L_{\text{eff}}$$


M_{eff} : an operator, not rotor inertia.

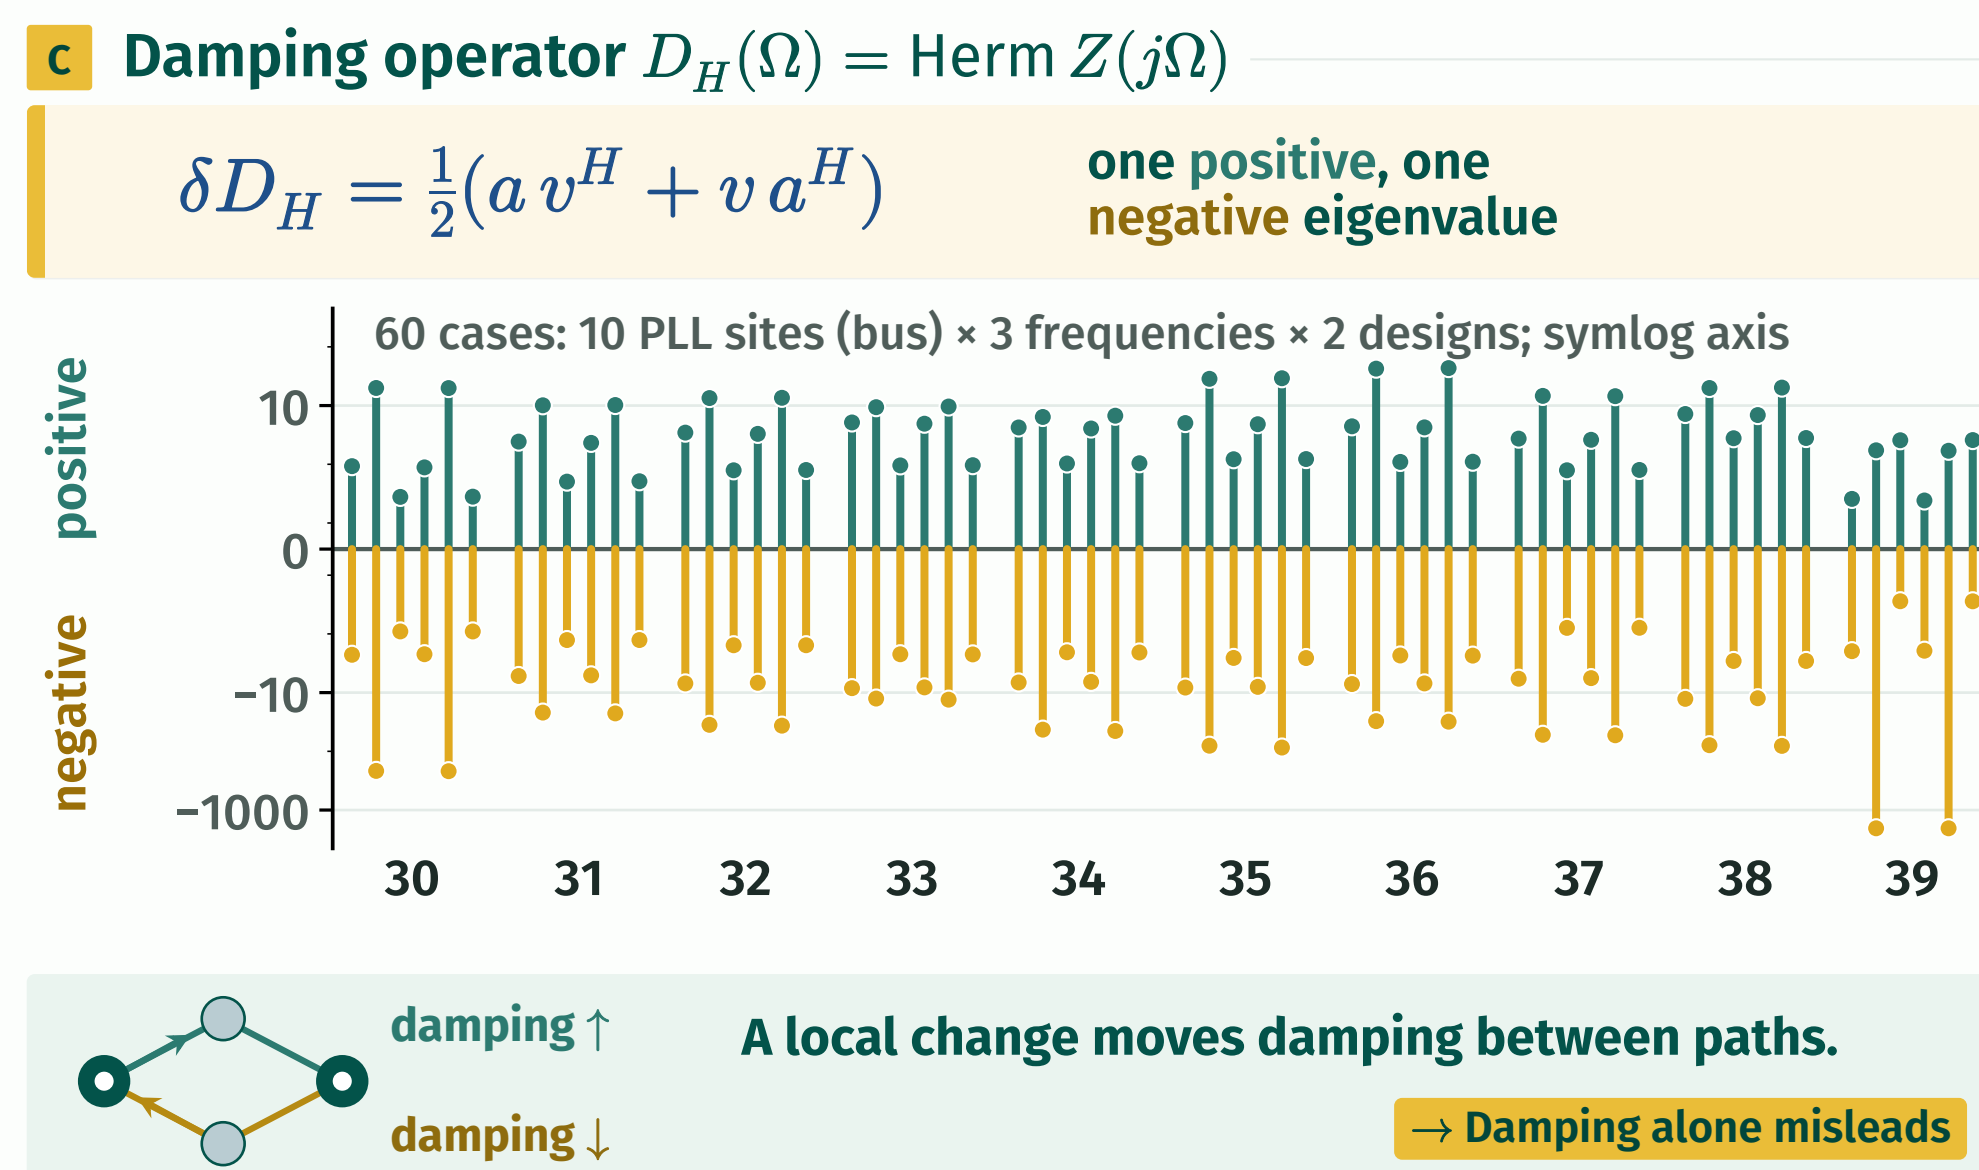


8 N-HOP RESULTS: AUTHORITY, SPILLOVER, REPAIR

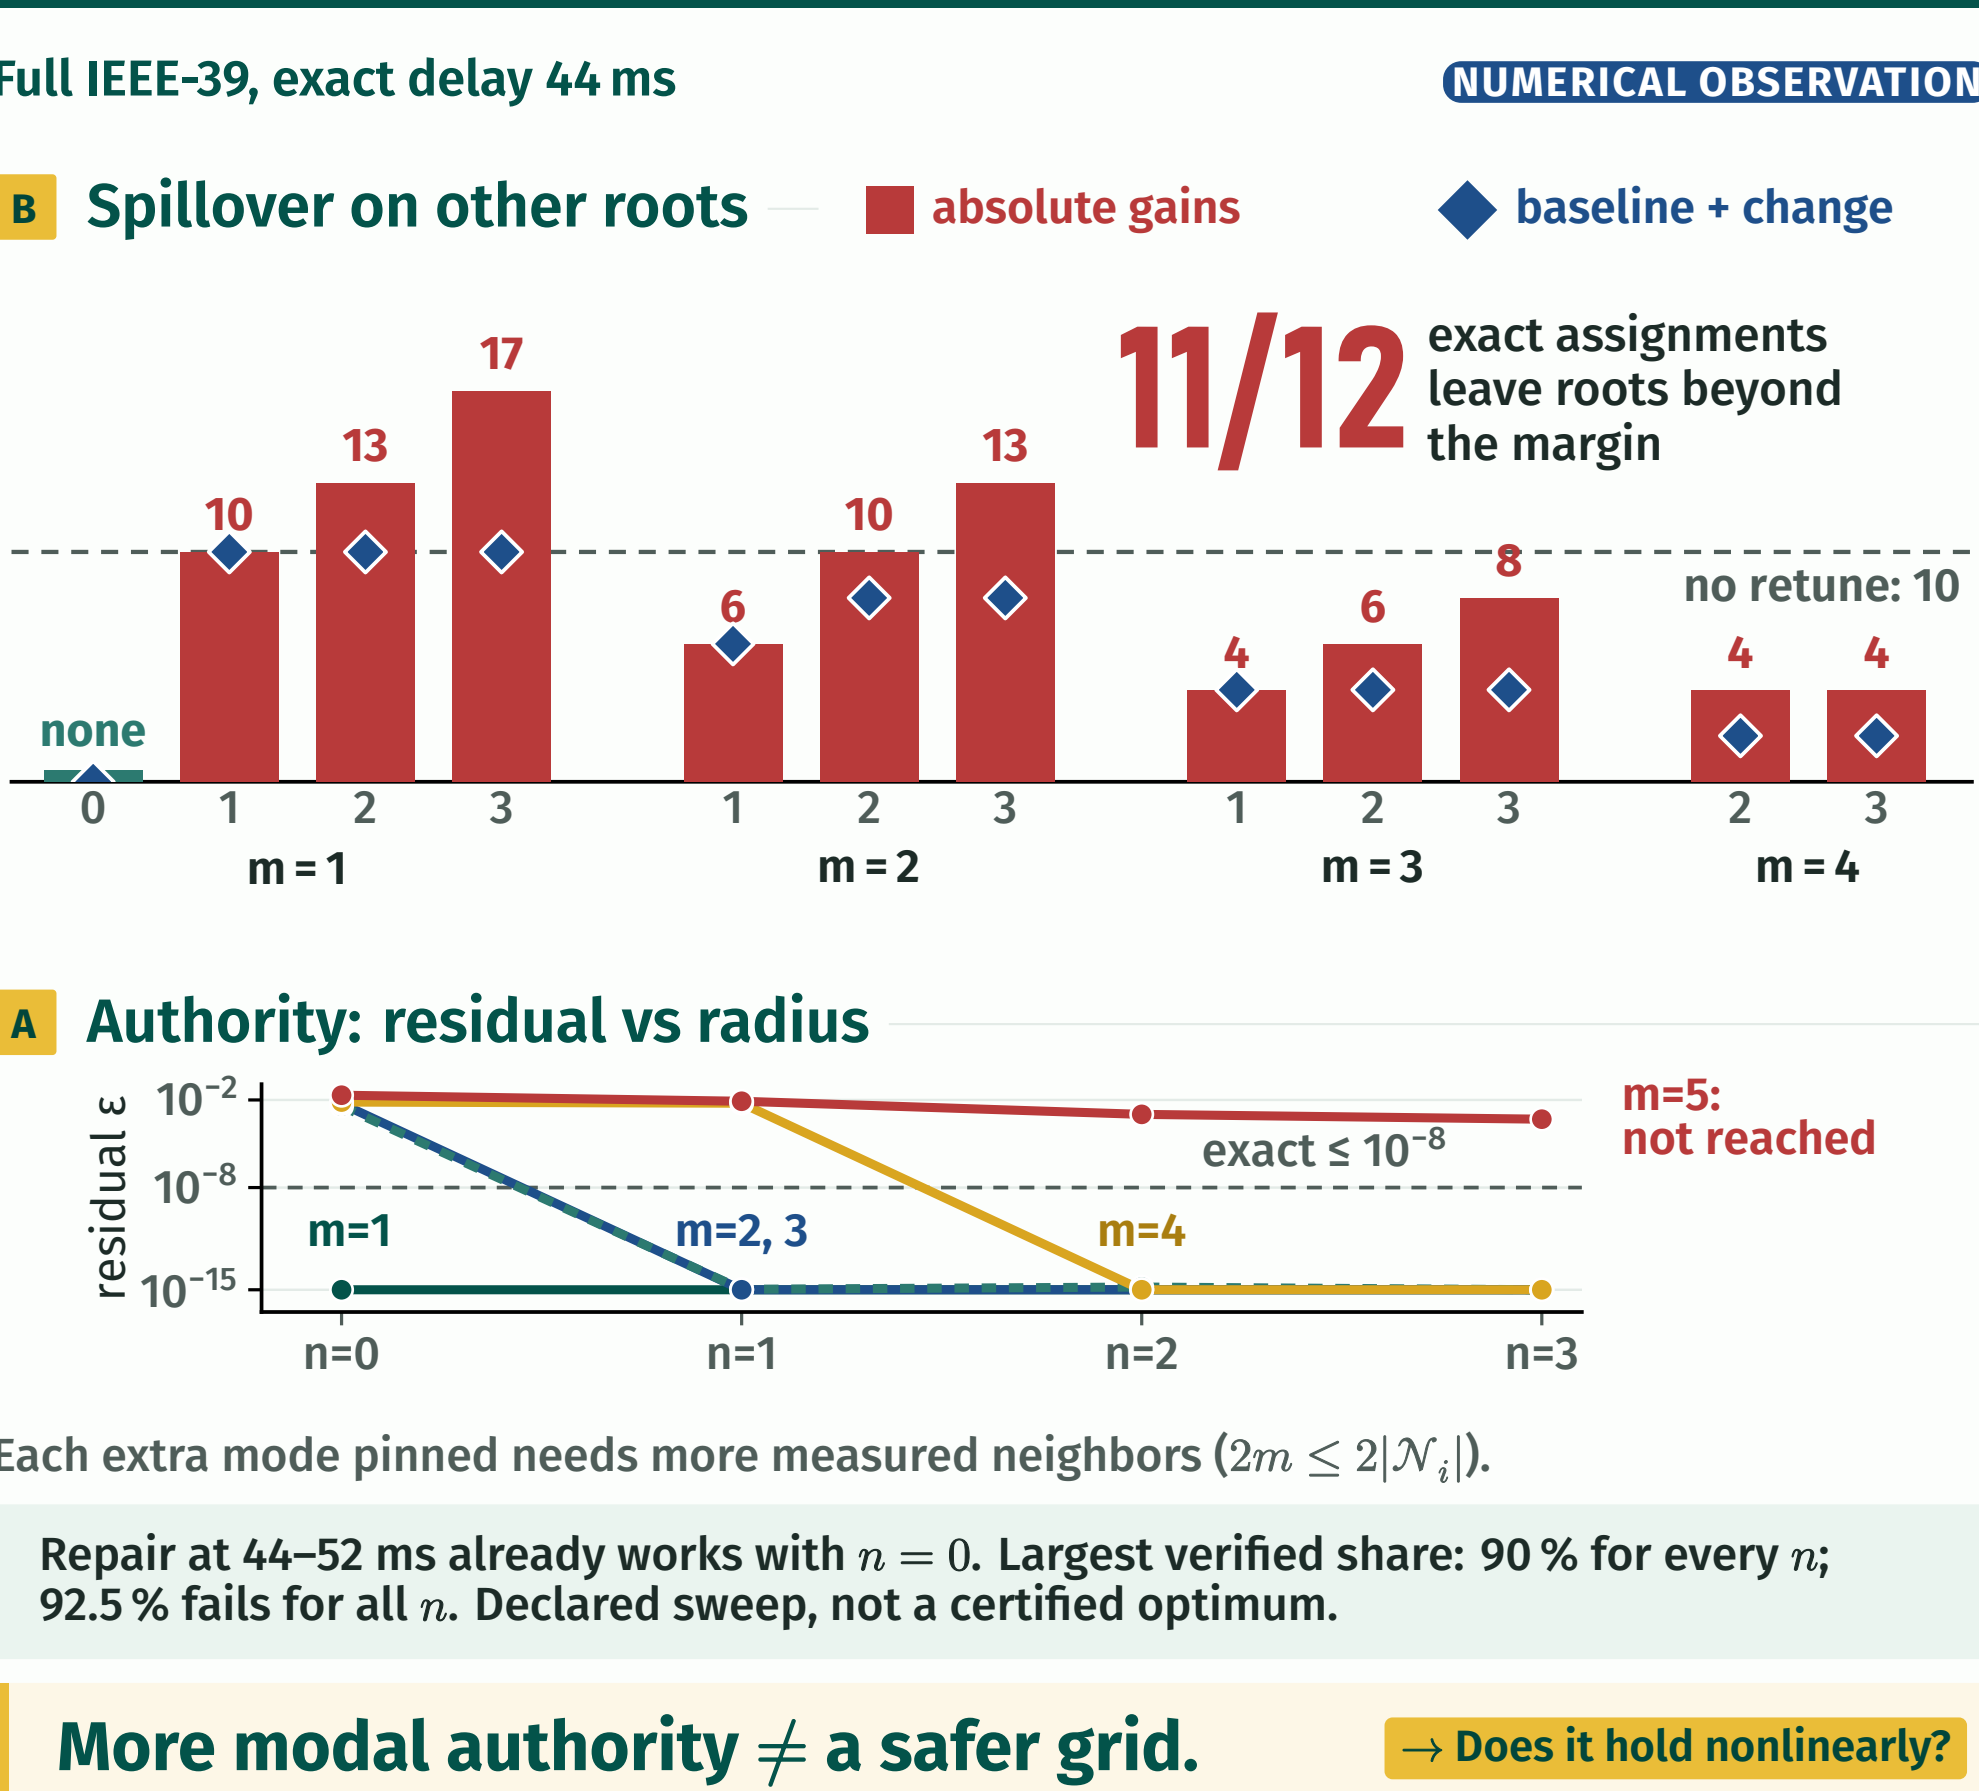


3 IEEE-39: MINIMAL COLLECTIVE BLOCKER

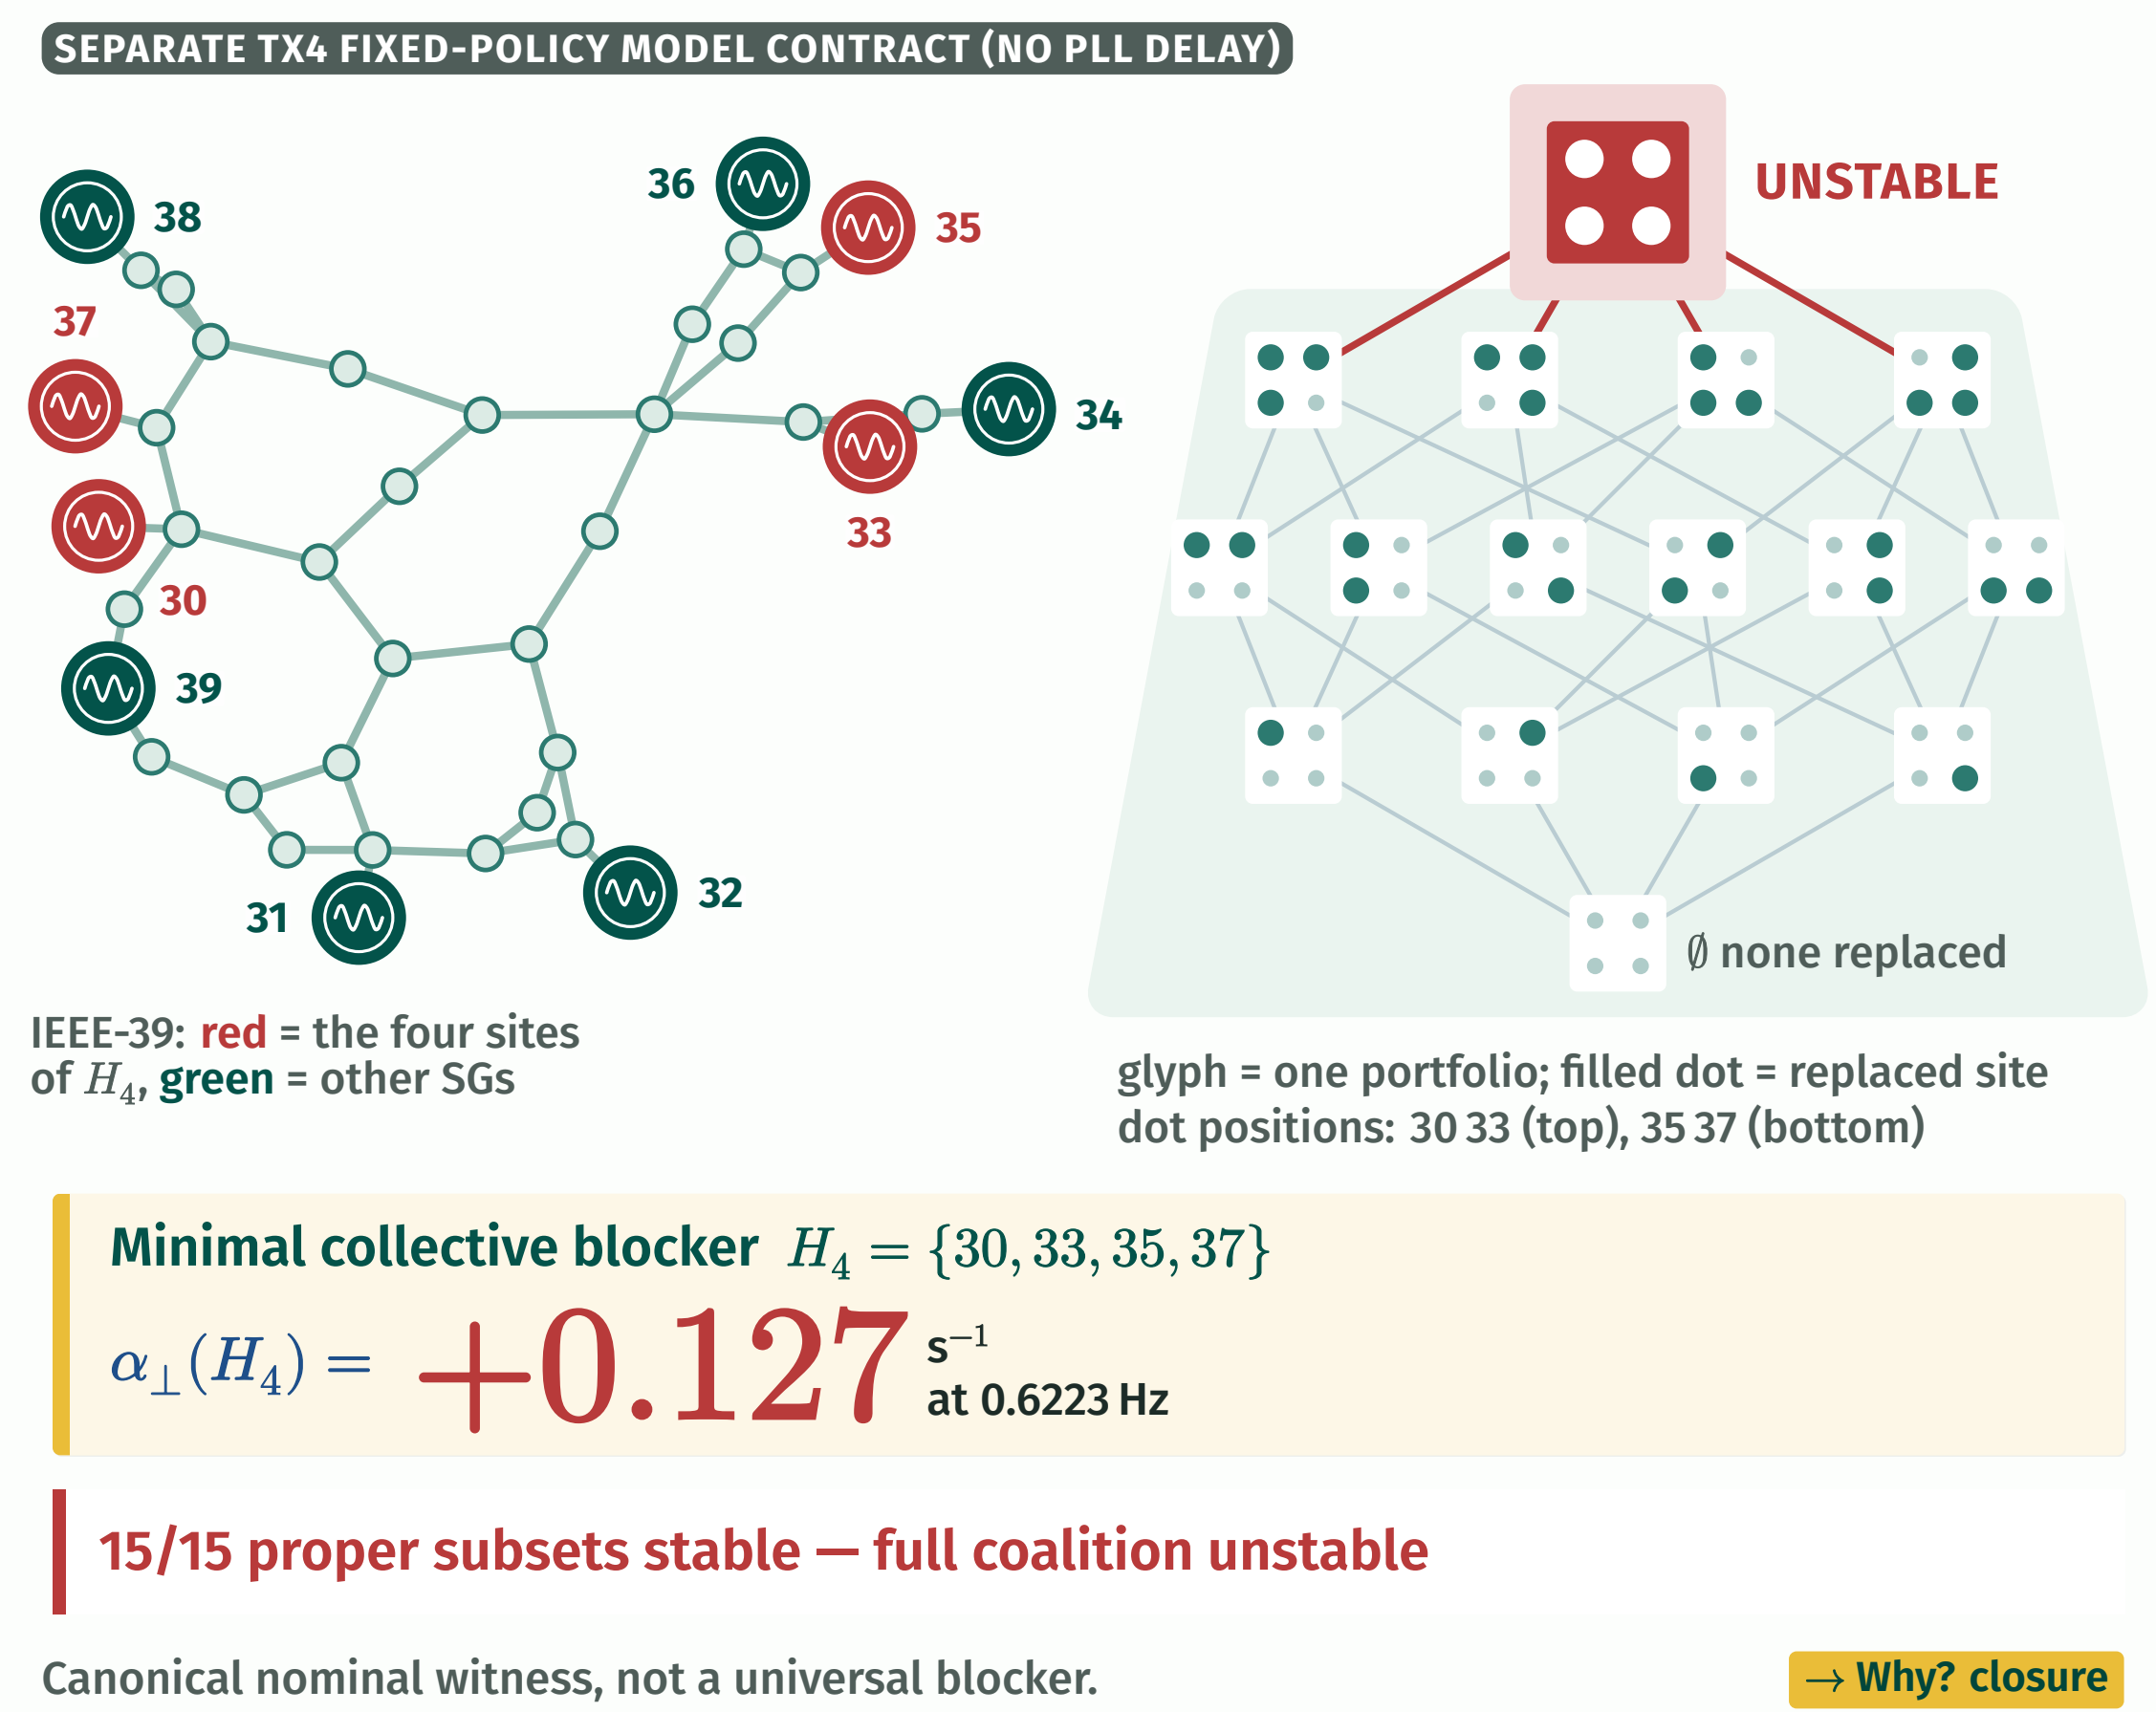

6 GRID-EMBEDDED PLL GAIN SYNTHESIS

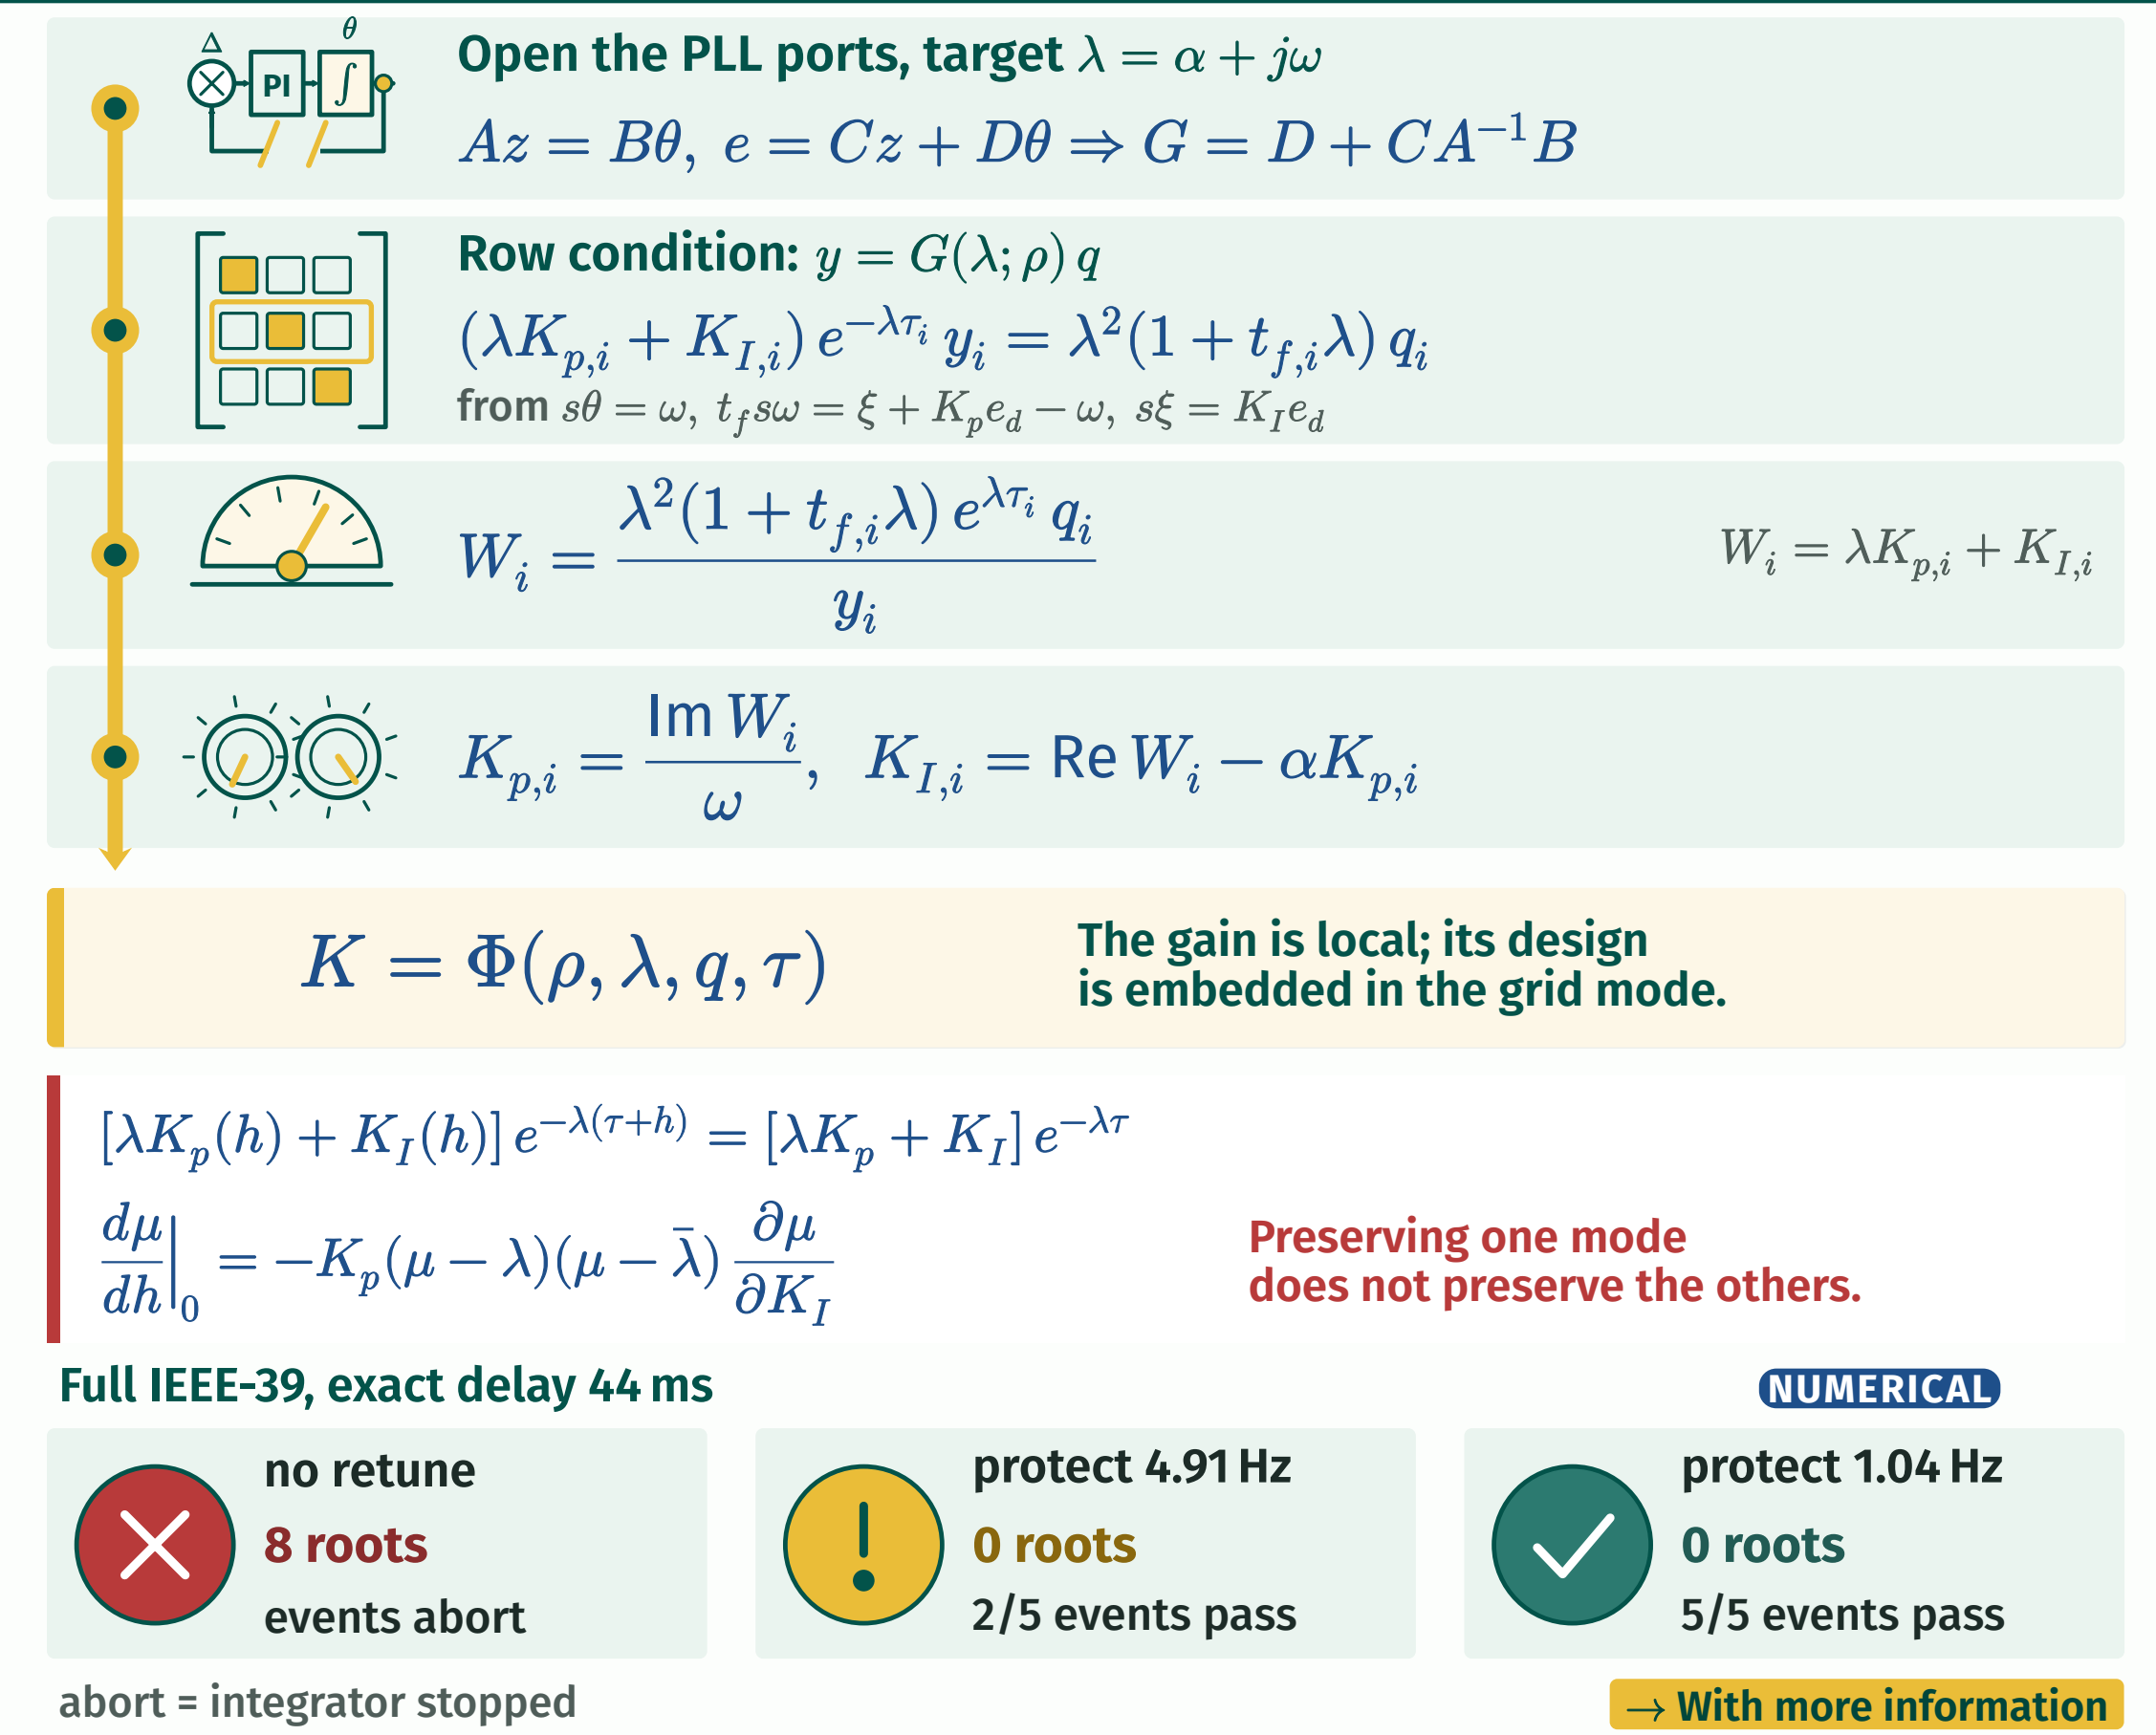

9 DELAYS, CO-DESIGN, AND NONLINEAR CHECKS

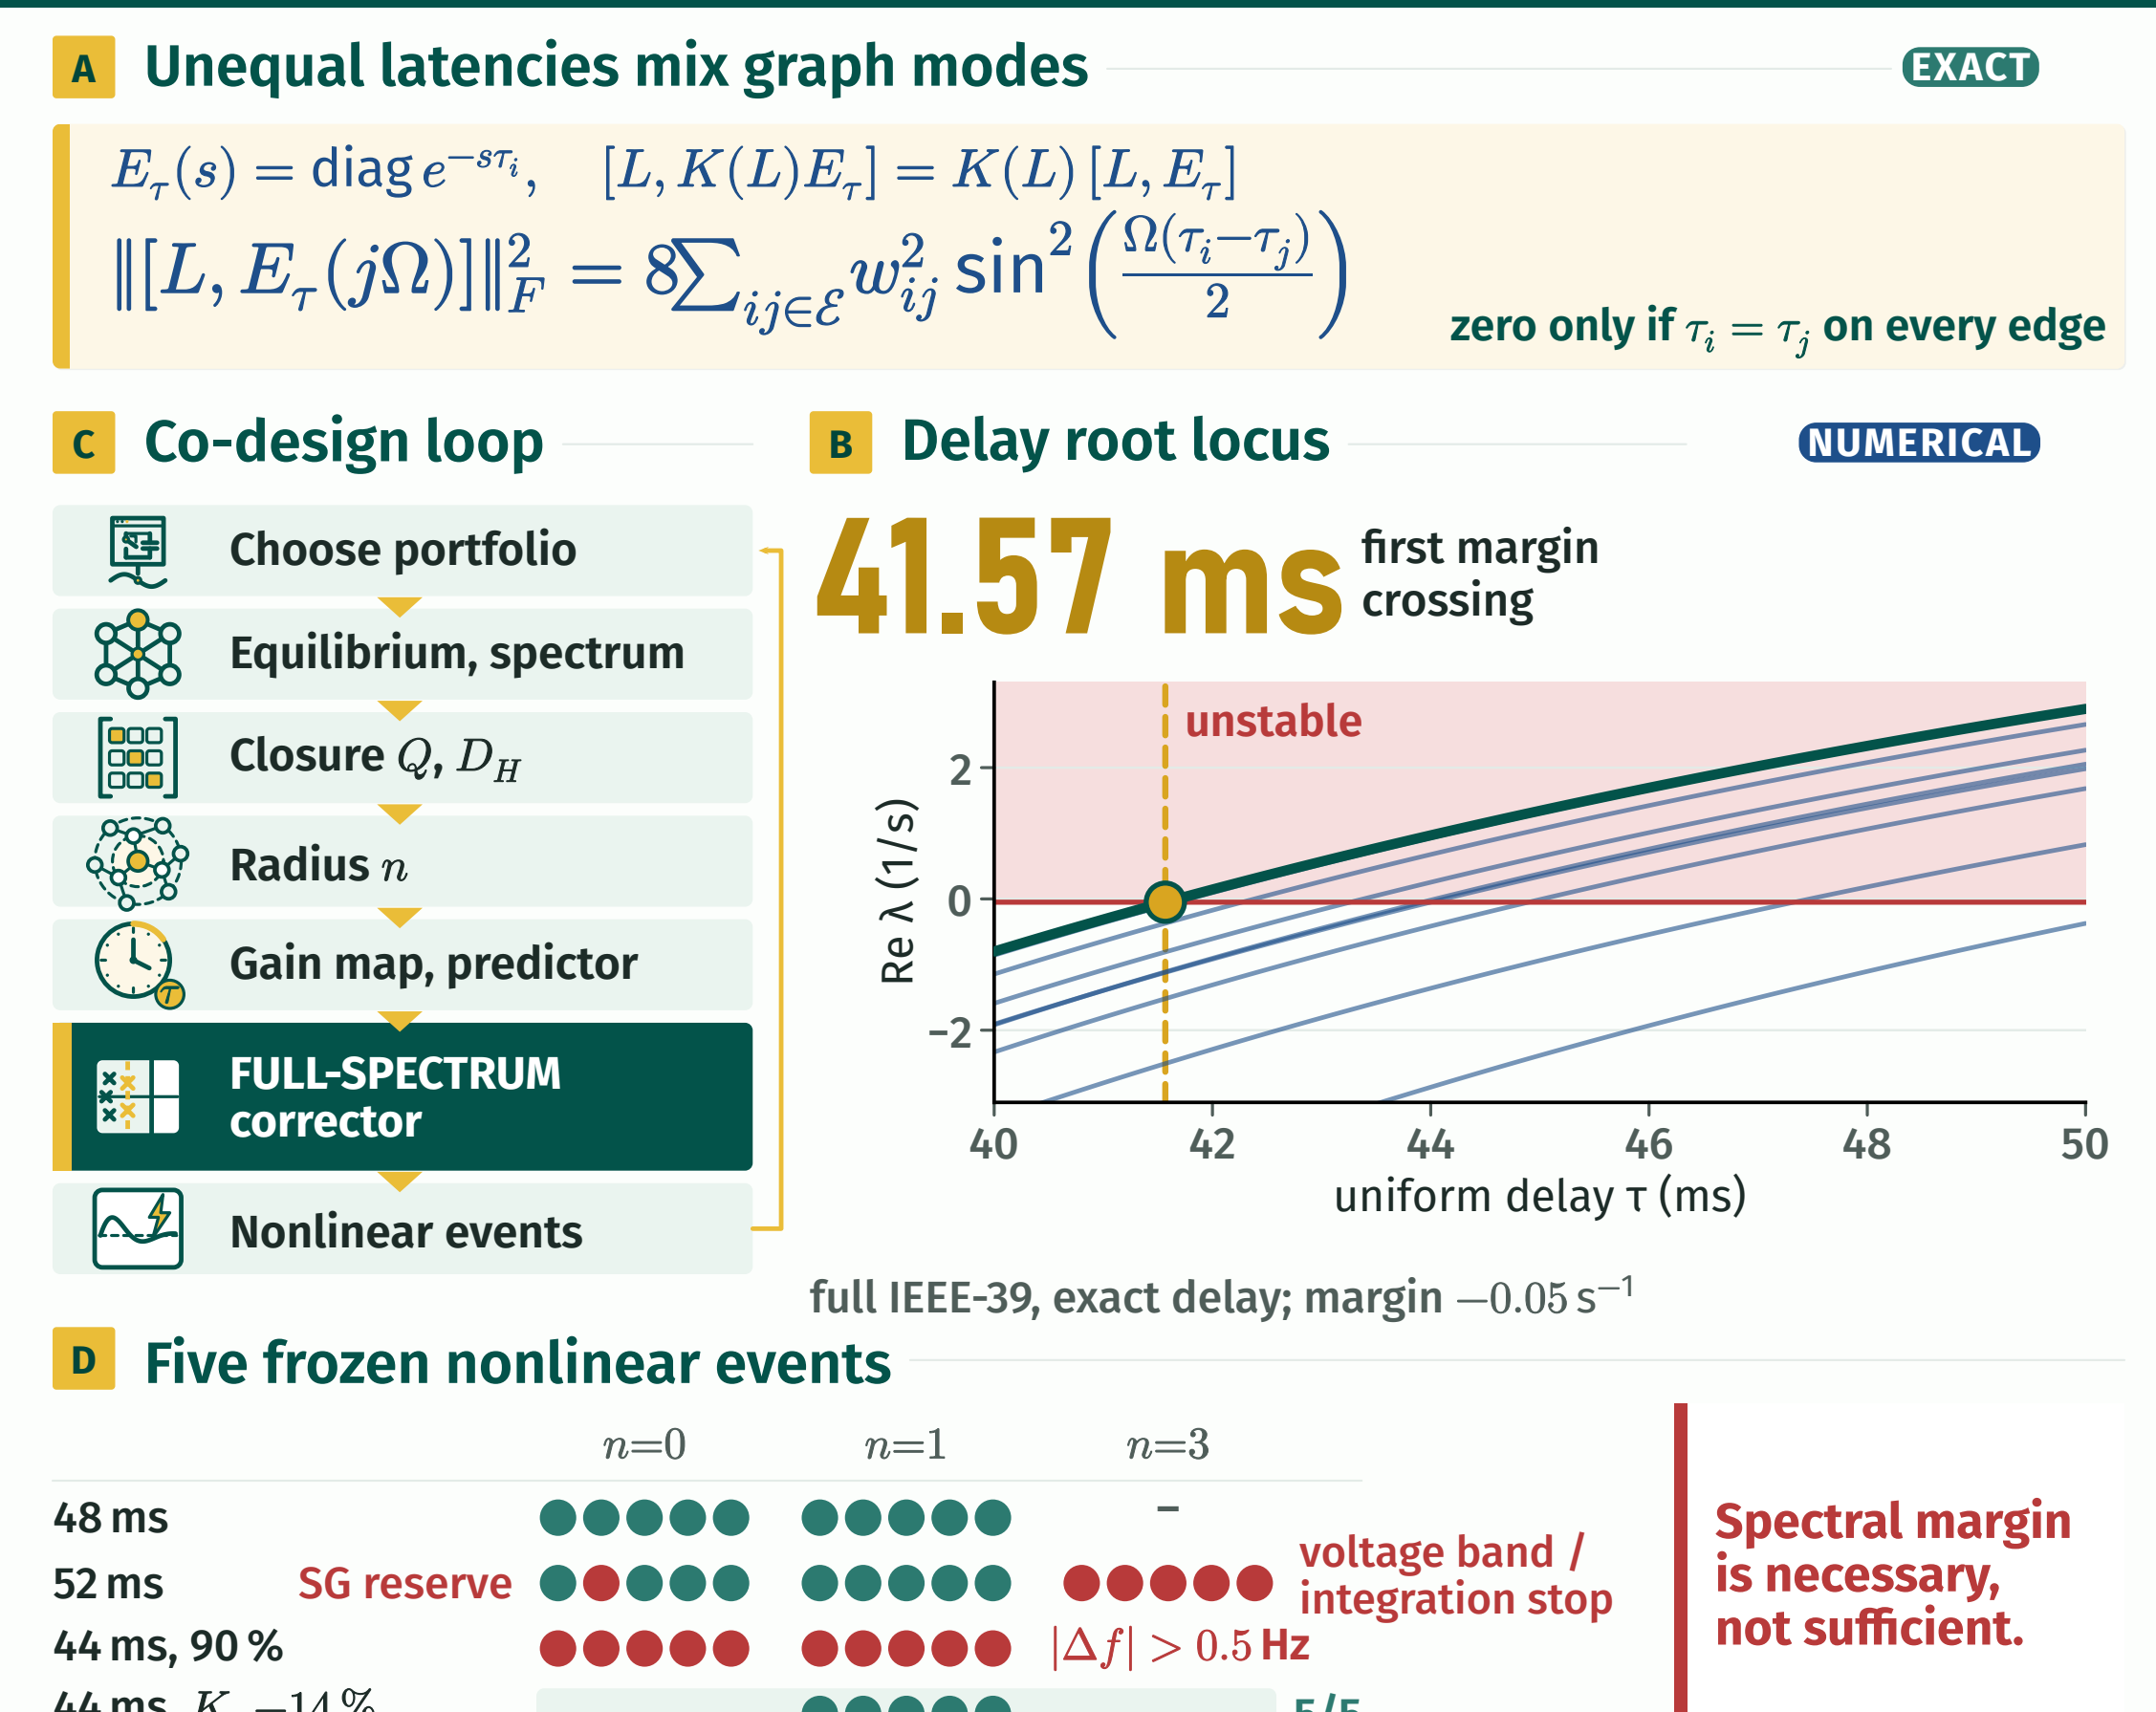

SCOPE OF THE RESULTS

- EXACT**
closure factorization
gain map W_i
delay transport
commutator identity
signed δD_H
- NUMERICAL**
 H_4 witness (TX4 contract)
full IEEE-39 delay campaign
 n -hop authority, spillover,
repair
nonlinear events
- PROPOSED**
 $M_{\text{eff}}, D_{\text{eff}}$ graph
diagnostics
certified global
maximum share
EMT and current limits

REFERENCES / CONTACT

- P. Kundur, *Power System Stability and Control*, 1994.
- F. Dörfler et al., Sparsity-promoting optimal wide-area control, IEEE TPWRS, 2014.
- L. Huang et al., Impacts of grid structure on PLL-synchronization stability, arXiv:1903.05489.
- W. Michiels, S. Gumusoy, fixed-order controllers for time-delay systems, arXiv:2003.05496.
- J. L. Mayorga T., Beyond nodal damping, in prep. jlmayorga@uniandes.edu.co

PRESERVING ONE MODE DOES NOT PROTECT THE GRID.

More information gives more control authority — only the full grid decides whether a larger SG → GFL transition is safe.