


## Datasheet for I2C display interface

### Board layout

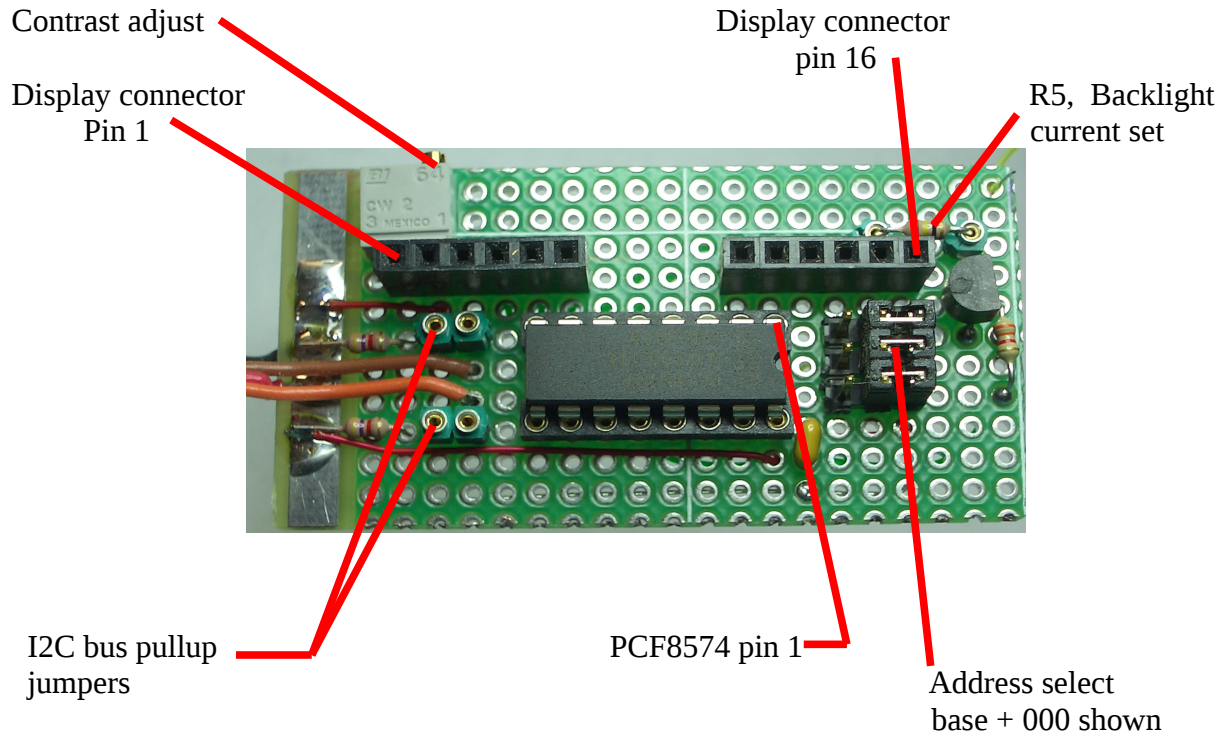

### Notes

- The base address for the PCF8574P is 0x20, for the PCF8574AP it is 0x38. The two devices are otherwise completely interchangeable. The 3 LSB of the address are selected with the 3 address select jumpers. The bit is 1 when the jumper position is closer to the IC. The LSB is near the middle of the board.
- The I2C bus jumpers are only installed on one board/device in a system. Usually the jumpers are installed on the device that is physically the most distant from the bus master.
- The backlight current adjustment resistor is installed on jumper sockets so it can be changed for different display backlight requirements. A typical display backlight will have a voltage of about 4.2V, the transistor switch may drop about .1V, so the backlight current would be about  $0.7V/R5$  in a 5V system. The backlight LED voltage varies quite a bit from one display to the next, and is temperature sensitive. So the current may vary quite a bit, but it doesn't seem to affect the backlight level very much.
- The connection shown here uses the '4-bit mode' of the HD44780 LCD display controller, consequently the 4 LSB data lines are not connected.
- This interface works properly with the LiquidCrystal\_I2C library.
- With the LiquidCrystal\_I2C library, multiple instances can be created to accommodate more than one display.

## Schematic

