SIEMENS

Installation Instructions
Model IIC

Interface Isolation Card

INTRODUCTION

The Model IIC Interface Isolation card from Siemens Industry, Inc., breaks the backplane network signals for multiple CC-2 card cages thereby isolating the respective cages from the network of the PSC-12 or PSC-12M, which is supplying power. It also provides one end of CAN termination on the side of the CC-2.

INSTALLATION



Remove all system power before installation, first battery then AC. (To power up, connect the AC first, then the battery.)

Please read the entire document before beginning installation.

There are three jumpers on the IIC (P1, P2 and P3) that are factory-set to the default CAN Termination settings, as shown in Figure 1. DO NOT change the jumper settings.




Figure 1
IIC Jumper Settings

The IIC is designed for use in a VNT-FCC configuration. It plugs into the 60-pin connector (P1 or P2) on the second and subsequent CC-2 card cages in an enclosure. The IIC fits in-line between a 60-pin ribbon cable and the corresponding header. There are two 60-pin interfaces on the IIC. One is a male ribbon cable receptacle which will accept the cable coming from the previous CC-2. The other is a female ribbon cable header which will plug into the 60-pin receptacle of the next CC-2. Refer to Figure 2.

Install the IIC in the CC-2 card cage before you install the CC-2 card cage in the enclosure. This is done so that the IIC can be securely fastened to the CC-2 with zip ties on both ends. Refer to Figure 2 for the location of the holes through which to thread the zip ties. (Zip ties should be in the holes directly above the holes in the CC-2 connector, not in the plated holes.) Fasten the zip ties securely. Figure 3 shows an IIC card fastened to a CC-2 with zip ties.

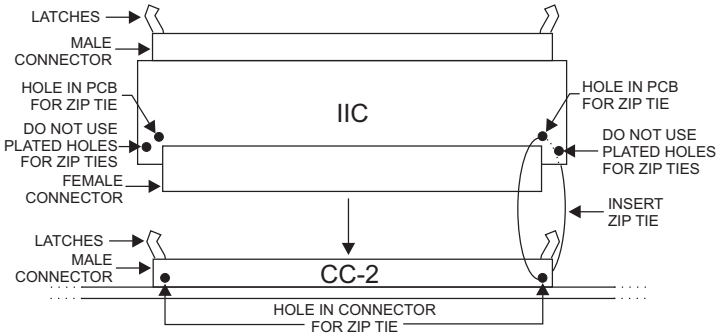


Figure 2
Installing the IIC in the CC-2


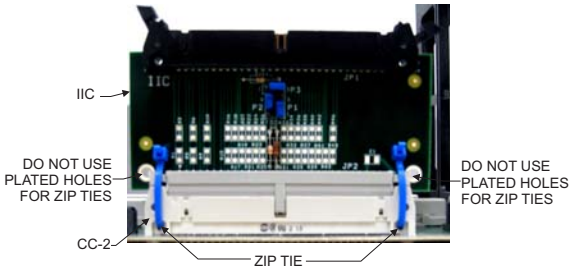


Figure 3
IIC Fastened to CC-2 with Zip Ties

Siemens Industry, Inc.
Smart Infrastructure

WIRING

Refer to Figure 4 for the wiring concept for the VNT-FCC configuration. The interconnection of CC-2s requires the use of the IIC Interface Isolation card to connect the standard power and data from one CC-2 to another. In this application, the NIC-C that is inserted into the CC-2 must have its backplane (BP) data communication isolated from the other NIC-Cs in the cabinet. Module placement is supervised.



Special FVNET-FCC Jumper Settings:

Enable S1 only on NIC-C connected to LVM. Disable S1 on all other NIC-Cs.

When Style 4 wiring is used for an NCC-2F-HNET-VNT application, remove jumper P2 from all NIC-Cs except the NIC-C that is connected to the NCC-2F card.

When Style 7 wiring is used for an NCC-2F-HNET-VNT application, remove jumpers P2 and P4 from all NIC-Cs except NIC-C that is connected to the NCC-2F card.

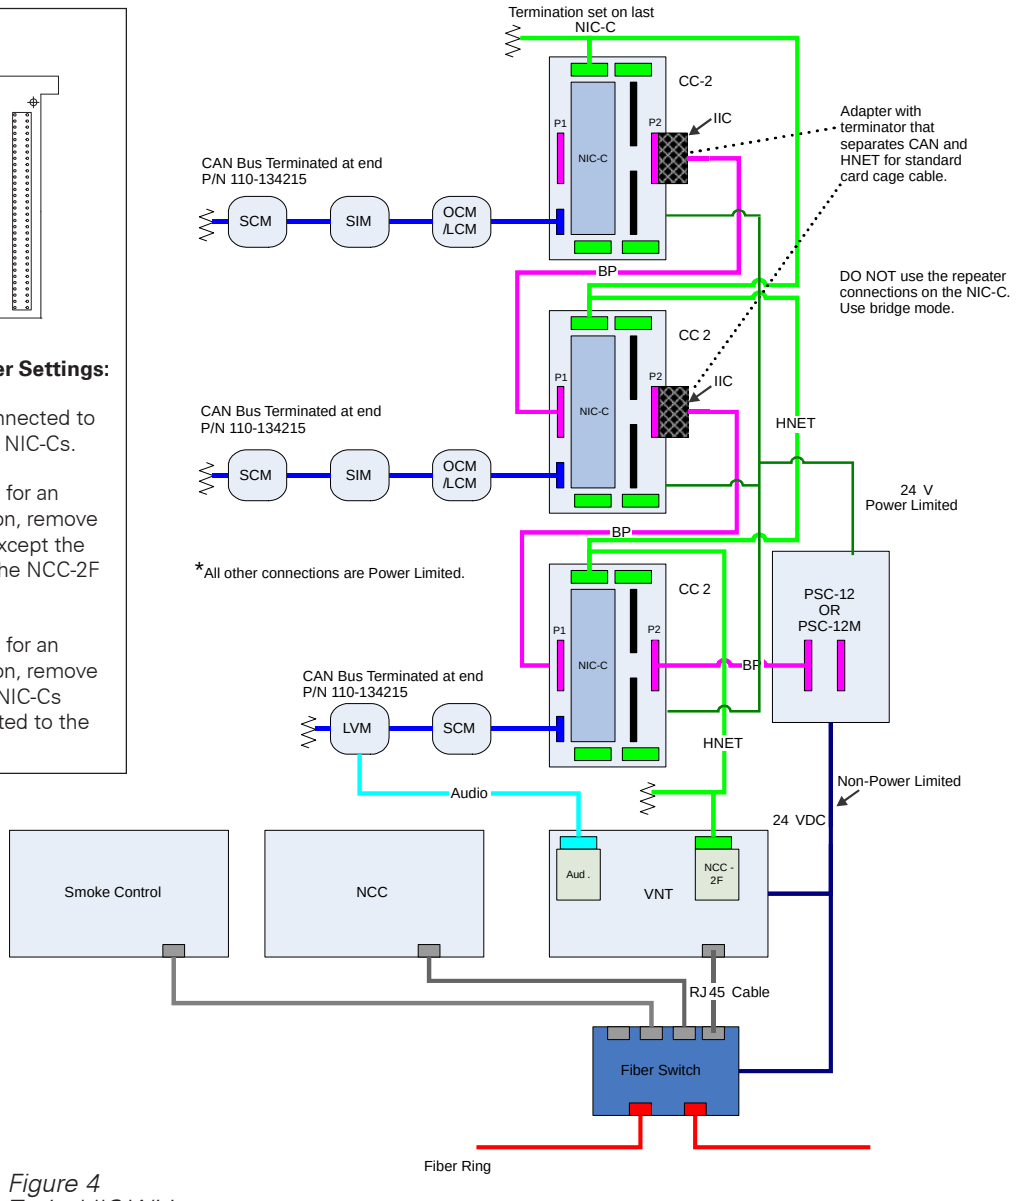


Figure 4
Typical IIC Wiring

ELECTRICAL RATINGS

The PSC-12 or PSC-12M supplies the power to the two 60-pin Data bus connectors (P1 and P2) in the CC-2 (power limited). The total rating on P1 and P2 for all CC-2s in any given enclosure is as follows:

24 VDC, 2 Amps max
6.2 VDC, 2 Amps max

CYBER SECURITY DISCLAIMER

Siemens provides a portfolio of products, solutions, systems and services that includes security functions that support the secure operation of plants, systems, machines and networks. In the field of Building Technologies, this includes building automation and control, fire safety, security management as well as physical security systems.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art security concept. Siemens' portfolio only forms one element of such a concept.

You are responsible for preventing unauthorized access to your plants, systems, machines and networks which should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. Additionally, Siemens' guidance on appropriate security measures should be taken into account. For additional information, please contact your Siemens sales representative or visit https://www.siemens.com/global/en/home/company/topicareas/future-of-manufacturing/industrial-security.html.

Siemens' portfolio undergoes continuous development to make it more secure. Siemens strongly recommends that updates are applied as soon as they are available and that the latest versions are used. Use of versions that are no longer supported, and failure to apply the latest updates may increase your exposure to cyber threats. Siemens strongly recommends to comply with security advisories on the latest security threats, patches and other related measures, published, among others, under

https://www.siemens.com/cert/en/cert-security-advisories.htm.

Siemens Industry, Inc.
Smart Infrastructure
8 Fernwood Road
Florham Park, NJ

Document ID A6V10337402

P/N 315-050328-AB