

# TAS2770 20-W Digital Input Mono Class-D Audio Amplifier with Speaker I/V Sense

## 1 Features

- High-Performance Mono Class-D Amplifier
  - 20-W at 1% THD+N (4  $\Omega$ , 16 V)
  - 15.4-W at 1% THD+N (4  $\Omega$ , 12.6 V)
  - 9.1-W at 1% THD+N (8  $\Omega$ , 12.6 V)
  - 7.1-W at 1% THD+N (4  $\Omega$ , 8.4 V)
  - 4-W at 1% THD+N (8  $\Omega$ , 8.4 V)
- 0.03% THD+N at 1 W (4  $\Omega$ , VBAT = 12.6 V)
- 32- $\mu$ Vrms A-Weighted Idle Channel noise
- 90-dB PSRR with 200 mV<sub>PP</sub> Ripple at 20 - 20 kHz
- 82.5% Efficiency at 1 W (4  $\Omega$ , VBAT = 12.6 V)
- < 1  $\mu$ A HW Shutdown VBAT Current
- 42 mW / 63 mW Idle Dissipation (8.4 V / 12.6 V)
- Speaker Voltage and Current Sense
- Real-Time Diagnostics Using I/V Speaker Sense
  - Over Current
  - Short Circuit(short to power, short to ground and terminal-to-terminal short)
  - Over-Temperature
- VBAT Tracking Peak Voltage Limiter with Brown Out Prevention
- 44.1-kHz to 192-kHz Sample Rates
- Flexible User Interfaces
  - I<sup>2</sup>S/TDM: 8 Channels (32-bit / 96 kHz)
  - I<sup>2</sup>C: 8 selectable Addresses
- MCLK Free Operation
- Low Pop and Click
- Power Supplies
  - VBAT: 4.5 V to 16 V
  - AVDD: 1.8 V
- Spread-Spectrum Low EMI Mode
- Thermal and Over Current Protection

## 2 Applications

- Laptop Computers
- Bluetooth Speakers
- Home Automation
- Smart Speakers/IoT

## 3 Description

The TAS2770 is a mono, digital input Class-D audio amplifier optimized for efficiently driving high peak power into small loudspeakers. The Class-D amplifier is capable of delivering 15.4 W of peak power into a 4- $\Omega$  load while sustaining 11.6 W continuously with less than 0.03% THD+N at a battery voltage of 12.6 V.

Integrated speaker voltage and current sense provides for real time monitoring of loudspeaker behavior. A battery tracking peak voltage limiter with brown out prevention optimizes amplifier headroom over the entire charge cycle of 2S or 3S battery systems.

Up to eight devices can share a common bus via either I<sup>2</sup>S/TDM + I<sup>2</sup>C.


The TAS2770 device is available in a 26-pin, 0.4-mm pitch QFN for a compact PCB footprint.

### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TAS2770	QFN	4 mm x 3.5 mm
TAS2770	DSBGA	2 mm x 2.52 mm
SNP002770	QFN	4 mm x 3.5 mm
SNP002770	DSBGA	2 mm x 2.52 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Functional Block Diagram

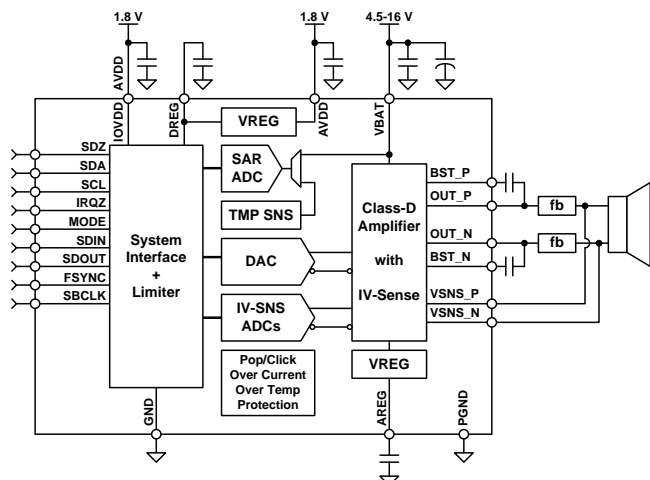

Copyright © 2016, Texas Instruments Incorporated



## Table of Contents


<b>1 Features</b> .....	<b>1</b>	8.3 Feature Description.....	<b>20</b>
<b>2 Applications</b> .....	<b>1</b>	8.4 Device Functional Modes.....	<b>23</b>
<b>3 Description</b> .....	<b>1</b>	8.5 Register Maps .....	<b>46</b>
<b>4 Revision History</b> .....	<b>2</b>	<b>9 Application and Implementation</b> .....	<b>73</b>
<b>5 Pin Configuration and Functions</b> .....	<b>3</b>	9.1 Application Information.....	<b>73</b>
<b>6 Specifications</b> .....	<b>5</b>	9.2 Typical Application .....	<b>73</b>
6.1 Absolute Maximum Ratings .....	<b>5</b>	9.3 Initialization Set Up .....	<b>75</b>
6.2 ESD Ratings.....	<b>5</b>	<b>10 Power Supply Recommendations</b> .....	<b>78</b>
6.3 Recommended Operating Conditions.....	<b>5</b>	<b>11 Layout</b> .....	<b>79</b>
6.4 Thermal Information .....	<b>5</b>	11.1 Layout Guidelines .....	<b>79</b>
6.5 Electrical Characteristics.....	<b>6</b>	11.2 Layout Example .....	<b>79</b>
6.6 I <sup>2</sup> C Timing Requirements.....	<b>11</b>	<b>12 Device and Documentation Support</b> .....	<b>84</b>
6.7 TDM Port Timing Requirements .....	<b>12</b>	12.1 Receiving Notification of Documentation Updates	<b>84</b>
6.8 PDM Port Timing Requirements .....	<b>12</b>	12.2 Community Resources.....	<b>84</b>
6.9 Typical Characteristics.....	<b>14</b>	12.3 Trademarks .....	<b>84</b>
<b>7 Parameter Measurement Information</b> .....	<b>19</b>	12.4 Electrostatic Discharge Caution.....	<b>84</b>
<b>8 Detailed Description</b> .....	<b>20</b>	12.5 Glossary .....	<b>84</b>
8.1 Overview .....	<b>20</b>	<b>13 Mechanical, Packaging, and Orderable Information</b> .....	<b>84</b>
8.2 Functional Block Diagram .....	<b>20</b>		

## 4 Revision History


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>Changes from Revision A (December 2017) to Revision B</b>	<b>Page</b>
• Changed From: Efficiency (%) To: VDD PSRR (dB) in <a href="#">Figure 18</a> .....	<b>15</b>
• Changed From: Efficiency (%) To: VBAT PSRR (dB) in <a href="#">Figure 19</a> .....	<b>15</b>
<b>Changes from Original (October 2017) to Revision A</b>	<b>Page</b>
• Released TAS2770 as Production Data .....	<b>1</b>

## 5 Pin Configuration and Functions

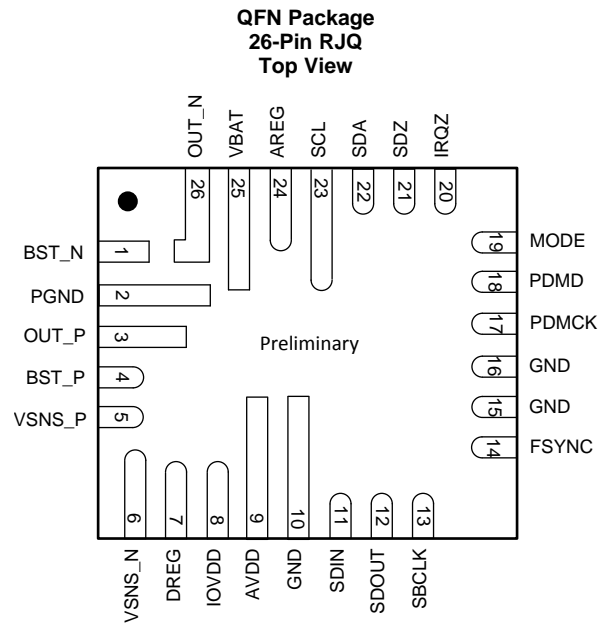

Drawing is Preliminary.

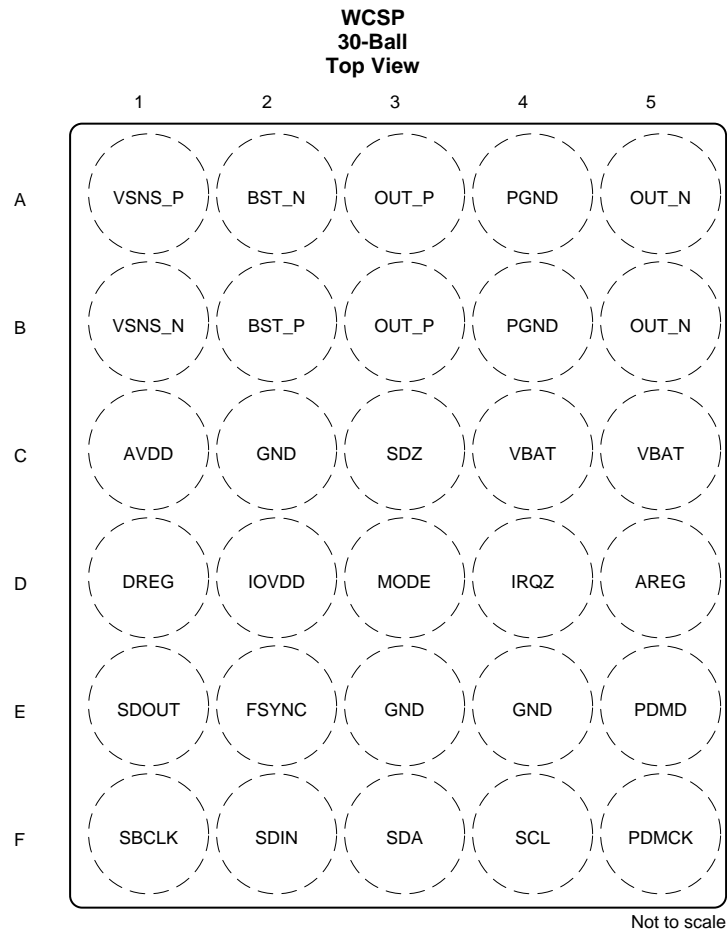

## Pin Functions

PIN			I/O	DESCRIPTION
DSBGA	QFN	NAME		
D5	24	AREG	O	Gate drive voltage regulator output. Decouple with cap to GND. Do not connect to external load.
C1	9	AVDD	P	Analog power input. Connect to 1.8V supply and decouple to GND with cap.
A2	1	BST_N	I	Class-D negative bootstrap. Connect a cap between BST_N and OUT_N.
B2	4	BST_P	I	Class-D positive bootstrap. Connect a cap between BST_P and OUT_P.
D1	7	DREG	O	Digital core voltage regulator output. Bypass to GND with a cap. Do not connect to external load.
E2	14	FSYNC	I	TDM Frame Sync.
C2, E3, E4	10, 15, 16	GND	P	Analog GND. Connect to PCB GND Plane.
D2	8	IOVDD	P	Digital IO Supply. Connect to the same 1.8 V supply that powers AVDD and decouple with a cap to GND.
D4	20	IRQZ	O	Open drain, active low interrupt pin. Pull up to IOVDD with resistor if optional internal pull up is not used.
D3	19	MODE	I	Mode detect pin. This pin can detect a short to IOVDD or GND, a 470 $\Omega$ connection to IOVDD or GND, a 2.2 k $\Omega$ connection to IOVDD or GND, a 10 k $\Omega$ connection to IOVDD or GND and a 47 k $\Omega$ connection to IOVDD. Minimize capacitive loading on this pin and do not connect to any other load.
A5, B5	26	OUT_N	O	Class-D negative output.
A3, B3	3	OUT_P	O	Class-D positive output.
F5	17	PDMCK	IO	PDM Clock.
E5	18	PDMD	I	PDM Digital Input.
A4, B4	2	PGND	P	Class-D GND. Connect to PCB GND Plane.
F1	13	SBCLK	I	TDM Serial Bit Clock in TDM/I <sup>2</sup> C Mode.
F4	23	SCL	I	I <sup>2</sup> C Clock Pin. Pull up to IOVDD with a resistor.
F3	22	SDA	IO	I <sup>2</sup> C Data Pin. Pull up to IOVDD with a resistor.
F2	11	SDIN	I	TDM Serial Data Input.
E1	12	SDOUT	IO	TDM Serial Data Output in TDM/I <sup>2</sup> C Mode.
C3	21	SDZ	I	Active low hardware shutdown.
C4, C5	25	VBAT	P	Class-D power supply input. Connect to VBAT supply and decouple with a cap.
B1	6	VSNS_N	I	Voltage Sense negative input. Connect to Class-D negative output after Ferrite bead filter.
A1	5	VSNS_P	I	Voltage Sense positive input. Connect to Class-D positive output after Ferrite bead filter.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

		MIN	MAX	UNIT
Supply Voltage	AVDD	–0.3	2	V
	IOVDD	–0.3	2	V
	VBAT	–0.3	19	V
Input voltage <sup>(2)</sup>	Digital IOs referenced to IOVDD supply	–0.3	2.3	V
Operating free-air temperature, T <sub>A</sub> ; Device is functional and reliable, some performance characteristics may be degraded.		–40	85	°C
Performance free-air temperature, T <sub>P</sub> ; All performance characteristics are met.		–20	70	°C
Operating junction temperature, T <sub>J</sub>		–40	150	°C
Storage temperature, T <sub>stg</sub>		–65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Procedures*. Exposure to absolute-maximum-rated conditions for extended periods can affect device reliability.
- (2) All digital inputs and IOs are failsafe.

### 6.2 ESD Ratings

		VALUE	UNIT
V <sub>(ESD)</sub> Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2500	V
	Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	±1500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
AVDD	Supply voltage	1.65	1.8	1.95	V
IOVDD	Supply voltage	1.65	1.8	1.95	V
VBAT	Supply voltage	4.5		16	V
V <sub>IH</sub>	High-level digital input voltage		IOVDD		V
V <sub>IL</sub>	Low-level digital input voltage		0		V
R <sub>SPK</sub>	Minimum speaker impedance	3.2			Ω
L <sub>SPK</sub>	Minimum speaker inductance	10			μH

### 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TAS2770	UNIT
		QFN (RJQ)	
		26 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	57.0	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	0.3	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	8.5	°C/W
ψ <sub>JT</sub>	Junction-to-top characterization parameter	0.2	°C/W
ψ <sub>JB</sub>	Junction-to-board characterization parameter	8.7	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	NA	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

$T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{BAT} = 12.6\text{ V}$ ,  $AVDD = IOVDD = 1.8\text{ V}$ ,  $R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ ,  $f_{in} = 1\text{ kHz}$ ,  $SSM, f_s = 48\text{ kHz}$ ,  $\text{Gain} = 21\text{ dBV}$ ,  $SDZ = 1$ , Measured filter free using [Parameter Measurement Information](#) (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DIGITAL INPUT and OUTPUT						
V <sub>IH</sub>	High-level digital input logic voltage threshold	All digital pins except SDA and SCL; IOVDD = 1.8 V.	0.65 × IOVDD			V
V <sub>IL</sub>	Low-level digital input logic voltage threshold	All digital pins except SDA and SCL; IOVDD = 1.8 V.			0.35 × IOVDD	V
V <sub>IH(I2C)</sub>	High-level digital input logic voltage threshold	SDA and SCL; IOVDD = 1.8 V.	0.7 × IOVDD			V
V <sub>IL(I2C)</sub>	Low-level digital input logic voltage threshold	SDA and SCL; IOVDD = 1.8 V.			0.3 × IOVDD	V
V <sub>OH</sub>	High-level digital output voltage	All digital pins except SDA, SCL and IRQZ; IOVDD = 1.8 V; I <sub>OH</sub> = 2 mA.	IOVDD – 0.45 V			V
V <sub>OL</sub>	Low-level digital output voltage	All digital pins except SDA, SCL and IRQZ; IOVDD = 1.8 V; I <sub>OL</sub> = –2 mA.			0.45	V
V <sub>OL(I2C)</sub>	Low-level digital output voltage	SDA and SCL; IOVDD = 1.8 V; I <sub>OL(I2C)</sub> = –2 mA.			0.2 × IOVDD	V
V <sub>OL(IRQZ)</sub>	Low-level digital output voltage for IRQZ open drain Output	IRQZ; IOVDD = 1.8 V; I <sub>OL(IRQZ)</sub> = –2 mA.			0.45	V
I <sub>IH</sub>	Input logic-high leakage for digital inputs	All digital pins; Input = IOVDD.	–5	0.1	5	μA
I <sub>IL</sub>	Input logic-low leakage for digital inputs	All digital pins; Input = GND.	–5	0.1	5	μA
C <sub>IN</sub>	Input capacitance for digital inputs	All digital pins	5			pF
R <sub>PD</sub>	Pull down resistance for digital input/IO pins when asserted on	SDOUT, SDIN, FSYNC, SBCLK, PDMD, PDMCK	18			kΩ
TDM SERIAL AUDIO PORT						
PCM Sample Rates & FSYNC Input Frequency	Single Speed, I <sup>2</sup> S/TDM Operation		48		kHz	
	Double Speed, I <sup>2</sup> S/TDM Operation		96			
	Quadruple Speed, I <sup>2</sup> S/TDM Operation		192			
SBCLK Input Frequency	I <sup>2</sup> S/TDM Operation		2.54		27.1	MHz
SBCLK Maximum Input Jitter	RMS Jitter below 40 kHz that can be tolerated without performance degradation			1		ns
	RMS Jitter above 40 kHz that can be tolerated without performance degradation			10		
SBCLK Cycles per FSYNC in I <sup>2</sup> S and TDM Modes	Values: 64, 96, 128, 192, 256, 384 and 512		64		512	Cycles
PDM AUDIO PORT						
PDM clock input frequency	Single Rate PDM		3.072		MHz	
	Double Rate PDM		6.144			
PDM sensor clock rate to PCM sample rate oversampling ratios	Single Speed PCM. Values: 64X and 128X.		64		128	
	Double Speed PCM. Values: 32X and 64X.		32		64	
	Quadruple Speed PCM. Values: 16X and 32X.		16		32	
PROTECTION CIRCUITRY						
Thermal shutdown temperature			140		°C	
Thermal shutdown retry			1.5		s	
VBAT undervoltage lockout threshold (UVLO)	UVLO is asserted		4		V	

## Electrical Characteristics (continued)

$T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{BAT} = 12.6\text{ V}$ ,  $AVDD = IOVDD = 1.8\text{ V}$ ,  $R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ ,  $f_{in} = 1\text{ kHz}$ ,  $SSM$ ,  $f_s = 48\text{ kHz}$ ,  $\text{Gain} = 21\text{ dBV}$ ,  $SDZ = 1$ , Measured filter free using [Parameter Measurement Information](#) (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
VBAT overvoltage lockout threshold (OVLO)		OVLO is asserted		18		V
<b>AMPLIFIER PERFORMANCE</b>						
$P_{OUT}$	Maximum Continuous Output Power 0.1% THD+N	$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 0.1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		3.7		W
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 0.1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		6.6		
		$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 0.1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		8.5		
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 0.1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		14.2		
	Maximum Continuous Output Power 1% THD+N	$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		4		
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		7.1		
		$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		9.1		
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , THD+N = 1 %, $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		15.4		
	System efficiency at $P_{OUT} = 1\text{ W}$	$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		89 %		
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		84 %		
		$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		87.5 %		
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		82.7 %		
	System efficiency at 0.1% THD+N power level	$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , $P_{OUT} = 3.7\text{ W}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		92 %		
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , $P_{OUT} = 6.6\text{ W}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		87 %		
		$R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , $P_{OUT} = 8.5\text{ W}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		92 %		
		$R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , $P_{OUT} = 14.2\text{ W}$ , $f_{in} = 1\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		86 %		
THD+N	Total harmonic distortion + noise	$P_{OUT} = 1\text{ W}$ , $R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 20\text{ Hz} - 20\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		0.01 %		
		$P_{OUT} = 1\text{ W}$ , $R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 20\text{ Hz} - 20\text{ kHz}$ , $V_{BAT} = 8.4\text{ V}$		0.01 %		
		$P_{OUT} = 1\text{ W}$ , $R_L = 8\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 20\text{ Hz} - 20\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		0.01 %		
		$P_{OUT} = 1\text{ W}$ , $R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ , $f_{in} = 20\text{ Hz} - 20\text{ kHz}$ , $V_{BAT} = 12.6\text{ V}$		0.01 %		
$V_N$	Idle channel noise	A-Weighted, 20 Hz - 20 kHz, DAC Modulator Running		31		$\mu\text{V}$
		$V_{BAT} = 8.4\text{ V}$		32		$\mu\text{V}$
		$V_{BAT} = 12.6\text{ V}$		36		$\mu\text{V}$

## Electrical Characteristics (continued)

$T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{BAT} = 12.6\text{ V}$ ,  $AVDD = IOVDD = 1.8\text{ V}$ ,  $R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ ,  $f_{in} = 1\text{ kHz}$ , SSM,  $f_s = 48\text{ kHz}$ , Gain = 21 dBV, SDZ = 1, Measured filter free using [Parameter Measurement Information](#) (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
F <sub>PWM</sub>	Class-D PWM switching frequency	Average frequency in Spread Spectrum Mode, CLASSD_SYNC=0		384		kHz
		Fixed Frequency Mode, CLASSD_SYNC=0	345.6	384	422.4	
		Fixed Frequency Mode, CLASSD_SYNC=1, f <sub>s</sub> = 44.1, 88.2, 174.6 kHz		44.1·8		
		Fixed Frequency Mode, CLASSD_SYNC=1, f <sub>s</sub> = 48, 96, 192 kHz		48·8		
V <sub>OS</sub>	Output offset voltage		-1		1	mV
DNR	Dynamic range	A-Weighted, -60 dBFS Method		108		dB
SNR	Signal to noise ratio	A-Weighted, Referenced to 1 % THD+N Output Level		108		dB
K <sub>CP</sub>	Click and pop performance	Into and out of Mute, Shutdown, Power Up, Power Down and audio clocks starting and stopping. A-weighted		5		mV
	Programmable output level range		12.5		21	dBV
	Programmable output level step size			0.5		dB
AV <sub>ERROR</sub>	Amplifier gain error	P <sub>OUT</sub> =1W		±0.1		dB
A <sub>RIPPLE</sub>	Frequency response passband ripple	20 Hz - 20 kHz		±0.1		dB
	Mute attenuation	Device in Shutdown or Muted in Normal Operation		110		dB
	Output short circuit limit	V <sub>BAT</sub> = 12.6 V, Output to Output, Output to GND or Output to V <sub>BAT</sub> Short		6		A
R <sub>DS(ON)FET</sub>	Power stage on-resistance (high-side + low-side + sense resistor)	T <sub>A</sub> = 25 °C		510		mΩ
	V <sub>BAT</sub> power-supply rejection ratio	V <sub>BAT</sub> = 12.6 V + 200 mV <sub>pp</sub> , f <sub>ripple</sub> = 217 Hz		105		dB
		V <sub>BAT</sub> = 12.6 V + 200 mV <sub>pp</sub> , f <sub>ripple</sub> = 20 kHz		86		
	AV <sub>DD</sub> power-supply rejection ratio	AV <sub>DD</sub> = 1.8 V + 200 mV <sub>pp</sub> , f <sub>ripple</sub> = 217 Hz		95		dB
		AV <sub>DD</sub> = 1.8 V + 200 mV <sub>pp</sub> , f <sub>ripple</sub> = 20 kHz		88		
	Turn on time from release of SW shutdown	No Volume Ramping		1.2		ms
		Volume Ramping		5.3		
	Turn off time from assertion of SW shutdown to amp Hi-Z	No Volume Ramping		0.3		ms
		Volume Ramping		4.7		
PCM PLAYBACK CHARACTERISTICS						
	Playback latency from latched input sample to speaker terminals	Single Speed, I <sup>2</sup> S/TDM		3.5		samples
		Double Speed, I <sup>2</sup> S/TDM		3.5		
		Quadruple Speed, I <sup>2</sup> S/TDM		3.5		
	Playback –0.1 dB bandwidth	Single Speed, I <sup>2</sup> S/TDM			23.06	kHz
		Double Speed, I <sup>2</sup> S/TDM			21.79	
		Quadruple Speed, I <sup>2</sup> S/TDM			21.69	



## Electrical Characteristics (continued)

$T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{BAT} = 12.6\text{ V}$ ,  $AVDD = IOVDD = 1.8\text{ V}$ ,  $R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ ,  $f_{in} = 1\text{ kHz}$ ,  $SSM, f_s = 48\text{ kHz}$ ,  $\text{Gain} = 21\text{ dBV}$ ,  $SDZ = 1$ , Measured filter free using [Parameter Measurement Information](#) (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Playback –3 dB bandwidth		Single Speed, I <sup>2</sup> S/TDM			24	kHz
		Double Speed, I <sup>2</sup> S/TDM			23	
		Quadruple Speed, I <sup>2</sup> S/TDM			27.26	
PDM PLAYBACK CHARACTERISTICS						
Playback latency from latched data bit to speaker terminals		Single Rate PDM, PDMD input		7.07		μs
		Double Rate PDM, PDMD input		5.02		
Playback –0.1 dB bandwidth		Single Rate PDM, PDMD input		41.5		kHz
		Double Rate PDM, PDMD input		88		
Playback –3 dB bandwidth		Single Rate PDM, PDMD input		77.5		kHz
		Double Rate PDM, PDMD input		143		
SPEAKER CURRENT SENSE						
DNR	Dynamic range	Un-Weighted, Relative to 0 dBFS		69		dB
THD+N	Total harmonic distortion + noise	R <sub>L</sub> = 8 Ω + 33 μH, f <sub>in</sub> = 1 kHz, P <sub>OUT</sub> = 5 W		–60		dB
		R <sub>L</sub> = 4 Ω + 33 μH, f <sub>in</sub> = 1 kHz, P <sub>OUT</sub> = 7.5 W		–60		
	Full-scale input current			3.75		A
	Current-sense accuracy	R <sub>L</sub> = 8 Ω + 33 μH, I <sub>OUT</sub> = 354 mA <sub>RMS</sub> (P <sub>OUT</sub> = 1 W)		±1 %		
	Current-sense gain error over temperature	–20°C to 70°C, P <sub>OUT</sub> = 1 W		±0.75%		
	Current-sense gain error over output power	50 mW to 0.1 % THD+N level, f <sub>in</sub> = 1 kHz, 4 Ω, using a 40Hz-34dB pilot tone		±0.75%		
	Current-sense frequency response	Max deviation above and below passband gain		±0.2		dB
SPEAKER VOLTAGE SENSE						
DNR	Dynamic range	Un-Weighted, Relative 0 dBFS		69		dB
THD+N	Total harmonic distortion + noise	R <sub>L</sub> = 8 Ω + 33 μH, f <sub>in</sub> = 1 kHz, P <sub>OUT</sub> = 5 W		–60		dB
		R <sub>L</sub> = 4 Ω + 33 μH, f <sub>in</sub> = 1 kHz, P <sub>OUT</sub> = 7.5 W		–60		
	Full-scale input voltage			14		V <sub>PK</sub>
	Voltage-sense accuracy	R <sub>L</sub> = 8 Ω + 33 μH, I <sub>OUT</sub> = 354 mA <sub>RMS</sub> (P <sub>OUT</sub> = 1 W)		±1%		
	Voltage-sense gain error over temperature	–20°C to 70°C, P <sub>OUT</sub> = 1 W		±0.75%		
	Voltage-sense gain error over output power	50 mW to 0.1 % THD+N level, f <sub>in</sub> = 1 kHz, 4 Ω, using a 40Hz-34dB pilot tone		±0.75%		
	Voltage-sense frequency response	Max deviation above and below passband gain		±0.2		dB
SPEAKER VOLTAGE/CURRENT SENSE RATIO						
	Gain ratio error over output power	50 mW to 0.1 % THD+N level, f <sub>in</sub> = 1 kHz, 4 Ω, using a 40Hz-34dB pilot tone		±0.75%		
	Gain ratio error over temperature	–20°C to 70°C		±0.5%		
TYPICAL CURRENT CONSUMPTION						

## Electrical Characteristics (continued)

$T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{BAT} = 12.6\text{ V}$ ,  $AVDD = IOVDD = 1.8\text{ V}$ ,  $R_L = 4\text{ }\Omega + 33\text{ }\mu\text{H}$ ,  $f_{in} = 1\text{ kHz}$ ,  $SSM$ ,  $f_s = 48\text{ kHz}$ ,  $\text{Gain} = 21\text{ dBV}$ ,  $SDZ = 1$ , Measured filter free using [Parameter Measurement Information](#) (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Current consumption in hardware shutdown	SDZ = 0, VBAT		0.1		μA
	SDZ = 0, AVDD		1		
	SDZ = 0, IOVDD		0.1		
Current consumption in software shutdown	All Clocks Stopped, VBAT		10		μA
	All Clocks Stopped, AVDD		10		
	All Clocks Stopped, IOVDD		1		
Current consumption during active operation with IV sense disabled	f <sub>s</sub> = 48 kHz, VBAT		3.1		mA
	f <sub>s</sub> = 48 kHz, AVDD		10		
	f <sub>s</sub> = 48 kHz, IOVDD		0.1		
Current consumption during active operation with IV sense enabled	f <sub>s</sub> = 48 kHz, VBAT		3.1		mA
	f <sub>s</sub> = 48 kHz, AVDD		12.5		
	f <sub>s</sub> = 48 kHz, IOVDD		0.1		
PEAK VOLTAGE LIMITER					
Limiter maximum threshold		2		14.7	V
Limiter minimum threshold		2		14.7	V
Limiter inflection point		2		14.7	V
Limiter VBAT tracking slope		1		4	V/V
Limiter max attenuation		1		16.5	dB
Limiter latency	Time from VBAT dipping below threshold to initial gain reduction			23	μs
Limiter attack rate		5		640	μs/step
Limiter attack step size		0.25		2	dB/step
Limiter hold time		0		1000	ms
Limiter release rate		10		1500	ms/step
Limiter release step size		0.25		2	dB/step
BROWN OUT PREVENTION LIMITER					
Brownout prevention threshold		4.5		10.875	V
Brownout prevention threshold step size			25		mV
Brownout prevention threshold tolerance	Measured at VBAT of 5V and 10V		±25		mV
Brownout prevention latency	Time from VBAT dipping below threshold to initial gain reduction			20	μs
Brownout prevention attack rate		5		640	μs/step
Brownout prevention attack step size		0.5		2	dB/step
Brownout prevention hold time		0		1000	ms
Brownout prevention release rate		10		1500	ms/step
Brownout prevention release step size		0.25		2	dB/step

## 6.6 I<sup>2</sup>C Timing Requirements

T<sub>A</sub> = 25 °C, AVDD = IOVDD = 1.8 V (unless otherwise noted)

		MIN	NOM	MAX	UNIT
<b>Standard-Mode</b>					
f <sub>SCL</sub>	SCL clock frequency	0		100	kHz
t <sub>HD;STA</sub>	Hold time (repeated) START condition. After this period, the first clock pulse is generated.	4			μs
t <sub>LOW</sub>	LOW period of the SCL clock	4.7			μs
t <sub>HIGH</sub>	HIGH period of the SCL clock	4			μs
t <sub>SU;STA</sub>	Setup time for a repeated START condition	4.7			μs
t <sub>HD;DAT</sub>	Data hold time: For I <sup>2</sup> C bus devices	0		3.45	μs
t <sub>SU;DAT</sub>	Data set-up time	250			ns
t <sub>r</sub>	SDA and SCL rise time			1000	ns
t <sub>f</sub>	SDA and SCL fall time			300	ns
t <sub>SU;STO</sub>	Set-up time for STOP condition	4			μs
t <sub>BUF</sub>	Bus free time between a STOP and START condition	4.7			μs
C <sub>b</sub>	Capacitive load for each bus line			400	pF
<b>Fast-Mode</b>					
f <sub>SCL</sub>	SCL clock frequency	0		400	kHz
t <sub>HD;STA</sub>	Hold time (repeated) START condition. After this period, the first clock pulse is generated.	0.6			μs
t <sub>LOW</sub>	LOW period of the SCL clock	1.3			μs
t <sub>HIGH</sub>	HIGH period of the SCL clock	0.6			μs
t <sub>SU;STA</sub>	Setup time for a repeated START condition	40.6			μs
t <sub>HD;DAT</sub>	Data hold time: For I <sup>2</sup> C bus devices	0		0.9	μs
t <sub>SU;DAT</sub>	Data set-up time	100			ns
t <sub>r</sub>	SDA and SCL rise time	20 + 0.1 × C <sub>b</sub>		300	ns
t <sub>f</sub>	SDA and SCL fall time	20 + 0.1 × C <sub>b</sub>		300	ns
t <sub>SU;STO</sub>	Set-up time for STOP condition	0.26			μs
t <sub>BUF</sub>	Bus free time between a STOP and START condition	1.3			μs
C <sub>b</sub>	Capacitive load for each bus line			400	pF
<b>Fast-Mode Plus</b>					
f <sub>SCL</sub>	SCL clock frequency	0		1000	kHz
t <sub>HD;STA</sub>	Hold time (repeated) START condition. After this period, the first clock pulse is generated.	0.26			μs
t <sub>LOW</sub>	LOW period of the SCL clock	0.5			μs
t <sub>HIGH</sub>	HIGH period of the SCL clock	0.26			μs
t <sub>SU;STA</sub>	Setup time for a repeated START condition	0.26			μs
t <sub>HD;DAT</sub>	Data hold time: For I <sup>2</sup> C bus devices	0			μs
t <sub>SU;DAT</sub>	Data set-up time	50			ns
t <sub>r</sub>	SDA and SCL Rise Time			120	ns
t <sub>f</sub>	SDA and SCL Fall Time			120	ns
t <sub>SU;STO</sub>	Set-up time for STOP condition				μs
t <sub>BUF</sub>	Bus free time between a STOP and START condition	0.5			μs
C <sub>b</sub>	Capacitive load for each bus line			550	pF

## 6.7 TDM Port Timing Requirements

$T_A = 25^\circ\text{C}$ ,  $AVDD = IOVDD = 1.8\text{ V}$ , 20 pF load on all outputs (unless otherwise noted)

		MIN	NOM	MAX	UNIT
$t_H(\text{SBCLK})$	SBCLK high period	40			ns
$t_L(\text{SBCLK})$	SBCLK low period	40			ns
$t_{SU}(\text{FSYNC})$	FSYNC setup time	8			ns
$t_{HLD}(\text{FSYNC})$	FSYNC hold time	8			ns
$t_{SU}(\text{FSYNC})$	SDIN setup time	8			ns
$t_{HLD}(\text{SDIN})$	SDIN hold time	8			ns
$t_d(\text{DO-FSYNC})$	FSYNC to SDOOUT delay (tx_offset = 0 only)	50% of FSYNC to 50% of SDOOUT		35	ns
$t_d(\text{DO-SBCLK})$	SBCLK to SDOOUT delay	50% of FSYNC to 50% of SDOOUT		35	ns
$t_r(\text{SBCLK})$	SBCLK rise time	10 % - 90 % Rise Time		8	ns
$t_f(\text{SBCLK})$	SBCLK fall time	90 % - 10 % Fall Time		8	ns

## 6.8 PDM Port Timing Requirements

$T_A = 25^\circ\text{C}$ ,  $AVDD = IOVDD = 1.8\text{ V}$ , 20 pF load on all outputs (unless otherwise noted)

		MIN	NOM	MAX	UNIT
$t_{SU}(\text{PDM})$	PDM IN setup time	20			ns
$t_{HLD}(\text{PDM})$	PDM IN hold time	3			ns
$t_r(\text{PDM})$	PDM IN rise time	10 % - 90 % Rise Time		4	ns
$t_f(\text{PDM})$	PDM IN fall time	90 % - 10 % Fall Time		4	ns

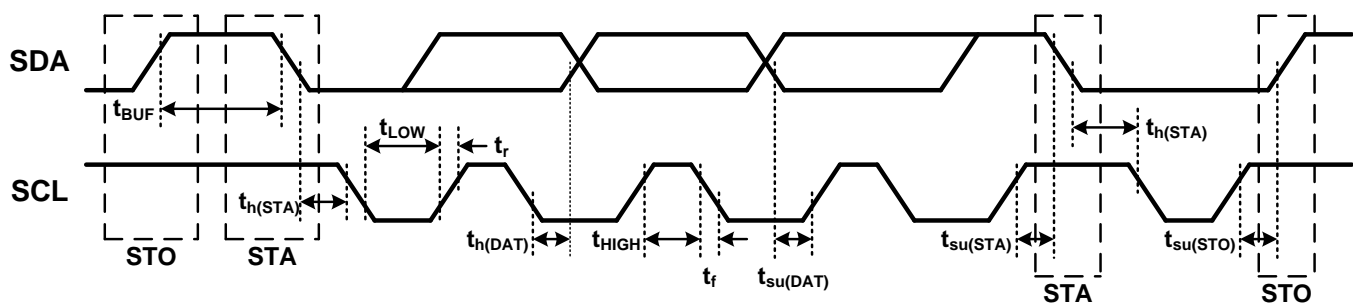


Figure 1. I2C Timing Diagram

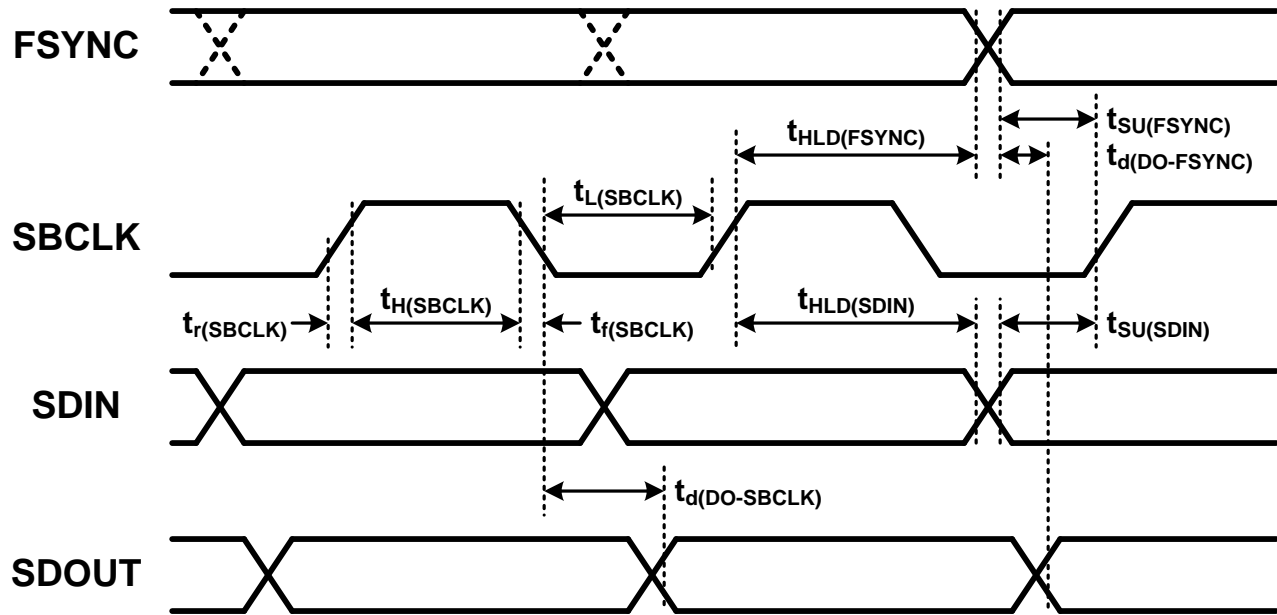


Figure 2. TDM Timing Diagram







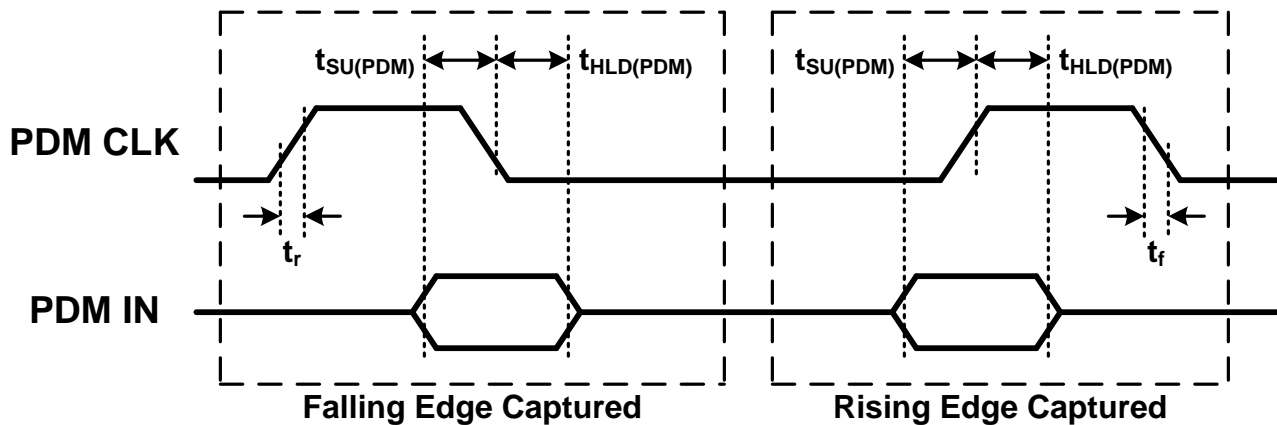


Figure 3. PDM Timing Diagram







## 6.9 Typical Characteristics

At  $T_A = 25^\circ\text{C}$ ,  $f_{\text{SPK\_AMP}} = 384 \text{ kHz}$ , input signal is 1 kHz Sine, unless otherwise noted. Filter used for Load Resistance is 30  $\mu\text{H}$ , unless otherwise noted.

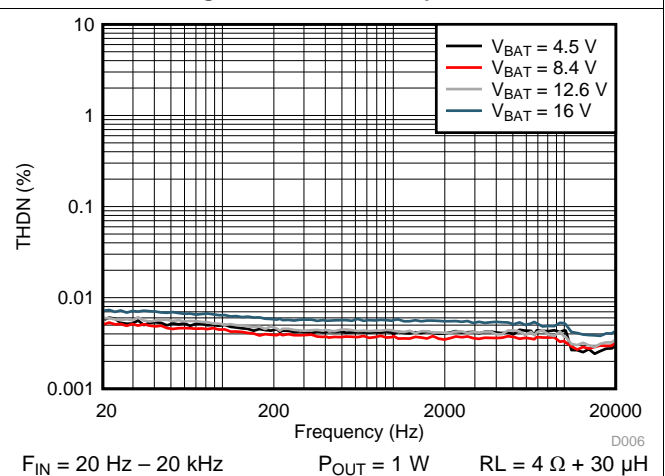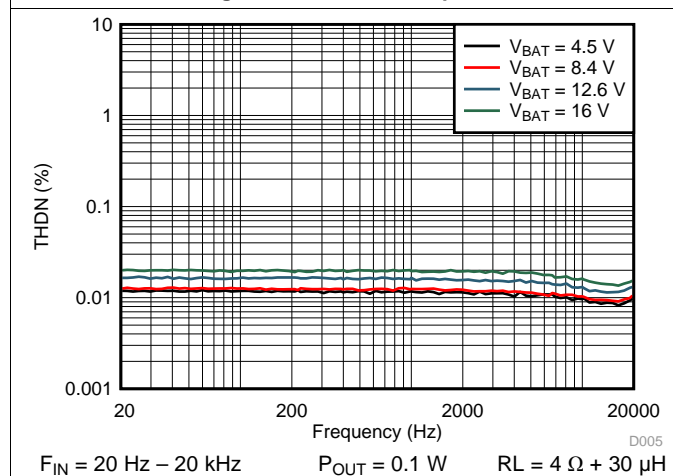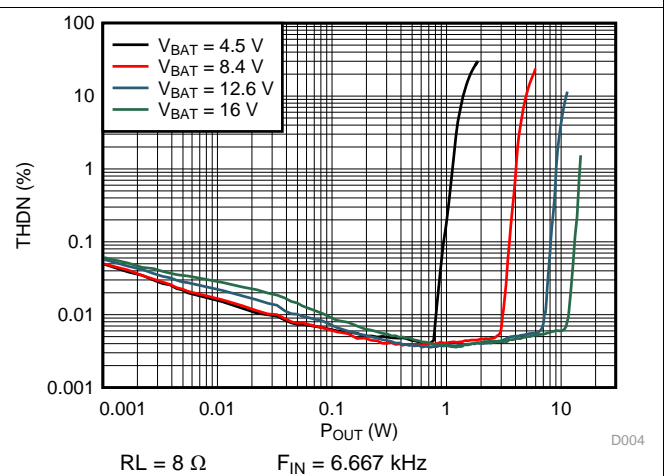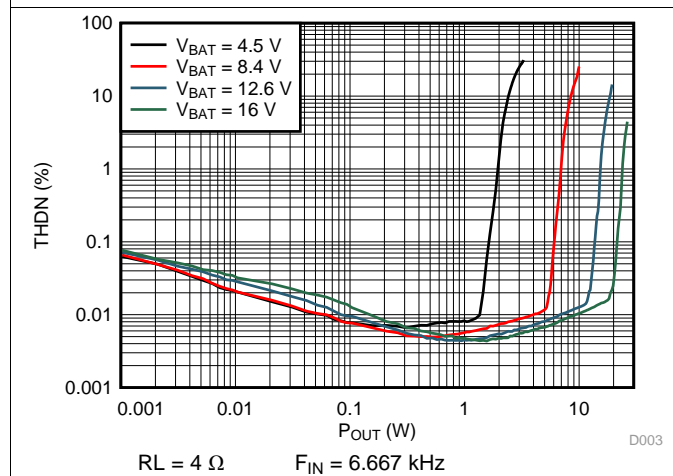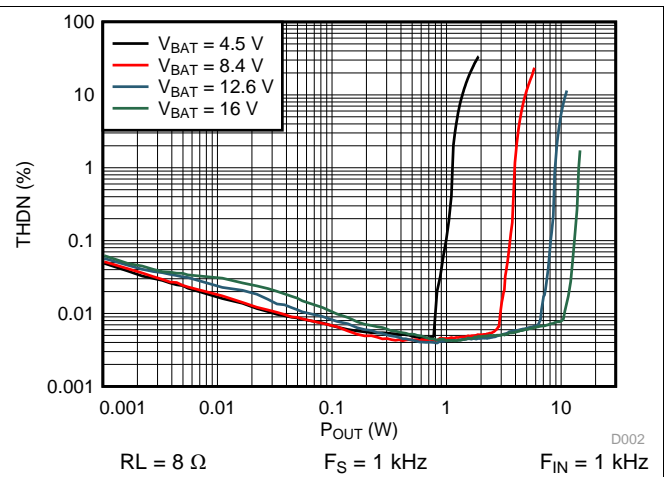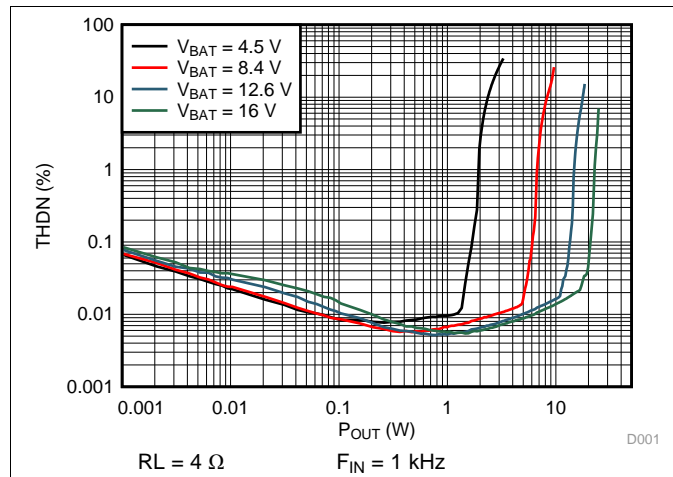

## Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $f_{\text{SPK\_AMP}} = 384\text{ kHz}$ , input signal is 1 kHz Sine, unless otherwise noted. Filter used for Load Resistance is 30  $\mu\text{H}$ , unless otherwise noted.

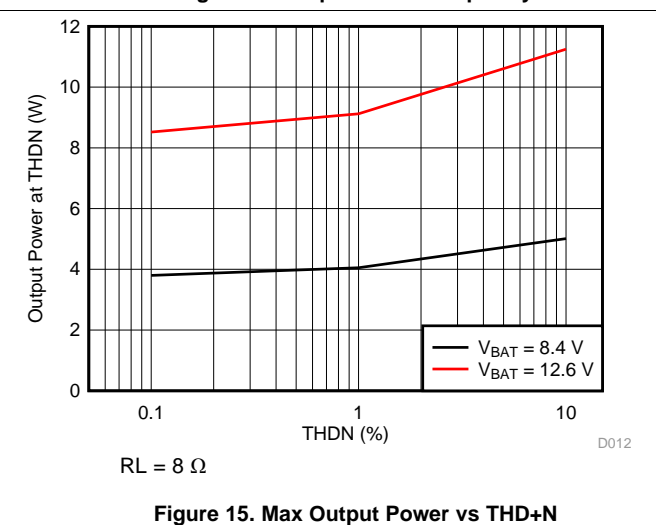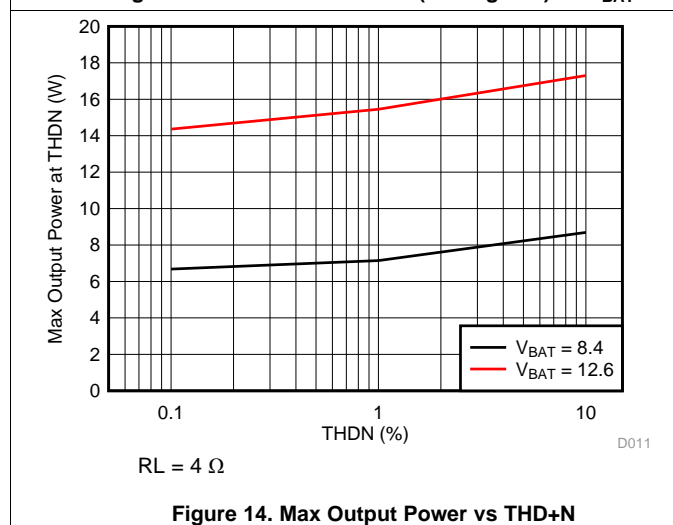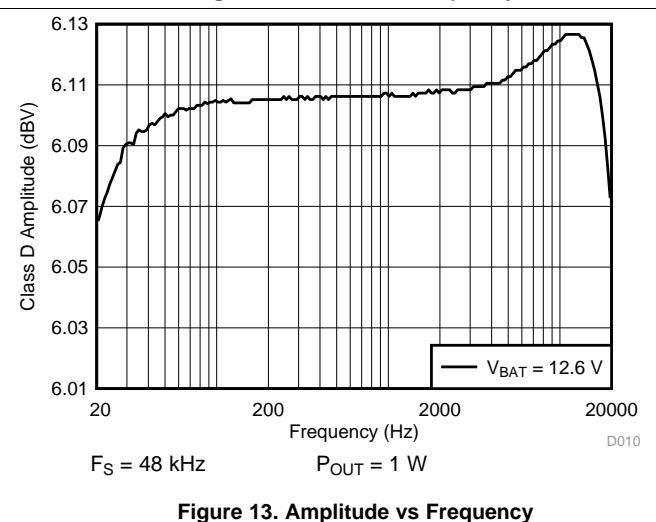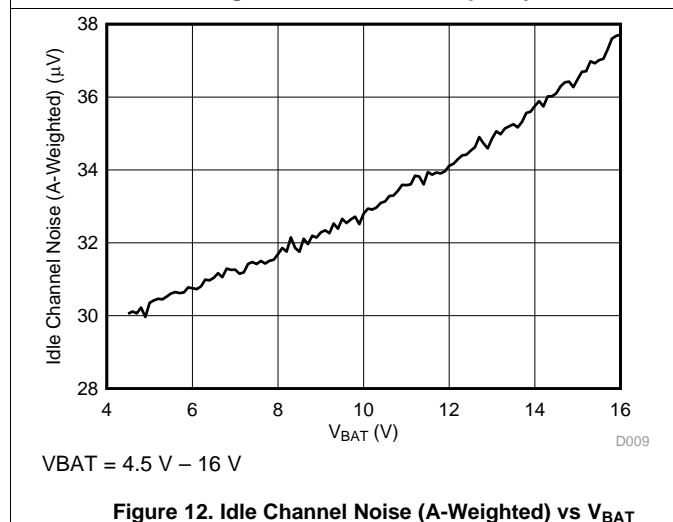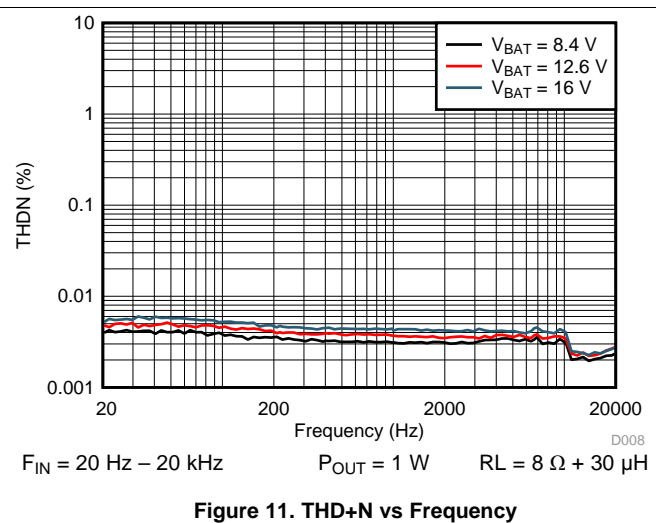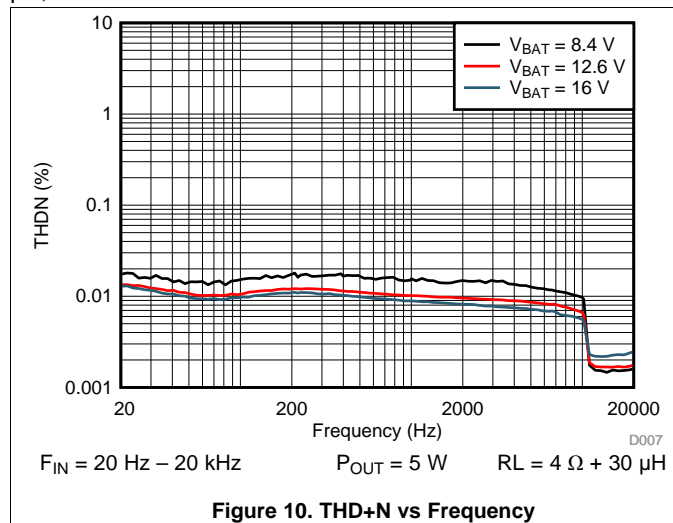

## Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $f_{\text{SPK\_AMP}} = 384\text{ kHz}$ , input signal is 1 kHz Sine, unless otherwise noted. Filter used for Load Resistance is 30  $\mu\text{H}$ , unless otherwise noted.

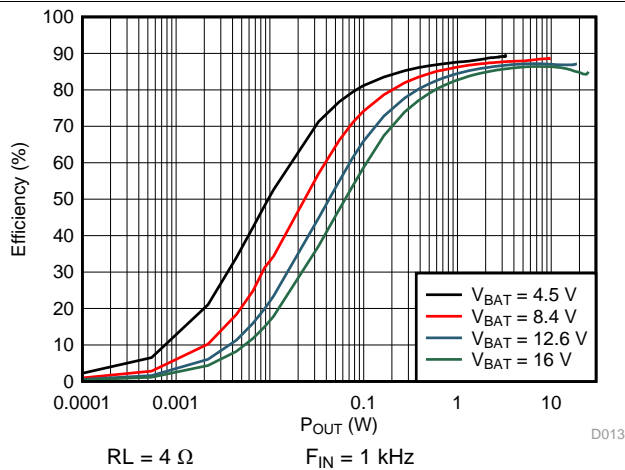


Figure 16. Efficiency vs Output Power

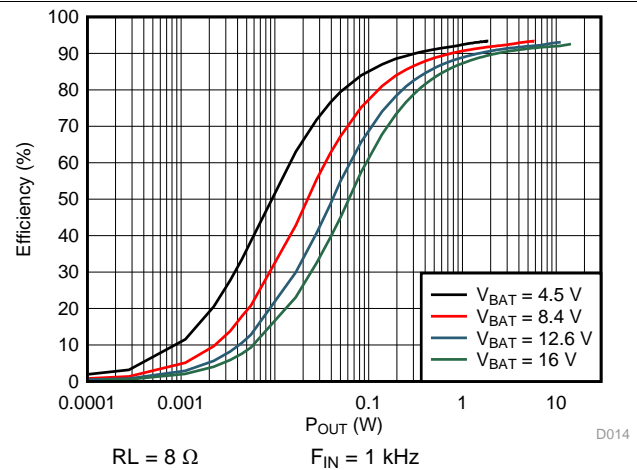


Figure 17. Efficiency vs Output Power

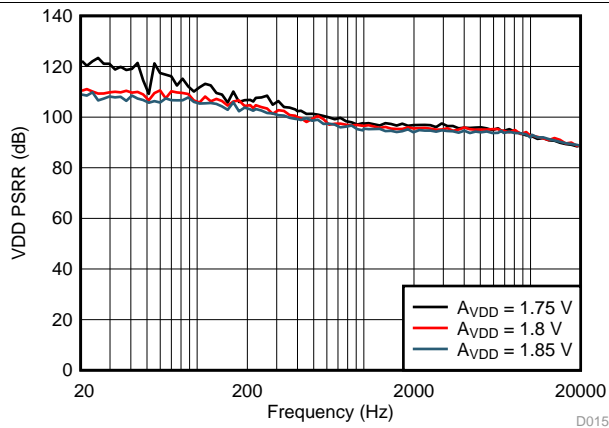


Figure 18. VDD PSRR vs Frequency

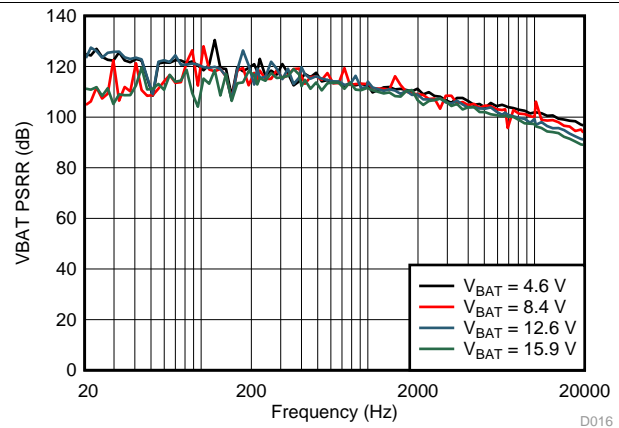


Figure 19. VBAT PSRR vs Frequency

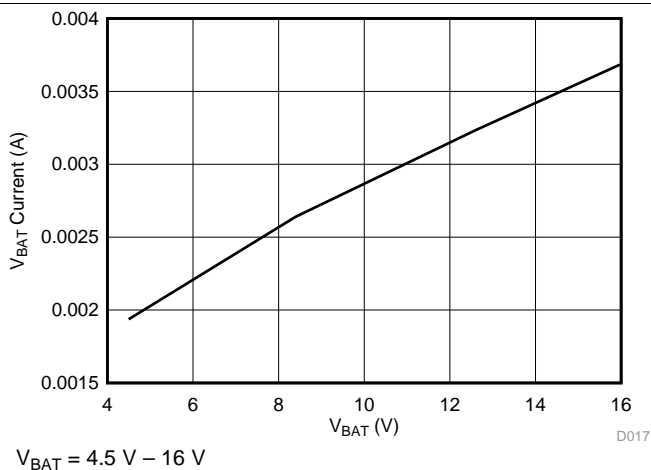


Figure 20.  $V_{\text{BAT}}$  Idle Current vs  $V_{\text{BAT}}$


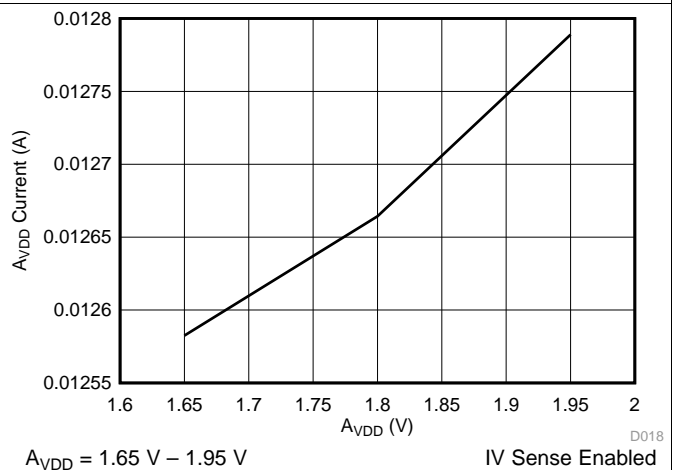


Figure 21.  $A_{\text{VDD}}$  Idle Current vs  $A_{\text{VDD}}$




## Typical Characteristics (continued)


At  $T_A = 25^\circ\text{C}$ ,  $f_{\text{SPK\_AMP}} = 384\text{ kHz}$ , input signal is 1 kHz Sine, unless otherwise noted. Filter used for Load Resistance is 30  $\mu\text{H}$ , unless otherwise noted.

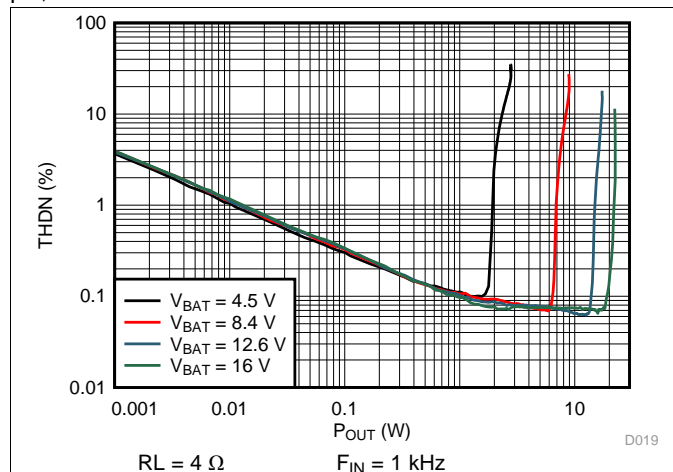


**Figure 22.  $I_{\text{SENSE}}$  THD+N vs Output Power**

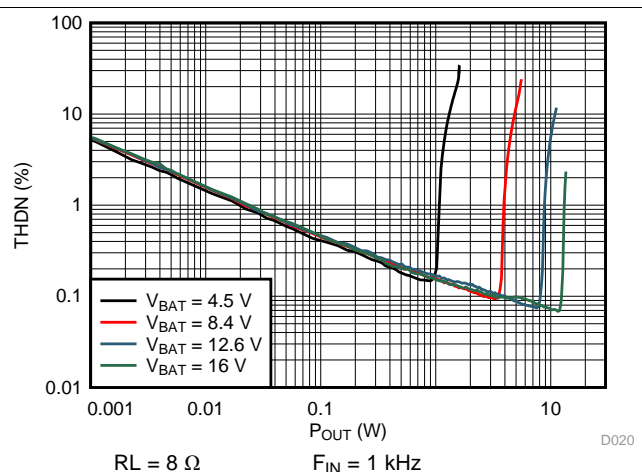


**Figure 23.  $I_{\text{SENSE}}$  THD+N vs Output Power**

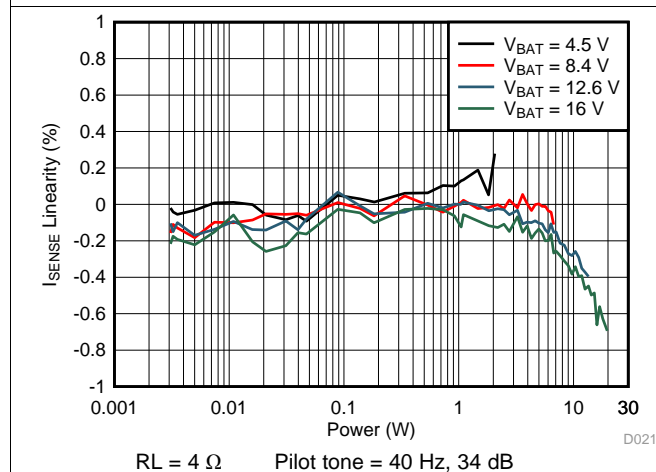


**Figure 24.  $I_{\text{SENSE}}$  Gain Linearity vs Output Power**

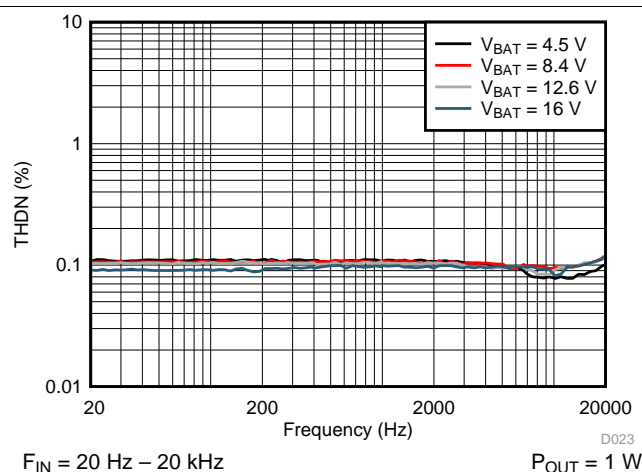

**Figure 25.  $I_{\text{SENSE}}$  THD+N vs Frequency**

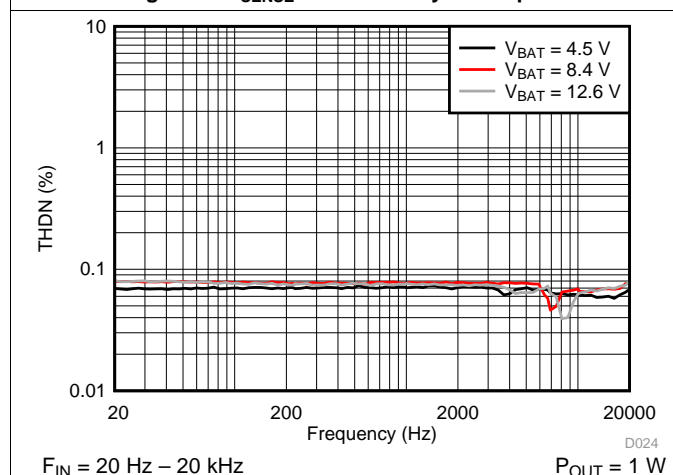


**Figure 26.  $I_{\text{SENSE}}$  THD+N vs Frequency**

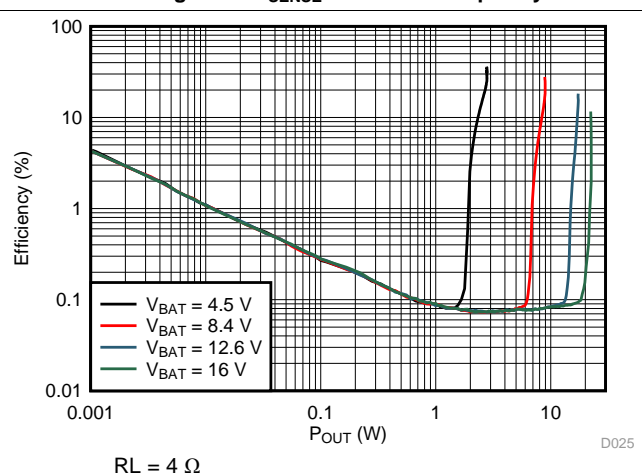

**Figure 27.  $V_{\text{SENSE}}$  THD+N vs Output Power**



## Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $f_{\text{SPK\_AMP}} = 384\text{ kHz}$ , input signal is 1 kHz Sine, unless otherwise noted. Filter used for Load Resistance is 30  $\mu\text{H}$ , unless otherwise noted.

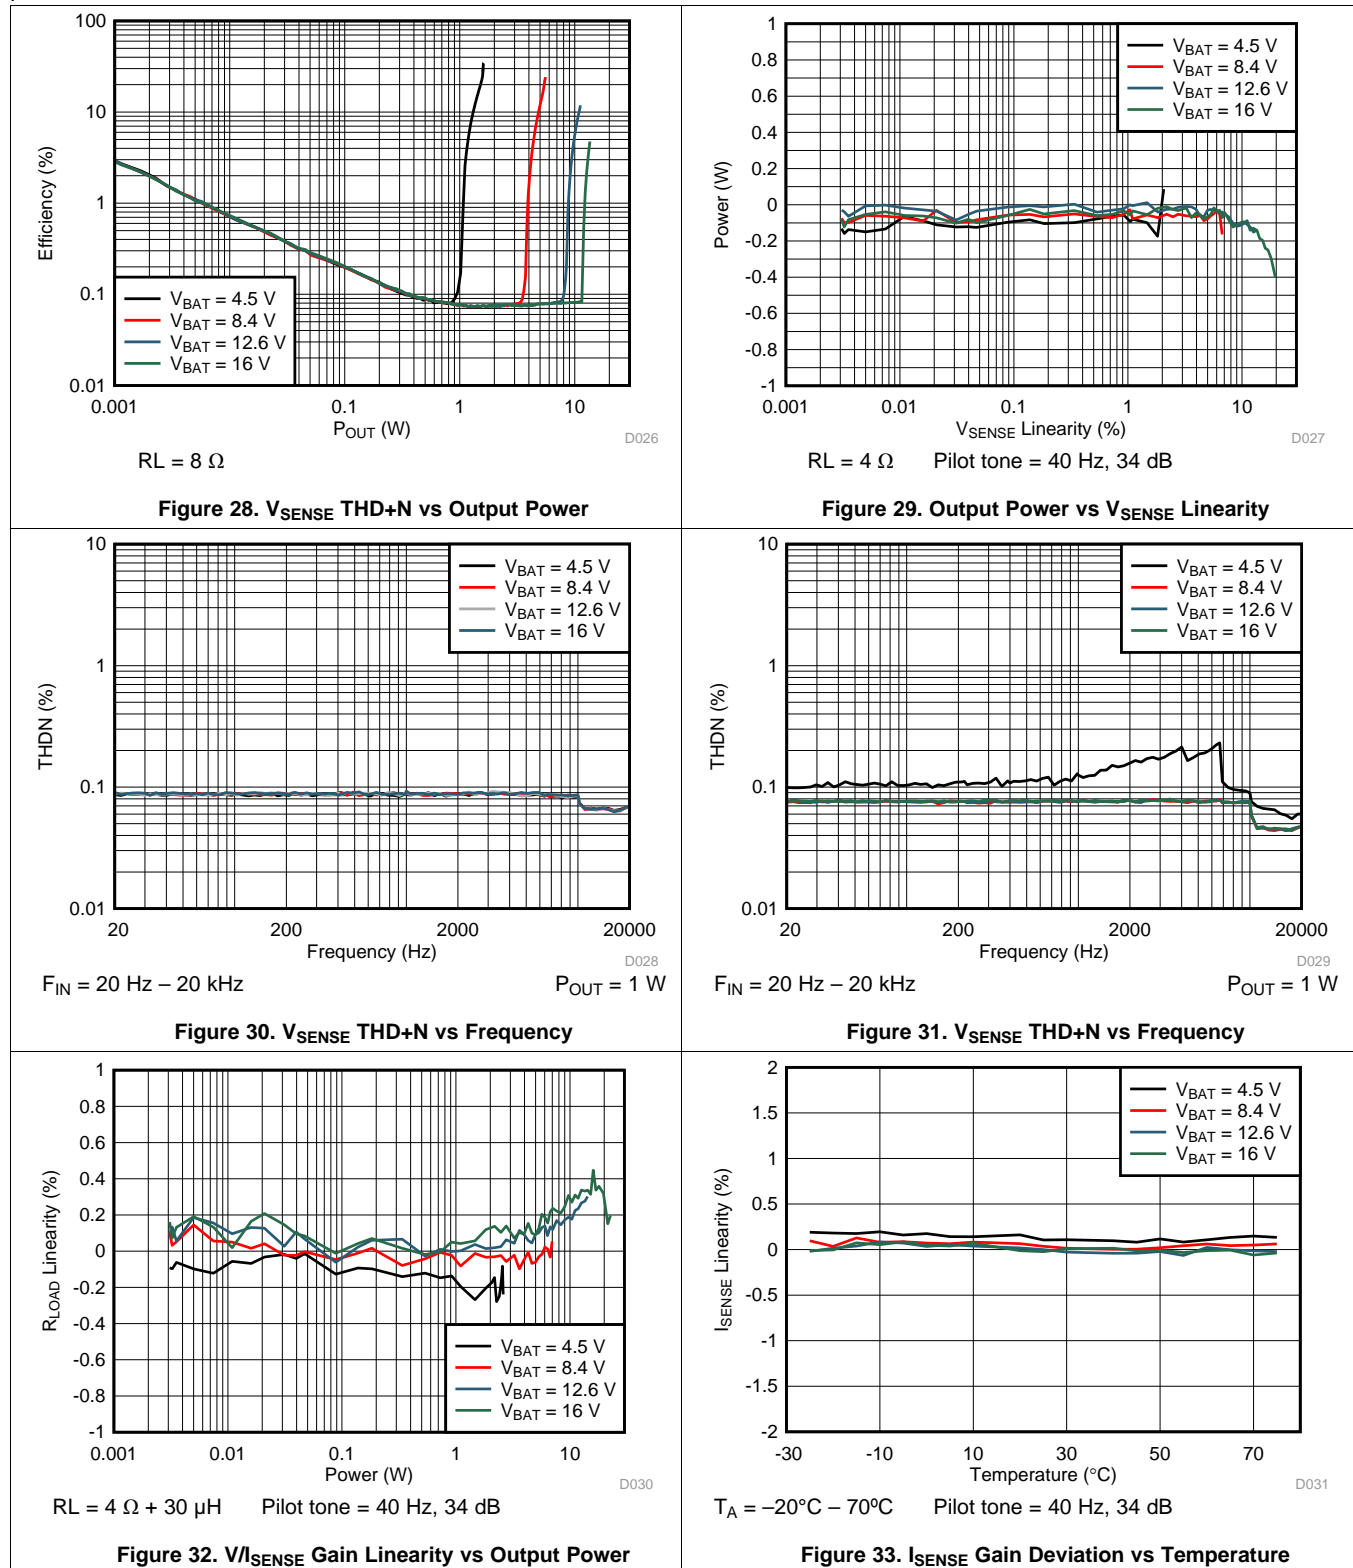


## Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $f_{\text{SPK\_AMP}} = 384 \text{ kHz}$ , input signal is 1 kHz Sine, unless otherwise noted. Filter used for Load Resistance is 30  $\mu\text{H}$ , unless otherwise noted.

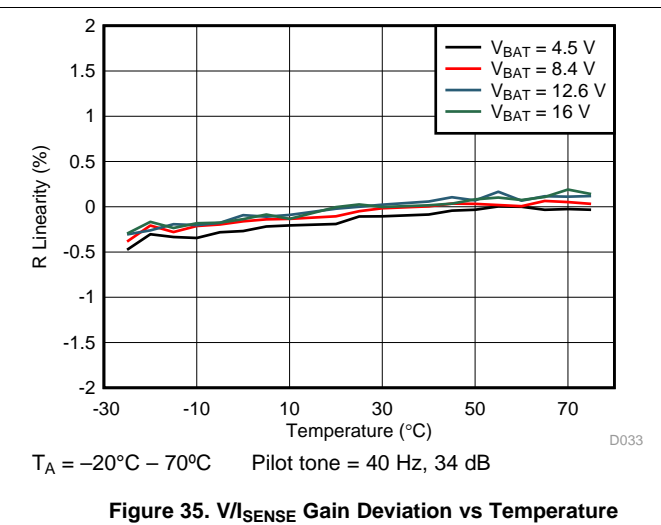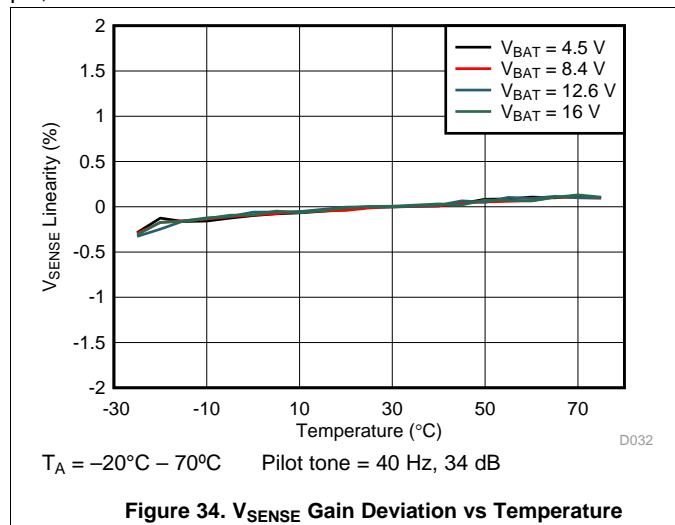

## 7 Parameter Measurement Information

All typical characteristics for the devices are measured using the Bench EVM and an Audio Precision SYS-2722 Audio Analyzer. A PSIA interface is used to allow the I<sup>2</sup>S interface to be driven directly into the SYS-2722. Speaker output terminals are connected to the Audio-Precision analyzer analog inputs through a differential-to-single ended(D2S) filter as shown below. The D2S filter contains a 1st order Passive pole at 120 kHz. The D2S filter ensures the TAS2770 high performance class-D amplifier sees a fully differential matched loading at its outputs. This prevents measurement errors due to loading effects of AUX-0025 filter on the class-D outputs.

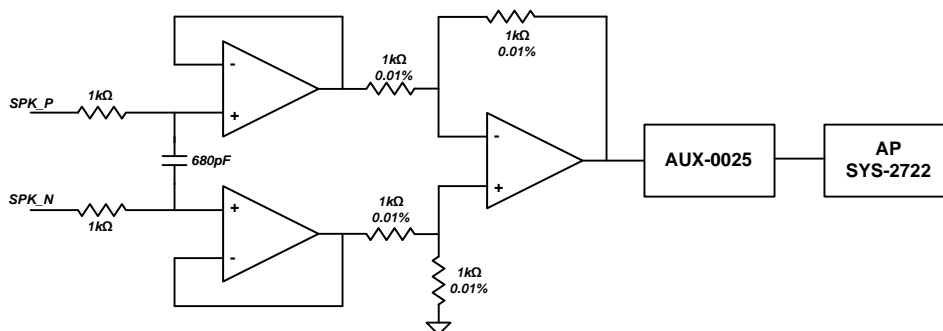


**Figure 36. Differential To Single Ended (D2S) Filter**

## 8 Detailed Description

### 8.1 Overview

The TAS2770 is a mono digital input Class-D amplifier optimized for mobile applications where efficient battery operation and small solution size are crucial. It integrates speaker voltage and current sensing and battery tracking limiting with brown out prevention. The device can operate in either TDM/I<sup>2</sup>C mode. Both modes support two PDM inputs that can be used for low latency playback or sensor aggregation.

### 8.2 Functional Block Diagram

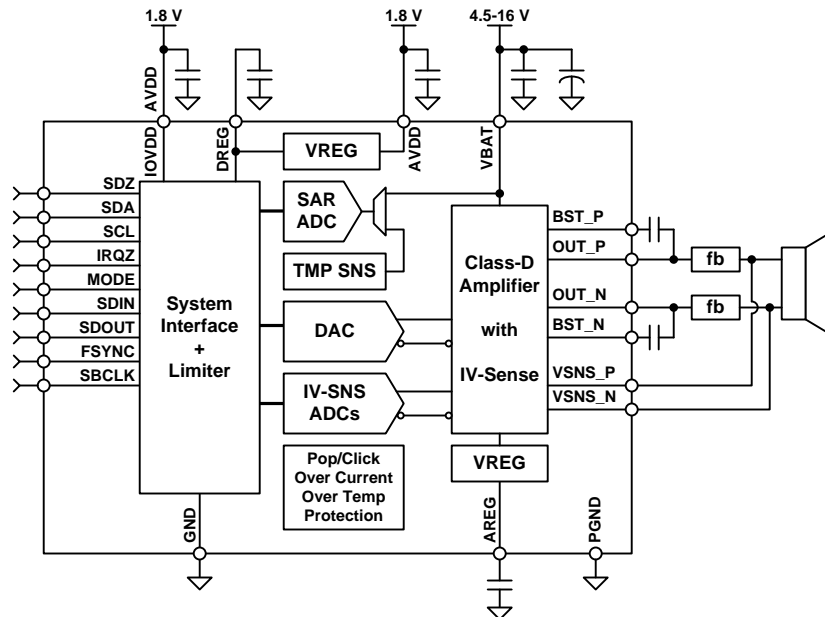

Copyright © 2016, Texas Instruments Incorporated

### 8.3 Feature Description

#### 8.3.1 Device Mode and Address Selection

The TAS2770 can operate in two distinct operational modes, each with eight selectable device addresses. In TDM/I<sup>2</sup>C Mode, audio input and output are provided via the FSYNC, SBCLK, SDIN and SDOUT pins using formats including I<sup>2</sup>S, Left Justified and TDM. Configuration and status are provided via the SDA and SCL pins using the I<sup>2</sup>C protocol.

The PDM input can be used for a low latency playback path or as a sensor input.

**Table 1** below illustrates how to configure the device for TDM/I<sup>2</sup>C Mode. I<sup>2</sup>C slave addresses are shown left shifted by one bit with the R/W bit set to 0 (i.e. {ADDR[6:0],1b0}). 5% or better tolerance resistors should be used for setting the mode configuration.

**Table 1. TDM/I<sup>2</sup>C Mode Address Selection**

MODE PIN	I2C SLAVE ADDRESS	
	TAS2770	
Short to GND	0x82	
470 Ω to GND	0x84	
470 Ω to IOVDD	0x86	
2.2 KΩ to GND	0x88	
2.2 KΩ to IOVDD	0x8A	
10 KΩ to GND	0x8C	

## Feature Description (continued)

**Table 1. TDM/I<sup>2</sup>C Mode Address Selection (continued)**


MODE PIN	I2C SLAVE ADDRESS
	TAS2770
10 K $\Omega$ to IOVDD	0x8E
47 K $\Omega$ to IOVDD	0x90

### 8.3.2 General I<sup>2</sup>C Operation

The I<sup>2</sup>C bus employs two signals, SDA (data) and SCL (clock), to communicate between integrated circuits in a system using serial data transmission. The address and data 8-bit bytes are transferred most-significant bit (MSB) first. In addition, each byte transferred on the bus is acknowledged by the receiving device with an acknowledge bit. Each transfer operation begins with the master device driving a start condition on the bus and ends with the master device driving a stop condition on the bus. The bus uses transitions on the data terminal (SDA) while the clock is at logic high to indicate start and stop conditions. A high-to-low transition on SDA indicates a start, and a low-to-high transition indicates a stop. Normal data-bit transitions must occur within the low time of the clock period. shows a typical sequence.

The master generates the 7-bit slave address and the read/write (R/W) bit to open communication with another device and then waits for an acknowledge condition. The device holds SDA low during the acknowledge clock period to indicate acknowledgment. When this occurs, the master transmits the next byte of the sequence. Each device is addressed by a unique 7-bit slave address plus R/W bit (1 byte). All compatible devices share the same signals via a bi-directional bus using a wired-AND connection.

Use external pull-up resistors for the SDA and SCL signals to set the logic-high level for the bus. Use pull-up resistors between 2 k $\Omega$  and 4.7 k $\Omega$ . Do not allow the SDA and SCL voltages to exceed the device supply voltage, IOVDD.

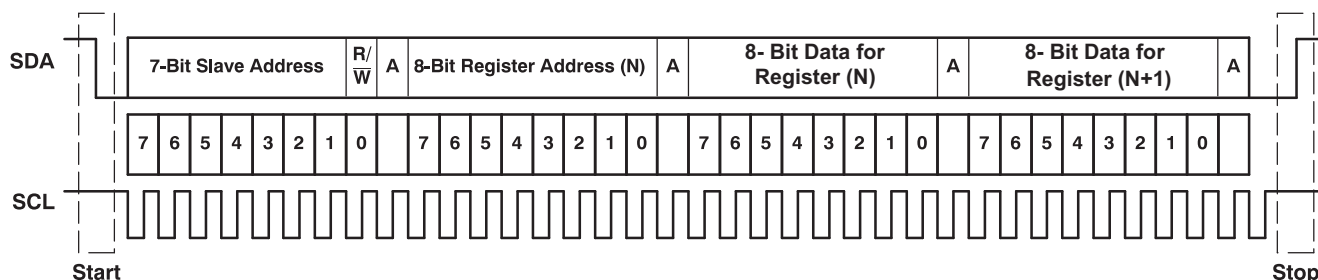

**Figure 37. Typical I<sup>2</sup>C Sequence**

There is no limit on the number of bytes that can be transmitted between start and stop conditions. When the last word transfers, the master generates a stop condition to release the bus. [Figure 37](#) shows a generic data transfer sequence.


### 8.3.3 Single-Byte and Multiple-Byte Transfers

The serial control interface supports both single-byte and multiple-byte read/write operations for all registers. During multiple-byte read operations, the TAS2770 responds with data, a byte at a time, starting at the register assigned, as long as the master device continues to respond with acknowledges.

The TAS2770 supports sequential I<sup>2</sup>C addressing. For write transactions, if a register is issued followed by data for that register and all the remaining registers that follow, a sequential I<sup>2</sup>C write transaction has taken place. For I<sup>2</sup>C sequential write transactions, the register issued then serves as the starting point, and the amount of data subsequently transmitted, before a stop or start is transmitted, determines to how many registers are written.

### 8.3.4 Single-Byte Write


As shown in [Figure 38](#), a single-byte data-write transfer begins with the master device transmitting a start condition followed by the I<sup>2</sup>C device address and the read/write bit. The read/write bit determines the direction of the data transfer. For a write-data transfer, the read/write bit must be set to 0. After receiving the correct I<sup>2</sup>C device address and the read/write bit, the TAS2770 responds with an acknowledge bit. Next, the master transmits the register byte corresponding to the device internal memory address being accessed. After receiving the register byte, the device again responds with an acknowledge bit. Finally, the master device transmits a stop condition to complete the single-byte data-write transfer.

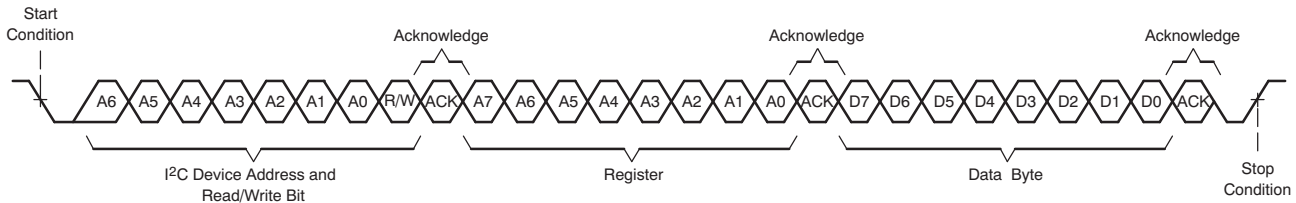

**Figure 38. Single-Byte Write Transfer**

### 8.3.5 Multiple-Byte Write and Incremental Multiple-Byte Write

A multiple-byte data write transfer is identical to a single-byte data write transfer except that multiple data bytes are transmitted by the master device to the TAS2770 as shown in [Figure 39](#). After receiving each data byte, the device responds with an acknowledge bit.

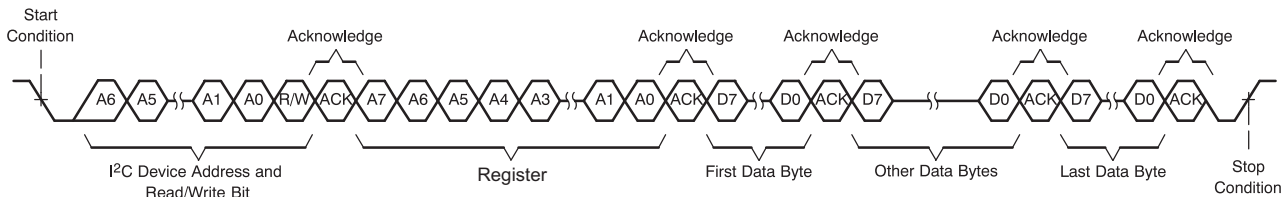


**Figure 39. Multi-Byte Write Transfer**

### 8.3.6 Single-Byte Read

As shown in [Figure 40](#), a single-byte data-read transfer begins with the master device transmitting a start condition followed by the I<sup>2</sup>C device address and the read/write bit. For the data-read transfer, both a write followed by a read are actually done. Initially, a write is done to transfer the address byte of the internal memory address to be read. As a result, the read/write bit is set to a 0.


After receiving the TAS2770 address and the read/write bit, the device responds with an acknowledge bit. The master then sends the internal memory address byte, after which the device issues an acknowledge bit. The master device transmits another start condition followed by the TAS2770 address and the read/write bit again. This time, the read/write bit is set to 1, indicating a read transfer. Next, the TAS2770 transmits the data byte from the memory address being read. After receiving the data byte, the master device transmits a not-acknowledge followed by a stop condition to complete the single-byte data read transfer.

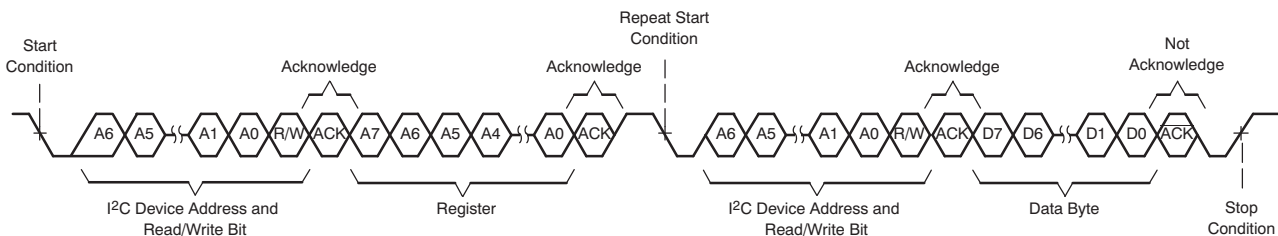

**Figure 40. Single-Byte Read Transfer**

### 8.3.7 Multiple-Byte Read

A multiple-byte data-read transfer is identical to a single-byte data-read transfer except that multiple data bytes are transmitted by the TAS2770 to the master device as shown in Figure 41. With the exception of the last data byte, the master device responds with an acknowledge bit after receiving each data byte.

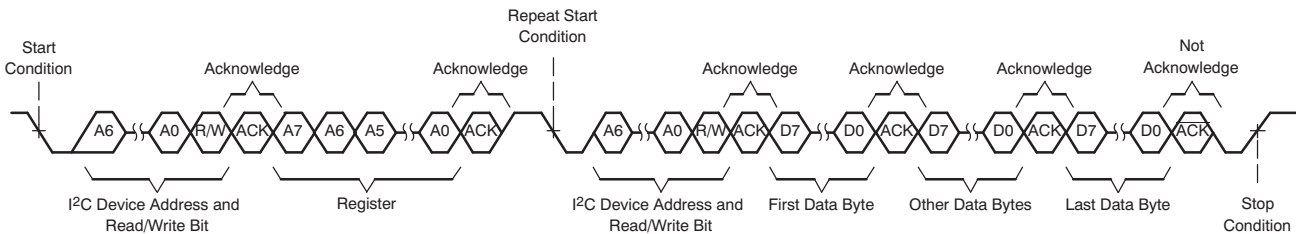

**Figure 41. Multi-Byte Read Transfer**


### 8.3.8 Register Organization

Device configuration and coefficients are stored using a page and book scheme. Each page contains 128 bytes and each book contains 256 pages. All device configuration registers are stored in book 0, page 0, which is the default setting at power up (and after a software reset). The book and page can be set by the *BOOK[7:0]* and *PAGE[7:0]* registers respectively.

## 8.4 Device Functional Modes


### 8.4.1 PDM Input

The TAS2770 provides one PDM input that can be used for low latency audio playback or sensor aggregation in TDM/I<sup>2</sup>C mode. Figure 42 below illustrates the double data rate nature of the PDM inputs. Each input has two interleaved PDM channels, one sampled by the rising edge and the other by the falling edge of the clock.

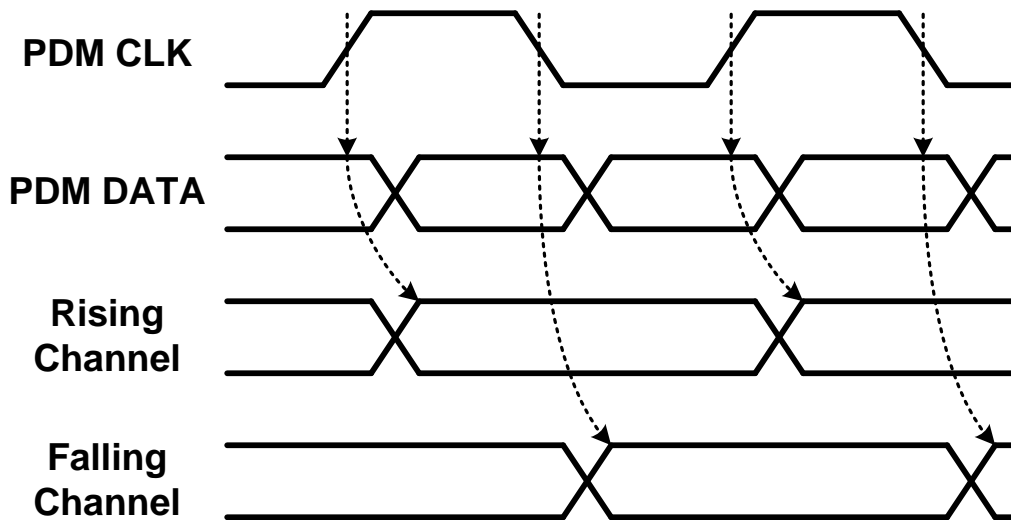

**Figure 42. PDM Waveform**

The PDM inputs are sampled by the PDMCK pin, which can be independently configured as either a PDM clock slave input or a PDM clock master output. The *PDM\_EDGE[1:0]* and *PDM\_SLV[1:0]* register bits select the sample clock edge and master/slave mode for each of the two PDM inputs. In master mode the PDMCK pin can disable the clocks (and drive a logic 0) by setting the *PDM\_GATE[1:0]* register bits low. The *PDM\_CLK[1:0]* register bits select which clock is used to sample each PDM input.

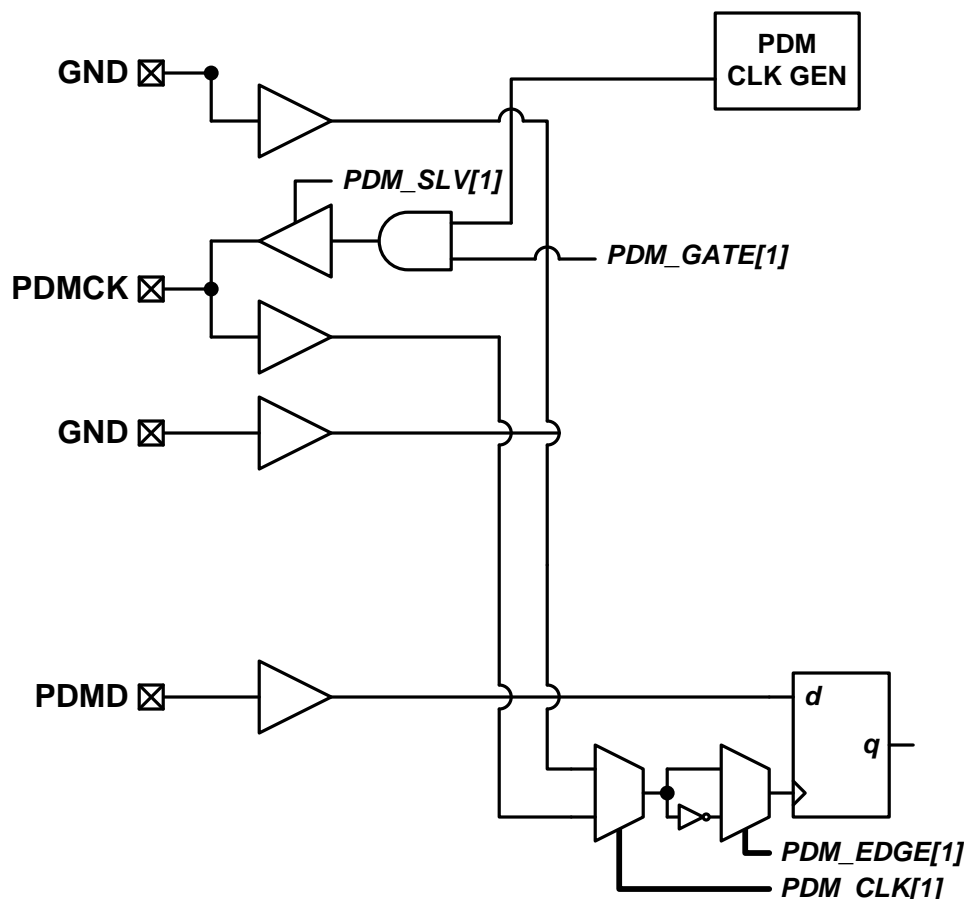**Device Functional Modes (continued)**

**Figure 43. PDM Data and Clock Input Block Diagram**

When configured as a clock slave, the PDM clock input does not require a specific phase relationship to the system clock (SBCLK in TDM/I<sup>2</sup>C Mode), but must have an exact frequency relationship to the audio sample rate. This is equivalent to 64/32/16 (~3 MHz) or 128/64/32 (~6 MHz) times a single/double/quadruple speed sample rate. The PDM rate is set by the *PDM\_RATE1[1:0]* register bits.

When the PDMCK pin is configured as a clock master, the TAS2770 will output a 50% duty cycle clock of frequency that is set by the *PDM\_RATE1[1:0]* register bits (64/32/16 or 128/64/32 times a single/double/quadruple speed sample rate).

The *PDM\_MAP* register bit selects which PDM pin is used for audio playback input and which is used for PDM sensor input. The PDM sensor input can be decimated (time aligned with the IV sense) and transmitted on the SDOUT pin when the device is in TDM/I<sup>2</sup>C mode.

**Table 2. PDM Input Capture Edge**

PDM Input Pin	Register Bit	Value	Capture Edge
PDMD	<i>PDM_EDGE[1]</i>	0	Rising (default)
		1	Falling

**Table 3. PDM Clock Slave**

PDM Input Pin	Register Bit	Value	Master/Slave
PDMD	<i>PDM_SLV[1]</i>	0	Slave (default)
		1	Master



**Table 4. PDM Clock Select**

PDM Input Pin	Register Bit	Value	Clock Source
PDM	<i>PDM_CLK[1]</i>	0	GND
		1	PDMCK (default)

**Table 5. PDM Master Mode Clock Gate**

PDM Clock Pin	Register Bit	Value	Gating
PDMCK	<i>PDM_GATE[1]</i>	0	Gated Off (default)
		1	Active

**Table 6. PDM Input Sample Rate**

PDM Input Pin	Register Bits	Value	Sample Rate
PDM	<i>PDM_RATE1[1:0]</i>	00	2.54 - 3.38 MHz (default)
		01	5.08 - 6.76 MHz
		10	Reserved
		11	Reserved

**Table 7. PDM Pin Mapping**

<i>PDM_MAP</i>	Mapping
0	PDM pin for sensor input (default)
1	PDM pin for playback

#### 8.4.2 TDM Port

The TAS2770 provides a flexible TDM serial audio port for use in TDM/I<sup>2</sup>C Mode. The port can be configured to support a variety of formats including stereo I<sup>2</sup>S, Left Justified and TDM. Mono audio playback is available via the SDIN pin. The SDOOUT pin is used to transmit sample streams including speaker voltage and current sense, VBAT voltage, die temperature and channel gain.

The TDM serial audio port supports up to 8 32-bit time slots at 44.1/48 kHz, 4 32-bit time slots at a 88.2/96 kHz sample rate and 2 32-bit time slots at a 176.4/192 kHz sample rate. The device supports 2 time slots at 32 bits in width and 4 or 8 time slots at 16, 24 or 32 bits in width. Valid SBCLK to FSYNC ratios are 64, 96, 128, 192, and 256.. Note that the device will automatically detect the number of time slots and this does not need to be programmed.

By default, the TAS2770 will automatically detect the PCM playback sample rate. This can be disabled by setting the *AUTO\_RATE* register bit high.

The *SAMP\_RATE[2:0]* register bits set the PCM audio sample rate when *AUTO\_RATE* = 1. The TAS2770 employs a robust clock fault detection engine that will automatically volume ramp down the playback path if FSYNC does not match the configured sample rate (if *AUTO\_RATE* = 1) or the ratio of SBCLK to FSYNC is not supported (minimizing any audible artifacts). Once the clocks are detected to be valid in both frequency and ratio, the device will automatically volume ramp the playback path back to the configured volume and resume playback.



**Table 8. PCM Auto Sample Rate Detection**

<i>AUTO_RATE</i>	Setting
0	Enabled (default)
1	Disabled

**Table 9. PCM Audio Sample Rates**

<b>SAMP_RATE[1:0]</b>	<b>Sample Rate</b>
000	Reserved
001	Reserved
010	Reserved
011	44.1 kHz / 48 kHz (default)
100	88.2 kHz / 96 kHz
101	176.4 kHz / 192 kHz
110	Reserved
111	Reserved

Figure 44 and Figure 45 below illustrates the receiver frame parameters required to configure the port for playback. A frame begins with the transition of FSYNC from either high to low or low to high (set by the *FRAME\_START* register bit). FSYNC and SDIN are sampled by SBCLK using either the rising or falling edge (set by the *RX\_EDGE* register bit). The *RX\_OFFSET[4:0]* register bits define the number of SBCLK cycles from the transition of FSYNC until the beginning of time slot 0. This is typically set to a value of 0 for Left Justified format and 1 for an I<sup>2</sup>S format.

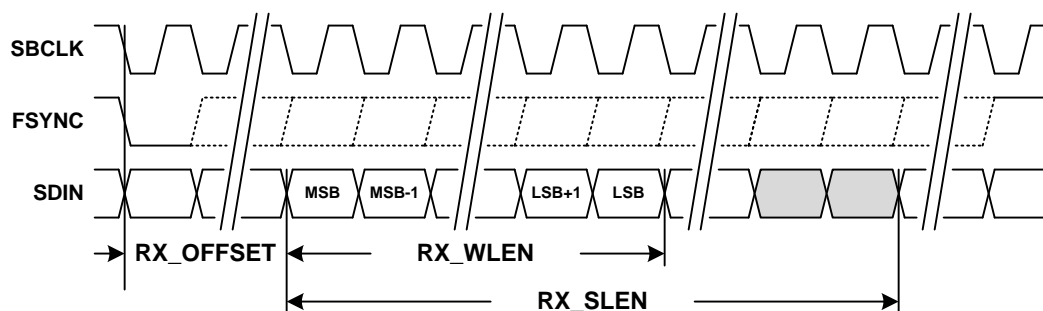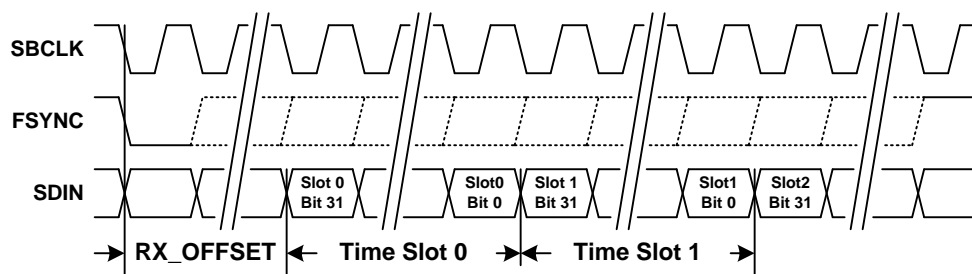
**Figure 44. TDM RX Time Slot with Left Justification**

**Figure 45. TDM RX Time Slots**
**Table 10. TDM Start of Frame Polarity**

<b>FRAME_START</b>	<b>Polarity</b>
0	Low to High on FSYNC
1	High to Low on FSYNC (default)

**Table 11. TDM RX Capture Polarity**

<b>RX_EDGE</b>	<b>FSYNC and SDIN Capture Edge</b>
0	Rising edge of SBCLK (default)
1	Falling edge of SBCLK

**Table 12. TDM RX Start of Frame to Time Slot 0 Offset**

<b><i>RX_OFFSET[4:0]</i></b>	<b>SBCLK Cycles</b>
0x00	0
0x01	1 (default)
0x02	2
...	...
0x1E	30
0x1F	31

The *RX\_SLEN[1:0]* register bits set the length of the RX time slot. The length of the audio sample word within the time slot is configured by the *RX\_WLEN[1:0]* register bits. The RX port will left justify the audio sample within the time slot by default, but this can be changed to right justification via the *RX\_JUSTIFY* register bit. The TAS2770 supports mono and stereo down mix playback ( $(L+R)/2$ ) via the left time slot, right time slot and time slot configuration register bits (*RX\_SLOT\_L[3:0]*, *RX\_SLOT\_R[3:0]* and *RX\_SCFG[1:0]* respectively). By default the device will playback mono from the time slot equal to the I<sup>2</sup>C base address offset (set by the MODE pin) for playback. The *RX\_SCFG[1:0]* register bits can be used to override the playback source to the left time slot, right time slot or stereo down mix set by the *RX\_SLOT\_L[3:0]* and *RX\_SLOT\_R[3:0]* register bits.

If time slot selections places reception either partially or fully beyond the frame boundary, the receiver will return a null sample equivalent to a digitally muted sample.

**Table 13. TDM RX Time Slot Length**

<b><i>RX_SLEN[1:0]</i></b>	<b>Time Slot Length</b>
00	16-bits
01	24-bits
10	32-bits (default)
11	reserved

**Table 14. TDM RX Sample Word Length**

<b><i>RX_WLEN[1:0]</i></b>	<b>Length</b>
00	16-bits
01	20-bits
10	24-bits (default)
11	32-bits

**Table 15. TDM RX Sample Justification**

<b><i>RX_JUSTIFY</i></b>	<b>Justification</b>
0	Left (default)
1	Right

**Table 16. TDM RX Time Slot Select Configuration**

<b><i>RX_SCFG[1:0]</i></b>	<b>Config Origin</b>
00	Mono with Time Slot equal to I <sup>2</sup> C Address Offset (default)
01	Mono Left Channel
10	Mono Right Channel
11	Stereo Down Mix $[L+R]/2$

**Table 17. TDM RX Left Channel Time Slot**

<b><i>RX_SLOT_L[3:0]</i></b>	<b>Time Slot</b>
0x0	0 (default)
0x1	1

**Table 17. TDM RX Left Channel Time Slot (continued)**


<i>RX_SLOT_L[3:0]</i>	Time Slot
...	...
0xE	14
0xF	15

**Table 18. TDM RX Right Channel Time Slot**

<i>RX_SLOT_R[3:0]</i>	Time Slot
0x0	0 (default)
0x1	1
...	...
0xE	14
0xF	15

The TDM port can transmit a number sample streams on the SDOUT pin including speaker voltage sense, speaker current sense, decimated PDM input, VBAT voltage, die temperature and channel gain. [Figure 46](#) below illustrates the alignment of time slots to the beginning of a frame and how a given sample stream is mapped to time slots. Either the rising or falling edge of SBCLK can be used to transmit data on the SDOUT pin, which can be configured by setting the *TX\_EDGE* register bit. The *TX\_OFFSET[2:0]* register bits define the number SBCLK cycles between the start of a frame and the beginning of time slot 0. This would typically be programmed to 0 for Left Justified format and 1 for I<sup>2</sup>S format. The TDM TX can either transmit logic 0 or Hi-Z depending on the setting of the *TX\_FILL* register bit setting. An optional bus keeper will weakly hold the state of SDOUT when all devices driving are Hi-Z. Since only one bus keeper is required on SDOUT, this feature can be disabled via the *TX\_KEEPER* register bit.

Each sample stream is composed of either one or two 8-bit time slots. Speaker voltage sense, speaker current sense and decimated PDM sample streams are 16-bit precision, so they will always utilize two TX time slots. The VBAT voltage stream is 12-bit precision, and can either be transmitted left justified in a 16-bit word (using two time slots) or can be truncated to 8-bits (the top 8 MSBs) and be transmitted in a single time slot. This is configured by setting *VBAT\_SLEN* register bit. The Die temperature and gain are both 8-bit precision and are transmitted in a single time slot.

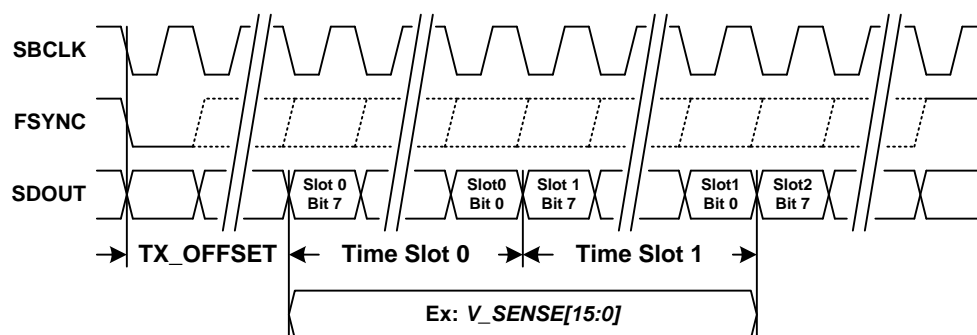
**Figure 46. TDM Port TX Diagram**
**Table 19. TDM TX Transmit Polarity**

<i>TX_EDGE</i>	SDOUT Transmit Edge
0	Rising edge of SBCLK
1	Falling edge of SBCLK (default)

**Table 20. TDM TX Start of Frame to Time Slot 0 Offset**

<b>TX_OFFSET[2:0]</b>	<b>SBCLK Cycles</b>
0x0	0
0x1	1 (default)
0x2	2
...	...
0x6	6
0x7	7

**Table 21. TDM TX Unused Bit Field Fill**

<b>TX_FILL</b>	<b>SDOUT Unused Bit Fields</b>
0	Transmit 0
1	Transmit Hi-Z (default)

**Table 22. TDM TX SDOUT Bus Keeper Enable**

<b>TX_KEEPER</b>	<b>SDOUT Bus Keeper</b>
0	Disable bus keeper
1	Enable bus keeper (default)

The time slot register for each sample stream defines where the MSB transmission begins. For instance, if *VSNS\_SLOT[5:0]* is set to 2, the upper 8 MSBs will be transmitted in time slot 2 and the lower 8 LSBs will be transmitted in time slot 3. Each sample stream can be individually enabled or disabled. This is useful to manage limited TDM bandwidth since it may not be necessary to transmit all streams for all devices on the bus.

It is important to ensure that time slot assignments for actively transmitted sample streams do not conflict. For instance, if *VSNS\_SLOT[5:0]* is set to 2 and *ISNS\_SLOT[5:0]* is set to 3, the lower 8 LSBs of voltage sense will conflict with the upper 8 MSBs of current sense. This will produce unpredictable transmission results in the conflicting bit slots (i.e. the priority is not defined).

If time slot selections place transmission beyond the frame boundary, the transmitter will truncate transmission at the frame boundary.

**Table 23. TDM Voltage Sense Time Slot**

<b>VSNS_SLOT[5:0]</b>	<b>Slot</b>
0x00	0 (default)
0x01	1
0x02	2
...	...
0x3E	62
0x3F	63

**Table 24. TDM Voltage Sense Transmit Enable**

<b>VSNS_TX</b>	<b>State</b>
0	Disabled (default)
1	Enabled

**Table 25. TDM Current Sense Time Slot**

<b>ISNS_SLOT[5:0]</b>	<b>Slot</b>
0x00	0
0x01	1
0x02	2 (default)
...	...

**Table 25. TDM Current Sense Time Slot (continued)**

<i>ISNS_SLOT[5:0]</i>	Slot
0x3E	62
0x3F	63

**Table 26. TDM Current Sense Transmit Enable**

<i>ISNS_TX</i>	State
0	Disabled (default)
1	Enabled

**Table 27. TDM Decimated PDM Input Time Slot**

<i>PDM_SLOT[5:0]</i>	Slot
0x00	0
0x01	1
...	...
0x04	4 (default)
...	...
0x3E	62
0x3F	63

**Table 28. TDM Decimated PDM Input Transmit Enable**

<i>PDM_TX</i>	State
0	Disabled (default)
1	Enabled

**Table 29. TDM VBAT Time Slot**

<i>VBAT_SLOT[5:0]</i>	Slot
0x00	0
0x01	1
...	...
0x06	6 (default)
...	...
0x3E	62
0x3F	63

**Table 30. TDM VBAT Time Slot Length**

<i>VBAT_SLEN</i>	Slot Length
0	Truncate to 8-bits (default)
1	Left justify to 16-bits

**Table 31. TDM VBAT Transmit Enable**

<i>VBAT_TX</i>	State
0	Disabled (default)
1	Enabled

**Table 32. TDM Temp Sensor Time Slot**

<i>TEMP_SLOT[5:0]</i>	Slot
0x00	0
0x01	1
...	...
0x07	7 (default)
...	...
0x3E	62
0x3F	63

**Table 33. TDM Temp Sensor Transmit Enable**

<i>TEMP_TX</i>	State
0	Disabled (default)
1	Enabled

**Table 34. TDM Limiter Gain Reduction Time Slot**

<i>GAIN_SLOT[5:0]</i>	Slot
0x00	0
0x01	1
...	...
0x08	8 (default)
...	...
0x3E	62
0x3F	63

**Table 35. TDM Limiter Gain Reduction Transmit Enable**

<i>GAIN_TX</i>	State
0	Disabled (default)
1	Enabled

### 8.4.3 Playback Signal Path

#### 8.4.3.1 High Pass Filter

Excessive DC and low frequency content in audio playback signal can damage loudspeakers, so the TAS2770 employs a high-pass filter (HPF) to prevent this from occurring for the PCM playback path. No HPF is available in the PDM playback path. [Table 36](#) below shows the -3 dB corner frequencies available for each sample rate set by register bits *HPF\_FREQ[2:0]*. The filter can be bypassed by setting the *HPF\_FREQ[2:0]* register to 3'b000. The HPF Bi-Quad filter coefficients can also be directly programmed via the TBD register bits.

**Table 36. HPF Filter Settings**

<i>HPF_FREQ[2:0]</i>	-3 dB FREQUENCY (Hz)	
	44.1/88.2/176.4 kHz	48/96/192 kHz
000	bypass	bypass
001	1.8 (default)	2 (default)
010	46	50
011	92	100
100	184	200
101	368	400
110	735	800
111	Reserved	Reserved

### 8.4.3.2 Digital Volume Control and Amplifier Output Level

The gain from audio input to speaker terminals is controlled by setting the amplifier's output level and digital volume control (DVC). A separate DVC is provided for PDM (available from the PDM input pins) and PCM (available from the TDM ports pins) playback paths.

Amplifier output level settings are presented in dBV (dB relative to 1 V<sub>rms</sub>) with a full scale digital audio input (0 dBFS) and the digital volume control set to 0 dB. It should be noted that these levels may not be achievable because of analog clipping in the amplifier, so they should be used to convey gain only. Table 37 below shows analog gain settings that can be programmed via the AMP\_LEVEL[4:0] register bits.

**Table 37. Amplifier Output Level Settings**

AMP_LEVEL[4:0]	FULL SCALE OUTPUT	
	dBV	V <sub>PEAK</sub> (V)
0x00	11.0	5.02
0x01	11.5	5.32
0x02	12.0	5.63
0x03	12.5	5.96
0x04	13.0	6.32
0x05	13.5	6.69
0x06	14.0	7.09
0x07	14.5	7.51
0x08	15.0	7.95
0x09	15.5	8.42
0x0A	16.0	8.92
0x0B	16.5	9.45
0x0C	17.0	10.0
0x0D	17.5	10.6
0x0E	18.0	11.2
0x0F	18.5	11.9
0x10	19.0 (default)	12.6 (default)
0x11	19.5	13.4
0x12	20.0	14.1
0x13	20.5	14.98
0x14	21.0	15.87
0x15 - 0x1F	Reserved	Reserved

Equation 1 calculates the amplifiers output voltage.

$$V_{AMP} = \text{Input} + A_{dvc} + A_{AMP} \text{ dBV}$$

where

- V<sub>AMP</sub> is the amplifier output voltage in dBV
- Input is the digital input amplitude in dB with respect to 0 dBFS
- A<sub>dvc</sub> is the digital volume control setting, 0 dB to -100 dB in 0.5 dB steps
- A<sub>AMP</sub> is the amplifier output level setting in dBV

(1)

The digital volume control (DVC) is independently configurable for PCM and PDM streams from 0 dB to -100 dB in 0.5 dB steps by setting the DVC\_PCM[7:0] and PVC\_PDM[7:0] register bits respectively. Settings greater than 0xC8 are interpreted as mute. When a change in digital volume control occurs, the device ramps the volume to the new setting based on the DVC\_RATE[1:0] register bits. If DVC\_RATE[1:0] is set to 2'b11, volume ramping is disabled. This can be used to speed up startup, shutdown and digital volume changes when volume ramping is handled by the system master.



**Table 38. PCM Digital Volume Control**

<i>DVC_PCM[7:0]</i>	Volume (dB)
0x00	0 (default)
0x01	-0.5
0x02	-1
...	...
0xC8	-100
0xC9 – 0xFF	Mute

**Table 39. PDM Digital Volume Control**

<i>DVC_PDM[7:0]</i>	Volume (dB)
0x00	0 (default)
0x01	-0.5
0x02	-1
...	...
0xC8	-100
0xC9 – 0xFF	Mute

**Table 40. Digital Volume Ramp Rate**

<i>DVC_RAMP[1:0]</i>	Ramp Rate
00	0.5 dB per 1 Sample (default)
01	0.5 dB per 4 Samples
10	0.5 dB per 8 Samples
11	Volume Ramping Disabled

The Class-D amplifier uses a closed-loop architecture, so the gain does not depend on VBAT. The approximate threshold for the onset of analog clipping is calculated in [Equation 2](#).

$$V_{PK(max,preclip)} = V_{BAT} \times \left( \frac{R_L}{R_{FET(tot)} + R_{interconnect} + R_L} \right) V$$

where

- $V_{PK(max,preclip)}$  is the maximum peak unclipped output voltage in V
- VBAT is the power supply voltage
- $R_L$  is the speaker load in  $\Omega$
- $R_{interconnect}$  is the additional resistance in the PCB (such as cabling and filters) in  $\Omega$
- $R_{FET(on)}$  is the power stage total on resistance (HS FET+LS FET+Sense Resistor+bonding+packaging) in  $\Omega$  (2)

The effective on-resistance for this device (including HS+LS FET, Sense Resistor and bonding and packaging leads) is approximately 510 m $\Omega$  at room temperature. [Table 41](#) shows approximate maximum unclipped peak output voltages at room temperature (excluding interconnect resistances).

**Table 41. Approximate Maximum Unclipped Peak Output Voltage at Room Temperature**

SUPPLY VOLTAGE VBAT (V)	MAXIMUM UNCLIPPED PEAK VOLTAGE $V_{PK}$ (V)	
	$R_L = 4 \Omega$	$R_L = 8 \Omega$
8.4	7.45	7.90
12.6	11.18	11.84

### 8.4.3.3 Audio Playback Selection

Audio playback can be sourced from either PCM (via TDM) or PDM (via PDMD PDM Inputs) input sources via the *PB\_SRC* register bit. The *PB\_PDM\_SRC* register bit determines the source of the PDM source.

**Table 42. Audio Playback Source**


<i>PB_SRC</i>	Source
0	PCM (default)
1	PDM

**Table 43. PDM Playback Source**

<i>PB_PDM_SRC</i>	Source
0	PDM input pin defined by PDM_MAP register bit (default)
1	Reserved

### 8.4.3.4 Battery Tracking Limiter with Brown Out Prevention

The TAS2770 monitors battery voltage (VBAT) and the audio signal to automatically decrease gain when the audio signal peaks exceed a programmable threshold. This helps prevent clipping and extends playback time through end of charge battery conditions. The limiter threshold can be configured to track VBAT below a programmable inflection point with a programmable slope. A minimum threshold sets the limit of threshold reduction from VBAT tracking. Configurable attack rate, hold time and release rate are provided to shape the dynamic response of the limiter (via *LIM\_ATK\_RT[2:0]*, *LIM\_HLD\_TM[2:0]* and *LIM\_RLS\_RT[2:0]* register bits).

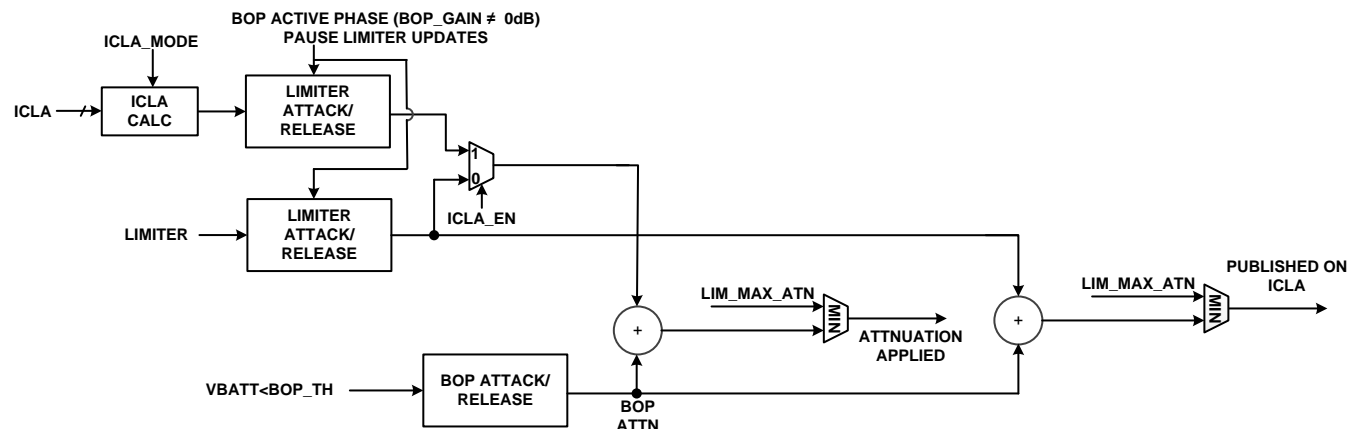
**Figure 47. Limiter and Brown Out Prevention Interaction Diagram**

A Brown Out Prevention (BOP) feature provides a priority input to the limiter to provide very fast response to transient dips in VBAT at end of charge conditions that can cause system level brown out. When VBAT dips below the BOP threshold, the limiter begins reducing gain with an attack latency of less than 10  $\mu$ s and a configurable attack rate. When VBAT rises above the BOP threshold, the limiter will begin to release after the programmed hold time.

The limiter is enabled by setting the *LIM\_EN* bit register bit high.

**Table 44. Battery Tracking Limiter Enable**

<i>LIM_EN</i>	Value
0	Disabled (default)
1	Enabled

The limiter has configurable attack rate, hold time and release rate, which are available via the *LIM\_ATK\_RT[2:0]*, *LIM\_HLD\_TM[2:0]* and *LIM\_RLS\_RT[2:0]* register bits respectively. The limiter attack and release step size can be set by configuring the *LIM\_ATK\_ST[1:0]* and *LIM\_RLS\_ST[1:0]* register bits respectively.

**Table 45. Limiter Attack Rate**

<i>LIM_ATK_RT[2:0]</i>	Attack Rate (μs)
0x0	5
0x1	10
0x2	20 (default)
0x3	40
0x4	80
0x5	160
0x6	320
0x7	640

**Table 46. Limiter Hold Time**

<i>LIM_HLD_TM[2:0]</i>	Hold Time (ms)
0x0	0
0x1	10
0x2	25
0x3	50
0x4	100
0x5	250
0x6	500 (default)
0x7	1000

**Table 47. Limiter Release Rate**

<i>LIM_RLS_RT[2:0]</i>	Release Time (ms)
0x0	10
0x1	50
0x2	100
0x3	250
0x4	500
0x5	750
0x6	1000 (default)
0x7	1500

**Table 48. Limiter Attack Step Size**

<i>LIM_ATK_ST[1:0]</i>	Step Size (dB)
00	0.25
01	0.5 (default)
10	1
11	2

**Table 49. Limiter Release Step Size**

<i>LIM_RLS_ST[1:0]</i>	Step Size (dB)
00	0.25
01	0.5 (default)
10	1

**Table 49. Limiter Release Step Size (continued)**


<i>LIM_RLS_ST[1:0]</i>	Step Size (dB)
11	2

A maximum level of attenuation applied by the limiter and brown out prevention feature is configurable via the *LIM\_MAX\_ATN[4:0]* register bits. This attenuation limit is shared between the features. For instance, if the maximum attenuation is set to 6 dB and the limiter has reduced gain by 4 dB, the brown out prevention feature will only be able to reduce the gain further by another 2 dB. If the limiter or brown out prevention feature is attacking and it reaches the maximum attenuation, gain will not be reduced any further.

**Table 50. Limiter Max Attenuation**

<i>LIM_MAX_ATN[4:0]</i>	Attenuation (dB)
0x00	1
0x01	1.5
...	...
0x10	9 (default)
...	...
0x1E	16
0x1F	16.5

The limiter begins reducing gain when the output signal level is greater than the limiter threshold. The limiter can be configured to track VBAT below a programmable inflection point with a minimum threshold value. [Figure 48](#) below shows the limiter configured to limit to a constant level regardless of VBAT level. To achieve this behavior, set the limiter maximum threshold to the desired level via the *LIM\_TH\_MAX[6:0]* register bits. Set the limiter inflection point (via the *LIM\_INF\_PT[6:0]* register bits) below the minimum allowable VBAT setting. The limiter minimum threshold register bits (*LIM\_TH\_MIN[6:0]*) do not impact limiter behavior in this use case.

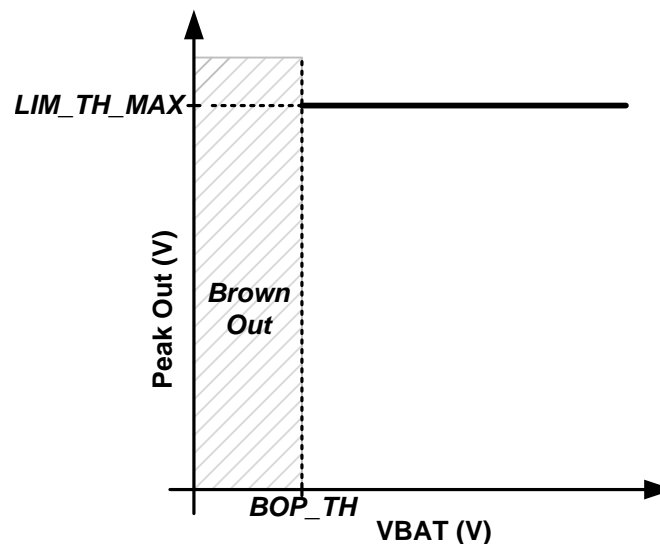
**Figure 48. Limiter with Fixed Threshold**
**Table 51. Limiter Maximum Threshold**

<i>LIM_TH_MAX[6:0]</i>	Threshold (V)
0x00	2
0x01	2.1
...	...
0x6E	13 (default)
...	...

**Table 51. Limiter Maximum Threshold (continued)**

<i>LIM_TH_MAX[6:0]</i>	Threshold (V)
0x7E	14.6
0x7F	14.7


**Table 52. Limiter Minimum Threshold**

<i>LIM_TH_MIN[6:0]</i>	Threshold (V)
0x00	2
0x01	2.1
...	...
0x1E	5 (default)
...	...
0x7E	14.6
0x7F	14.7

**Table 53. Limiter Inflection Point**

<i>LIM_INF_PT[6:0]</i>	Inflection Point (V)
0x00	2
0x01	2.1
...	...
0x58	10.8 (default)
...	...
0x7E	14.6
0x7F	14.7

Figure 49 shows how to configure the limiter to track VBAT below a threshold without a minimum threshold. Set the *LIM\_TH\_MAX[6:0]* register bits to the desired threshold and *LIM\_INF\_PT[6:0]* register bits to the desired inflection point where the limiter will begin reducing the threshold with VBAT. The *LIM\_SLOPE[1:0]* register bits can be used to change the slope of the limiter tracking with VBAT. The default value of 1 V/V will reduce the threshold 1 V for every 1 V of drop in VBAT. More aggressive tracking slopes can be programmed if desired. Program the *LIM\_TH\_MIN[6:0]* below the minimum VBAT to prevent the limiter from having a minimum threshold reduction when tracking VBAT.

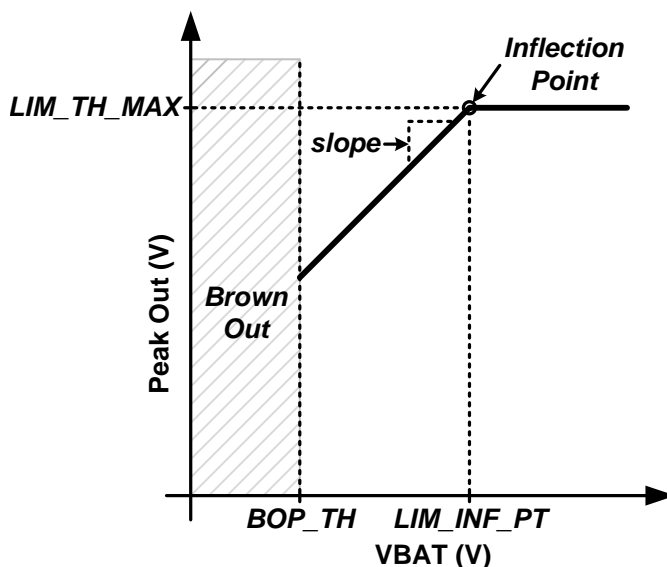


**Figure 49. Limiter with Inflection Point**


**Table 54. Limiter VBAT Tracking Slope**

<i>LIM_SLOPE[1:0]</i>	Slope (V/V)
00	1 (default)
01	1.5
10	2
11	4

To achieve a limiter that tracks VBAT below a threshold, configure the limiter as explained in the previous example, except program the *LIM\_TH\_MIN[6:0]* register bits to the desired minimum threshold. This is shown in Figure 50 below.

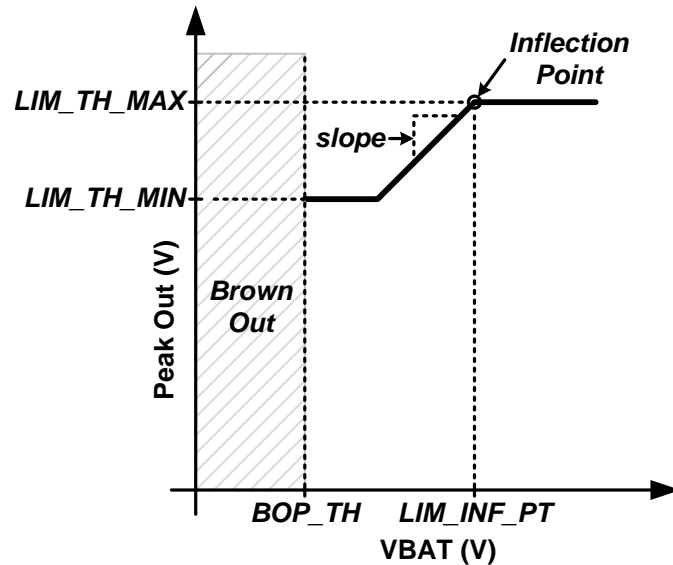
**Figure 50. Limiter with Inflection Point and Minimum Threshold**

The TAS2770 also employs a Brown Out Prevention (BOP) feature that serves as a low latency priority input to the limiter engine that begins attacking within 10  $\mu$ s of VBAT dipping below the programmed BOP threshold. This feature can be enabled by setting the *BOP\_EN* register bit high. It should be noted that the BOP feature is independent of the limiter and will function if enabled even if the limiter is disabled. The BOP threshold is configured by setting the threshold with register bits *BOP\_TH[7:0]*.

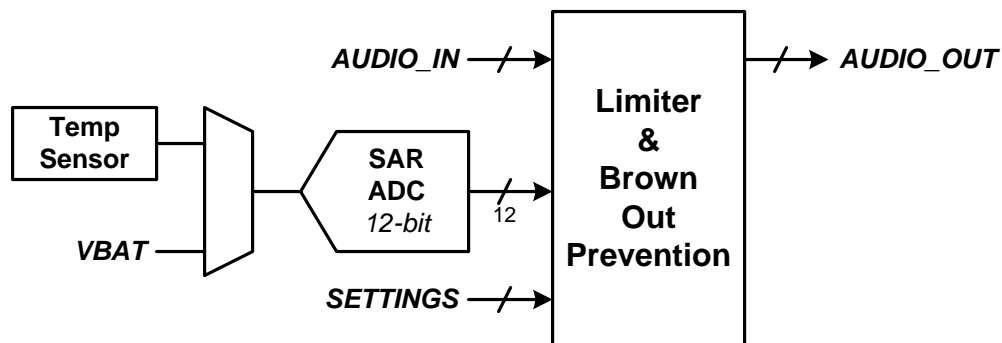
**Figure 51. Limiter Block Diagram**
**Table 55. Brown Out Prevention Enable**

<i>BOP_EN</i>	Value
0	Disabled
1	Enabled (default)

**Table 56. Brown Out Prevention Threshold**

<i>BOP_TH[7:0]</i>	Threshold (V)
0x00	4.5
0x01	4.525
0x02	4.55
...	...
0x14	5.0 (default)
...	...
0xFE	10.85
0xFF	10.875

The BOP feature has a separate attack rate, attack step size and hold time from the battery tracking limiter (register bits *BOP\_ATK\_RT[2:0]*, *BOP\_ATK\_ST[1:0]* and *BOP\_HLD\_TM[2:0]* respectively). The BOP feature uses the *LIM\_RLS\_RT[2:0]* register setting to release after a brown out event.

**Table 57. Brown Out Prevention Attack Rate**

<i>BOP_ATK_RT[2:0]</i>	Attack Rate (μs)
0x0	5
0x1	10
0x2	20 (default)
0x3	40
0x4	80
0x5	160
0x6	320
0x7	640

**Table 58. Brown Out Prevention Attack Step Size**

<i>BOP_ATK_ST[1:0]</i>	Step Size (dB)
00	0.5
01	1 (default)
10	1.5
11	2

**Table 59. Brown Out Prevention Hold Time**

<i>BOP_HLD_TM[2:0]</i>	Hold Time (ms)
0x0	0
0x1	10
0x2	25
0x3	50
0x4	100
0x5	250
0x6	500 (default)
0x7	1000

The TAS2770 can also shutdown the device when a brown out event occurs if the *BOP\_SHUTDOWN* register bit is set high. For the device to continue playing audio again, the device must transition through a SW/HW shutdown state. Setting the *BOP\_INF\_HLD* high will cause the limiter to stay in the hold state (i.e. never release) after a cleared brown out event until either the device transitions through a mute or SW/HW shutdown state or the register bit *BOP\_HLD\_CLR* is written to a high value (which will cause the device to exit the hold state and begin releasing). This bit is self clearing and will always readback low. [Figure 52](#) below illustrates the entering and exiting from a brown out event.

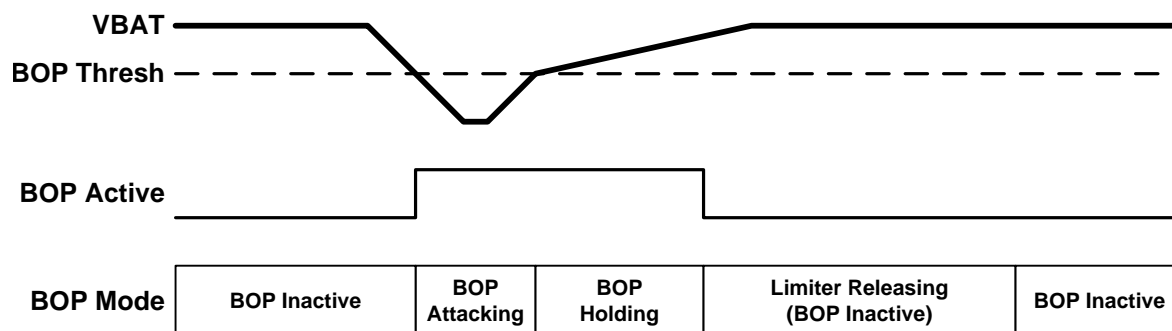


Figure 52. Brown Out Prevention Event

Table 60. Shutdown on Brown Out Event

BOP_SHUTDOWN	Value
0	Don't Shutdown (default)
1	Shutdown

Table 61. Infinite Hold on Brown Out Event

BOP_INF_HLD	Value
0	Use BOP_HLD_TM after Brown Out event (default)
1	Do not release until BOP_HLD_CLR is asserted high

Table 62. BOP Infinite Hold Clear

BOP_HLD_CLR	Value
0	Don't clear (default)
1	Clear event (self clearing)

### 8.4.3.5 Inter Chip Limiter Alignment

#### 8.4.3.5.1 TDM Mode

The TAS2770 supports alignment of limiter (including brown out prevention) dynamics across devices that share the same TDM bus. This ensures consistent gain between channels during limiting or brown out events since these dynamics are dependent on audio content, which can vary across channels. Each device can be configured to align to a specified number of other devices, which allows creation of groupings of devices that align only to each other.

Limiter activity is communicated via the limiter gain reduction parameter that can be optionally transmitted by each device on SDOUT in an 8-bit time slot. Gain reduction should be transmitted in adjacent time slots for all devices that are to be aligned beginning with the first slot that is specified by the *ICLA\_SLOT[5:0]* register bits. The order of the devices is not important as long as they are adjacent. The time slot for limiter gain reduction is configured by the *GAIN\_SLOT[5:0]* register bits and enabled by the *GAIN\_TX* register bit.

The *ICLA\_SEN[7:0]* register bits specify which time slots should be listened to for gain alignment. This allows any number of devices between two and eight to be grouped together. At least two of these bits should be enabled for alignment to take place. The *ICLA\_USE\_MAX* register bit determines whether alignment is based on the maximum or minimum gain reduction value from the group of enabled devices.

To enable the inter chip limiter alignment feature, the *ICLA\_EN* register bit should be asserted high and all devices should be configured with identical limiter and brown out prevention settings. Limiter gain reduction transmission should be enabled on all devices as described above.



**Table 63. Inter Chip Limiter Alignment**

<i>ICLA_EN</i>	Value
0	Disabled (default)
1	Enabled

**Table 64. ICLA Alignment Configuration**

<i>ICLA_MODE</i>	Value
00	Use the minimum gain reduction of the ICLA group including 0dB (default)
01	Use the maximum gain reduction of the ICLA group
10	Use the minimum gain reduction of the ICLA group that is non-0dB
11	Reserved

**Table 65. Inter Chip Limiter Alignment Starting Time Slot**

<i>ICLA_SLOT[5:0]</i>	Starting Time Slot
0x00	Time Slot 0 (default)
0x01	Time Slot 1
0x02	Time Slot 2
...	...
0x3F	Time Slot 63

**Table 66. Inter Chip Limiter Alignment Time Slot Enable**

Register Bit	Description	Bit Value	State
<i>ICLA_SEN[0]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> . When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled
<i>ICLA_SEN[1]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> + 1. When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled
<i>ICLA_SEN[2]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> + 2. When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled
<i>ICLA_SEN[3]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> + 3. When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled
<i>ICLA_SEN[4]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> + 4. When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled
<i>ICLA_SEN[5]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> + 5. When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled
<i>ICLA_SEN[6]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> + 6. When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled
<i>ICLA_SEN[7]</i>	Time Slot = <i>ICLA_SLOT[5:0]</i> + 7. When enabled, the limiter will include this time slot in the alignment group.	0	Disabled (default)
		1	Enabled

#### 8.4.3.6 Class-D Settings

The TAS2770 Class-D amplifier supports spread spectrum PWM modulation, which can be enabled by setting the *AMP\_SS* register bit high. This can help reduce EMI in some systems.

**Table 67. Low EMI Spread Spectrum Mode**

<b>AMP_SS</b>	<b>Spread Spectrum</b>
0	Disabled
1	Enabled (default)

By default the Class-D amplifier's switching frequency is based on the device's trimmed internal oscillator. To synchronize switching to the audio sample rate, set the *CLASSD\_SYNC* register bit high. When the Class-D is synchronized to the audio sample rate, the *RATE\_RAMP* register bit must be set based whether the audio sample rate is based on a 44.1 kHz or 48 kHz frequency. For 44.1, 88.2 and 176.4 kHz, set this bit high. for 48, 96 and 192 kHz, set this bit low. This ensures that the internal ramp generator has the appropriate slope.

**Table 68. Class-D Synchronization Mode**

<b>CLASSD_SYNC</b>	<b>Synchronization Mode</b>
0	Not synchronized to audio clocks (default)
1	Synchronized to audio clocks

**Table 69. Sample Rate for Class-D Synchronized Mode**

<b>RAMP_RATE</b>	<b>Playback Sample Rate</b>
0	48, 96 and 192 kHz (default)
1	44.1, 88.2 and 174.6 kHz

#### 8.4.4 SAR ADC

A 12-bit SAR ADC monitors VBAT voltage and die temperature. The results of these conversions are available via register readback (*VBAT\_CNV[11:0]* and *TMP\_CNV[7:0]* registers respectively). VBAT voltage conversions are also used by the limiter and brown out prevention features.

The ADC runs at a fixed 667 kHz sample rate (1.5  $\mu$ s per conversion) interleaved between VBAT voltage and die temperature measurements. This gives an effective sample rate of 333 kHz (3  $\mu$ s per conversion) with a latency of 1 sample (1.5  $\mu$ s). This gives a worst case measurement latency of 4.5  $\mu$ s. Actual VBAT voltage is calculated by dividing the *VBAT\_CNV[11:0]* register by 256. Actual die temperature is calculated by dividing the *TMP\_CNV[11:0]* register by 16 and then subtracting 93.

**Table 70. ADC VBAT Voltage Conversion**


<b>VBAT_CNV[11:0]</b>	<b>VBAT Voltage (V)</b>
0x000	0 V
0x001	0.0039 V
...	...
0xC9A	12.6016 V
...	...
0xFFE	15.9922 V
0xFFF	15.9961 V

**Table 71. ADC Die Temperature Conversion**

<b>TMP_CNV[11:0]</b>	<b>Die Temperature (°C)</b>
0x000	-93 °C
0x001	-92.9375 °C
...	...
0x760	25 °C
...	...
0xFFE	162.8750 °C
0xFFF	162.9375 °C

### 8.4.5 IV Sense

The TAS2770 provides speaker voltage and current sense for real time monitoring of loudspeaker behavior. The VSNS\_P and VSNS\_N pins should be connected after any ferrite bead filter (or directly to the OUT\_P and OUT\_N connections if no EMI filter is used). The V-Sense connections eliminate IR drop error due to packaging, PCB interconnect or ferrite bead filter resistance. It should be noted that any interconnect resistance after the V-Sense terminals will not be corrected for, so it is advised to connect the sense connections as close to the load as possible.



**Figure 53. V-Sense Connections**

I-Sense and V-Sense can be powered down by asserting the *ISNS\_PD* and *VSNS\_PD* register bits respectively. When powered down, the device will return null samples for the powered down block.

**Table 72. I-Sense Power Down**

<i>ISNS_PD</i>	Setting
0	I-Sense is active (default)
1	I-Sense is powered down

**Table 73. V-Sense Power Down**

<i>VSNS_PD</i>	Setting
0	V-Sense is active (default)
1	V-Sense is powered down

### 8.4.6 Clocks and PLL

In TMD/I<sup>2</sup>C Mode, the device operates from SBCLK. [Table 74](#) and [Table 75](#) below shows the valid SBCLK frequencies for each sample rate and SBCLK to FSYNC ratio (for 44.1 kHz and 48 kHz family frequencies respectively).

If the sample rate is properly configured via the *SAMP\_RATE[1:0]* bits, no additional configuration is required as long as the SBCLK to FSYNC ratio is valid. The device will detect improper SBCLK frequencies and SBCLK to FSYNC ratios and volume ramp down the playback path to minimize audible artifacts.

**Table 74. Supported SBCLK Frequencies (48 kHz based sample rates)**

Sample Rate (kHz)	SBCLK to FSYNC Ratio						
	64	96	128	192	256	384	512
48 kHz	3.072 MHz	4.608 MHz	6.144 MHz	9.216 MHz	12.288 MHz	18.432 MHz	24.576 MHz
96 kHz	6.144 MHz	9.216 MHz	12.288 MHz	18.432 MHz	24.576 MHz	-	-
192 kHz	12.288 MHz	18.432 MHz	24.576 MHz	-	-	-	-

**Table 75. Supported SBCLK Frequencies (44.1 kHz based sample rates)**

Sample Rate (kHz)	SBCLK to FSYNC Ratio						
	64	96	128	192	256	384	512
44.1 kHz	2.8224 MHz	4.2336 MHz	5.6448 MHz	8.4672 MHz	11.2896 MHz	16.9344 MHz	22.5792 MHz
88.2 kHz	5.6448 MHz	8.4672 MHz	11.2896 MHz	16.9344 MHz	22.5792 MHz	-	-
176.4 kHz	11.2896 MHz	16.9344 MHz	22.5792 MHz	-	-	-	-

## 8.4.7 Operational Modes

### 8.4.7.1 Hardware Shutdown

The device enters Hardware Shutdown mode if the SDZ pin is asserted low. In Hardware Shutdown mode, the device consumes the minimum quiescent current from AVDD and VBAT supplies. All registers loose state in this mode and communication is disabled (via I<sup>2</sup>C).

If SDZ is asserted low while audio is playing, the device will ramp down volume on the audio, stop the Class-D switching, power down analog and digital blocks and finally put the device into Hardware Shutdown mode.

When SDZ is released, the device will sample the MODE pin and enter the selected operational mode (i.e. either TDM/I<sup>2</sup>C).

### 8.4.7.2 Software Shutdown

Software Shutdown mode powers down all analog blocks required to playback audio, but does not cause the device to loose register state. Software Shutdown is enabled by asserting the *MODE[1:0]* register bits to 2'b10. If audio is playing when Software Shutdown is asserted, the Class-D will volume ramp down before shutting down. When deasserted, the Class-D will begin switching and volume ramp back to the programmed digital volume setting.

### 8.4.7.3 Mute

The TAS2770 will volume ramp down the Class-D amplifier to a mute state by setting the *MODE[1:0]* register bits to 2'b01. During mute the Class-D still switches, but transmits no audio content. If mute is deasserted, the device will volume ramp back to the programmed digital volume setting.

### 8.4.7.4 Active

In Active Mode the Class-D switches and plays back audio. Speaker voltage and current sensing are operational if enabled. PDM inputis also active if enabled. Set the *MODE[1:0]* register bits to 2'b00 to enter active mode.

### 8.4.7.5 Mode Control and Software Reset

The TAS2770 mode can be configured by writing the *MODE[1:0]* bits.

**Table 76. Mode Control**

<i>MODE[1:0]</i>	Setting
00	Active
01	Mute
10	Software Shutdown (default)
11	Reserved

A software reset can be accomplished by asserting the *SW\_RESET* bit, which is self clearing. This will restore all registers to their default values.

**Table 77. Software Reset**

<i>SW_RESET</i>	Setting
0	Don't reset (default)
1	Reset

## 8.4.8 Faults and Status

During the power-up sequence, the power-on-reset circuit (POR) monitoring the AVDD pin will hold the device in reset (including all configuration registers) until the supply is valid. The device will not exit hardware shutdown until AVDD is valid and the SDZ pin is released. Once SDZ is released, the digital core voltage regulator will power up, enabling detection of the operational mode. If AVDD dips below the POR threshold, the device will immediately be forced into a reset state.

The device also monitors the VBAT supply and holds the analog core in power down if the supply is below the UVLO threshold or above the OVLO threshold. If the TAS2770 is in active operation and a UVLO or OVLO fault occurs, the analog supplies will immediately power down to protect the device. These faults are latching and require a transition through HW/SW shutdown to clear the fault. The live and latched registers will report UVLO/OVLO faults.

The device transitions into software shutdown mode if it detects any faults with the TDM clocks such as:

- Invalid SBCLK to FSYNC ratio
- Invalid FSYNC frequency
- Halting of SBCLK or FSYNC clocks


Upon detection of a TDM clock error, the device transitions into software shutdown mode as quickly as possible to limit the possibility of audio artifacts. Once all TDM clock errors are resolved, the device volume ramps back to its previous playback state. During a TDM clock error, the IRQZ pin will assert low if the clock error interrupt mask register bit is set low (*INT\_MASK[2]*). The clock fault is also available for readback in the live or latched fault status registers (*INT\_LIVE[2]* and *INT\_LTCH[2]*). Reading the latched fault status register (*INT\_LTCH[7:0]*) clears the register.

The TAS2770 also monitors die temperature and Class-D load current and will enter software shutdown mode if either of these exceed safe values. As with the TDM clock error, the IRQZ pin will assert low for these faults if the appropriate fault interrupt mask register bit is set low (*INT\_MASK[0]* for over temp and *INT\_MASK[1]* for over current). The fault status can also be monitored in the live and latched fault registers as with the TDM clock error.

Die over temp and Class-D over current errors can either be latching (i.e. the device will enter software shutdown until a HW/SW shutdown sequence is applied) or they can be configured to automatically retry after a prescribed time. This behavior can be configured in the *OTE\_RETRY* and *OCE\_RETRY* register bits (for over temp and over current respectively). Even in latched mode, the Class-D will not attempt to retry after an over temp or over current error until the retry time period (1.5s) has elapsed. This prevents applying repeated stress to the device in a rapid fashion that could lead to device damage. If the device has been cycled through SW/HW shutdown, the device will only begin to operate after the retry time period.

The status registers (and IRQZ pin if enabled via the status mask register) also indicates limiter behavior including when the limiter is activity, when VBAT is below the inflection point, when maximum attenuation has been applied, when the limiter is in infinite hold and when the limiter has muted the audio.

The IRQZ pin is an open drain output that asserts low during unmasked fault conditions and therefore must be pulled up with a resistor to IOVDD. An internal pull up resistor is provided in the TAS2770 and can be accessed by setting the *IRQZ\_PU* register bit high. Figure 54 below highlights the IRQZ pin circuit.

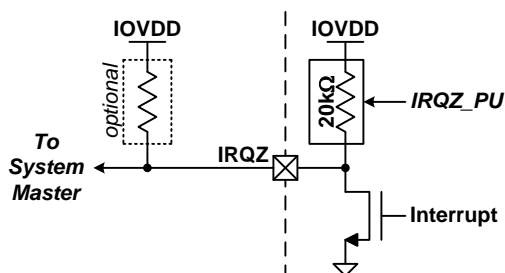

**Figure 54. IRQZ Pin**

**Table 78. Fault Interrupt Mask**

<i>INT_MASK[10:0]</i> Bit	Interrupt	Default (1 = Mask)
0	Over Temp Error	0
1	Over Current Error	0
2	TDM Clock Error	1
3	Limiter Active	1
4	VBAT < Inf Point	1

**Table 78. Fault Interrupt Mask (continued)**

<i>INT_MASK[10:0] Bit</i>	<b>Interrupt</b>	<b>Default (1 = Mask)</b>
5	Limiter Max Atten	1
6	Limiter Inf Hold	1
7	Limiter Mute	1
8	PDM Clock Error	1
9	VBAT Brown Out	1
10	VBAT UVLO	1
11	VBAT OVLO	1

**Table 79. IRQZ Internal Pull Up Enable**

<i>IRQZ_PU</i>	<b>State</b>
0	Disabled (default)
1	Enabled

**Table 80. IRQZ Interrupt Configuration**

<i>IRQZ_PIN_CFG[1:0]</i>	<b>Value</b>
00	IRQZ will assert on any unmasked live interrupts
01	IRQZ will assert on any unmasked latched interrupts (default)
10	Reserved
11	Reserved

#### 8.4.9 Power Sequencing Requirements

AVDD and IOVDD pins should be connected to the same 1.8 V supply domain. There are no other power sequencing requirements for order of rate of ramping up or down.

#### 8.4.10 Digital Input Pull Downs

Each digital input and IO has an optional weak pull down to prevent the pin from floating. Pull downs are not enabled during HW shutdown.

**Table 81. Digital Input Pull Down Enables**

<b>Register Bit</b>	<b>Description</b>	<b>Bit Value</b>	<b>State</b>
<i>DIN_PD[0]</i>	Weak pull down for PDMCK.	0	Disabled
		1	Enabled (default)
<i>DIN_PD[2]</i>	Weak pull down for PDMD.	0	Disabled
		1	Enabled (default)
<i>DIN_PD[5]</i>	Weak pull down for FSYNC.	0	Disabled
		1	Enabled (default)
<i>DIN_PD[6]</i>	Weak pull down for SDIN.	0	Disabled
		1	Enabled (default)
<i>DIN_PD[7]</i>	Weak pull down for SDOOUT.	0	Disabled
		1	Enabled (default)

## 8.5 Register Maps

### 8.5.1 Register Summary Table Book=0x00 Page=0x00

<b>Addr</b>	<b>Register</b>	<b>Description</b>	<b>Section</b>
0x00	PAGE	Device Page	<a href="#">PAGE (book=0x00 page=0x00 address=0x00) [reset=0h]</a>

## Register Maps (continued)

0x01	SW_RESET	Software Reset	<a href="#">SW_RESET (book=0x00 page=0x00 address=0x01) [reset=0h]</a>
0x02	PWR_CTL	Power Control	<a href="#">PWR_CTL (book=0x00 page=0x00 address=0x02) [reset=Eh]</a>
0x03	PB_CFG0	Playback Configuration 0	<a href="#">PB_CFG0 (book=0x00 page=0x00 address=0x03) [reset=10h]</a>
0x04	PB_CFG1	Playback Configuration 1	<a href="#">PB_CFG1 (book=0x00 page=0x00 address=0x04) [reset=1h]</a>
0x05	PB_CFG2	Playback Configuration 2	<a href="#">PB_CFG2 (book=0x00 page=0x00 address=0x05) [reset=0h]</a>
0x06	PB_CFG3	Playback Configuration 3	<a href="#">PB_CFG3 (book=0x00 page=0x00 address=0x06) [reset=0h]</a>
0x07	MISC_CFG	Misc Configuration	<a href="#">MISC_CFG (book=0x00 page=0x00 address=0x07) [reset=6h]</a>
0x08	PDM_CFG0	PDM Input Register 0	<a href="#">PDM_CFG0 (book=0x00 page=0x00 address=0x08) [reset=0h]</a>
0x09	PDM_CFG1	PDM Configuration 1	<a href="#">PDM_CFG1 (book=0x00 page=0x00 address=0x09) [reset=8h]</a>
0x0A	TDM_CFG0	TDM Configuration 0	<a href="#">TDM_CFG0 (book=0x00 page=0x00 address=0x0A) [reset=7h]</a>
0x0B	TDM_CFG1	TDM Configuration 1	<a href="#">TDM_CFG1 (book=0x00 page=0x00 address=0x0B) [reset=2h]</a>
0x0C	TDM_CFG2	TDM Configuration 2	<a href="#">TDM_CFG2 (book=0x00 page=0x00 address=0x0C) [reset=Ah]</a>
0x0D	TDM_CFG3	TDM Configuration 3	<a href="#">TDM_CFG3 (book=0x00 page=0x00 address=0x0D) [reset=10h]</a>
0x0E	TDM_CFG4	TDM Configuration 4	<a href="#">TDM_CFG4 (book=0x00 page=0x00 address=0x0E) [reset=13h]</a>
0x0F	TDM_CFG5	TDM Configuration 5	<a href="#">TDM_CFG5 (book=0x00 page=0x00 address=0x0F) [reset=2h]</a>
0x10	TDM_CFG6	TDM Configuration 6	<a href="#">TDM_CFG6 (book=0x00 page=0x00 address=0x10) [reset=0h]</a>
0x11	TDM_CFG7	TDM Configuration 7	<a href="#">TDM_CFG7 (book=0x00 page=0x00 address=0x11) [reset=4h]</a>
0x12	TDM_CFG8	TDM Configuration 8	<a href="#">TDM_CFG8 (book=0x00 page=0x00 address=0x12) [reset=6h]</a>
0x13	TDM_CFG9	TDM Configuration 9	<a href="#">TDM_CFG9 (book=0x00 page=0x00 address=0x13) [reset=7h]</a>
0x14	TDM_CFG10	TDM Configuration 10	<a href="#">TDM_CFG10 (book=0x00 page=0x00 address=0x14) [reset=8h]</a>
0x15	LIM_CFG0	Limiter Configuration 0	<a href="#">LIM_CFG0 (book=0x00 page=0x00 address=0x15) [reset=14h]</a>
0x16	LIM_CFG1	Limiter Configuration 1	<a href="#">LIM_CFG1 (book=0x00 page=0x00 address=0x16) [reset=76h]</a>
0x17	LIM_CFG2	Limiter Configuration 2	<a href="#">LIM_CFG2 (book=0x00 page=0x00 address=0x17) [reset=10h]</a>
0x18	LIM_CFG3	Limiter Configuration 3	<a href="#">LIM_CFG3 (book=0x00 page=0x00 address=0x18) [reset=6Eh]</a>
0x19	LIM_CFG4	Limiter Configuration 4	<a href="#">LIM_CFG4 (book=0x00 page=0x00 address=0x19) [reset=1Eh]</a>
0x1A	LIM_CFG5	Limiter Configuration 5	<a href="#">LIM_CFG5 (book=0x00 page=0x00 address=0x1A) [reset=58h]</a>
0x1B	BOP_CFG0	Brown Out Prevention 0	<a href="#">BOP_CFG0 (book=0x00 page=0x00 address=0x1B) [reset=1h]</a>
0x1C	BOP_CFG1	Brown Out Prevention 1	<a href="#">BOP_CFG1 (book=0x00 page=0x00 address=0x1C) [reset=14h]</a>
0x1D	BOP_CFG2	Brown Out Prevention 2	<a href="#">BOP_CFG2 (book=0x00 page=0x00 address=0x1D) [reset=4Eh]</a>
0x1E	ICLA_CFG0	Inter Chip Limiter Alignment 0	<a href="#">ICLA_CFG0 (book=0x00 page=0x00 address=0x1E) [reset=0h]</a>
0x1F	ICLA_CFG1	Inter Chip Limiter Alignment 1	<a href="#">ICLA_CFG1 (book=0x00 page=0x00 address=0x1F) [reset=0h]</a>
0x20	INT_MASK0	Interrupt Mask 0	<a href="#">INT_MASK0 (book=0x00 page=0x00 address=0x20) [reset=FCh]</a>
0x21	INT_MASK1	Interrupt Mask 1	<a href="#">INT_MASK1 (book=0x00 page=0x00 address=0x21) [reset=B1h]</a>
0x22	INT_LIVE0	Live Interrupt Readback 0	<a href="#">INT_LIVE0 (book=0x00 page=0x00 address=0x22) [reset=0h]</a>
0x23	INT_LIVE1	Live Interrupt Readback 1	<a href="#">INT_LIVE1 (book=0x00 page=0x00 address=0x23) [reset=0h]</a>
0x24	INT_LTCH0	Latched Interrupt Readback 0	<a href="#">INT_LTCH0 (book=0x00 page=0x00 address=0x24) [reset=0h]</a>
0x25	INT_LTCH1	Latched Interrupt Readback 1	<a href="#">INT_LTCH1 (book=0x00 page=0x00 address=0x25) [reset=0h]</a>



## Register Maps (continued)

0x27	VBAT_MSB	SAR ADC Conversion 0	VBAT_MSB (book=0x00 page=0x00 address=0x27) [reset=0h]
0x28	VBAT_LSB	SAR ADC Conversion 1	VBAT_LSB (book=0x00 page=0x00 address=0x28) [reset=0h]
0x29	TEMP_MSB	SAR ADC Conversion 2	TEMP_MSB (book=0x00 page=0x00 address=0x29) [reset=0h]
0x2A	TEMP_LSB	SAR ADC Conversion 2	TEMP_LSB (book=0x00 page=0x00 address=0x2A) [reset=0h]
0x30	INT_CFG	Interrupt Configuration	INT_CFG (book=0x00 page=0x00 address=0x30) [reset=5h]
0x31	DIN_PD	Digital Input Pin Pull Down	DIN_PD (book=0x00 page=0x00 address=0x31) [reset=0h]
0x32	MISC_IRQ	Misc Configuration	MISC_IRQ (book=0x00 page=0x00 address=0x32) [reset=81h]
0x3C	CLOCK_CFG	Clock Configuration	CLOCK_CFG (book=0x00 page=0x00 address=0x3C) [reset=Dh]
0x77	TDM_DET	TDM Clock detection monitor	TDM_DET (book=0x00 page=0x00 address=0x77) [reset=7Fh]
0x7D	REV_ID	Revision and PG ID	REV_ID (book=0x00 page=0x00 address=0x7D) [reset=20h]
0x7E	I2C_CKSUM	I2C Checksum	I2C_CKSUM (book=0x00 page=0x00 address=0x7E) [reset=0h]
0x7F	BOOK	Device Book	BOOK (book=0x00 page=0x00 address=0x7F) [reset=0h]

## 8.5.2 Register Maps

### 8.5.2.1 PAGE (book=0x00 page=0x00 address=0x00) [reset=0h]

The device's memory map is divided into pages and books. This register sets the page.

**Figure 55. PAGE Register Address: 0x00**

7	6	5	4	3	2	1	0
PAGE[7:0]							
RW-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 82. Device Page Field Descriptions**

Bit	Field	Type	Reset	Description
7-0	PAGE[7:0]	RW	0h	Sets the device page. 00h = Page 0 01h = Page 1 ... FFh = Page 255

### 8.5.2.2 SW\_RESET (book=0x00 page=0x00 address=0x01) [reset=0h]

Asserting Software Reset will place all register values in their default POR (Power on Reset) state.

**Figure 56. SW\_RESET Register Address: 0x01**

7	6	5	4	3	2	1	0
Reserved							SW_RESET
RW-0h							RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 83. Software Reset Field Descriptions**

Bit	Field	Type	Reset	Description
7-1	Reserved	RW	0h	Reserved
0	SW_RESET	RW	0h	Software reset. Bit is self clearing. 0b = Don't reset 1b = Reset



### 8.5.2.3 PWR\_CTL (book=0x00 page=0x00 address=0x02) [reset=Eh]

Sets device's mode of operation and power down of IV sense blocks.

**Figure 57. PWR\_CTL Register Address: 0x02**

7	6	5	4	3	2	1	0
Reserved		Reserved	Reserved	ISNS_PD	VSNS_PD	MODE[1:0]	
RW-0h		RW-0h	RW-0h	RW-1h	RW-1h	RW-2h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 84. Power Control Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved	RW	0h	Reserved
5	Reserved	RW	0h	Reserved
4	Reserved	RW	0h	Reserved
3	ISNS_PD	RW	1h	Current sense power down. 0b = Current sense active 1b = Current sense is powered down
2	VSNS_PD	RW	1h	Voltage sense power down. 0b = voltage sense is active 1b = Voltage sense is powered down
1-0	MODE[1:0]	RW	2h	Device operational mode. 00b = Active 01b = Mute 10b = Software Shutdown 11b = Reserved

### 8.5.2.4 PB\_CFG0 (book=0x00 page=0x00 address=0x03) [reset=10h]

Sets playback source, including PDM input and amplifier output level setting.

**Figure 58. PB\_CFG0 Register Address: 0x03**

7	6	5	4	3	2	1	0
PDM_MAP	PB_PDM_SRC	PB_SRC	AMP_LEVEL[4:0]				
RW-0h	RW-0h	RW-0h	RW-10h				

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 85. Playback Configuration 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7	PDM_MAP	RW	0h	PDM Pin Mapping 0b = PDMD1 for sensor input. 1b = PDMD1 for playback.
6	PB_PDM_SRC	RW	0h	PDM playback source. 0b = PDM input pin defined by PDM_MAP. 1b = Reserved.
5	PB_SRC	RW	0h	Playback source. 0b = PCM 1b = PDM

**Table 85. Playback Configuration 0 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
4-0	AMP_LEVEL[4:0]	RW	10h	Amplifier output level setting. 00h = 11.0 dBV (5.02 Vpk) 01h = 11.5 dBV (5.32 Vpk) 02h = 12.0 dBV (5.63 Vpk) 03h = 12.5 dBV (5.96 Vpk) 04h = 13.0 dBV (6.32 Vpk) 05h = 13.5 dBV (6.69 Vpk) 06h = 14.0 dBV (7.09 Vpk) 07h = 14.5 dBV (7.51 Vpk) 08h = 15.0 dBV (7.95 Vpk) 09h = 15.5 dBV (8.42 Vpk) 0Ah = 16.0 dBV (8.92 Vpk) 0Bh = 16.5 dBV (9.45 Vpk) 0Ch = 17.0 dBV (10.01 Vpk) 0Dh = 17.5 dBV (10.61 Vpk) 0Eh = 18.0 dBV (11.23 Vpk) 0Fh = 18.5 dBV (11.90 Vpk) 10h = 19.0 dBV (12.60 Vpk) 11h = 19.5 dBV (13.35 Vpk) 12h = 20.0 dBV (14.14 Vpk) 13h = 20.5 dBV (14.98 Vpk) 14h = 21.0 dBV (15.87 Vpk) 15h - 1Fh = Reserved

#### 8.5.2.5 PB\_CFG1 (book=0x00 page=0x00 address=0x04) [reset=1h]

Sets playback high pass filter corner (PCM playback only).

**Figure 59. PB\_CFG1 Register Address: 0x04**

7	6	5	4	3	2	1	0
Reserved	Reserved	Reserved	Reserved	Reserved	HPF_FREQ[2:0]		
RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-1h		

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 86. Playback Configuration 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	Reserved	RW	0h	Reserved
5	Reserved	RW	0h	Reserved
4	Reserved	RW	0h	Reserved
3	Reserved	RW	0h	Reserved
2-0	HPF_FREQ[2:0]	RW	1h	High Pass Filter Corner Frequency. 000b = Bypass 001b = 2 Hz 010b = 50 Hz 011b = 100 Hz 100b = 200 Hz 101b = 400 Hz 110b = 800 Hz 111b = Reserved

#### 8.5.2.6 PB\_CFG2 (book=0x00 page=0x00 address=0x05) [reset=0h]

Sets playback volume for PCM playback path.

**Figure 60. PB\_CFG2 Register Address: 0x05**

7	6	5	4	3	2	1	0
DVC_PCM[7:0]							
RW-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 87. Playback Configuration 2 Field Descriptions**

Bit	Field	Type	Reset	Description
7-0	DVC_PCM[7:0]	RW	0h	PCM digital volume control. 00h = 0 dB 01h = -0.5 dB 02h = -1 dB .... C7h = -99.5 dB C8h = -100dB C9h - FFh = Mute

### 8.5.2.7 PB\_CFG3 (book=0x00 page=0x00 address=0x06) [reset=0h]

Sets playback volume for PDM playback path.

**Figure 61. PB\_CFG3 Register Address: 0x06**

7	6	5	4	3	2	1	0
DVC_PDM[7:0]							
RW-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 88. Playback Configuration 3 Field Descriptions**

Bit	Field	Type	Reset	Description
7-0	DVC_PDM[7:0]	RW	0h	PDM digital volume control. 00h = 0 dB 01h = -0.5 dB 02h = -1 dB .... C7h = -99.5 dB C8h = -100dB C9h - FFh = Mute

### 8.5.2.8 MISC\_CFG (book=0x00 page=0x00 address=0x07) [reset=6h]

Sets DVC Ramp Rate, IRQZ pull up, amp spread spectrum and I-Sense current range.

**Figure 62. MISC\_CFG Register Address: 0x07**

7	6	5	4	3	2	1	0
DVC_RAMP_RATE[1:0]		Reserved		IRQZ_PU	AMP_SS	Reserved	
RW-0h		RW-0h		RW-0h	RW-1h	RW-2h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 89. Misc Configuration Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	DVC_RAMP_RATE[1:0]	RW	0h	Digital volume control ramp rate. 00b = 0.5 dB per 1 sample 01b = 0.5 dB per 4 samples 10b = 0.5 dB per 8 samples 11b = Volume ramping disabled
5-4	Reserved	RW	0h	Reserved

**Table 89. Misc Configuration Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
3	IRQZ_PU	RW	0h	IRQZ internal pull up enable. 0b = Disabled 1b = Enabled
2	AMP_SS	RW	1h	Low EMI spread spectrum enable. 0b = Disabled 1b = Enabled
1-0	Reserved	RW	2h	Reserved

### 8.5.2.9 PDM\_CFG0 (book=0x00 page=0x00 address=0x08) [reset=0h]

Sets Class-D sync mode and PDM sample rates.

**Figure 63. PDM\_CFG0 Register Address: 0x08**

7	6	5	4	3	2	1	0
Reserved	CLASSD_SYNC	Reserved	Reserved	PDM_RATE1[1:0]	Reserved	Reserved	Reserved
RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 90. PDM Input Register 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	CLASSD_SYNC	RW	0h	Class-D synchronization mode. 0b = Not synchronized to audio clocks 1b = Synchronized to audio clocks
5-4	Reserved	RW	0h	Reserved
3-2	PDM_RATE1[1:0]	RW	0h	PDMD1 input sample rate. 00b = 2.54 - 3.38 MHz 01b = 5.08 - 6.76 MHz 10b = Reserved 11b = Reserved
1-0	Reserved	RW	0h	Reserved

### 8.5.2.10 PDM\_CFG1 (book=0x00 page=0x00 address=0x09) [reset=8h]

Sets PDM capture edge, master/slave, clock source and gating.

**Figure 64. PDM\_CFG1 Register Address: 0x09**

7	6	5	4	3	2	1	0
PDM_EDGE1	Reserved	PDM_SLV1	Reserved	PDM_CLK1	Reserved	PDM_GATE1	Reserved
RW-0h	RW-0h	RW-0h	RW-0h	RW-1h	RW-0h	RW-0h	RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 91. PDM Configuration 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7	PDM_EDGE1	RW	0h	PDMD1 input capture edge. 0b = Rising 1b = Falling
6	Reserved	RW	0h	Reserved
5	PDM_SLV1	RW	0h	PDMD1 input master or slave. 0b = Slave 1b = Master
4	Reserved	RW	0h	Reserved

**Table 91. PDM Configuration 1 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
3	PDM_CLK1	RW	1h	PDMD1 clock select. 0b = GND 1b = PDMCK1
2	Reserved	RW	0h	Reserved
1	PDM_GATE1	RW	0h	PDMD1 clock gate. 0b = Gated Off 1b = Active
0	Reserved	RW	0h	Reserved

#### 8.5.2.11 TDM\_CFG0 (book=0x00 page=0x00 address=0x0A) [reset=7h]

Sets the TDM frame start, TDM sample rate, TDM auto rate detection and whether rate is based on 44.1 kHz or 48 kHz frequency.

**Figure 65. TDM\_CFG0 Register Address: 0x0A**

7	6	5	4	3	2	1	0
Reserved		RATE_RAMP	AUTO_RATE	SAMP_RATE[2:0]			FRAME_START
RW-0h		RW-0h	RW-0h	RW-3h			RW-1h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 92. TDM Configuration 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved	RW	0h	Reserved
5	RATE_RAMP	RW	0h	Sample rate based on 44.1kHz or 48kHz when CLASSD_SYNC=1. 0b = 48kHz 1b = 44.1kHz
4	AUTO_RATE	RW	0h	Auto detection of TDM sample rate. 0b = Enabled 1b = Disabled
3-1	SAMP_RATE[2:0]	RW	3h	Sample rate of the TDM bus. 000b = Reserved 001b = Reserved 010b = Reserved 011b = 44.1/48 kHz 100b = 88.2/96 kHz 101b = 176.4/192 kHz 110b = Reserved 111b = Reserved
0	FRAME_START	RW	1h	TDM frame start polarity. 0b = Low to High on FSYNC 1b = High to Low on FSYNC

#### 8.5.2.12 TDM\_CFG1 (book=0x00 page=0x00 address=0x0B) [reset=2h]

Sets TDM RX justification, offset and capture edge.

**Figure 66. TDM\_CFG1 Register Address: 0x0B**

7	6	5	4	3	2	1	0
Reserved	RX_JUSTIFY	RX_OFFSET[4:0]					RX_EDGE
RW-0h	RW-0h	RW-1h					RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 93. TDM Configuration 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	RX_JUSTIFY	RW	0h	TDM RX sample justification within the time slot. 0b = Left 1b = Right
5-1	RX_OFFSET[4:0]	RW	1h	TDM RX start of frame to time slot 0 offset (SBCLK cycles).
0	RX_EDGE	RW	0h	TDM RX capture clock polarity. 0b = Rising edge of SBCLK 1b = Falling edge of SBCLK

### 8.5.2.13 TDM\_CFG2 (book=0x00 page=0x00 address=0x0C) [reset=Ah]

Sets TDM RX time slot select, word length and time slot length.

**Figure 67. TDM\_CFG2 Register Address: 0x0C**

7	6	5	4	3	2	1	0
Reserved		RX_SCFG[1:0]		RX_WLEN[1:0]		RX_SLEN[1:0]	
RW-0h		RW-0h		RW-2h		RW-2h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 94. TDM Configuration 2 Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved	RW	0h	Reserved
5-4	RX_SCFG[1:0]	RW	0h	TDM RX time slot select config. 00b = Mono with time slot equal to I2C address offset 01b = Mono left channel 10b = Mono right channel 11b = Stereo downmix (L+R)/2
3-2	RX_WLEN[1:0]	RW	2h	TDM RX word length. 00b = 16-bits 01b = 20-bits 10b = 24-bits 11b = 32-bits
1-0	RX_SLEN[1:0]	RW	2h	TDM RX time slot length. 00b = 16-bits 01b = 24-bits 10b = 32-bits 11b = Reserved

### 8.5.2.14 TDM\_CFG3 (book=0x00 page=0x00 address=0x0D) [reset=10h]

Sets TDM RX left and right time slots.

**Figure 68. TDM\_CFG3 Register Address: 0x0D**

7	6	5	4	3	2	1	0
RX_SLOT_R[3:0]				RX_SLOT_L[3:0]			
RW-1h				RW-0h			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 95. TDM Configuration 3 Field Descriptions**

Bit	Field	Type	Reset	Description
7-4	RX_SLOT_R[3:0]	RW	1h	TDM RX Right Channel Time Slot.
3-0	RX_SLOT_L[3:0]	RW	0h	TDM RX Left Channel Time Slot.

### 8.5.2.15 TDM\_CFG4 (book=0x00 page=0x00 address=0x0E) [reset=13h]

Sets TDM TX bus keeper, fill, offset and transmit edge.

**Figure 69. TDM\_CFG4 Register Address: 0x0E**

7	6	5	4	3	2	1	0
TX_LSB_CFG	TX_KEEPER_CFG	TX_KEEPER	TX_FILL	TX_OFFSET[2:0]			TX_EDGE
RW-0h	RW-0h	RW-0h	RW-1h	RW-1h			RW-1h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 96. TDM Configuration 4 Field Descriptions**

Bit	Field	Type	Reset	Description
7	TX_LSB_CFG	RW	0h	TDM TX SDOUT LSB data option 0b = TX SDOUT LSB is driven for full-cycle (provided TX_KEEPER is '0') 1b = TX SDOUT LSB is driven for half-cycle
6	TX_KEEPER_CFG	RW	0h	TDM TX SDOUT bus keeper configuration. 0b = Bus keeper is enabled only for 1 LSB bit cycle & SDOUT LSB driven for half cycle (provided TX_KEEPER is '1') 1b = Bus keeper is always enabled & SDOUT LSB driven for half cycle (provided TX_KEEPER is '1')
5	TX_KEEPER	RW	0h	TDM TX SDOUT bus keeper enable. 0b = Disable bus keeper 1b = Enable bus keeper
4	TX_FILL	RW	1h	TDM TX SDOUT unused bitfield fill. 0b = Transmit 0 1b = Transmit Hi-Z
3-1	TX_OFFSET[2:0]	RW	1h	TDM TX start of frame to time slot 0 offset.
0	TX_EDGE	RW	1h	TDM TX launch clock polarity. 0b = Rising edge of SBCLK 1b = Falling edge of SBCLK

### 8.5.2.16 TDM\_CFG5 (book=0x00 page=0x00 address=0x0F) [reset=2h]

Sets TDM TX V-Sense time slot and enable.

**Figure 70. TDM\_CFG5 Register Address: 0x0F**

7	6	5	4	3	2	1	0
Reserved	VSNS_TX	VSNS_SLOT[5:0]					
RW-0h	RW-0h	RW-2h					

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 97. TDM Configuration 5 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	VSNS_TX	RW	0h	TDM TX voltage sense transmit enable. 0b = Disabled 1b = Enabled
5-0	VSNS_SLOT[5:0]	RW	2h	TDM TX voltage sense time slot. It is recommended to maintain the following order: ISNS_SLOT<VSNS_SLOT<PDM_SLOT<VBAT_SLOT<TEMP_SLOT<GAIN_SLOT

### 8.5.2.17 TDM\_CFG6 (book=0x00 page=0x00 address=0x10) [reset=0h]

Sets TDM TX I-Sense time slot and enable.

**Figure 71. TDM\_CFG6 Register Address: 0x10**

7	6	5	4	3	2	1	0
Reserved	ISNS_TX	ISNS_SLOT[5:0]					
RW-0h	RW-0h	RW-0h					

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 98. TDM Configuration 6 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	ISNS_TX	RW	0h	TDM TX current sense transmit enable. 0b = Disabled 1b = Enabled
5-0	ISNS_SLOT[5:0]	RW	0h	TDM TX current sense time slot. It is recommended to maintain the following order: ISNS_SLOT<VSNS_SLOT<PDM_SLOT<VBAT_SLOT<TEMP_SLOT<GAIN_SLOT

#### 8.5.2.18 TDM\_CFG7 (book=0x00 page=0x00 address=0x11) [reset=4h]

Sets TDM TX time slot and transmit enable for decimated PDM.

**Figure 72. TDM\_CFG7 Register Address: 0x11**

7	6	5	4	3	2	1	0
Reserved	PDM_TX	PDM_SLOT[5:0]					
RW-0h	RW-0h	RW-4h					

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 99. TDM Configuration 7 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	PDM_TX	RW	0h	TDM TX decimated PDM transmit enable. 0b = Disabled 1b = Enabled
5-0	PDM_SLOT[5:0]	RW	4h	TDM TX decimated PDM time slot.

#### 8.5.2.19 TDM\_CFG8 (book=0x00 page=0x00 address=0x12) [reset=6h]

Sets TDM TX VBAT time slot and enable.

**Figure 73. TDM\_CFG8 Register Address: 0x12**

7	6	5	4	3	2	1	0
VBAT_SLEN	VBAT_TX	VBAT_SLOT[5:0]					
RW-0h	RW-0h	RW-6h					

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 100. TDM Configuration 8 Field Descriptions**

Bit	Field	Type	Reset	Description
7	VBAT_SLEN	RW	0h	TDM TX VBAT time slot length. 0b = Truncate to 8-bits 1b = Left justify to 16-bits
6	VBAT_TX	RW	0h	TDM TX VBAT transmit enable. 0b = Disabled 1b = Enabled
5-0	VBAT_SLOT[5:0]	RW	6h	TDM TX VBAT time slot.



### 8.5.2.20 TDM\_CFG9 (book=0x00 page=0x00 address=0x13) [reset=7h]

Sets TDM TX temp time slot and enable.

**Figure 74. TDM\_CFG9 Register Address: 0x13**

7	6	5	4	3	2	1	0
Reserved	TEMP_TX	TEMP_SLOT[5:0]					
RW-0h	RW-0h	RW-7h					

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 101. TDM Configuration 9 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	TEMP_TX	RW	0h	TDM TX temp sensor transmit enable. 0b = Disabled 1b = Enabled
5-0	TEMP_SLOT[5:0]	RW	7h	TDM TX temp sensor time slot.

### 8.5.2.21 TDM\_CFG10 (book=0x00 page=0x00 address=0x14) [reset=8h]

Sets TDM TX limiter gain reduction time slot and enable.

**Figure 75. TDM\_CFG10 Register Address: 0x14**

7	6	5	4	3	2	1	0
Reserved	GAIN_TX	GAIN_SLOT[5:0]					
RW-0h	RW-0h	RW-8h					

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 102. TDM Configuration 10 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	GAIN_TX	RW	0h	TDM TX limiter gain reduction transmit enable. 0b = Disabled 1b = Enabled
5-0	GAIN_SLOT[5:0]	RW	8h	TDM TX limiter gain reduction time slot.

### 8.5.2.22 LIM\_CFG0 (book=0x00 page=0x00 address=0x15) [reset=14h]

Sets Limiter attack step size, attack rate and enable.

**Figure 76. LIM\_CFG0 Register Address: 0x15**

7	6	5	4	3	2	1	0
Reserved		LIM_ATK_ST[1:0]		LIM_ATK_RT[2:0]		LIM_EN	
RW-0h		RW-1h		RW-2h		RW-0h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 103. Limiter Configuration 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	Reserved	RW	0h	Reserved
5-4	LIM_ATK_ST[1:0]	RW	1h	Limiter/ICLA attack step size. 00b = 0.25 dB 01b = 0.5 dB 10b = 1 dB 11b = 2 dB

**Table 103. Limiter Configuration 0 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
3-1	LIM_ATK_RT[2:0]	RW	2h	Limiter/ICLA attack rate. 000b = 5 us/step 001b = 10 us/step 010b = 20 us/step 011b = 40 us/step 100b = 80 us/step 101b = 160 us/step 110b = 320 us/step 111b = 640 us/step
0	LIM_EN	RW	0h	Limiter enable. 0b = Disabled 1b = Enabled

### 8.5.2.23 LIM\_CFG1 (book=0x00 page=0x00 address=0x16) [reset=76h]

Sets limiter release step size, release rate and hold time.

**Figure 77. LIM\_CFG1 Register Address: 0x16**

7	6	5	4	3	2	1	0
LIM_RLS_ST[1:0]		LIM_RLS_RT[2:0]			LIM_HLD_TM[2:0]		
RW-1h		RW-6h			RW-6h		

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 104. Limiter Configuration 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7-6	LIM_RLS_ST[1:0]	RW	1h	Limiter/BOP/ICLA release step size. 00b = 0.25 dB 01b = 0.5 dB 10b = 1 dB 11b = 2 dB
5-3	LIM_RLS_RT[2:0]	RW	6h	Limiter/BOP/ICLA release rate. 000b = 10 ms/step 001b = 50 ms/step 010b = 100 ms/step 011b = 250 ms/step 100b = 500 ms/step 101b = 750 ms/step 110b = 1000 ms/step 111b = 1500 ms/step
2-0	LIM_HLD_TM[2:0]	RW	6h	Limiter hold time. 000b = 0 ms 001b = 10 ms 010b = 25 ms 011b = 50 ms 100b = 100 ms 101b = 250 ms 110b = 500 ms 111b = 1000 ms

### 8.5.2.24 LIM\_CFG2 (book=0x00 page=0x00 address=0x17) [reset=10h]

Sets limiter VBAT tracking slope and max attenuatio.

**Figure 78. LIM\_CFG2 Register Address: 0x17**

7	6	5	4	3	2	1	0
Reserved			LIM_MAX_ATN[4:0]				
RW-0h			RW-10h				

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 105. Limiter Configuration 2 Field Descriptions**

Bit	Field	Type	Reset	Description
7-5	Reserved	RW	0h	Reserved
4-0	LIM_MAX_ATN[4:0]	RW	10h	Limiter max attenuation. 00h = 1 dB 01h = 1.5 dB ... 10h = 9 dB ... 1Eh = 16 dB 1Fh = 16.5 dB

#### 8.5.2.25 LIM\_CFG3 (book=0x00 page=0x00 address=0x18) [reset=6Eh]

Sets Limiter max threshold.

**Figure 79. LIM\_CFG3 Register Address: 0x18**

7	6	5	4	3	2	1	0
Reserved	LIM_TH_MAX[6:0]						
RW-0h	RW-6Eh						

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 106. Limiter Configuration 3 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6-0	LIM_TH_MAX[6:0]	RW	6Eh	Limiter max threshold. 00h = 2 V 01h = 2.1 V ... 6Eh = 13 V ... 7Eh = 14.6 V 7Fh = 14.7 V

#### 8.5.2.26 LIM\_CFG4 (book=0x00 page=0x00 address=0x19) [reset=1Eh]

Sets limiter min threshold.

**Figure 80. LIM\_CFG4 Register Address: 0x19**

7	6	5	4	3	2	1	0
Reserved	LIM_TH_MIN[6:0]						
RW-0h	RW-1Eh						

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 107. Limiter Configuration 4 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6-0	LIM_TH_MIN[6:0]	RW	1Eh	Limiter min threshold. 00h = 2 V 01h = 2.1 V ... 1Eh = 5 V ... 7Eh = 14.6 V 7Fh = 14.7 V

### 8.5.2.27 LIM\_CFG5 (book=0x00 page=0x00 address=0x1A) [reset=58h]

Sets limiter inflection point.

**Figure 81. LIM\_CFG5 Register Address: 0x1A**

7	6	5	4	3	2	1	0
Reserved	LIM_INF_PT[6:0]						
RW-0h	RW-58h						

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 108. Limiter Configuration 5 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6-0	LIM_INF_PT[6:0]	RW	58h	Limiter inflection point. 00h = 2 V 01h = 2.1 V ... 58h = 10.8 V ... 7Eh = 14.6 V 7Fh = 14.7 V

### 8.5.2.28 BOP\_CFG0 (book=0x00 page=0x00 address=0x1B) [reset=1h]

Sets BOP infinite hold clear, infinite hold enable, mute on brown out and enable.

**Figure 82. BOP\_CFG0 Register Address: 0x1B**

7	6	5	4	3	2	1	0
Reserved	EN_BO_RECOVERY_HYSTERSIS	LIM_SLOPE[1:0]		BOP_HLD_CLR	BOP_INF_HLD	BOP_MUTE	BOP_EN
RW-0h	RW-0h	RW-0h		RW-0h	RW-0h	RW-0h	RW-1h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 109. Brown Out Prevention 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	EN_BO_RECOVERY_HYSTERSIS	RW	0h	
5-4	LIM_SLOPE[1:0]	RW	0h	Limiter VBAT tracking slope. 00b = 1 V/V 01b = 1.5 V/V 10b = 2 V/V 11b = 4 V/V
3	BOP_HLD_CLR	RW	0h	BOP infinite hold clear (self clearing). 0b = Don't clear 1b = Clear
2	BOP_INF_HLD	RW	0h	Infinite hold on brown out event. 0b = Use BOP_HLD_TM after brown out event 1b = Don't release until BOP_HLD_CLR is asserted high
1	BOP_MUTE	RW	0h	Mute on brown out event. 0b = Don't mute 1b = Mute followed by device shutdown
0	BOP_EN	RW	1h	Brown out prevention enable. 0b = Disabled 1b = Enabled

### 8.5.2.29 BOP\_CFG1 (book=0x00 page=0x00 address=0x1C) [reset=14h]

BOP threshold.

**Figure 83. BOP\_CFG1 Register Address: 0x1C**

7	6	5	4	3	2	1	0
BOP_TH[7:0]							
RW-14h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 110. Brown Out Prevention 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7-0	BOP_TH[7:0]	RW	14h	Brown out prevention threshold. 00h = 4.5 V 01h = 4.525 V ... 14h = 5.0 V ... FEh = 10.85 V FFh = 10.875 V

#### 8.5.2.30 BOP\_CFG2 (book=0x00 page=0x00 address=0x1D) [reset=4Eh]

BOP attack rate, attack step size and hold time.

**Figure 84. BOP\_CFG2 Register Address: 0x1D**

7	6	5	4	3	2	1	0
BOP_ATK_RT[2:0]			BOP_ATK_ST[1:0]		BOP_HLD_TM[2:0]		
RW-2h			RW-1h		RW-6h		

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 111. Brown Out Prevention 2 Field Descriptions**

Bit	Field	Type	Reset	Description
7-5	BOP_ATK_RT[2:0]	RW	2h	Brown out prevention attack rate. 000b = 5 us/step 001b = 10 us/step 010b = 20 us/step 011b = 40 us/step 100b = 80 us/step 101b = 160 us/step 110b = 320 us/step 111b = 640 us/step
4-3	BOP_ATK_ST[1:0]	RW	1h	Brown out prevention attack step size. 00b = 0.5 dB 01b = 1 dB 10b = 1.5 dB 11b = 2 dB
2-0	BOP_HLD_TM[2:0]	RW	6h	Brown out prevention hold time. 000b = 0 ms 001b = 10 ms 010b = 25 ms 011b = 50 ms 100b = 100 ms 101b = 250 ms 110b = 500 ms 111b = 1000 ms

#### 8.5.2.31 ICLA\_CFG0 (book=0x00 page=0x00 address=0x1E) [reset=0h]

ICLA starting time slot and enable.

**Figure 85. ICLA\_CFG0 Register Address: 0x1E**

7	6	5	4	3	2	1	0
ICLA_USE_MAX	ICLA_SLOT[5:0]						ICLA_EN
RW-0h	RW-0h						RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 112. Inter Chip Limiter Alignment 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7	ICLA_USE_MAX	RW	0h	Inter chip limiter alignment min/max config 0b = Use the maximum of the ICLA group gain reduction 1b = Use the minimum of the ICLA group gain reduction
6-1	ICLA_SLOT[5:0]	RW	0h	Inter chip limiter alignment starting time slot.
0	ICLA_EN	RW	0h	Inter chip limiter alignment enable. 0b = Disabled 1b = Enabled

### 8.5.2.32 ICLA\_CFG1 (book=0x00 page=0x00 address=0x1F) [reset=0h]

ICLA time slot enables.

**Figure 86. ICLA\_CFG1 Register Address: 0x1F**

7	6	5	4	3	2	1	0
ICLA_SEN[7]	ICLA_SEN[6]	ICLA_SEN[5]	ICLA_SEN[4]	ICLA_SEN[3]	ICLA_SEN[2]	ICLA_SEN[1]	ICLA_SEN[0]
RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 113. Inter Chip Limiter Alignment 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7	ICLA_SEN[7]	RW	0h	Time slot equals ICLA_SLOT[5:0]+7. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled
6	ICLA_SEN[6]	RW	0h	Time slot equals ICLA_SLOT[5:0]+6. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled
5	ICLA_SEN[5]	RW	0h	Time slot equals ICLA_SLOT[5:0]+5. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled
4	ICLA_SEN[4]	RW	0h	Time slot equals ICLA_SLOT[5:0]+4. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled
3	ICLA_SEN[3]	RW	0h	Time slot equals ICLA_SLOT[5:0]+3. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled
2	ICLA_SEN[2]	RW	0h	Time slot equals ICLA_SLOT[5:0]+2. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled
1	ICLA_SEN[1]	RW	0h	Time slot equals ICLA_SLOT[5:0]+1. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled

**Table 113. Inter Chip Limiter Alignment 1 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
0	ICLA_SEN[0]	RW	0h	Time slot equals ICLA_SLOT[5:0]. When enabled, the limiter will include this time slot in the alignment group. 0b = Disabled 1b = Enabled

### 8.5.2.33 INT\_MASK0 (book=0x00 page=0x00 address=0x20) [reset=FCh]

Interrupt masks.

**Figure 87. INT\_MASK0 Register Address: 0x20**

7	6	5	4	3	2	1	0
INT_MASK[7]	INT_MASK[6]	INT_MASK[5]	INT_MASK[4]	INT_MASK[3]	INT_MASK[2]	INT_MASK[1]	INT_MASK[0]
RW-1h	RW-1h	RW-1h	RW-1h	RW-1h	RW-1h	RW-0h	RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 114. Interrupt Mask 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7	INT_MASK[7]	RW	1h	Limiter mute mask. 0b = Don't Mask 1b = Mask
6	INT_MASK[6]	RW	1h	Limiter infinite hold mask. 0b = Don't Mask 1b = Mask
5	INT_MASK[5]	RW	1h	Limiter max attenuation mask. 0b = Don't Mask 1b = Mask
4	INT_MASK[4]	RW	1h	VBAT <N521 Inflection Point mask. 0b = Don't Mask 1b = Mask
3	INT_MASK[3]	RW	1h	Limiter active mask. 0b = Don't Mask 1b = Mask
2	INT_MASK[2]	RW	1h	TDM clock error mask. 0b = Don't Mask 1b = Mask
1	INT_MASK[1]	RW	0h	Over current error mask. 0b = Don't Mask 1b = Mask
0	INT_MASK[0]	RW	0h	Over temp error mask. 0b = Don't Mask 1b = Mask

### 8.5.2.34 INT\_MASK1 (book=0x00 page=0x00 address=0x21) [reset=B1h]

Interrupt masks.

**Figure 88. INT\_MASK1 Register Address: 0x21**

7	6	5	4	3	2	1	0
INT_MASK[14]	Reserved	Reserved	Reserved	INT_MASK[11]	INT_MASK[10]	INT_MASK[9]	INT_MASK[8]
RW-1h	RW-0h	RW-1h	RW-1h	RW-0h	RW-0h	RW-0h	RW-1h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 115. Interrupt Mask 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7	INT_MASK[14]	RW	1h	PDM audio data invalid mask. 0b = Don't Mask 1b = Mask
6	Reserved	RW	0h	Reserved
5	Reserved	RW	1h	Reserved
4	Reserved	RW	1h	Reserved
3	INT_MASK[11]	RW	0h	VBAT OVLO mask. 0b = Don't Mask 1b = Mask
2	INT_MASK[10]	RW	0h	VBAT UVLO mask. 0b = Don't Mask 1b = Mask
1	INT_MASK[9]	RW	0h	VBAT Brown out mask 0b = Don't Mask 1b = Mask
0	INT_MASK[8]	RW	1h	PDM clock error mask. 0b = Don't Mask 1b = Mask

### 8.5.2.35 INT\_LIVE0 (book=0x00 page=0x00 address=0x22) [reset=0h]

Live interrupt readback.

**Figure 89. INT\_LIVE0 Register Address: 0x22**

7	6	5	4	3	2	1	0
INT_LIVE[7]	INT_LIVE[6]	INT_LIVE[5]	INT_LIVE[4]	INT_LIVE[3]	INT_LIVE[2]	INT_LIVE[1]	INT_LIVE[0]
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 116. Live Interrupt Readback 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7	INT_LIVE[7]	R	0h	Interrupt due to limiter mute. 0b = No interrupt 1b = Interrupt
6	INT_LIVE[6]	R	0h	Interrupt due to limiter infinite hold. 0b = No interrupt 1b = Interrupt
5	INT_LIVE[5]	R	0h	Interrupt due to limiter max attenuation. 0b = No interrupt 1b = Interrupt
4	INT_LIVE[4]	R	0h	Interrupt due to VBAT below limiter inflection point. 0b = No interrupt 1b = Interrupt
3	INT_LIVE[3]	R	0h	Interrupt due to limiter active. 0b = No interrupt 1b = Interrupt
2	INT_LIVE[2]	R	0h	Interrupt due to TDM clock error. 0b = No interrupt 1b = Interrupt
1	INT_LIVE[1]	R	0h	Interrupt due to over current error. 0b = No interrupt 1b = Interrupt
0	INT_LIVE[0]	R	0h	Interrupt due to over temp error. 0b = No interrupt 1b = Interrupt



### 8.5.2.36 INT\_LIVE1 (book=0x00 page=0x00 address=0x23) [reset=0h]

Live interrupt readback.

**Figure 90. INT\_LIVE1 Register Address: 0x23**

7	6	5	4	3	2	1	0
INT_LIVE[15]	Reserved	Reserved	Reserved	INT_LIVE[11]	INT_LIVE[10]	INT_LIVE[9]	INT_LIVE[8]
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 117. Live Interrupt Readback 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7	INT_LIVE[15]	R	0h	Interrupt due to PDM audio data invalid 0b = No interrupt 1b = Interrupt
6	Reserved	R	0h	Reserved
5	Reserved	R	0h	Reserved
4	Reserved	R	0h	Reserved
3	INT_LIVE[11]	R	0h	Interrupt due to VBAT OVLO flag. 0b = No interrupt 1b = Interrupt
2	INT_LIVE[10]	R	0h	Interrupt due to VBAT UVLO flag. 0b = No interrupt 1b = Interrupt
1	INT_LIVE[9]	R	0h	Interrupt due to VBAT brown out flag. 0b = No interrupt 1b = Interrupt
0	INT_LIVE[8]	R	0h	Interrupt due to PDM clock error. 0b = No interrupt 1b = Interrupt

### 8.5.2.37 INT\_LTCH0 (book=0x00 page=0x00 address=0x24) [reset=0h]

Latched interrupt readback.

**Figure 91. INT\_LTCH0 Register Address: 0x24**

7	6	5	4	3	2	1	0
INT_LTCH[7]	INT_LTCH[6]	INT_LTCH[5]	INT_LTCH[4]	INT_LTCH[3]	INT_LTCH[2]	INT_LTCH[1]	INT_LTCH[0]
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 118. Latched Interrupt Readback 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7	INT_LTCH[7]	R	0h	Interrupt due to limiter mute (read to clear). 0b = No interrupt 1b = Interrupt
6	INT_LTCH[6]	R	0h	Interrupt due to limiter infinite hold (read to clear). 0b = No interrupt 1b = Interrupt
5	INT_LTCH[5]	R	0h	Interrupt due to limiter max attenuation (read to clear). 0b = No interrupt 1b = Interrupt
4	INT_LTCH[4]	R	0h	Interrupt due to VBAT < limiter inflection point (read to clear). 0b = No interrupt 1b = Interrupt
3	INT_LTCH[3]	R	0h	Interrupt due to limiter active (read to clear). 0b = No interrupt 1b = Interrupt

**Table 118. Latched Interrupt Readback 0 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
2	INT_LTCH[2]	R	0h	Interrupt due to TDM clock error (read to clear). 0b = No interrupt 1b = Interrupt
1	INT_LTCH[1]	R	0h	Interrupt due to over current error (read to clear). 0b = No interrupt 1b = Interrupt
0	INT_LTCH[0]	R	0h	Interrupt due to over temp error (read to clear). 0b = No interrupt 1b = Interrupt

### 8.5.2.38 INT\_LTCH1 (book=0x00 page=0x00 address=0x25) [reset=0h]

Latched interrupt readback.

**Figure 92. INT\_LTCH1 Register Address: 0x25**

7	6	5	4	3	2	1	0
INT_LTCH[15]	Reserved	Reserved	Reserved	INT_LTCH[11]	INT_LTCH[10]	INT_LTCH[9]	INT_LTCH[8]
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 119. Latched Interrupt Readback 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7	INT_LTCH[15]	R	0h	Interrupt due to PDM audio data invalid. (read to clear). 0b = No interrupt 1b = Interrupt
6	Reserved	R	0h	Reserved
5	Reserved	R	0h	Reserved
4	Reserved	R	0h	Reserved
3	INT_LTCH[11]	R	0h	Interrupt due to VBAT OVLO flag (read to clear). 0b = No interrupt 1b = Interrupt
2	INT_LTCH[10]	R	0h	Interrupt due to VBAT UVLO flag (read to clear). 0b = No interrupt 1b = Interrupt
1	INT_LTCH[9]	R	0h	Interrupt due to VBAT brown out flag (read to clear). 0b = No interrupt 1b = Interrupt
0	INT_LTCH[8]	R	0h	Interrupt due to PDM clock error (read to clear). 0b = No interrupt 1b = Interrupt

### 8.5.2.39 INT\_LTCH2 (book=0x00 page=0x00 address=0x26) [reset=0h]

**Table 120. INT\_LTCH2 Register Address: 0x26**

7	6	5	4	3	2	1	0
INT_LTCH[23]	INT_LTCH[22]	INT_LTCH[21]	INT_LTCH[20]	INT_LTCH[19]	INT_LTCH[18]	INT_LTCH[17]	INT_LTCH[16]
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 121. INT\_LTCH2 Field Descriptions**

Bit	Field	Type	Reset	Description
7	INT_LTCH[23]	R	0h	Interrupt due to clock halt flag (read to clear) 0b = No interrupt 1b = Interrupt

**Table 121. INT\_LTCH2 Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
6	INT_LTCH[22]	R	0h	Interrupt due to DMA Request to DSP lost flag (read to clear) 0b = No interrupt 1b = Interrupt
5	INT_LTCH[21]	R	0h	Interrupt due to Auto Trim converged status (read to clear) 0b = No interrupt 1b = Interrupt
4	INT_LTCH[20]	R	0h	Interrupt due to Class D Clamp status flag (read to clear) 0b = No interrupt 1b = Interrupt
3	INT_LTCH[19]	R	0h	Interrupt due to HIGH SIDE OC flag (read to clear). 0b = No interrupt 1b = Interrupt
2	INT_LTCH[18]	R	0h	Interrupt due to LOW SIDE OC flag (read to clear). 0b = No interrupt 1b = Interrupt
1	INT_LTCH[17]	R	1h	Interrupt due to LDO 5 V PG flag (read to clear). 0b = No interrupt 1b = Interrupt
0	INT_LTCH[16]	R	0h	Interrupt due to LDO 5 V OL (read to clear). 0b = No interrupt 1b = Interrupt

#### 8.5.2.40 VBAT\_MSB (book=0x00 page=0x00 address=0x27) [reset=0h]

MSBs of SAR ADC VBAT conversion.

**Figure 93. VBAT\_MSB Register Address: 0x27**

7	6	5	4	3	2	1	0
VBAT_CNV[11:4]							
R-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 122. SAR ADC Conversion 0 Field Descriptions**

Bit	Field	Type	Reset	Description
7--4	VBAT_CNV[11:0]	R	0h	Returns SAR ADC VBAT conversion MSBs.

#### 8.5.2.41 VBAT\_LSB (book=0x00 page=0x00 address=0x28) [reset=0h]

LSBs of SAR ADC VBAT conversion.

**Figure 94. VBAT\_LSB Register Address: 0x28**

7	6	5	4	3	2	1	0
VBAT_CNV[3:0]				Reserved			
R-0h				R-0h			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 123. SAR ADC Conversion 1 Field Descriptions**

Bit	Field	Type	Reset	Description
7-4	VBAT_CNV[3:0]	R	0h	Returns SAR ADC VBAT conversion LSBs.
3-0	Reserved	R	0h	Reserved

### 8.5.2.42 TEMP\_MSB (book=0x00 page=0x00 address=0x29) [reset=0h]

SARD ADC Temp conversion.

**Figure 95. TEMP\_MSB Register Address: 0x29**

7	6	5	4	3	2	1	0
TMP_CNVR[11:4]							
R-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 124. SAR ADC Conversion 2 Field Descriptions**

Bit	Field	Type	Reset	Description
7--4	TMP_CNVR[11:0]	R	0h	Returns SAR ADC temp sensor conversion.

### 8.5.2.43 TEMP\_LSB (book=0x00 page=0x00 address=0x2A) [reset=0h]

SARD ADC Temp conversion.

**Figure 96. TEMP\_LSB Register Address: 0x2A**

7	6	5	4	3	2	1	0
TMP_CNVR[3:0]				Reserved			
-0h				R-0h			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 125. SAR ADC Conversion 2 Field Descriptions**

Bit	Field	Type	Reset	Description
7-4	TMP_CNVR[3:0]		0h	Returns SAR ADC temp sensor conversion.
3-0	Reserved	R	0h	Reserved

### 8.5.2.44 INT\_CFG (book=0x00 page=0x00 address=0x30) [reset=5h]

Sets whether latched or live interrupts will trigger IRQZ pin.

**Figure 97. INT\_CFG Register Address: 0x30**

7	6	5	4	3	2	1	0
Reserved						IRQZ_PIN_CFG[1:0]	
RW-0h						RW-1h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 126. Interrupt Configuration Field Descriptions**

Bit	Field	Type	Reset	Description
7-2	Reserved	RW	0h	Reserved
1-0	IRQZ_PIN_CFG[1:0]	RW	1h	IRQZ interrupt configuration. 00b = IRQZ will assert on any unmasked live interrupts 01b = IRQZ will assert on any unmasked latched interrupts 10b = IRQZ will assert for 2ms one time on any unmasked live interrupt event 11b = IRQZ will assert for 2ms every 4ms on any unmasked latched interrupts

### 8.5.2.45 DIN\_PD (book=0x00 page=0x00 address=0x31) [reset=0h]

Sets enables of input pin weak pull down.

**Figure 98. DIN\_PD Register Address: 0x31**

7	6	5	4	3	2	1	0
DIN_PD[7]	DIN_PD[6]	DIN_PD[5]	DIN_PD[4]	Reserved	DIN_PD[2]	Reserved	DIN_PD[0]
RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h	RW-0h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 127. Digital Input Pin Pull Down Field Descriptions**

Bit	Field	Type	Reset	Description
7	DIN_PD[7]	RW	0h	Weak pull down for SDOUT 0b = Disabled 1b = Enabled
6	DIN_PD[6]	RW	0h	Weak pull down for SDIN. 0b = Disabled 1b = Enabled
5	DIN_PD[5]	RW	0h	Weak pull down for FSYNC. 0b = Disabled 1b = Enabled
4	DIN_PD[4]	RW	0h	Weak pull down for SBCLK. 0b = Disabled 1b = Enabled
3	Reserved	RW	0h	Reserved
2	DIN_PD[2]	RW	0h	Weak pull down for PDMD1. 0b = Disabled 1b = Enabled
0	Reserved	RW	0h	Reserved
0	DIN_PD[0]	RW	0h	Weak pull down for PDMCK1. 0b = Disabled 1b = Enabled

#### 8.5.2.46 MISC\_IRQ (book=0x00 page=0x00 address=0x32) [reset=81h]

Set IRQZ pin active state

**Figure 99. MISC\_IRQ Register Address: 0x32**

7	6	5	4	3	2	1	0
IRQZ_POL	Reserved			Reserved	Reserved	Reserved	IRQZ_VAL
RW-1h	RW-0h			RW-0h	RW-0h	RW-0h	R-1h

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 128. Misc Configuration Field Descriptions**

Bit	Field	Type	Reset	Description
7	IRQZ_POL	RW	1h	IRQZ pin polarity for interrupt. 0b = Active high (IRQ) 1b = Active low (IRQZ)
6-4	Reserved	RW	0h	Reserved
3	Reserved	RW	0h	Reserved
2	Reserved	RW	0h	Reserved
1	Reserved	RW	0h	Reserved
0	IRQZ_VAL	R	1h	IRQZ bit bang in read value. Default is 1b'1 if there are no interrupts/errors 0b = IRQZ Input Buffer Value=0 1b = IRQZ Input Buffer Value=1

#### 8.5.2.47 CLOCK\_CFG (book=0x00 page=0x00 address=0x3C) [reset=Dh]

Can override audio configure and set the clocking ratio

**Figure 100. CLOCK\_CFG Register Address: 0x3C**

7	6	5	4	3	2	1	0
Reserved	Reserved	SBCLK_FS_RATIO[3:0]				AUTO_CLK[1:0]	
RW-0h	RW-0h	RW-3h				RW-1h	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 129. Clock Configuration Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	RW	0h	Reserved
6	Reserved	RW	0h	Reserved
5-2	SBCLK_FS_RATIO[3:0]	RW	3h	Program manually SBCLK to FS ratio when auto clock detection is disabled 00h = 16 01h = 24 02h = 32 03h = 48 04h = 64 05h = 96 06h = 128 07h = 192 08h = 256 09h = 384 0Ah = 512
1-0	AUTO_CLK[1:0]	RW	1h	Clocking automatic configuraiton 00b = Auto configure clock dividers based on SBCLK to FSYNC ratio 01b = Manually configure clock dividers by programming SBCLK_FS_RATIO

#### 8.5.2.48 TDM\_DET (book=0x00 page=0x00 address=0x77) [reset=7Fh]

Readback of internal auto-rate detection.

**Figure 101. TDM\_DET Register Address: 0x77**

7	6	5	4	3	2	1	0
Reserved	FS_RATIO[3:0]				FS_RATE_V[2:0]		
R-0h	R-Fh				R-7h		

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 130. TDM Clock detection monitor Field Descriptions**

Bit	Field	Type	Reset	Description
7	Reserved	R	0h	Reserved
6-3	FS_RATIO[3:0]	R	Fh	Detected SBCLK to FSYNC ratio. 00h = 16 01h = 24 02h = 32 03h = 48 04h = 64 05h = 96 06h = 128 07h = 192 08h = 256 09h = 384 0Ah = 512 0Bh-0Eh = Reserved 0F = Invalid ratio

**Table 130. TDM Clock detection monitor Field Descriptions (continued)**

Bit	Field	Type	Reset	Description
2-0	FS_RATE_V[2:0]	R	7h	Detected sample rate of TDM bus. 000b = 7.35/8 KHz 001b = 14.7/16 KHz 010b = 29.4/32 KHz 011b = 44.1/48 KHz 100b = 88.2/96 kHz 101b = 176.4/192 kHz 110b = reserved 111b = Error condition

#### 8.5.2.49 REV\_ID (book=0x00 page=0x00 address=0x7D) [reset=20h]

Returns REV and PG ID.

**Figure 102. REV\_ID Register Address: 0x7D**

7	6	5	4	3	2	1	0
REV_ID[3:0]				PG_ID[3:0]			
R-0h				R-0h			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 131. Revision and PG ID Field Descriptions**

Bit	Field	Type	Reset	Description
7-4	REV_ID[3:0]	R	0h	Returns the revision ID.
3-0	PG_ID[3:0]	R	0h	Returns the PG ID.

#### 8.5.2.50 I2C\_CKSUM (book=0x00 page=0x00 address=0x7E) [reset=0h]

Returns I2C checksum.

**Figure 103. I2C\_CKSUM Register Address: 0x7E**

7	6	5	4	3	2	1	0
I2C_CKSUM[7:0]							
RW-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 132. I2C Checksum Field Descriptions**

Bit	Field	Type	Reset	Description
7-0	I2C_CKSUM[7:0]	RW	0h	Returns I2C checksum. Writing to this register will reset the checksum to the written value. This register is updated on writes to other registers on all books and pages.

#### 8.5.2.51 BOOK (book=0x00 page=0x00 address=0x7F) [reset=0h]

Device's memory map is divided into pages and books. This register sets the book.

**Figure 104. BOOK Register Address: 0x7F**

7	6	5	4	3	2	1	0
BOOK[7:0]							
RW-0h							

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**TAS2770**

SLASEM6B –OCTOBER 2017–REVISED OCTOBER 2018

[www.ti.com](http://www.ti.com)
**Table 133. Device Book Field Descriptions**

Bit	Field	Type	Reset	Description
7-0	BOOK[7:0]	RW	0h	Sets the device book. 00h = Book 0 01h = Book 1 ... FFh = Book 255



## 9 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TAS2770 is a digital input Class-D audio power amplifier with integrated I/V sense. I2S audio data is supplied by host processor. It also accepts I/V data in I2S format. I<sup>2</sup>C bus is used for configuration and control.

### 9.2 Typical Application

Figure 105 below shows a typical configuration of the TAS2770.

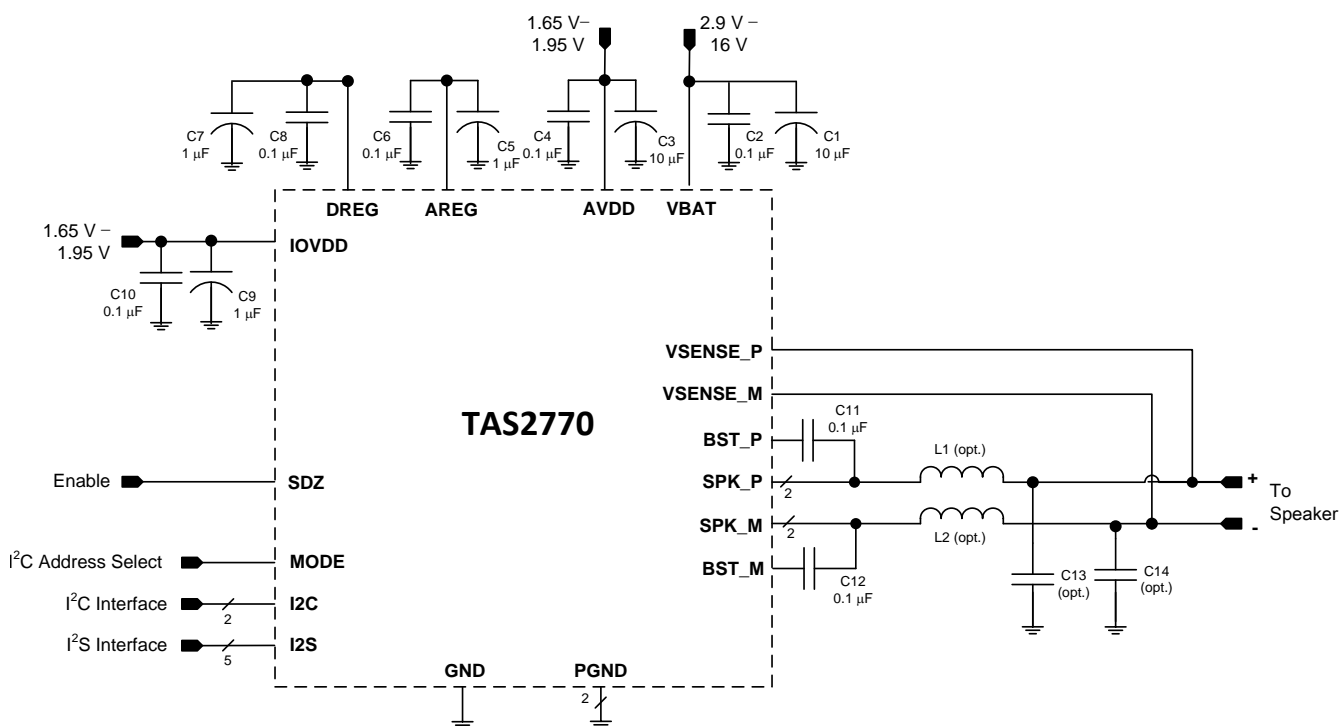

Copyright © 2016, Texas Instruments Incorporated

**Figure 105. TAS2770 Typical Application**

#### 9.2.1 Design Requirements

Table 134 shows the design parameters.

**Table 134. Recommended Component Selection**

PARAMETER	EXAMPLE VALUE
Amplifier power supply (VBAT)	4.5 V to 16 V
EVM power supply	4.5 V to 16 V
IO power supply (IOVDD)	1.65 V to 1.95 V
Output Power	18.3 W
USB, USB class-audio	Micro-USB B

## 9.2.2 Detailed Design Procedure

### 9.2.2.1 Overview

The TAS2770 is a flexible and easy-to-use Class D amplifier. Therefore, the design process is straightforward.

Before beginning the design, gather the following information regarding the audio system:

- VBAT rail planned for the design
- Speaker or load impedance
- Audio sample rate
- Maximum output power requirement

### 9.2.2.2 Select Input Capacitance

Select the bulk capacitors at the VBAT inputs for proper voltage margin and adequate capacitance to support the power requirements. The TAS2770 has very good PSRR, so the capacitor is more about limiting the ripple and droop for the rest of system than preserving good audio performance. The amount of bulk decoupling can be reduced as long as the droop and ripple is acceptable. One capacitor should be placed near the VBAT pin. VBATY capacitors should be a low ESR type because they are being used in a high-speed switching application.

### 9.2.2.3 Select Decoupling Capacitors

Good quality decoupling capacitors should be added at each of the VBAT input to provide good reliability, good audio performance, and to meet regulatory requirements. X5R or better ratings should be used in this application. Consider temperature, ripple current, and voltage overshoots when selecting decoupling capacitors.

Also, the decoupling capacitors should be located near the VBAT and GND connections to the device to minimize series inductances.

### 9.2.2.4 Select Bootstrap Capacitors

Each of the outputs require bootstrap capacitors to provide gate drive for the high-side output FETs. For this design, use 0.1-μF, 25-V capacitors of X5R quality or better.

## 9.2.3 Application Curves

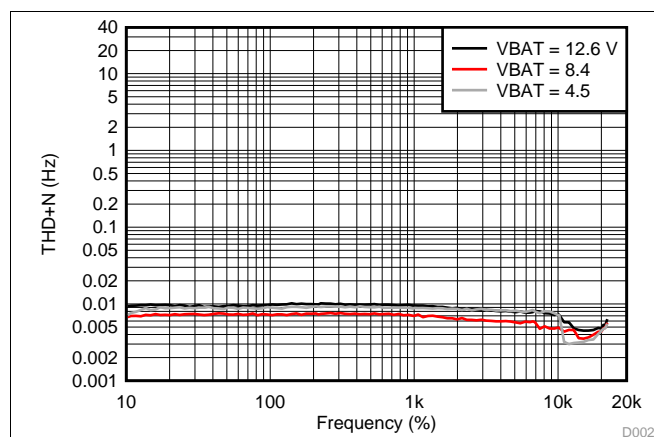


Figure 106. THD+N vs Frequency

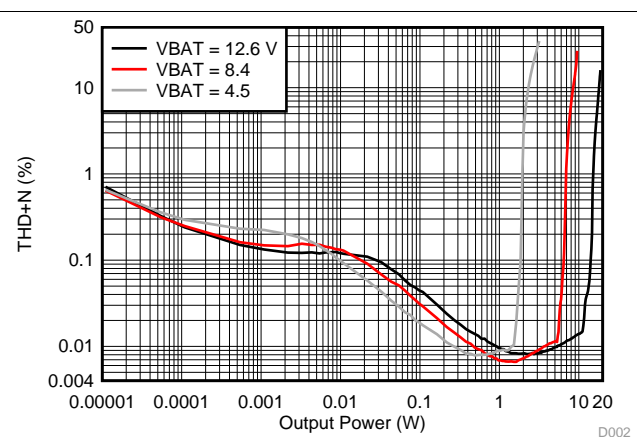


Figure 107. THD+N vs Output Power (W)

## 9.3 Initialization Set Up

### 9.3.1 Initial Device Configuration - Auto Rate

The following I2C sequence is an example of initializing four TAS2770 devices. The devices will be configured to use the TDM auto-rate detection feature. This sequence contains a 1 ms delay required after a software or hardware reset as illustrated in [Power Supply Recommendations](#).

```
w 62 00 00 # Page-0
w 62 7f 00 # Book-0
w 62 01 01 # Software Reset

w 64 00 00 # Page-0
w 64 7f 00 # Book-0
w 64 01 01 # Software Reset

w 66 00 00 # Page-0
w 66 7f 00 # Book-0
w 66 01 01 # Software Reset

w 68 00 00 # Page-0
w 68 7f 00 # Book-0
w 68 01 01 # Software Reset

d 1 # 1mS Delay

##### Configure Channel 1

w 62 3c 11 # sbclk to fs ratio = 64
w 62 0e 33 # TX bus keeper, Hi-Z, offset 1, TX on Falling edge
w 62 0f 42 # TDM TX voltage sense transmit enable with slot 2,
w 62 10 40 # TDM TX current sense transmit enable with slot 0
w 62 03 14 # 21 dB gain
w 62 02 00 # power up audio playback with I,V enabled

##### Configure Channel 2

w 64 3c 11 # sbclk to fs ratio = 64
w 64 0e 13 # TX bus keeper, Hi-Z, offset 1, TX on Falling edge
w 64 0f 46 # TDM TX voltage sense transmit enable with slot 6,
w 64 10 44 # TDM TX current sense transmit enable with slot 4
w 64 03 14 # 21 dB gain
w 64 02 00 # power up audio playback with I,V enabled

##### Configure Channel 3

w 66 3c 11 # sbclk to fs ratio = 64
w 66 0e 13 # TX bus keeper, Hi-Z, offset 1, TX on Falling edge
w 66 0f 4A # TDM TX voltage sense transmit enable with slot 10,
w 66 10 48 # TDM TX current sense transmit enable with slot 8
w 66 03 14 # 21 dB gain
w 66 02 00 # power up audio playback with I,V enabled

##### Configure Channel 4

w 68 3c 11 # sbclk to fs ratio = 64
w 68 0e 13 # TX bus keeper, Hi-Z, offset 1, TX on Falling edge
w 68 0f 4E # TDM TX voltage sense transmit enable with slot 14,
w 68 10 4C # TDM TX current sense transmit enable with slot 12
w 68 03 14 # 21 dB gain
w 68 02 00 # power up audio playback with I,V enabled
```

### 9.3.2 Initial Device Configuration - 48 kHz

The following I2C sequence is an example of initializing a TAS2770 device into 48 kHz sampling rate. This sequence contains a 1 ms delay required after a software or hardware reset as illustrated in [Power Supply Recommendations](#).

```
w 62 00 00 # Page-0
w 62 7f 00 # Book-0
w 62 01 01 # Software Reset
```

## Initialization Set Up (continued)

```
d 1 # 1mS Delay

##### Configure Channel 1

w 62 3c 21 # sbclk to fs ratio = 256 / 8 TDM Slots
w 62 0a 17 # 48KHz, Auto TDM off, Frame start High to Low
w 62 0b 03 # Offset = 1, Sync on BCLK falling edge
w 62 0c 0a # TDM slot by address, Word = 24 bit, Frame = 32 bit
w 62 0d 20 # Right Ch = TDM slot 2, Left Ch = TDM slot 0
w 62 0e 33 # TX bus keeper, Hi-Z, offset 1, TX on Falling edge
w 62 0f 42 # TDM TX voltage sense transmit enable with slot 2,
w 62 10 40 # TDM TX current sense transmit enable with slot 0
w 62 03 14 # 21 dB gain
w 62 02 00 # power up audio playback with I,V enabled
```

### 9.3.3 Initial Device Configuration - 44.1 kHz

The following I2C sequence is an example of initializing a TAS2770 device into 48 kHz sampling rate. This sequence contains a 1 ms delay required after a software or hardware reset as illustrated in [Power Supply Recommendations](#).

```
w 62 00 00 # Page-0
w 62 7f 00 # Book-0
w 62 01 01 # Software Reset

d 1 # 1mS Delay

##### Configure Channel 1

w 62 3c 21 # sbclk to fs ratio = 256 / 8 TDM Slots
w 62 0a 37 # 44.1KHz, Auto TDM off, Frame start High to Low
w 62 0b 03 # Offset = 1, Sync on BCLK falling edge
w 62 0c 0a # TDM slot by address, Word = 24 bit, Frame = 32 bit
w 62 0d 20 # Right Ch = TDM slot 2, Left Ch = TDM slot 0
w 62 0e 33 # TX bus keeper, Hi-Z, offset 1, TX on Falling edge
w 62 0f 42 # TDM TX voltage sense transmit enable with slot 2,
w 62 10 40 # TDM TX current sense transmit enable with slot 0
w 62 03 14 # 21 dB gain
w 62 02 00 # power up audio playback with I,V enabled
```

### 9.3.4 Sample Rate Change - 48 kHz to 44.1kHz

The following I2C sequence is an example of changing the sampling rate from 48 kHz to 44.1 kHz .

```
w 62 07 80 #Set DVC Ramp Rate to 0.5 dB / 8 samples
w 62 02 01 #Mute
d 1
w 62 02 02 #Software shutdown
w 62 0a 37 #44.1KHz, Auto TDM off, Frame start High to Low
### change source sample rate now
w 62 02 01 #Take device out of low-power shutdown
d 1
w 62 02 00 #Un-mute
```

### 9.3.5 Sample Rate Change - 44.1 kHz to 48 kHz

The following I2C sequence is an example of changing the sampling rate from 44.1 kHz to 48 kHz .

```
w 62 07 80 #Set DVC Ramp Rate to 0.5 dB / 8 samples
w 62 02 01 #Mute
d 1
w 62 02 02 #Software shutdown
w 62 0a 17 #44.1KHz, Auto TDM off, Frame start High to Low
### change source sample rate now
```

## Initialization Set Up (continued)

```
w 62 02 01 #Take device out of low-power shutdown
d 1
w 62 02 00 #Un-mute
```

### 9.3.6 Device Mute

The following I2C sequence will mute one device at address 62 using a digital volume ramp rate of 0.5dB per 8 samples.

```
w 62 07 80 #Set DVC Ramp Rate to 0.5 dB / 8 samples
w 62 02 01 #Mute
```

### 9.3.7 Device Un-Mute

The following I2C sequence will un-mute one device at address 62 using a digital volume ramp rate of 0.5dB per 8 samples.

```
w 62 07 80 #Set DVC Ramp Rate to 0.5 dB / 8 samples
w 62 02 00 #Un-Mute
```

### 9.3.8 Device Sleep

The following I2C sequence will mute the device and put it into low power mode for one device at address 62 using a digital volume ramp rate of 0.5dB per 8 samples.

```
w 62 07 80 #Set DVC Ramp Rate to 0.5 dB / 8 samples
w 62 02 01 #Mute
d 1 # 1mS Delay
w 62 02 02 #Software shutdown
```


### 9.3.9 Device Wake

The following I2C sequence will wake the device from low power mode (sleep) and un-mute one device at address 62 using a digital volume ramp rate of 0.5dB per 8 samples.

```
w 62 07 80 #Set DVC Ramp Rate to 0.5 dB / 8 samples
w 62 02 01 #Take device out of low-power shutdown
d 1 # 1mS Delay
w 62 02 00 #Un-mute TAS2770
```

## 10 Power Supply Recommendations

The power sequence between the supply rails can be applied in any order as long as SDZ pin is held low. Generally VBAT would be applied before IOVDD and AVDD in most system applications. Once all supplies are stable the SDZ pin can be set high to initialize the part. After a hardware or software reset additional commands to the device should be delayed for 1 mS to allow the OTP to load.

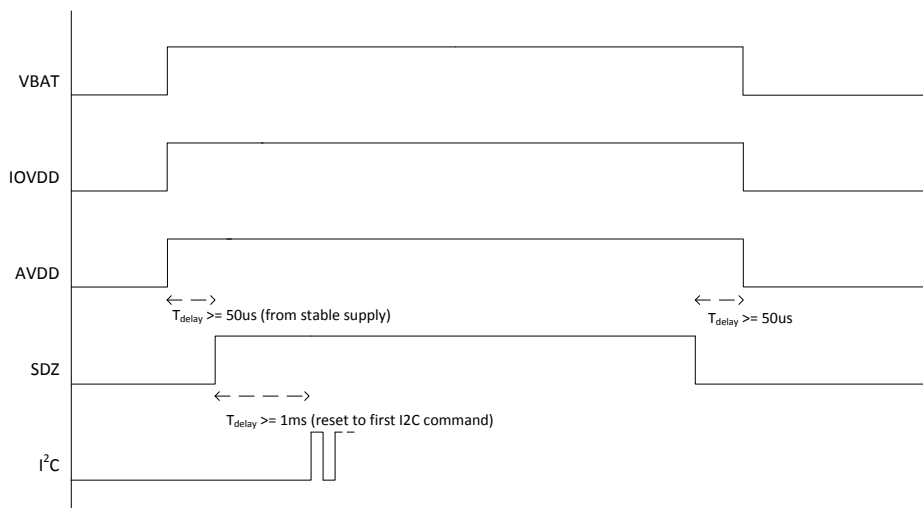

**Figure 108. Power Supply Sequence for Power-Up and Power-Down**

## 11 Layout

### 11.1 Layout Guidelines

Pay special attention to the power stage power supply layout.

- Use 4.7  $\mu$ F for decoupling of VBAT supply.
- Keep the current circulating loops containing the supply decoupling capacitors, the H-bridges in the device and the connections to the speakers as tight as possible to reduce emissions.
- Use ground planes to provide the lowest impedance for power and signal current between the device and the decoupling capacitors. The area directly under the device should be treated as a central ground area for the device, and all device grounds must be connected directly to that area.
- Use a via pattern to connect the area directly under the device to the ground planes in copper layers below the surface. This connection helps to dissipate heat from the device.
- Avoid interrupting the ground plane with circular traces around the device. Interruption disconnects the copper and interrupt flow of heat and current. Radial copper traces are better to use if necessary.

### 11.2 Layout Example


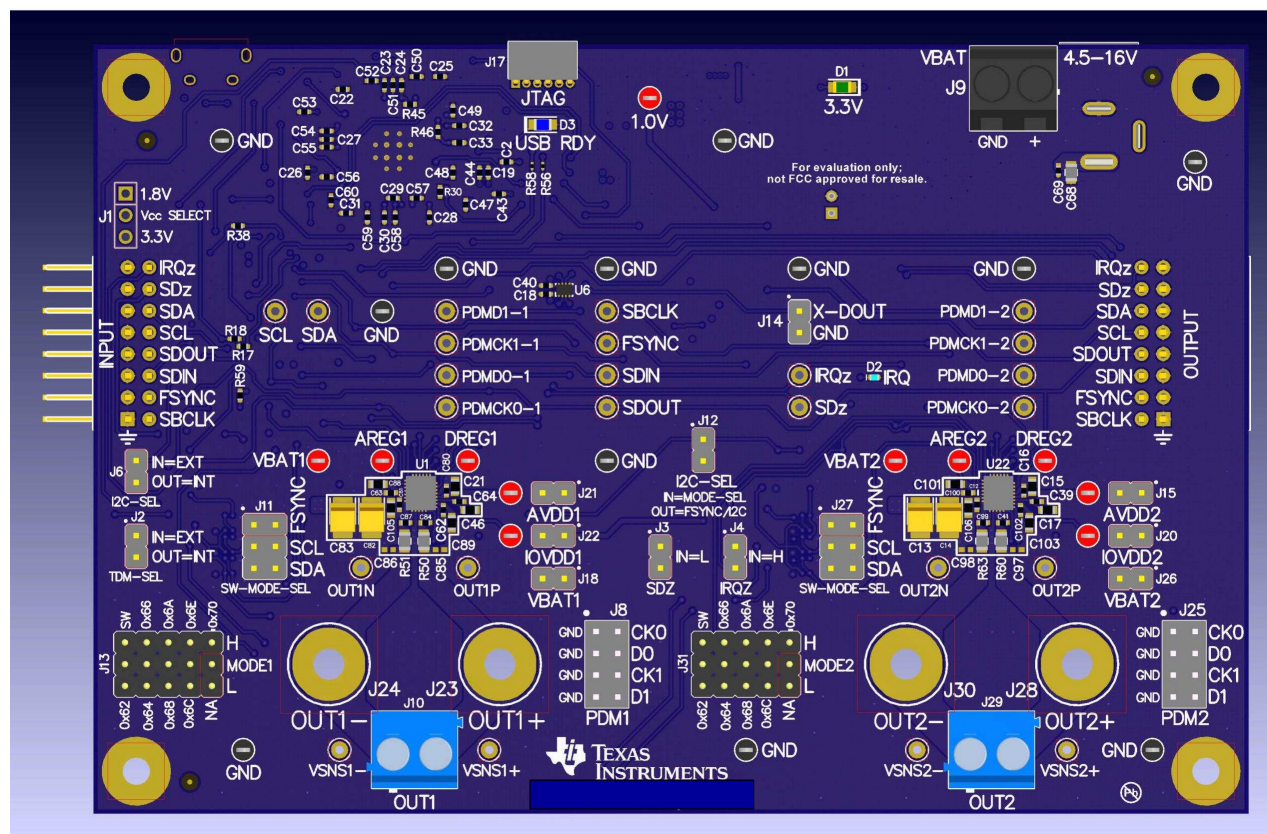


Figure 109. Stereo EVM Layout Diagram




## Layout Example (continued)

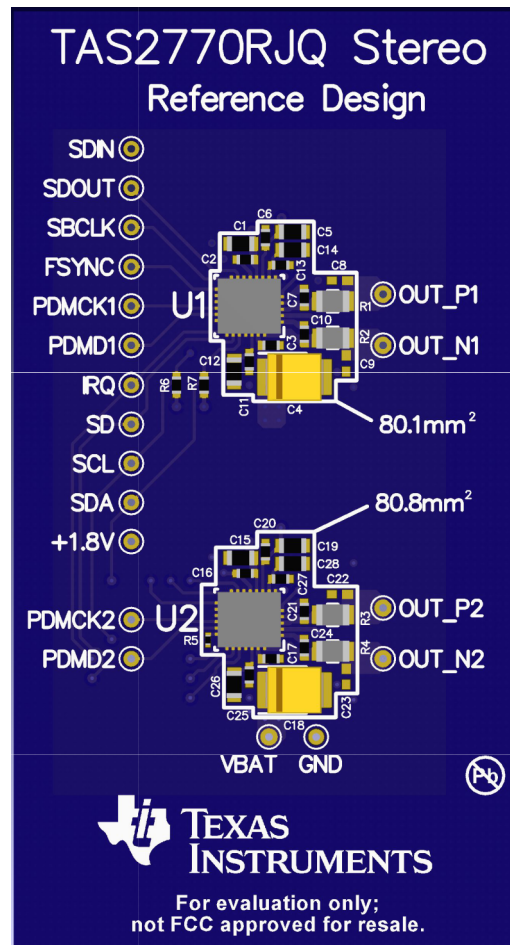

**Figure 110. Stereo EVM Layout Reference Design - 01**




## Layout Example (continued)

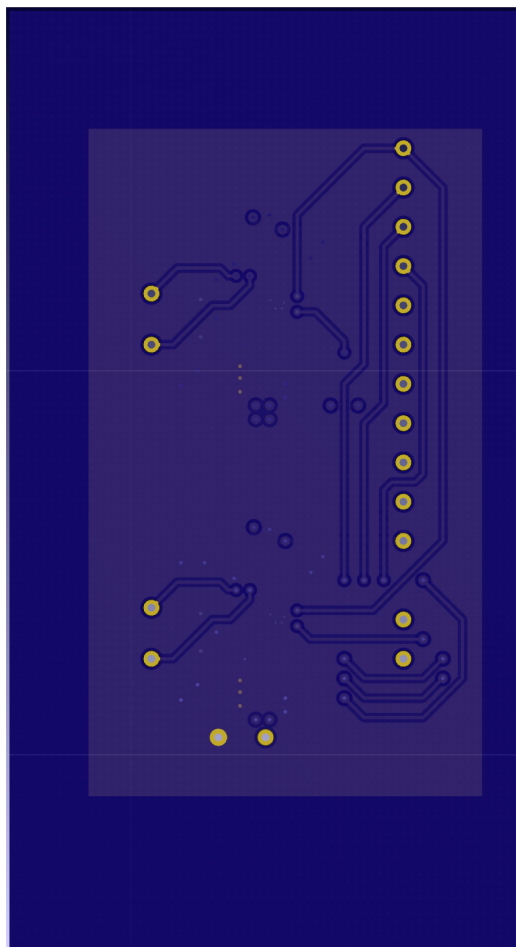


**Figure 111. Stereo EVM Layout Reference Design - 02**

## Layout Example (continued)

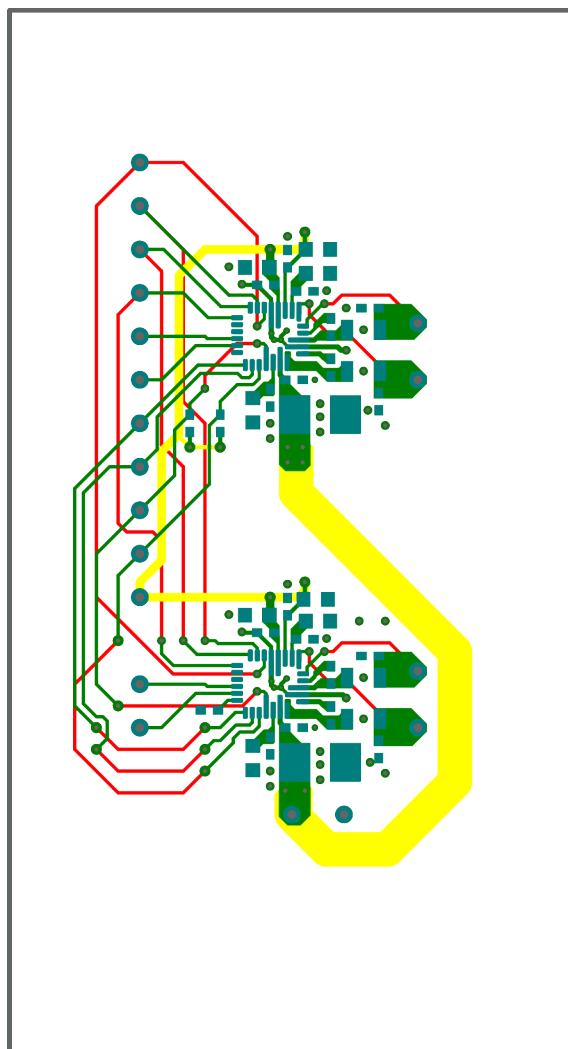

**Figure 112. Layout Reference – TAS2770RJQ**

## Layout Example (continued)

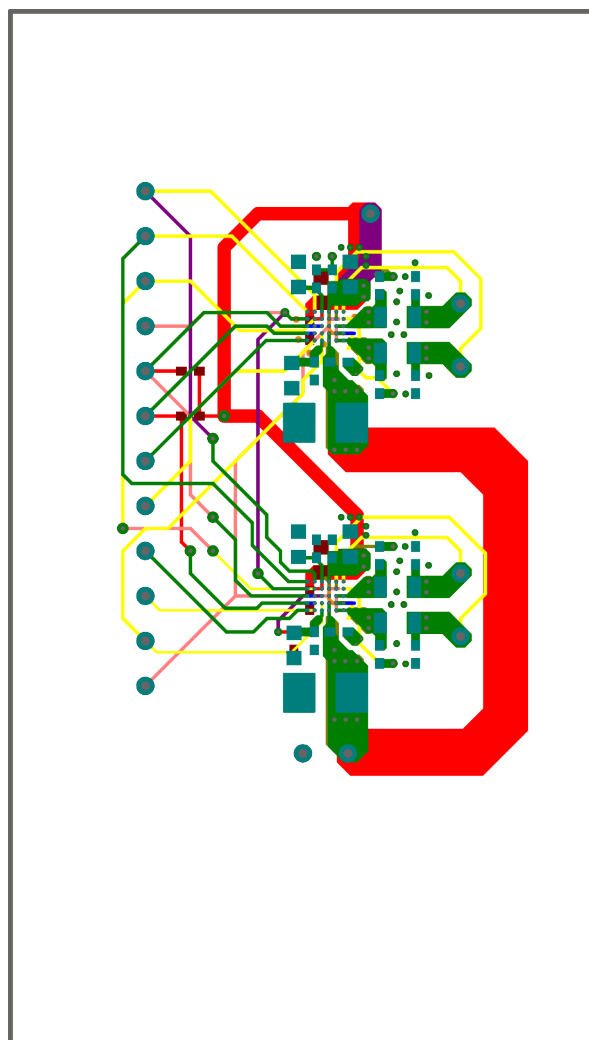

**Figure 113. Layout Reference – TAS2770YFF**

## 12 Device and Documentation Support

### 12.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.3 Trademarks

E2E is a trademark of Texas Instruments.

### 12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 12.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information


The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGE OUTLINE

### VQFN-HR - 1 mm max height

RJQ0026A

PLASTIC QUAD FLATPACK- NO LEAD

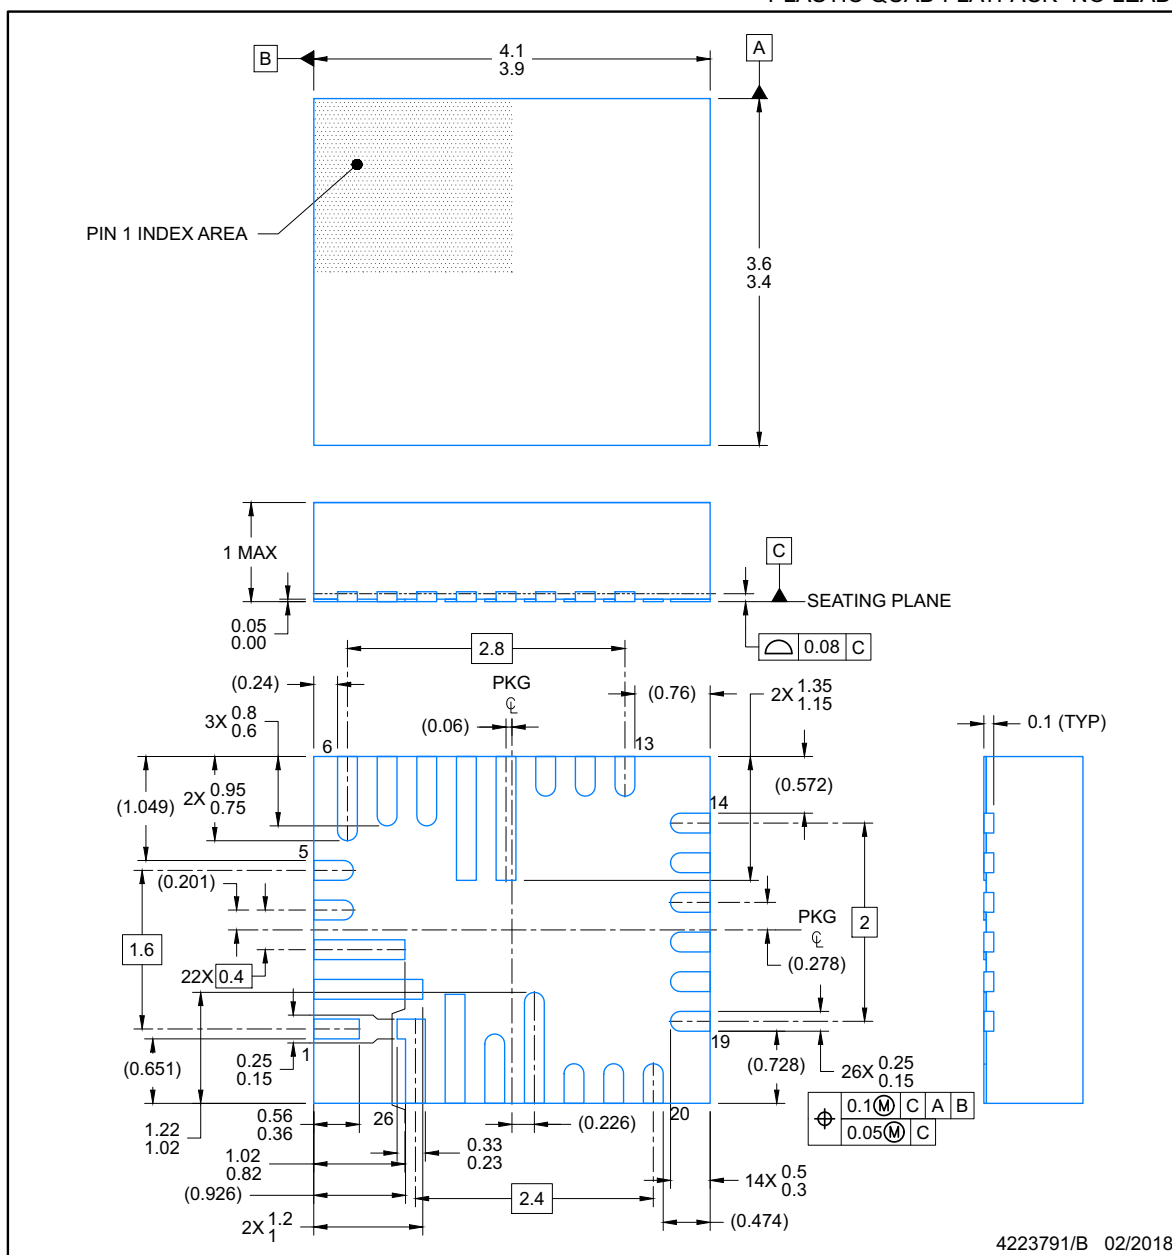

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT

VQFN-HR - 1 mm max height

RJQ0026A

PLASTIC QUAD FLATPACK- NO LEAD

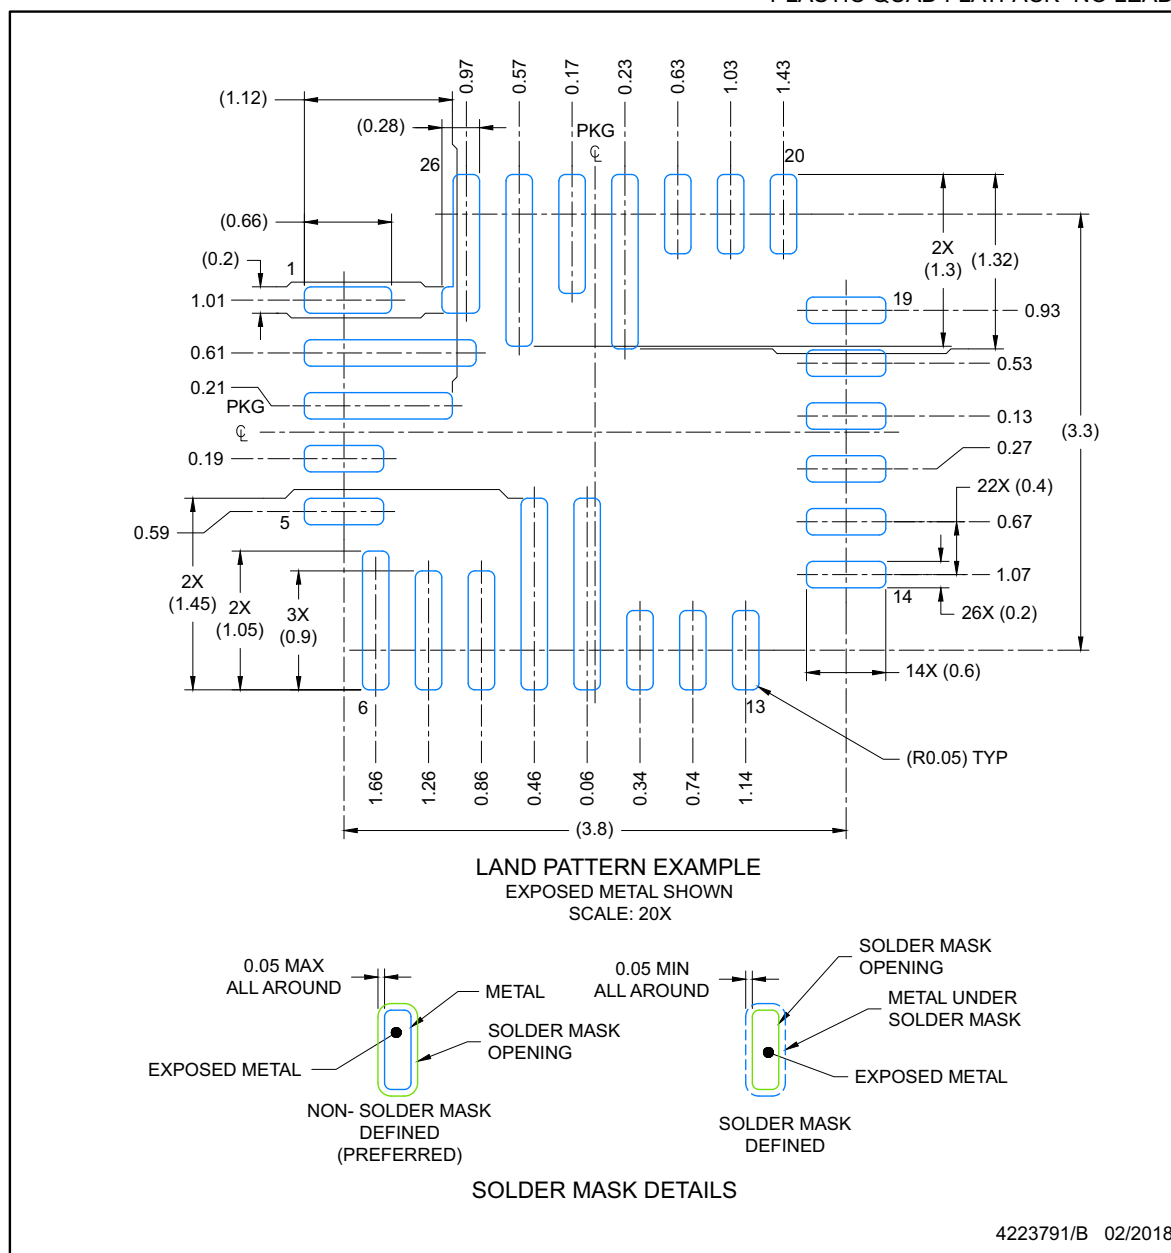

NOTES: (continued)


- For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)) .
- Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

**RJQ0026A**


**VQFN-HR - 1 mm max height**

PLASTIC QUAD FLATPACK- NO LEAD

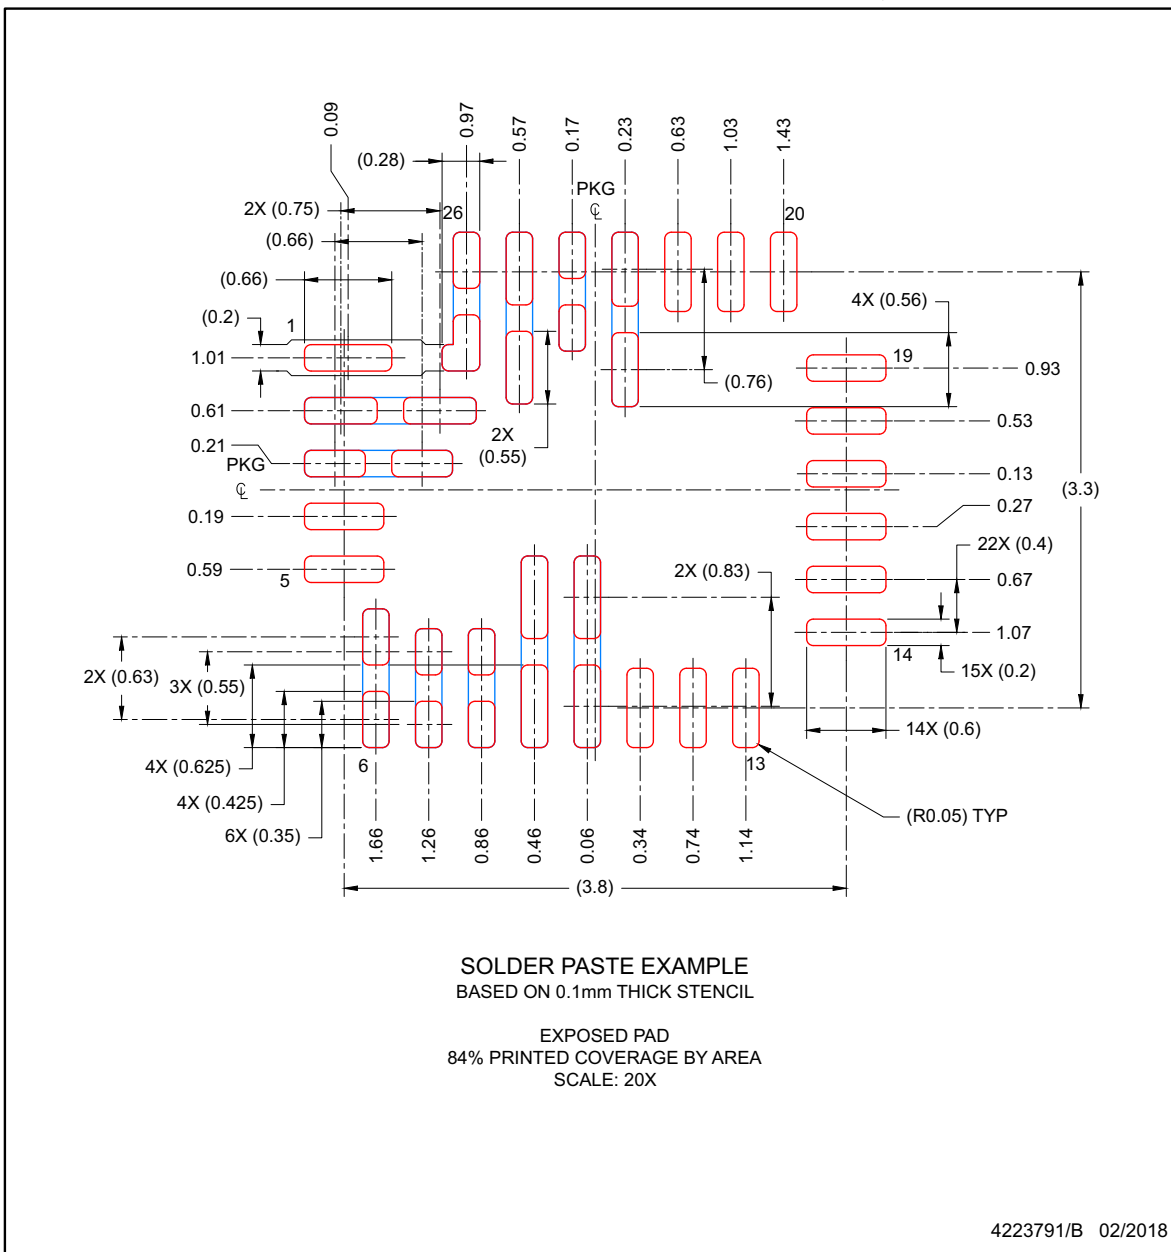

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.




## PACKAGE OUTLINE

YFF0030-C02

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

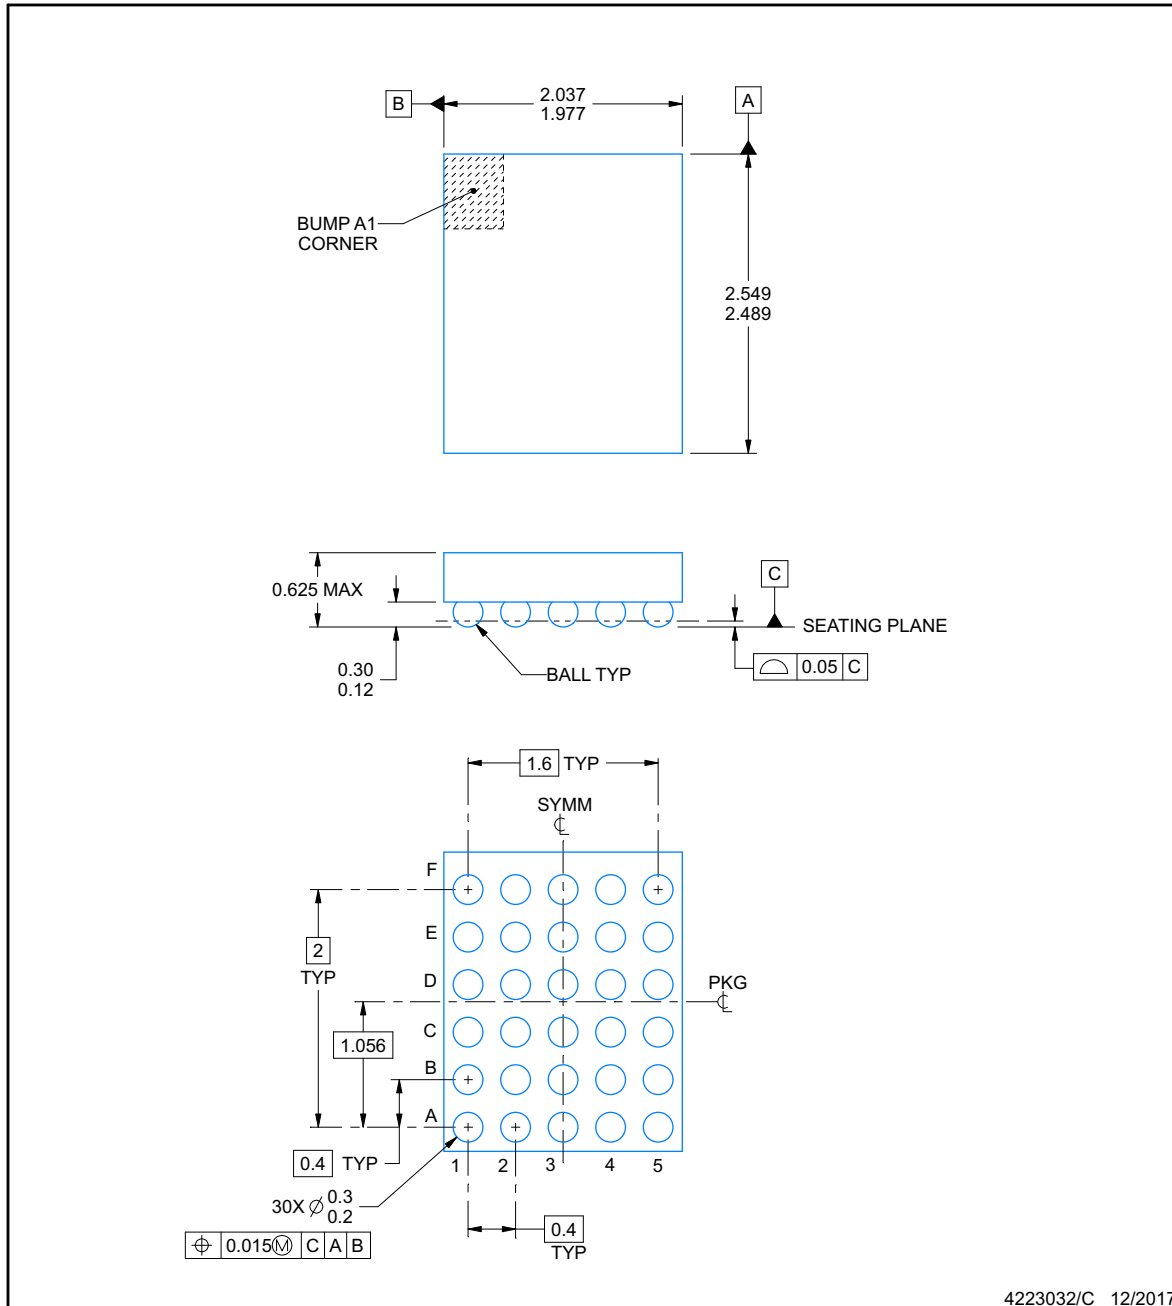

### NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- This drawing is subject to change without notice.




## EXAMPLE BOARD LAYOUT


**YFF0030-C02**

**DSBGA - 0.625 mm max height**

DIE SIZE BALL GRID ARRAY

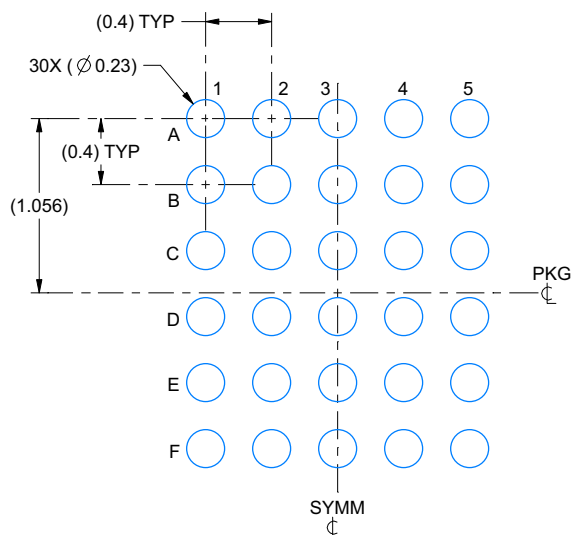

LAND PATTERN EXAMPLE  
SCALE:25X

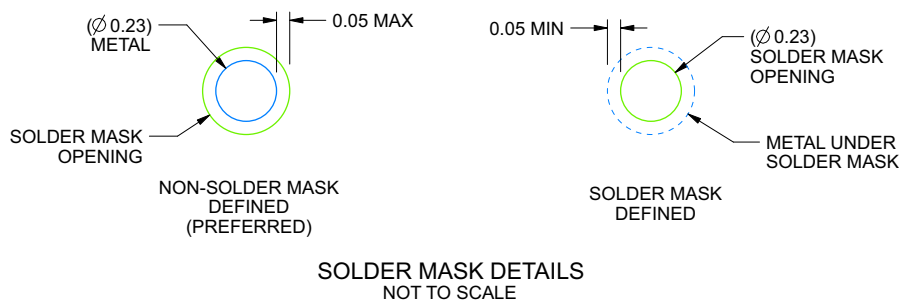

SOLDER MASK DETAILS  
NOT TO SCALE

4223032/C 12/2017

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

## EXAMPLE STENCIL DESIGN

**YFF0030-C02**

**DSBGA - 0.625 mm max height**

DIE SIZE BALL GRID ARRAY

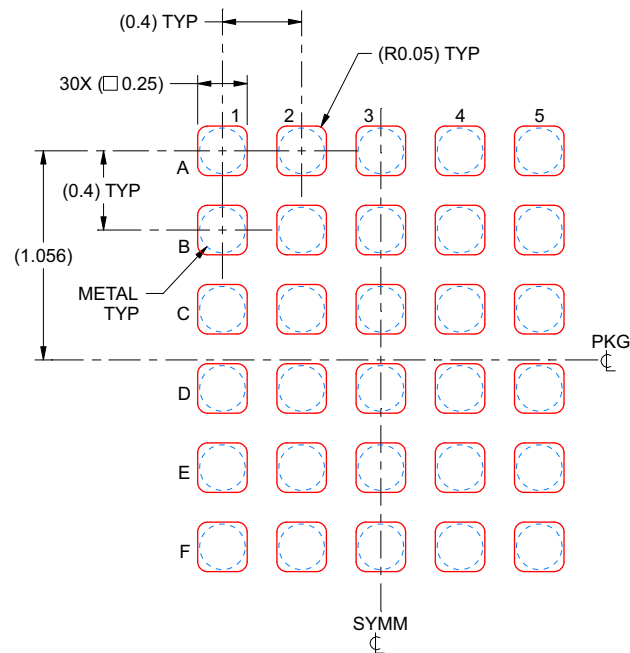

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:30X

4223032/C 12/2017

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TAS2770RJQR	ACTIVE	VQFN-HR	RJQ	26	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	2770	<a href="#">Samples</a>
TAS2770RJQT	ACTIVE	VQFN-HR	RJQ	26	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	2770	<a href="#">Samples</a>
TAS2770YFFR	ACTIVE	DSBGA	YFF	30	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	2770	<a href="#">Samples</a>
TAS2770YFFT	ACTIVE	DSBGA	YFF	30	250	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	2770	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

---

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TAS2770RJQR	VQFN-HR	RJQ	26	3000	330.0	12.4	3.8	4.3	1.5	8.0	12.0	Q2
TAS2770RJQT	VQFN-HR	RJQ	26	250	180.0	12.4	3.8	4.3	1.5	8.0	12.0	Q2
TAS2770YFFR	DSBGA	YFF	30	3000	180.0	8.4	2.13	2.66	0.69	4.0	8.0	Q1
TAS2770YFFT	DSBGA	YFF	30	250	180.0	8.4	2.13	2.66	0.69	4.0	8.0	Q1

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TAS2770RJQR	VQFN-HR	RJQ	26	3000	367.0	367.0	35.0
TAS2770RJQT	VQFN-HR	RJQ	26	250	210.0	185.0	35.0
TAS2770YFFR	DSBGA	YFF	30	3000	182.0	182.0	20.0
TAS2770YFFT	DSBGA	YFF	30	250	182.0	182.0	20.0

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2018, Texas Instruments Incorporated