2.4GHz Yagi Uda Antenna Datasheet

A high-gain directional antenna designed for 2.4GHz WiFi applications, providing excellent directivity and reduced power loss for improved wireless connectivity.

Presented by

José Pérez Clar
Ricardo Pereira González

Presented to

Radiocommunication Systems - 2025

P&P ANTENNAS

Dimensions

Antenna’s Dipole Main Dimensions

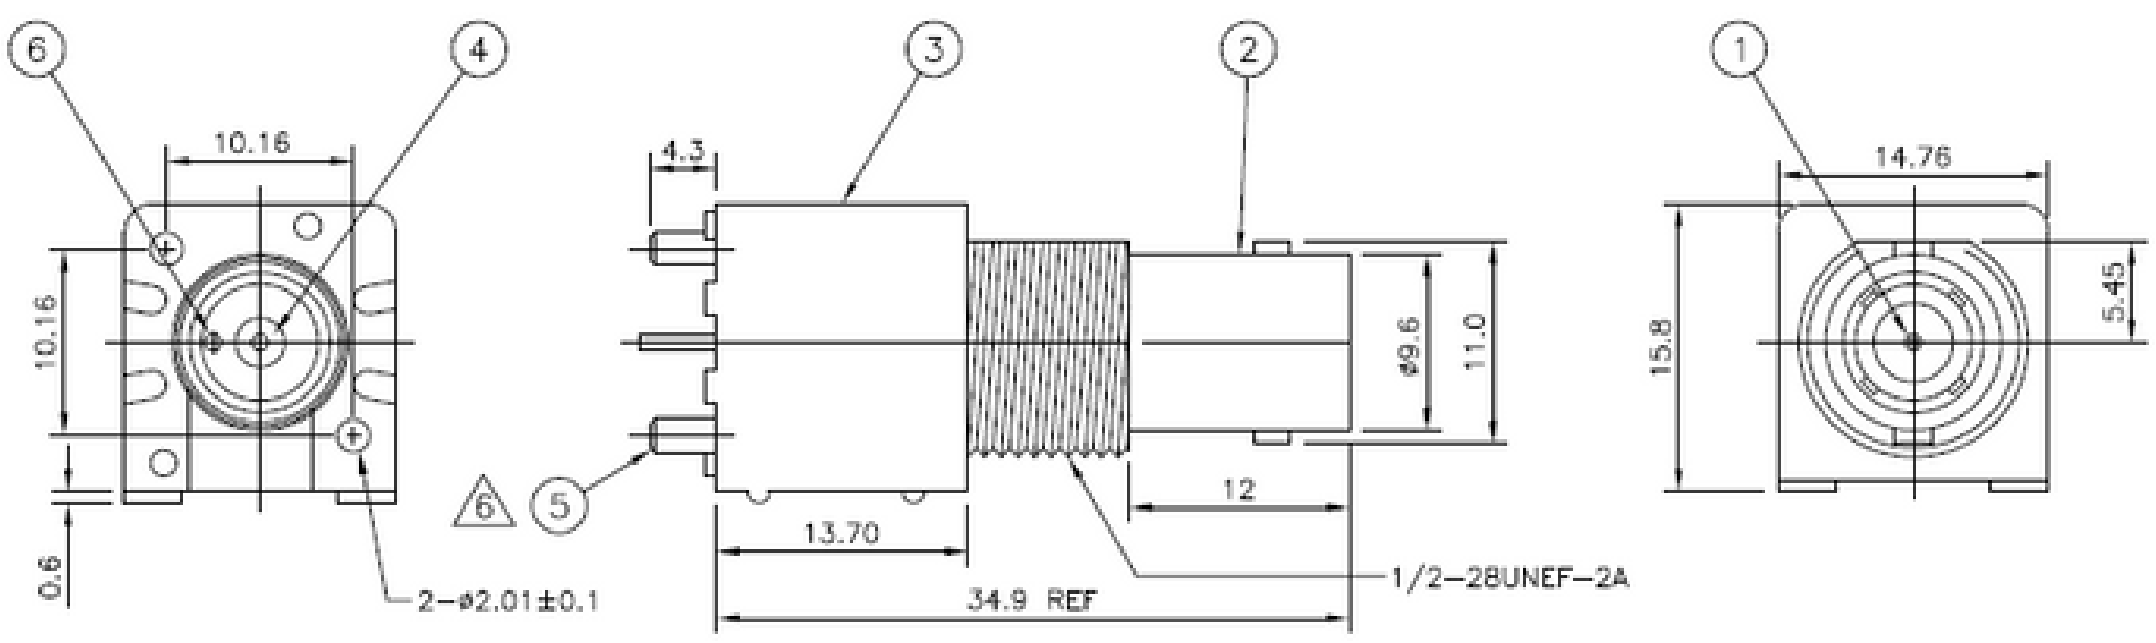

Antenna’s Support Main Dimensions

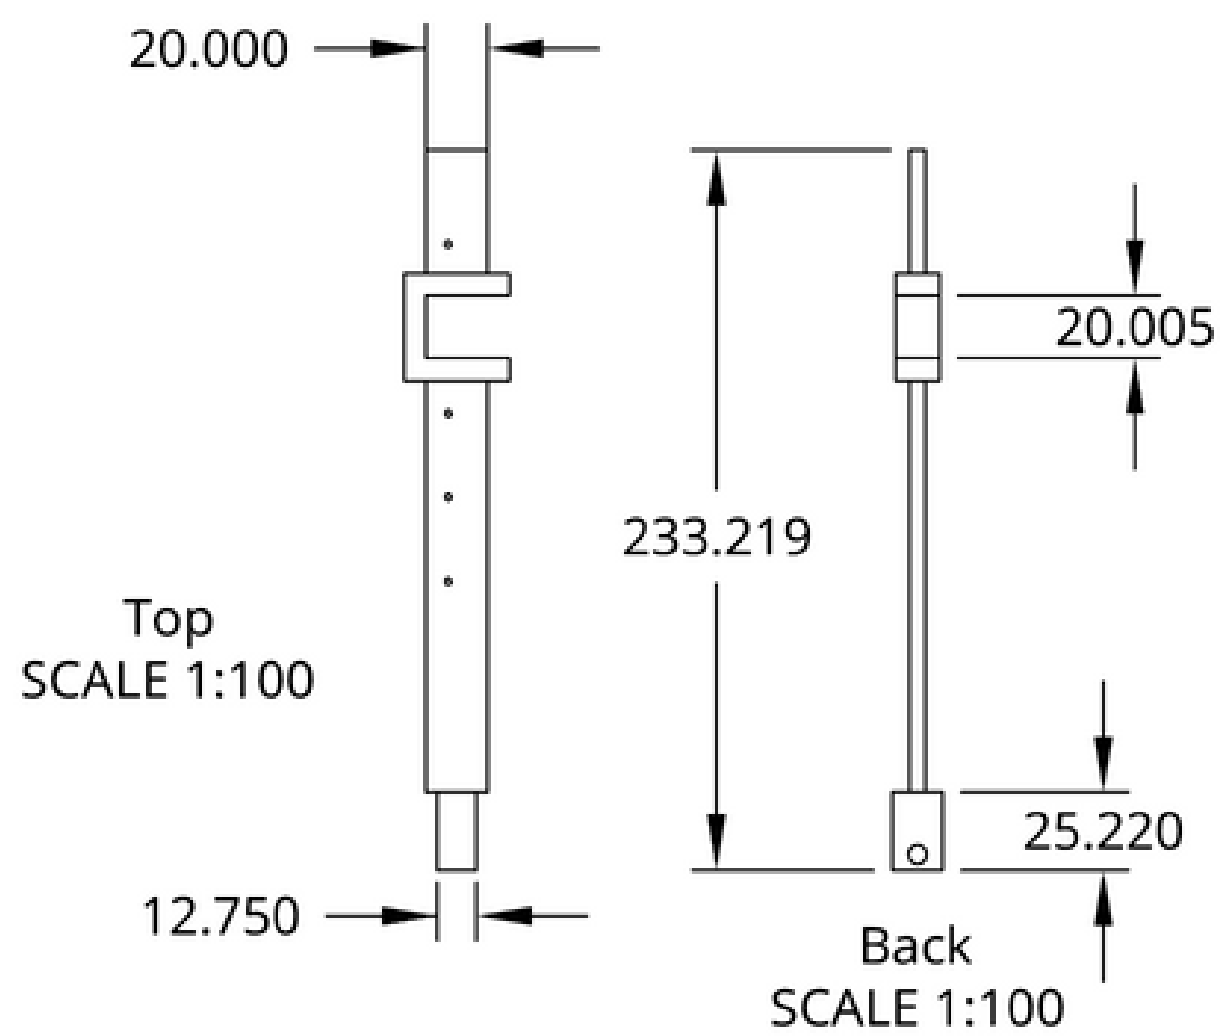

Antenna’s Additional Dimensions

- Length Dipole (LA): 54.46mm
- Length Reflector (LR): 56.92mm
- Length Directors (LD): 49.41mm
- Distance from Dipole to Reflector (deltaR): 26.98mm
- Increment of distance from Dipole to each Director (deltaD): 27.03mm

Behavioural Details

Frequency Band: 2.3 GHz to 2.5 GHz

Adaptation Values and Graphs

Return Loss:

- Minimum Return Loss: -37.75 dB
- Maximum Return Loss: -11.58 dB
- Return Loss at 2.4 GHz: -15.17 dB

Impedance at 2.4GHz:

- Real Part (R): 25.5132 Ω
- Imaginary Part (X): 1.71712 Ω

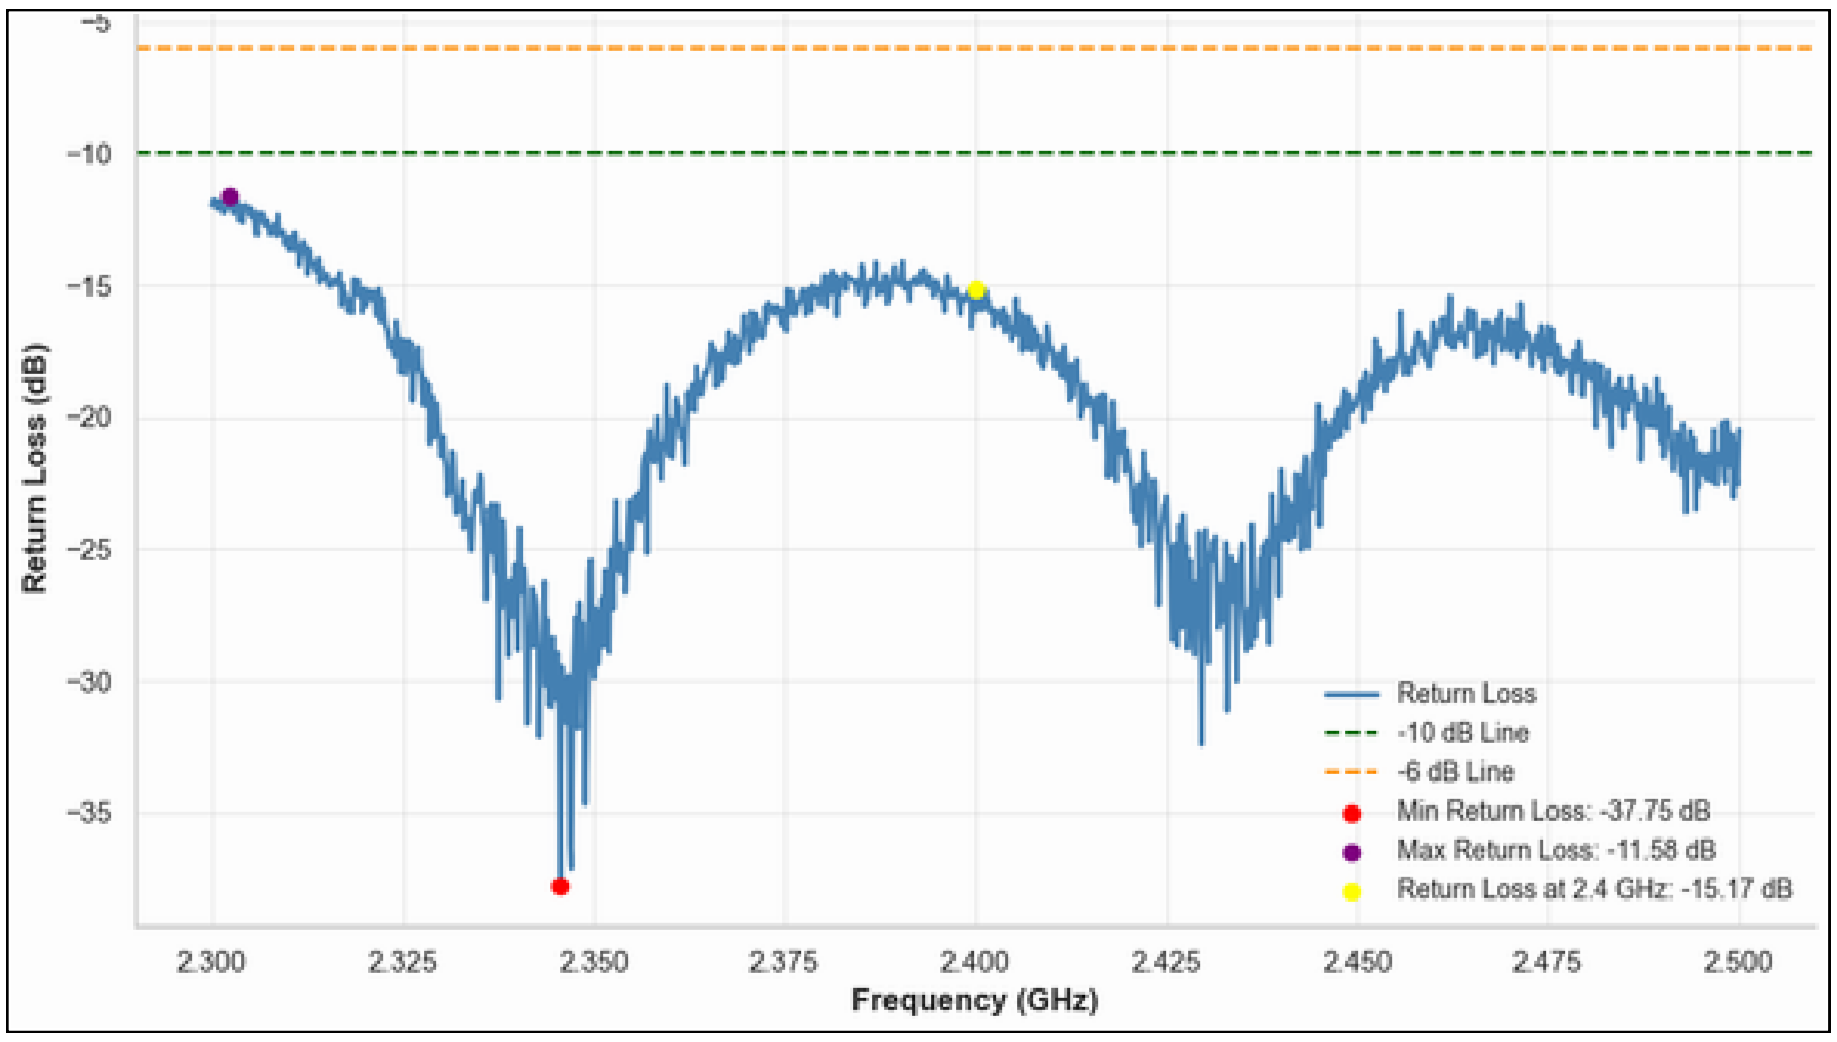

Figure 1: Return Loss graph

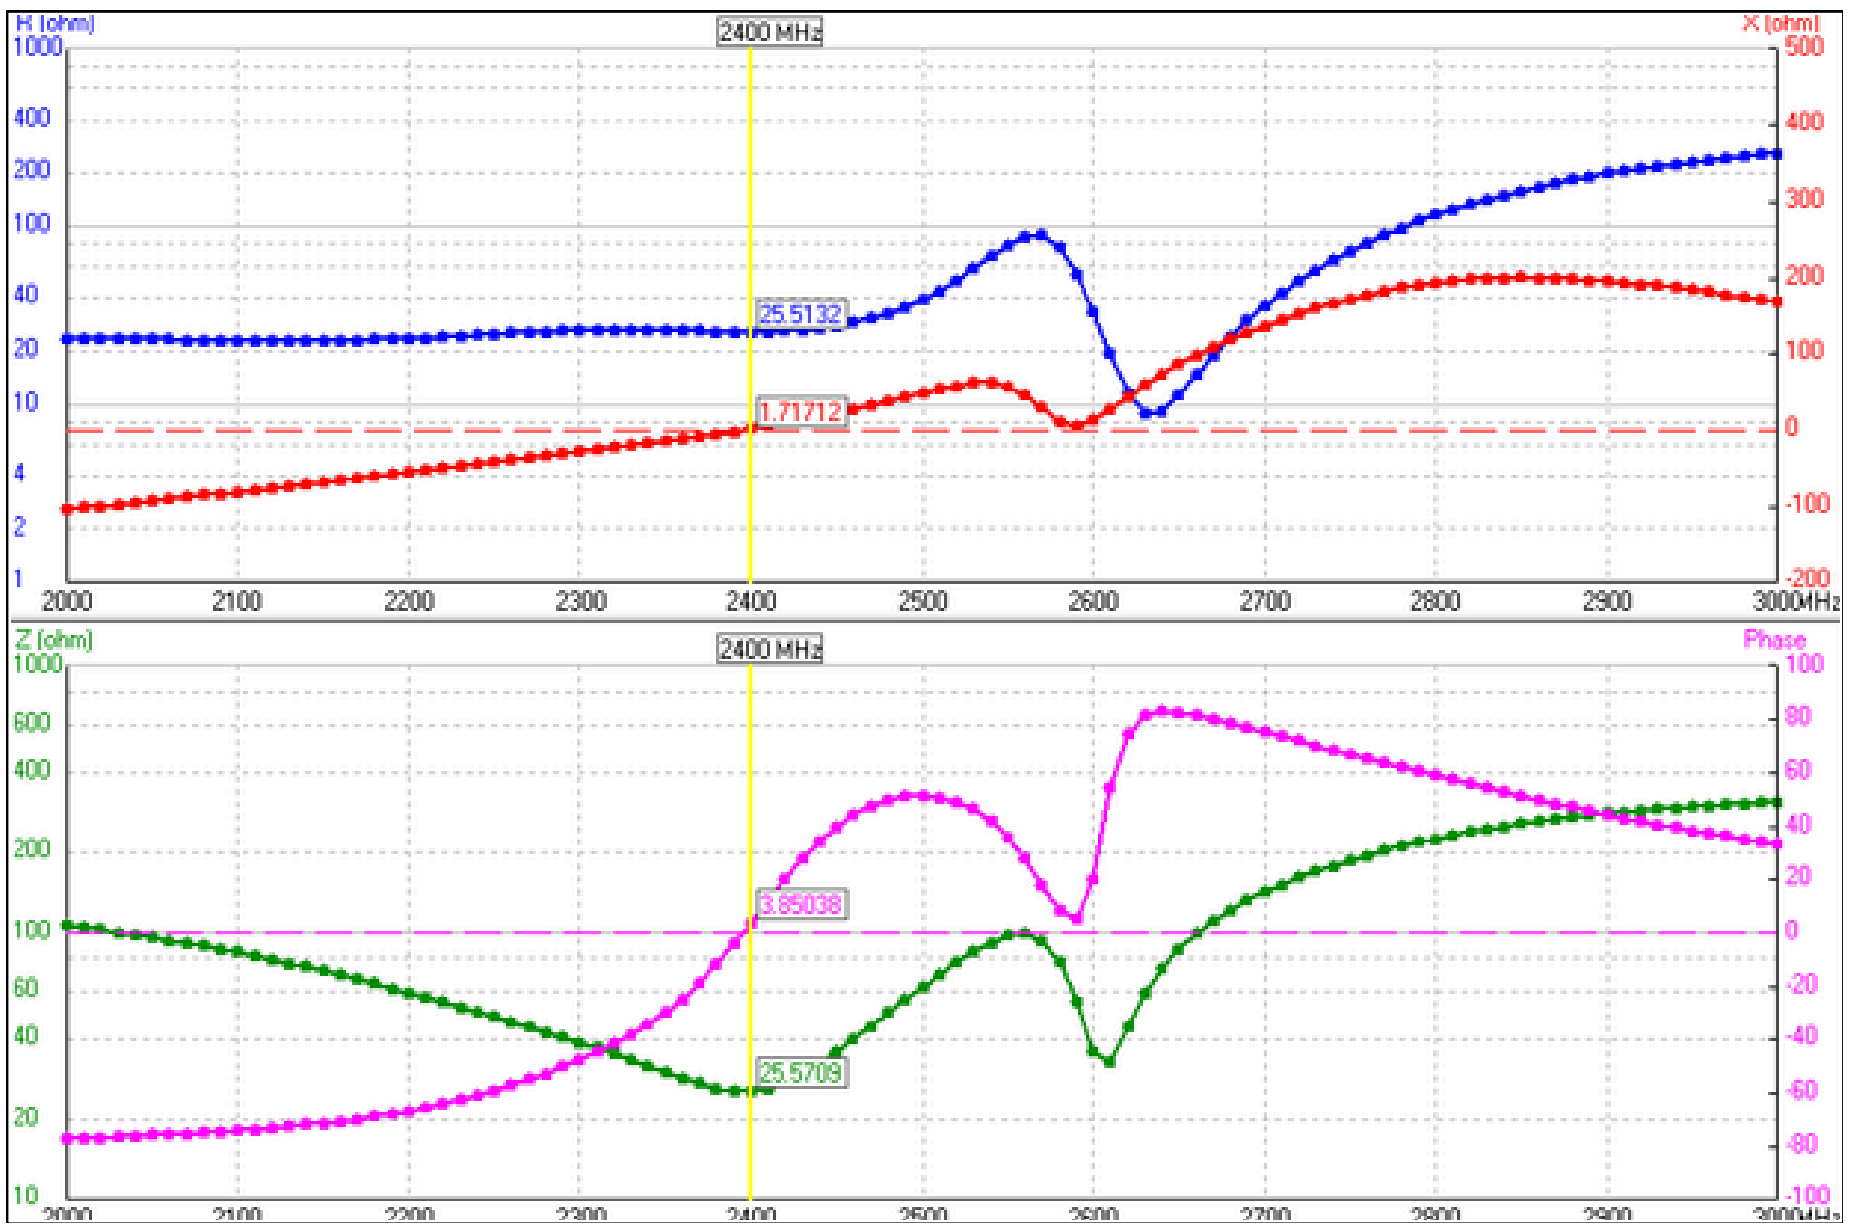

Figure 2: Impedances graph

Behavioural Details

Radiation Data at 2.4GHz

Max Gain: 10.8 dBi
Front-to-Back Ratio (F/B): 15 dB

Beamwidth:
- Vertical Plane (Elevation): 50°
- Horizontal Plane (Azimuth): 62°

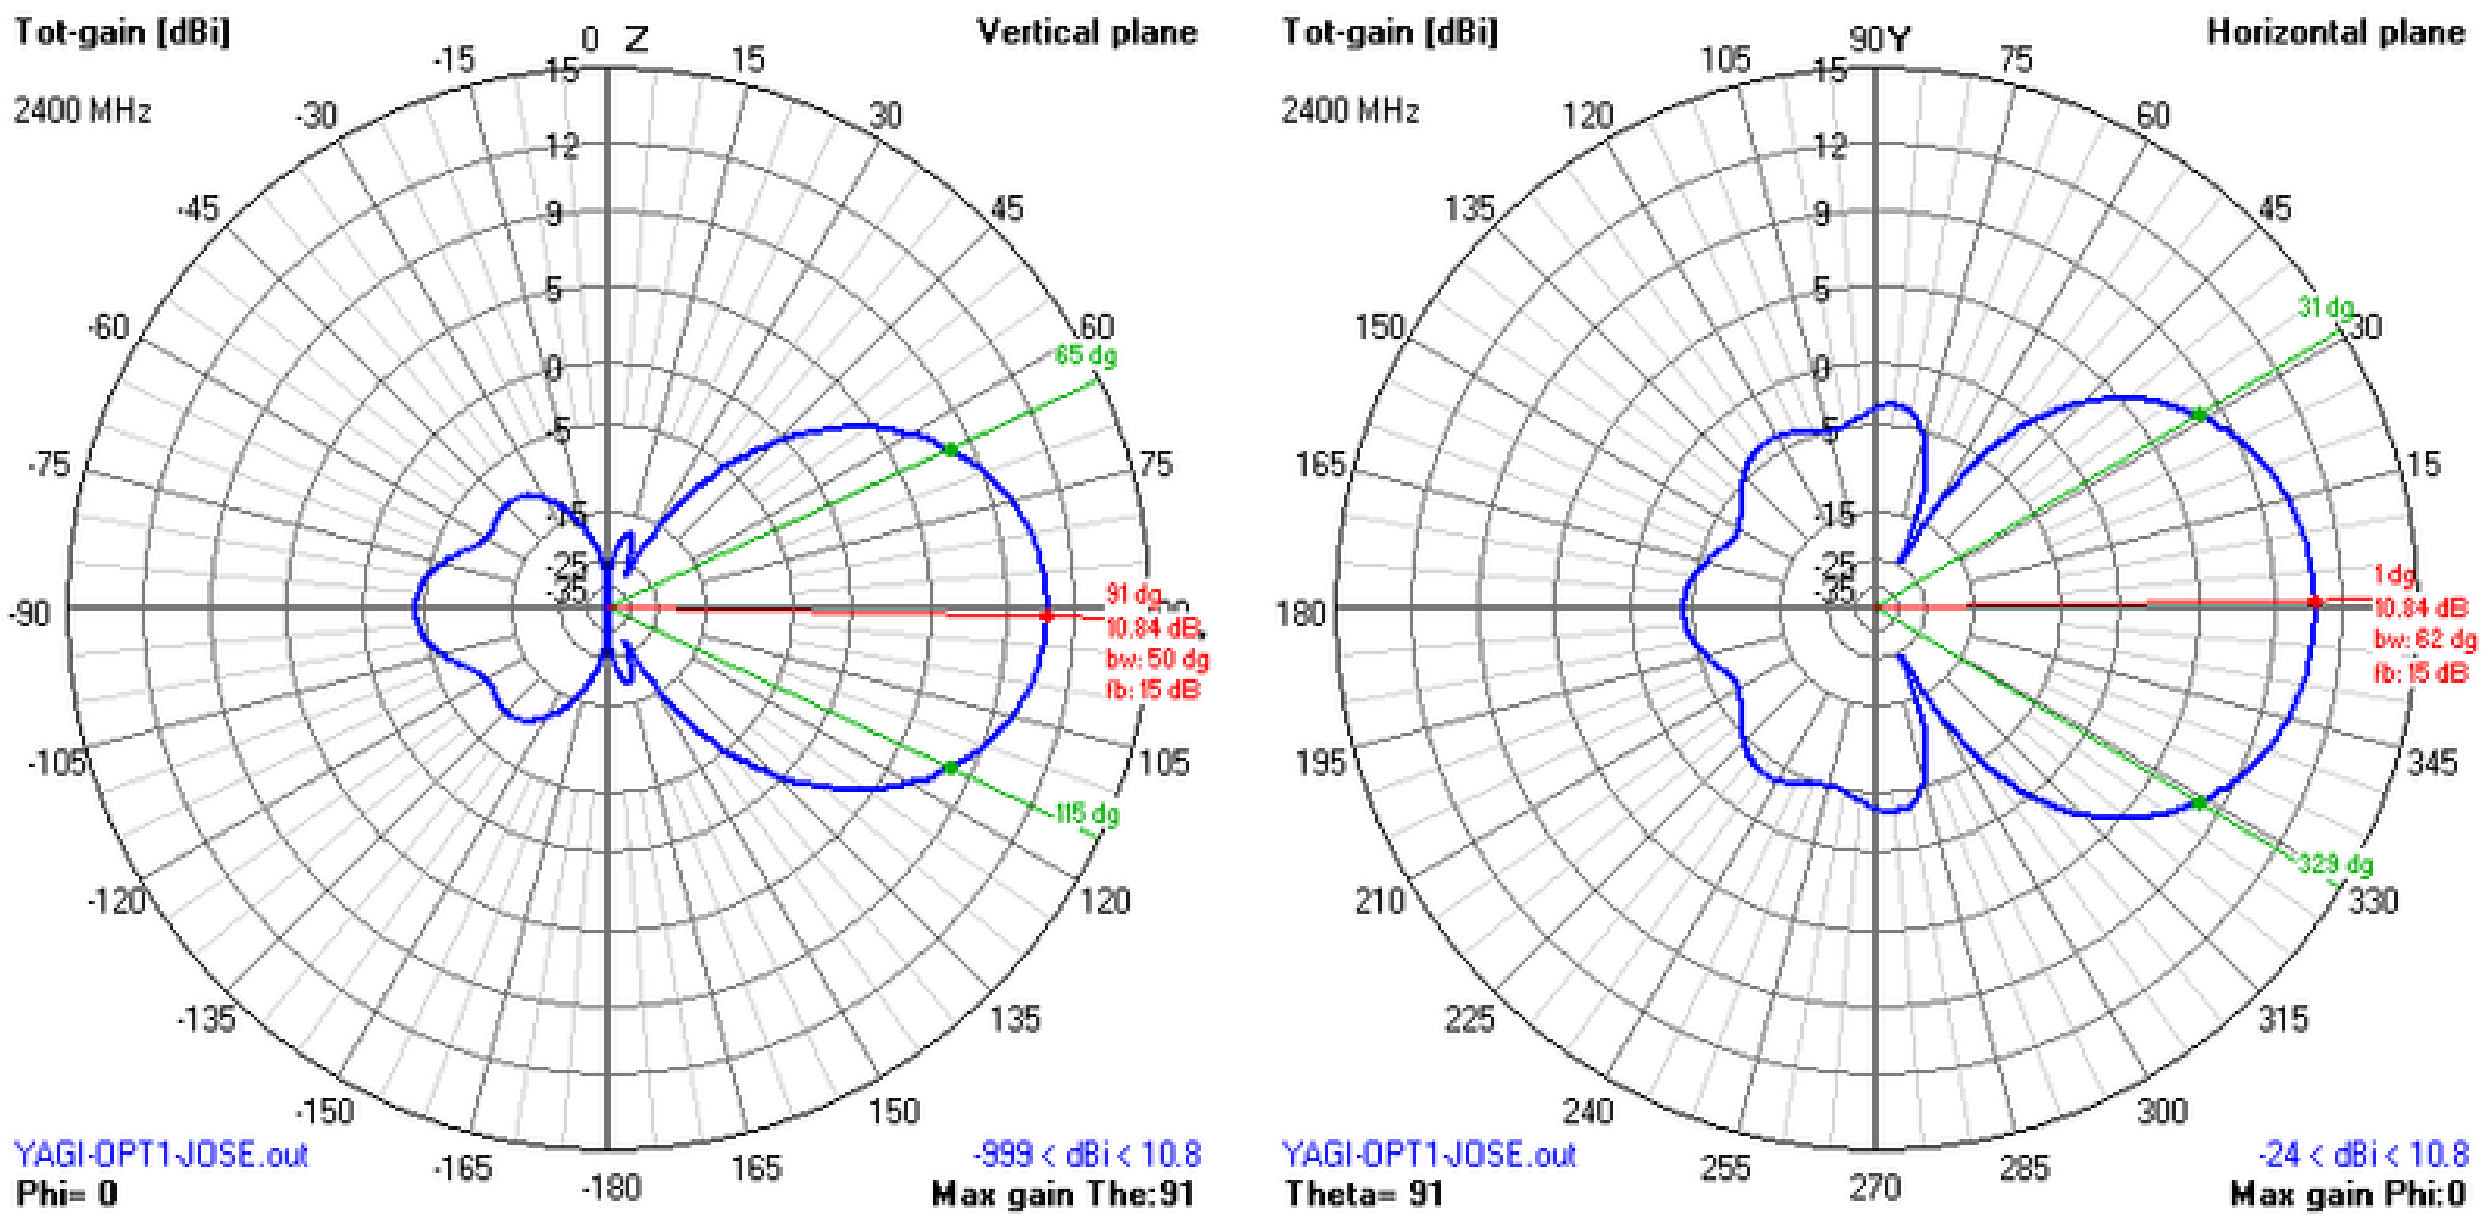

Figure 3: 2D Radiation diagrams

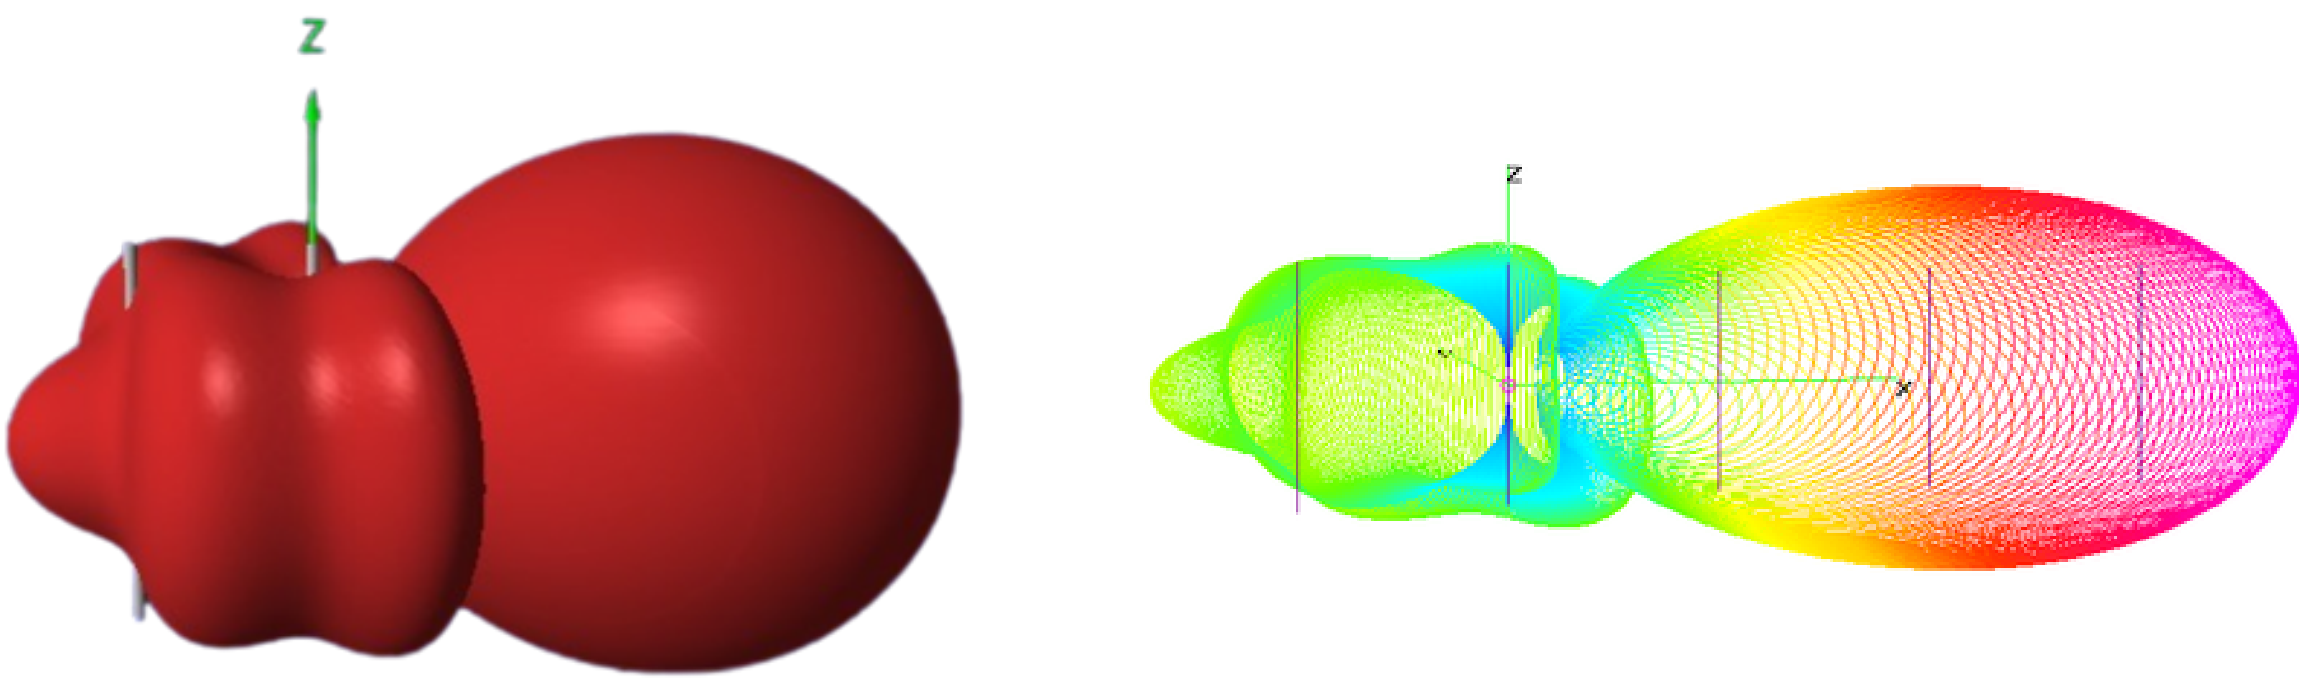

Figure 4: 3D Radiation diagrams

P&P ANTENNAS

Questions? Contact us.