

Autonomous Argumentative

SOURCE: github.com/jorisesch/moduleur

A self-running stream of short electronic chirps, stepped whistles, and nervous pitch warbles inspired by an argumentative little service robot.

BRAIN: Le Controlleur | VERSION: v1.4 (target; confirm installed) | MODE: Sequencer

LAYOUT: three-knobs-two-buttons

X/Y/Z are upper knobs left to right; A/B are lower buttons. Press A to run.
X: 45% tempo. Keep above minimum because minimum selects external sync.
Y: 65% octave range for wide pitch jumps. Z: 55% randomness for an irregular conversation.
OUT 1 drives oscillator pitch; OUT 2 changes filter color; PULSE supplies 20 ms gates.

SOUND

Short bright chirps jump between pitches while the filter changes color and a fast LFO makes each tone wobble. The result should suggest an animated machine trying urgently to explain something.

SETUP

Make the five numbered connections. Five dashed routes are built in and need no cables; the headphone lead is separate. Select Sequencer mode, start with output volume low, then press A.
Set the marked controls before raising the output. If the sound is dull, open cutoff; if it whistles continuously, reduce resonance or Filter CV2.

PLAY

Turn Brain X to change speaking speed and Z to move between repeated phrases and scattered chatter. Move LFO RATE from fast warble toward audio rate for sharper metallic vowels.
Use VCO 1 FINE as a voice control. Small movements shift the whole character without changing the programmed sequence.

VARIATIONS

Raise envelope decay for longer whistles. Increase Brain Y for wider leaps. Remove cable 5 for cleaner tones, or reduce LFO amount when the pitch becomes too seasick.

NORMALLED WIRING

N1-N5 retain the built-in VCO 1-to-mixer, mixer-to-filter, filter-to-VCA 1, ENV 1-to-control, and VCA 1-to-output audio chain. The five physical cables supply pitch, gate, two filter movements, and oscillator FM.

COMPLETE CONNECTION LIST

- 1 Brain OUT1 > VCO 1 PITCH
- 2 Brain PULSE > ENV/VCA 1 GATE
- 3 Brain OUT2 > Filter CV2
- 4 ENV/VCA 1 ENV > Filter CV1
- 5 LFO TRIANGLE > VCO 1 FM
- 6 OUTPUT OUT > Stereo headphones
- N1 VCO 1 OUT > Mixer IN1 [internal normal]
- N2 Mixer OUT > Filter LP [internal normal]
- N3 Filter OUT > ENV/VCA 1 IN [internal normal]
- N4 ENV/VCA 1 ENV > ENV/VCA 1 CONTROL [internal normal]
- N5 ENV/VCA 1 OUT > OUTPUT IN [internal normal]

CRITICAL STARTING POSITIONS

VCO1 / wave: SAW; octave: 72%; high; fine: 55%; tune by ear
MIXER / level1: 55%; level2: 0%; unused; level3: 0%; unused; level4: 0%; unused; main: 48%
FILTER / resonance: 58%; vocal; cutoff: 62%; cv1: 68% (+); cv2: 58% (+)
ENV1 / attack: minimum; decay: 18%; short; sustain: 0%; release: 10%
LFO / rate: 72%; fast warble; amount: 30%; moderate
OUTPUT / volume: 8%; start low; drive: 8%
BRAIN / x: 45%; tempo; y: 65%; octave range; z: 55%; randomness


CONTROLS NOT AFFECTING THIS PATCH

VCO1 / width: Saw selected; pulse width does not affect this waveform.
MIXER / gain4: Mixer input 4 is unused and its level is zero.; threshold: No signal enters sidechain input 4, so compression is inactive.


Sources / attribution

Firmware: [upstream/le-controlleur/SEQUENCER.md](#) (target download v1.4; installed version unconfirmed)
Instrument and modules: [shmoergh.com/guides/moduleur-user-guide/](#); [upstream/moduleur/modules/](#)
Background: [shmoergh.com/content/files/2026/02/moduleur-patch-sheet.pdf](#)
Official background: Shmoergh. Patch notes and overlay are community-authored.


OSCILLATOR

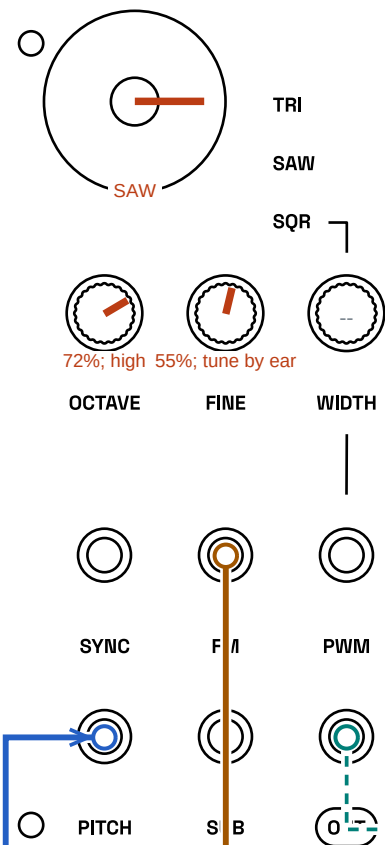


OSCILLATOR

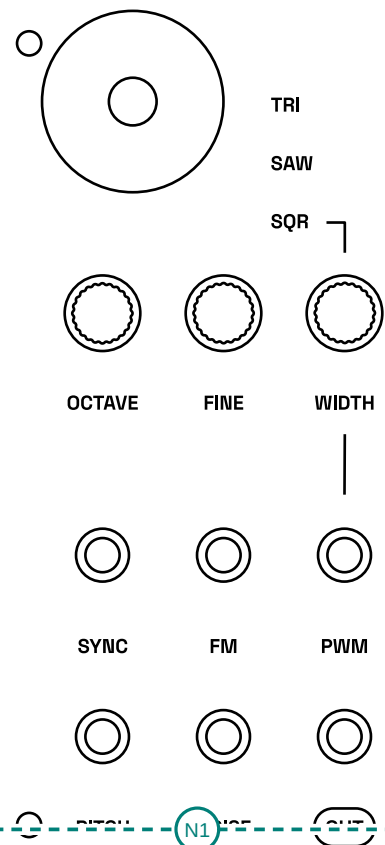


MIXER & SIDECHAIN

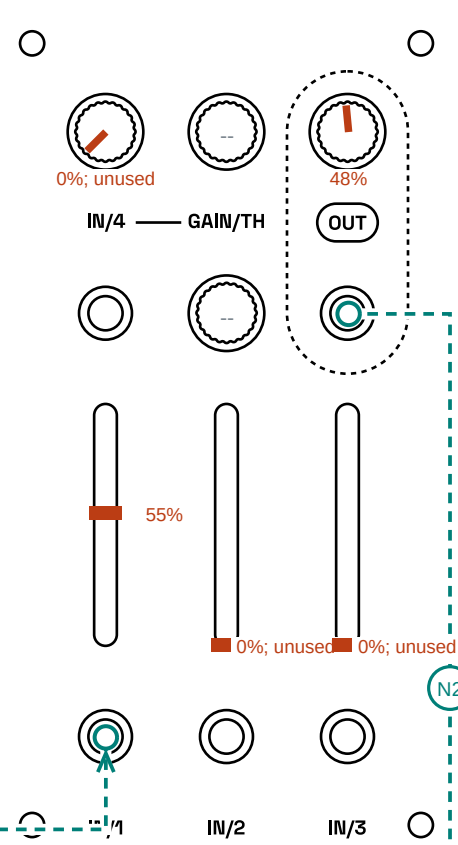


FILTER

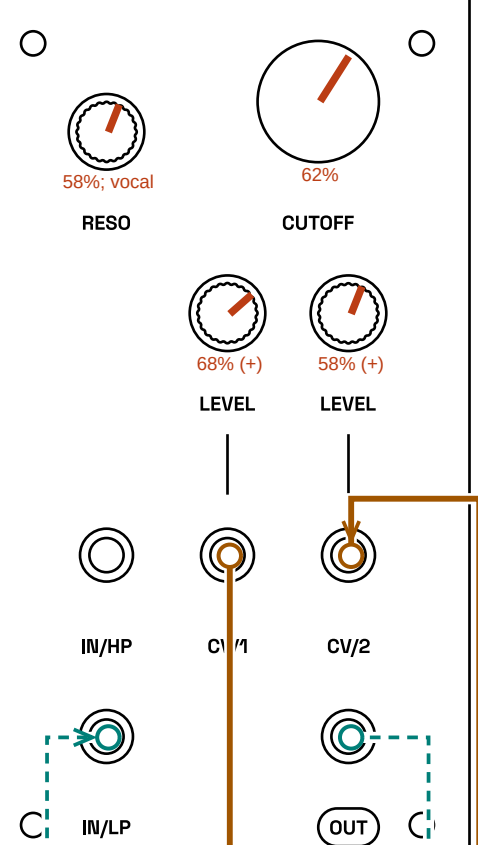


ENVELOPE & VCA

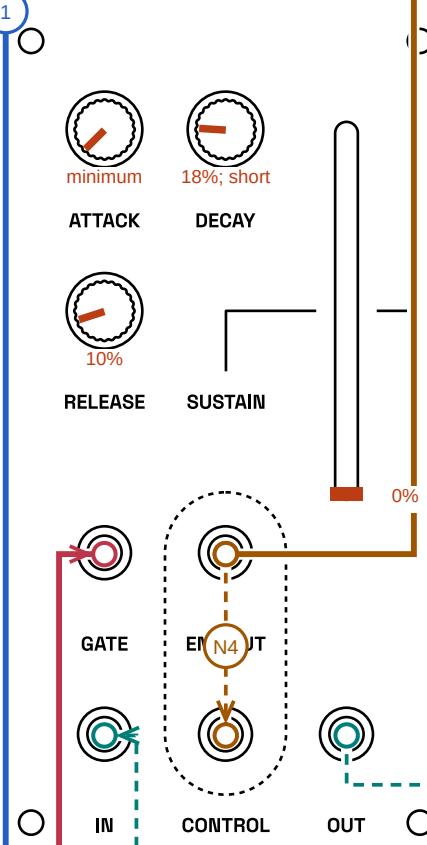


ENVELOPE & VCA

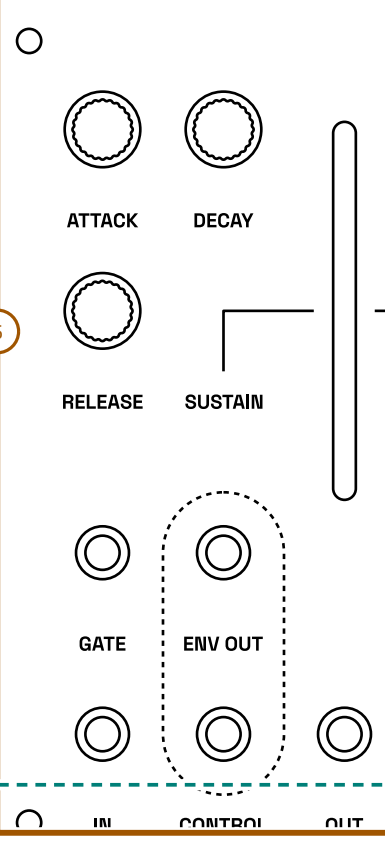

CRUSH LFO OUTPUT

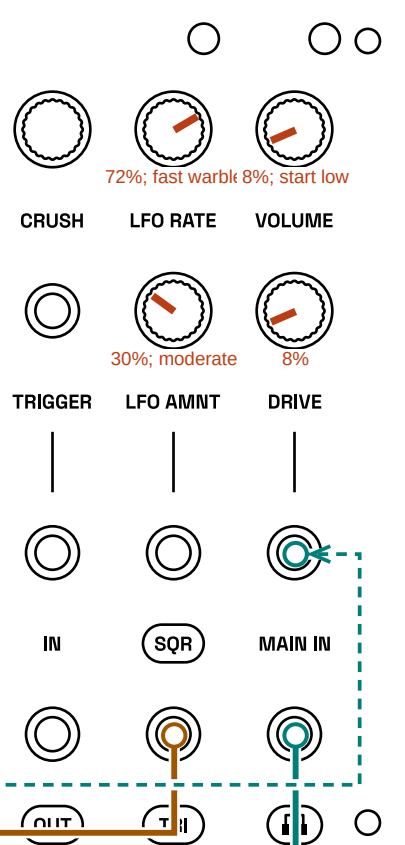

BRAIN

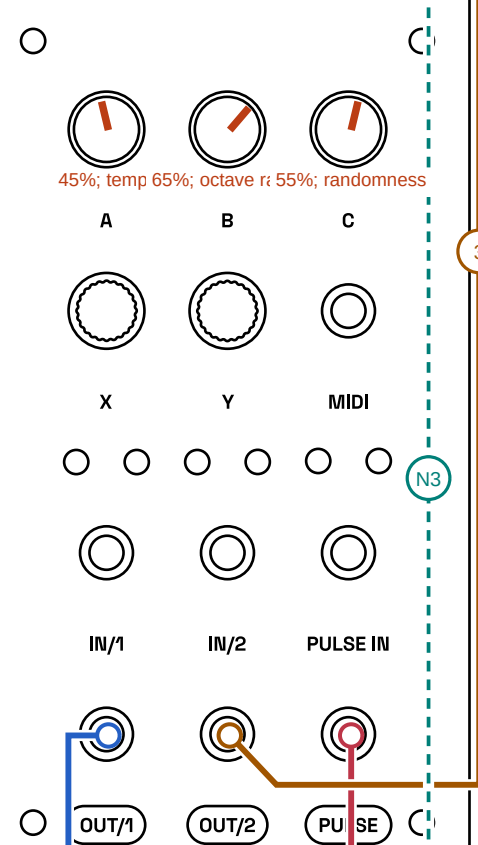

Stereo headphones

PATCH KEY

AUDIO

PITCH CV

MOD CV

GATE/TRIG

MIDI

MODULEUR
ANALOG SYNTHESIZER

Orange control marks = critical. -- = irrelevant (reasons on page 1).

Positions are physical starting points. Cable IDs and firmware settings: page 1.