
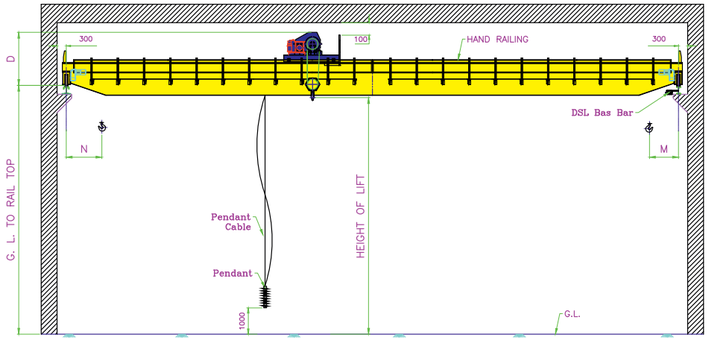


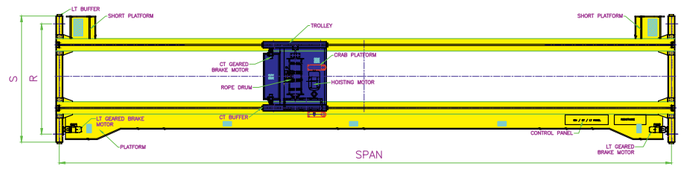

Standard Features

Double Girder Open Winch Crab Type E.O.T. Cranes

- Modular construction makes it possible to supply cranes for any class, application, speed as required
- Tables indicate Cranes designed as per class II as per IS 3177 and IS 807
- Rugged Construction
- Full length service platform on one side for maintenance of Crab, control panels and drives
- Low maintenance Cranes
- Double shoe type hydraulic / AC or DC electromagnetic breaks for all motions
- Option of squirrel cage/ slip ring motors for all motions depending upon load spectrum
- Multiple speeds through optional Variable Frequency Drive
- Option for central or twin drive for long travel
- Extra break for hoisting of capacities above 20 Ton
- Heavy duty limit switches for all motions
- Box type construction for main bridge girders
- Specially designed wheels with 'L' type housing for easy removal
- Forged and hardened wheels
- Radiographic test carried out for all butt welds under tension
- Crane component kits can be supplied

SAHIL INDUSTRIES™

MANUFACTURER OF CRANES & HOISTS

AN ISO 9001: 2008 Certified Company





Life up Your Expectation...

Double Girder Open Winch Crab Type EOT Cranes

SWL / Lift Hoist Speed C.T. Speed L.T. Speed	Span (Mtrs)	M (mm)	N (mm)	S (mm)	R (mm)	D Std. (mm)	D Min. (mm)	H Head Room (mm)	p dyn Max. (Ton)	Weight (kg)	Rail Size (mm2)
15000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	1150	1000	2650	1800	1600	1500	1700	9.5	9500	50
	12	1150	1000	3250	2400	1600	1500	1700	10.40	11500	50
	15	1150	1000	3850	3000	1600	1500	1700	11	13500	50
	18	1150	1000	4450	3600	1800	1700	1900	11.8	16000	50
	21	1150	1000	5050	4200	1800	1700	1900	13.1	21000	63
	24	1200	1050	5650	4800	1800	1700	1900	13.8	24000	63
	27	1200	1050	5650	4800	1800	1700	1900	16.1	33500	63
	30	1200	1050	5850	5000	1800	1700	1900	17.5	39000	63
20000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	1250	1100	2650	1800	1700	1600	1800	12.2	11800	50
	12	1250	1100	3250	2400	1700	1600	1800	13	13800	50
	15	1250	1100	3850	3000	1700	1600	1800	13.9	15500	63
	18	1250	1100	4450	3600	1900	1800	2000	15.1	19200	63
	21	1250	1100	5050	4200	1900	1800	2000	16	22000	63
	24	1300	1150	5650	4800	1900	1800	2000	17	26200	63
	27	1300	1150	5650	4800	1900	1800	2000	19.5	34400	90lb/yard
	30	1300	1150	5850	5000	1900	1800	2000	20.5	40500	90lb/yard

SWL / Lift Hoist Speed C.T. Speed L.T. Speed	Span (Mtrs)	M (mm)	N (mm)	S (mm)	R (mm)	D Std. (mm)	D Min. (mm)	H Head Room (mm)	p dyn Max. (Ton)	Weight (kg)	Rail Size (mm2)
25000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	1250	1050	2650	1800	1800	1700	1900	14.6	12300	63
	12	1250	1050	3250	2400	1800	1700	1900	15.6	14800	63
	15	1250	1050	3850	3000	1800	1700	1900	16.8	17800	63
	18	1250	1050	4450	3600	2000	1900	2100	16.18	19800	90lb/yard
	21	1250	1050	5050	4200	2000	1900	2100	19.2	24000	90lb/yard
	24	1300	1100	5650	4800	2000	1900	2100	19.6	29500	80CR
	27	1300	1100	5650	4800	2000	1900	2100	22.1	38500	80CR
	30	1300	1100	5850	5000	2000	1900	2100	23.5	42000	80CR
30000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	1300	1100	2650	1800	2100	2000	2200	17.5	13200	90lb/yard
	12	1300	1100	3250	2400	2100	2000	2200	18.2	15800	80CR
	15	1300	1100	3850	3000	2100	2000	2200	19.2	19000	80CR
	18	1300	1100	4450	3600	2100	2000	2200	20.8	22000	80CR
	21	1300	1100	5050	4200	2500	2400	2600	22.2	27500	80CR
	24	1350	1150	5650	4800	2500	2400	2600	23.3	31500	80CR
	27	1350	1150	5650	4800	2500	2400	2600	25	37500	80CR
	30	1350	1150	5850	5000	2500	2400	2600	26.5	42500	80CR

Note:- * If lifting is beyond the listed range, please consult your local SAHIL INDUSTRIES Representative or consult the head office for sutaible solution


*Because of continuous improvement process in design and manufacturing overall dimetions may change without notice


*All rights reserved with SAHIL INDUSTRIES

*Due to constant improvement in design, we reserve the right to change the dimenons & specifications mentioned herein, without prior notice.

SAHIL INDUSTRIES™
MANUFACTURER OF CRANES & HOISTS
AN ISO 9001: 2008 Certified Company

Manufacturing Plant :
B-88, 89 & 90 Kagal-Hatkanangale Five Star MIDC Kagal,
Village - Halsawade, Tal. - Karveer, Dist. - Kolhapur. 416 236.
Mob No. : + 91 9623242324, +91 9860044227, +91 8975913535,
+91 9623242324, +91 9503569899, +91 9511913535, +91 9172253535, +91 7350803535
E-mail : sahilcranes@gmail.com / marketing@sahilcrane.com
Web : www.sahilcrane.co.in

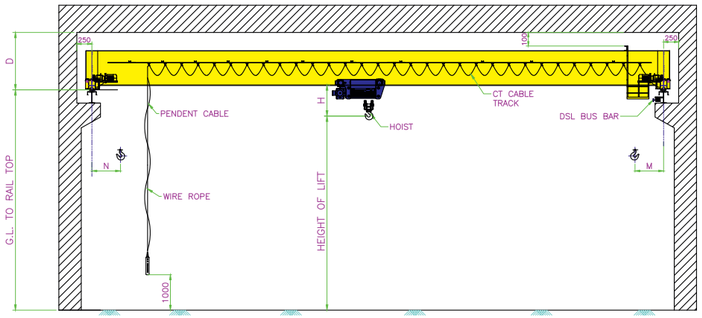


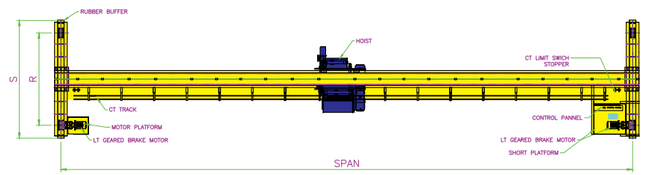


Standard Features

S.G. E.O.T. Cranes
D.G. Modular E.O.T. Cranes

- Standard Single Speed Motors
- Two Speed option available through variable frequence drives, Micro motor and two speed motors
- Compact Hoist design, giving minimum hook approaches
- Quality Test certificates for hoist test, wire rope, hook forgings etc.
- Electromagnetic break for hoisting motion
- Option of centrifugal mechanical/ AC or DC electromagnetic break for Cross and long travel motions.
- Welded box type beam or standard rolled 'I' beam construction for main bridge girder
- Standard Supply voltage 415V, 50 Hz
- Standard Control Voltage 110V
  Optional Control Voltages 24V/48V
- Standard Cross travel speed 15 mpm
- Standard Long travel speed 20 mpm
- Other speed available upon request
- Tables indicate Cranes designed as per Class II as per IS 3177and IS 807
- Cranes can also be designed for other Classifications
- Compact long and cross travel drives
- Limit switches for all motions
- Emergency upper limit switch for hoisting motion
- Low headroom hoist option
- Underslung cranes can also be supplied where there is constraint of space
- Crane component kits can also be supplied

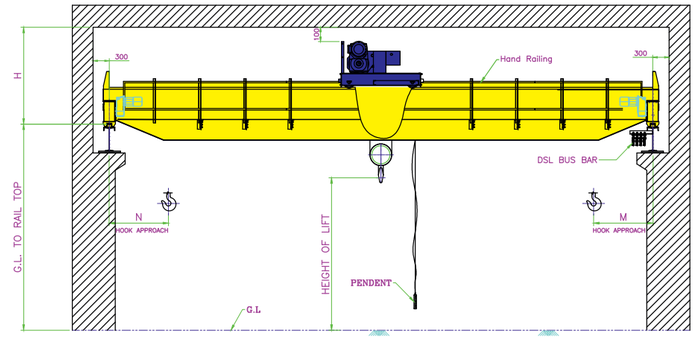

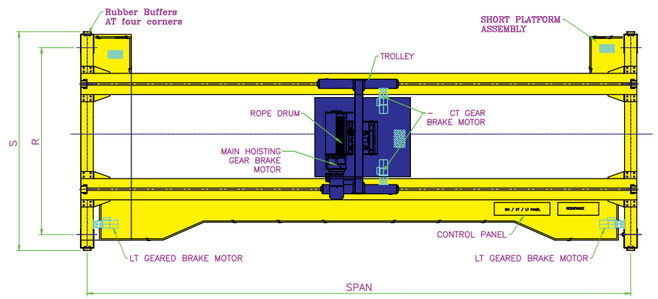

Common Optional Features for all Cranes

- Anti-collision arrangement for two or more cranes working in the same bay
- Independent moving pendent
- Load indicator
- Radio remote Control
- Alarm
- Bridge lights

Single Girder EOT Cranes

SWL / Lift Hoist Speed C.T. Speed L.T. Speed	Span (Mtrs)	M (mm)	N (mm)	S (mm)	R (mm)	D Std. (mm)	D Min. (mm)	H Head Room (mm)	p dyn Max. (Ton)	Weight (kg)	Rail Size (mm)²
2000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	6	850	750	1500	1000	500	450	650	1.2	1250	32
	9	850	750	2000	1500	600	550	650	1.35	1600	32
	12	850	750	2500	2000	720	620	650	1.55	2250	32
	15	850	750	3000	2500	830	730	650	1.75	2940	32
	18	850	750	3500	3000	950	800	650	2.04	4100	40
	21	850	750	4000	3500	1075	950	650	2.2	4700	40
	24	850	750	4500	4000	1180	1000	650	2.23	4800	40
	27	850	750	5000	4500	1300	1100	650	2.5	5790	40
3000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	6	900	810	1500	1000	550	500	650	1.69	1400	40
	9	900	810	2000	1500	650	575	650	1.87	1860	40
	12	900	810	2500	2000	770	650	650	2.1	2300	40
	15	900	810	3000	2500	900	800	650	2.4	3630	40
	18	900	810	3500	3000	950	850	650	2.6	4360	40
	21	900	810	4000	3500	1150	1000	650	2.67	4590	40
	24	900	810	4500	4000	1225	1100	650	2.85	5260	40
	27	900	810	5000	4500	1400	1200	650	3.04	6030	40

SWL / Lift Hoist Speed C.T. Speed L.T. Speed	Span (Mtrs)	M (mm)	N (mm)	S (mm)	R (mm)	D Std. (mm)	D Min. (mm)	H Head Room (mm)	p dyn Max. (Ton)	Weight (kg)	Rail Size (mm)²
5000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	6	900	810	1500	1000	650	575	800	2.62	1795	40
	9	900	810	2000	1500	750	650	800	2.92	2400	40
	12	900	810	2500	2000	900	800	800	3.23	3350	40
	15	900	810	3000	2500	910	810	800	3.5	4210	40
	18	900	810	3500	3000	1020	910	800	3.6	4260	40
	21	900	810	4000	3500	1170	1020	800	3.8	5250	40
	24	900	810	4500	4000	1300	1150	800	4.3	7275	40
	27	900	810	5000	4500	1450	1300	800	4.6	8610	40
10000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	6	1100	950	1500	1000	800	700	800	5.13	3000	40
	9	1100	950	2000	1500	900	750	800	5.67	3900	40
	12	1100	950	2500	2000	950	820	800	6.11	4980	50
	15	1100	950	3000	2500	1000	850	800	6.62	6400	50
	18	1100	950	3500	3000	1075	950	800	7.03	8050	50
	21	1100	950	4000	3500	1200	1050	800	7.5	9950	50
	24	1100	950	4500	4000	1350	1100	800	8	11190	50

Note:- * If lifting is beyond the listed range, please consult your local SAHIL INDUSTRIES Representative or consult the head office for sutaible solution
*Because of continuous improvement process in design and manufacturing overall dimetions may change without notice
*All rights reserved with SAHIL INDUSTRIES

*Due to constant improvement in design, we reserve the right to change the dimenons & specifications mentioned herein, without prior notice.

Double Girder Modular EOT Cranes

SWL / Lift Hoist Speed C.T. Speed L.T. Speed	Span (Mtrs)	M (mm)	N (mm)	S (mm)	R (mm)	D Std. (mm)	D Min. (mm)	H Head Room (mm)	p dyn Max. (Ton)	Weight (kg)	Rail Size (mm)²
2000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	900	750	2650	1800	1200	1000	1300	1.8	2400	40
	12	900	750	3250	2400	1200	1000	1300	2.00	2900	40
	15	900	750	3850	3000	1200	1000	1300	2.3	4000	40
	18	900	750	4450	3600	1200	1000	1300	2.6	5000	40
	21	1000	750	5050	4200	1300	1100	1400	2.8	6500	40
	24	1000	750	5650	4800	1300	1100	1400	3	7450	40
	27	1000	750	6250	5400	1350	1150	1450	3.3	7700	40
	30	1000	750	6850	6000	1350	1150	1450	3.7	9200	40
3000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	900	810	2650	1800	1300	1100	1400	2.5	2800	40
	12	900	810	3250	2400	1300	1100	1400	2.8	3500	40
	15	900	810	3850	3000	1300	1100	1400	3.15	4500	40
	18	900	810	4450	3600	1300	1100	1400	3.36	6300	40
	21	1000	810	5050	4200	1400	1200	1500	3.9	7100	40
	24	1000	810	5650	4800	1400	1200	1500	4	7500	50
	27	1000	810	6250	5400	1450	1250	1550	4.2	8400	50
	30	1000	810	6850	6000	1450	1250	1550	4.5	10000	50

SWL / Lift Hoist Speed C.T. Speed L.T. Speed	Span (Mtrs)	M (mm)	N (mm)	S (mm)	R (mm)	D Std. (mm)	D Min. (mm)	H Head Room (mm)	p dyn Max. (Ton)	Weight (kg)	Rail Size (mm)²
5000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	1000	950	2650	1800	1350	1150	1450	3.85	5500	40
	12	1000	950	3250	2400	1350	1150	1450	4.1	7100	40
	15	1000	950	3850	3000	1350	1150	1450	4.2	8100	40
	18	1000	950	4450	3600	1350	1150	1450	4.85	10300	50
	21	1100	1000	5050	4200	1450	1250	1550	6	15000	50
	24	1100	1000	5650	4800	1450	1250	1550	6.5	17500	50
	27	1100	1000	6250	5400	1500	1300	1600	8.6	25500	50
	30	1100	1000	6850	6000	1500	1300	1600	10.2	30000	50
10000 kg 8.0 Mtrs. 3.0 MPM 15.0 MPM 20.0 MPM	9	1100	1000	2650	1800	1400	1200	1500	6.65	7500	50
	12	1100	1000	3250	2400	1400	1200	1500	7.1	9000	50
	15	1100	1000	3850	3000	1400	1200	1500	7.3	10000	50
	18	1100	1000	4450	3600	1650	1450	1750	7.75	12500	50
	21	1100	1000	5050	4200	1650	1450	1750	8.1	15000	63
	24	1100	1000	5650	4800	1650	1450	1750	8.7	18500	63
	27	1100	1000	6250	5400	1650	1450	1750	11	28000	63
	30	1100	1000	6850	6000	1650	1450	1750	12	33000	63

Note:- * If lifting is beyond the listed range, please consult your local SAHIL INDUSTRIES Representative or consult the head office for sutaible solution
*Because of continuous improvement process in design and manufacturing overall dimetions may change without notice
*All rights reserved with SAHIL INDUSTRIES

*Due to constant improvement in design, we reserve the right to change the dimenons & specifications mentioned herein, without prior notice.