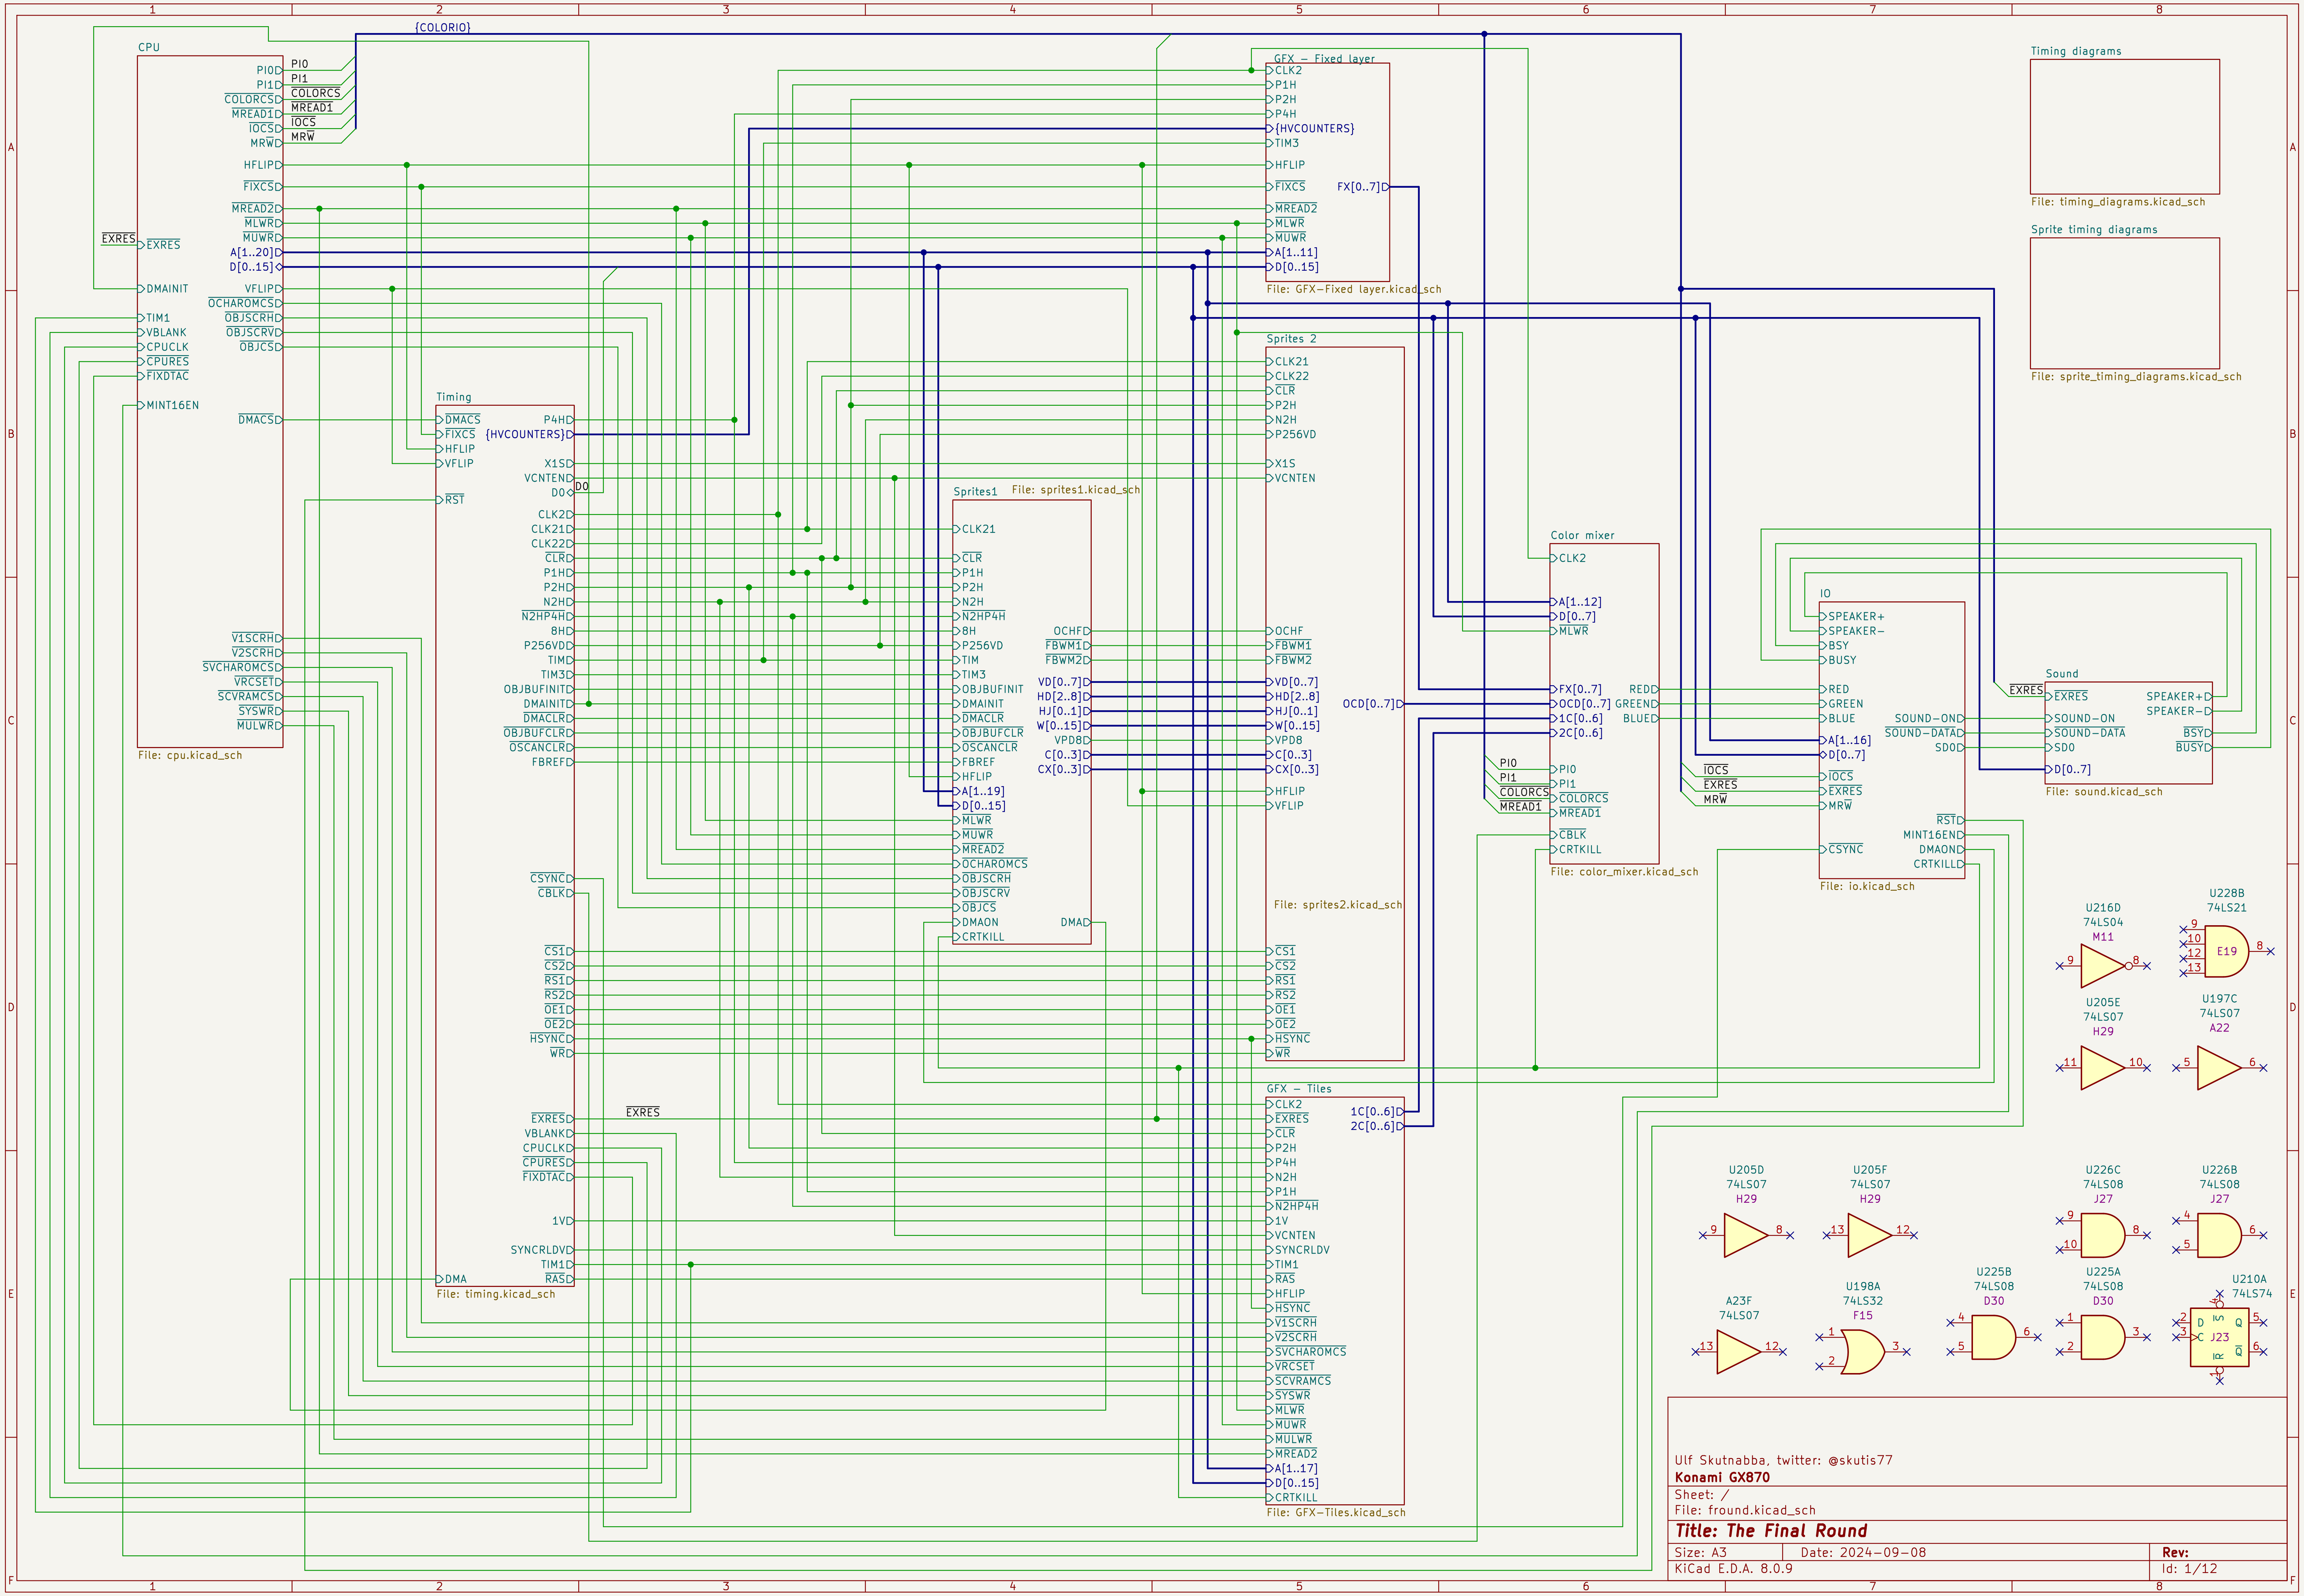

Ulf Skutnabba, twitter: @skutis77

Konami GX870

Sheet: /

File: fround.kicad_sch

Title: The Final Round

Size: A3	Date: 2024-09-08	Rev:
KiCad E.D.A. 8.0.9		Id: 1/12

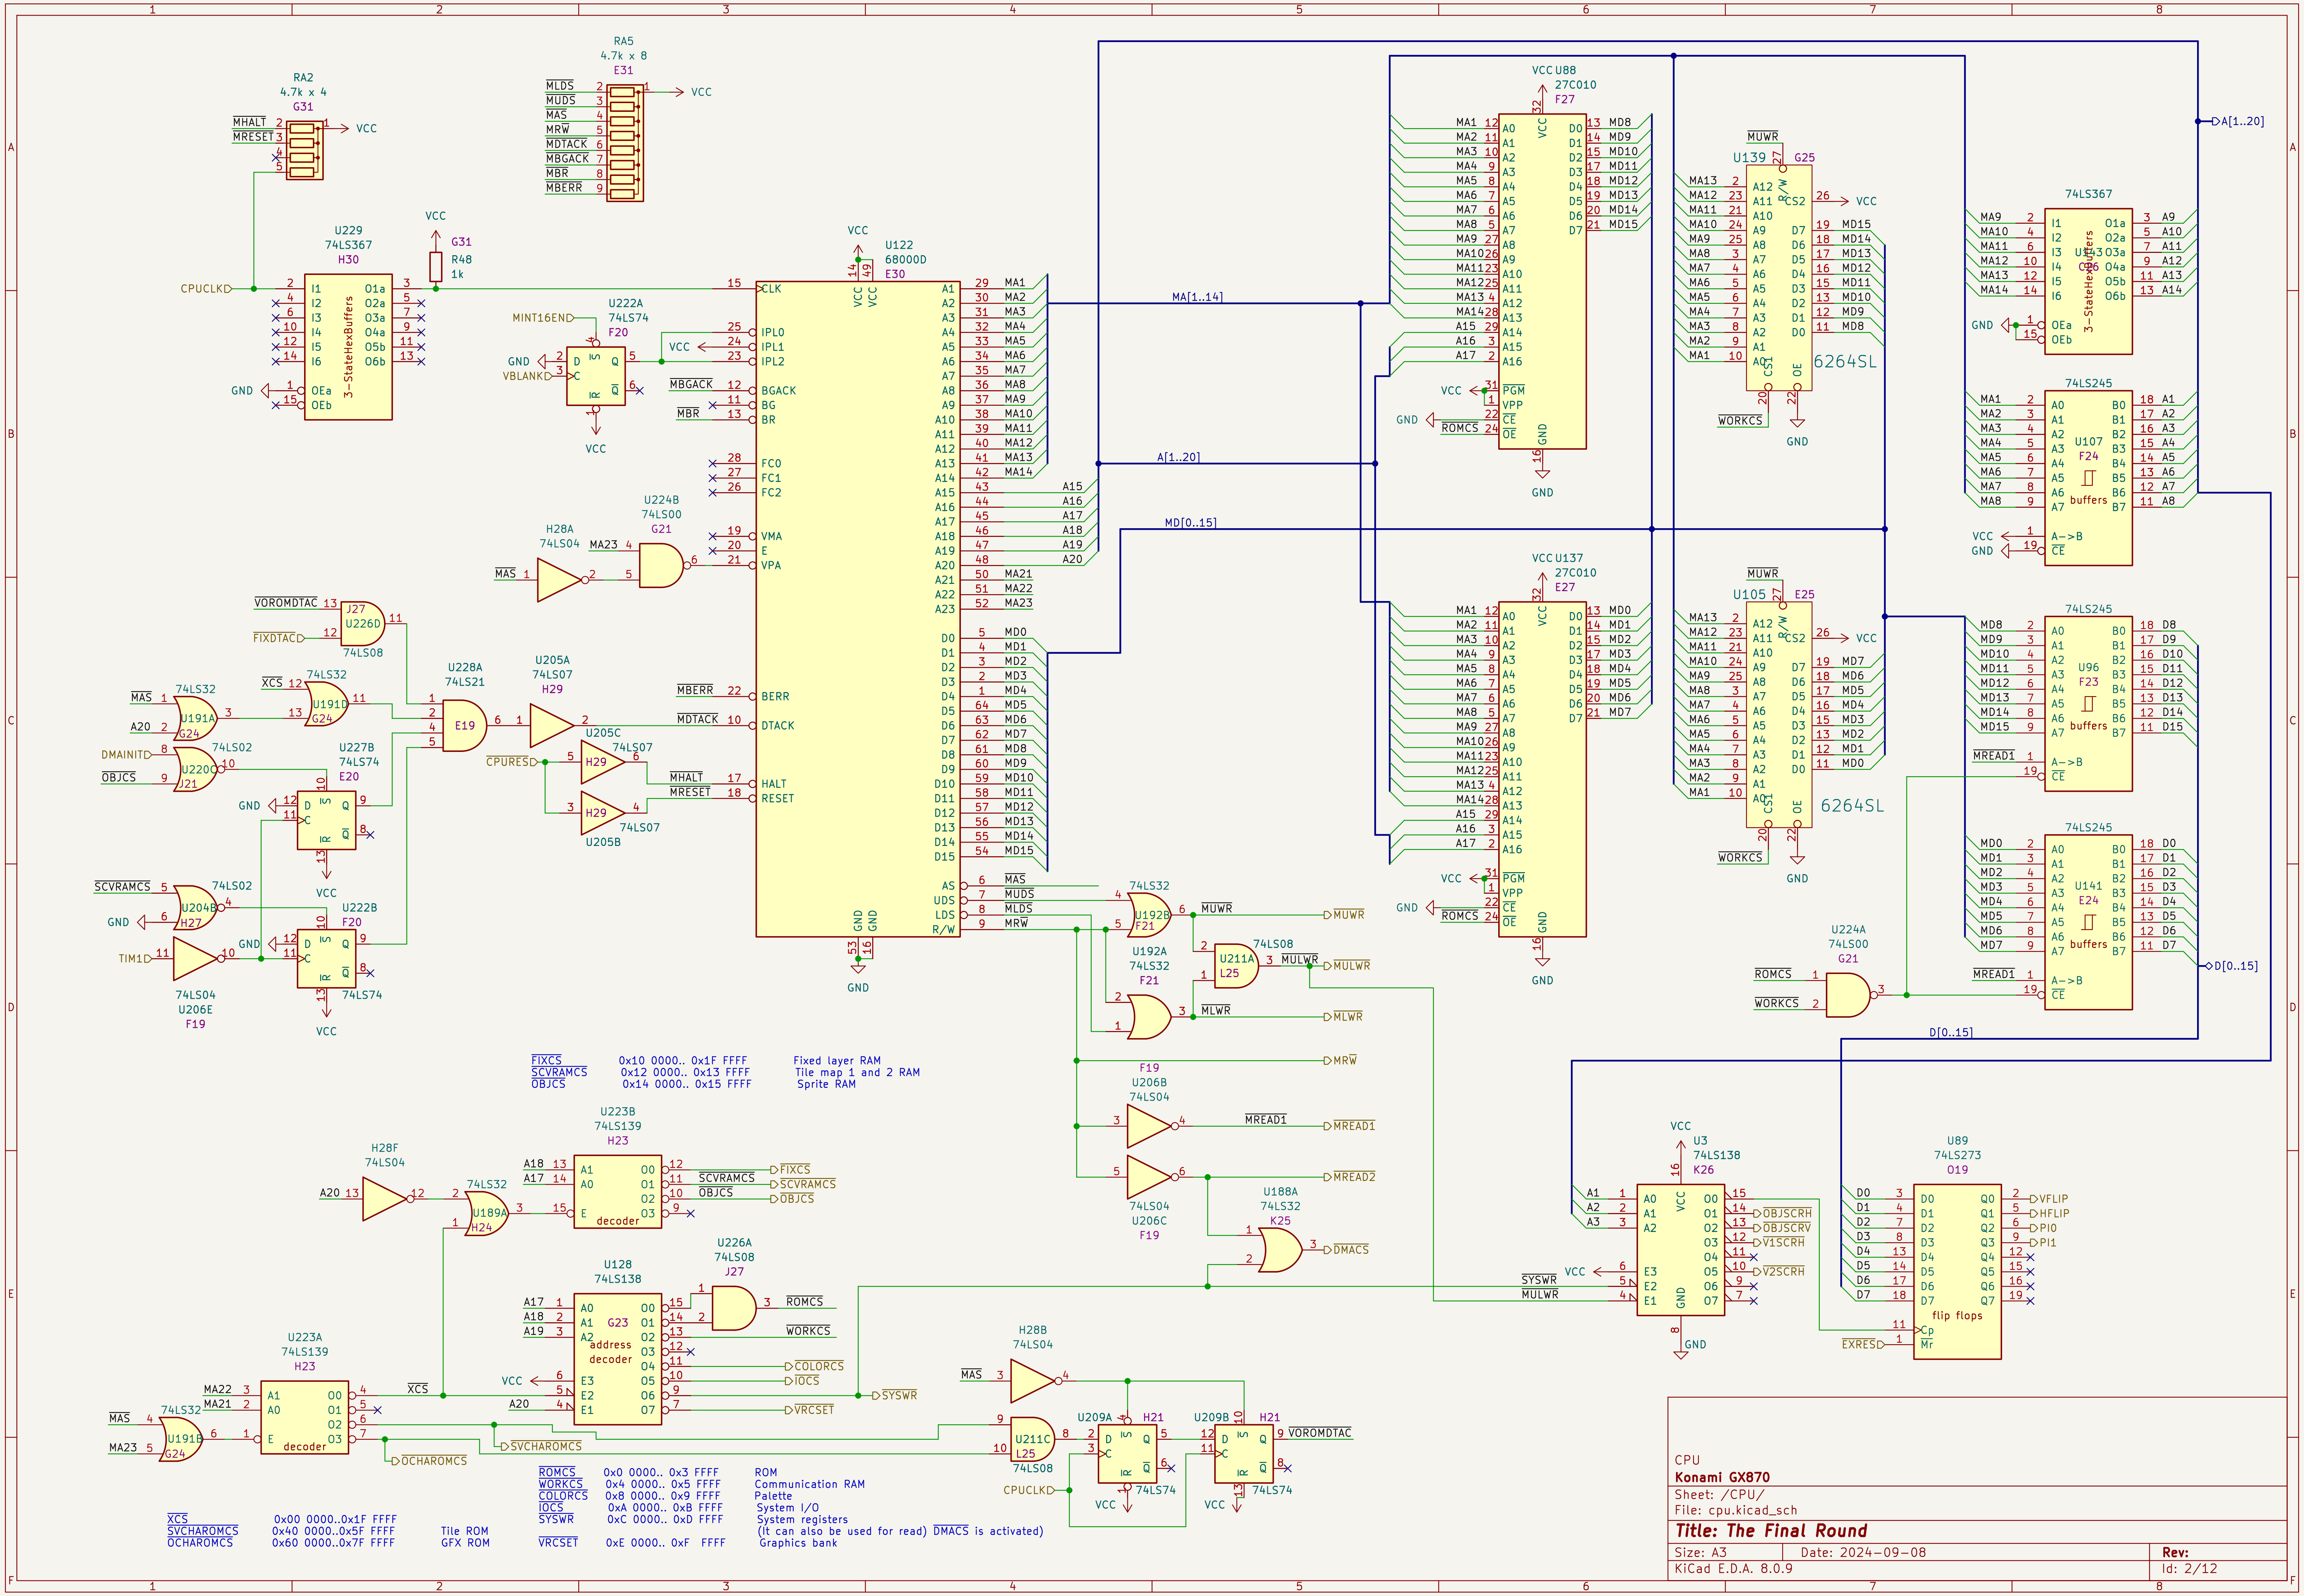
FIXCS 0x10 0000.. 0x1F FFFF Fixed layer RAM
SCVRAMCS 0x12 0000.. 0x13 FFFF Tile map 1 and 2 RAM
OBJCS 0x14 0000.. 0x15 FFFF Sprite RAM
ROMCS 0x0 0000.. 0x3 FFFF ROM
WORKCS 0x4 0000.. 0x5 FFFF Communication RAM
COLORCS 0x8 0000.. 0x9 FFFF Palette
IOCS 0xA 0000.. 0xB FFFF System I/O
SYSWR 0xC 0000.. 0xD FFFF System registers
(It can also be used for read) DMACS is activated)
VRCSET 0xE 0000.. 0xF FFFF Graphics bank
XCS 0x00 0000..0x1F FFFF
SVCHAROMCS 0x40 0000..0x5F FFFF Tile ROM
OCHAROMCS 0x60 0000..0x7F FFFF GFX ROM
U122 68000D E30
U88 27C010 F27
U137 27C010 E27
U139 6264SL G25
U105 6264SL E25
U143 74LS367 C26
U107 74LS245 F24
U96 74LS245 F23
U141 74LS245 E24
U229 74LS367 H30
U3 74LS138 K26
U89 74LS273 O19
U128 74LS138 G23
U223A 74LS139 H23
U223B 74LS139 H23
RA2 4.7k x 4 G31
RA5 4.7k x 8 E31
R48 1k G31
CPU
Konami GX870
Sheet: /CPU/
File: cpu.kicad_sch
Title: The Final Round
Size: A3
Date: 2024-09-08
Rev:
KiCad E.D.A. 8.0.9
Id: 2/12

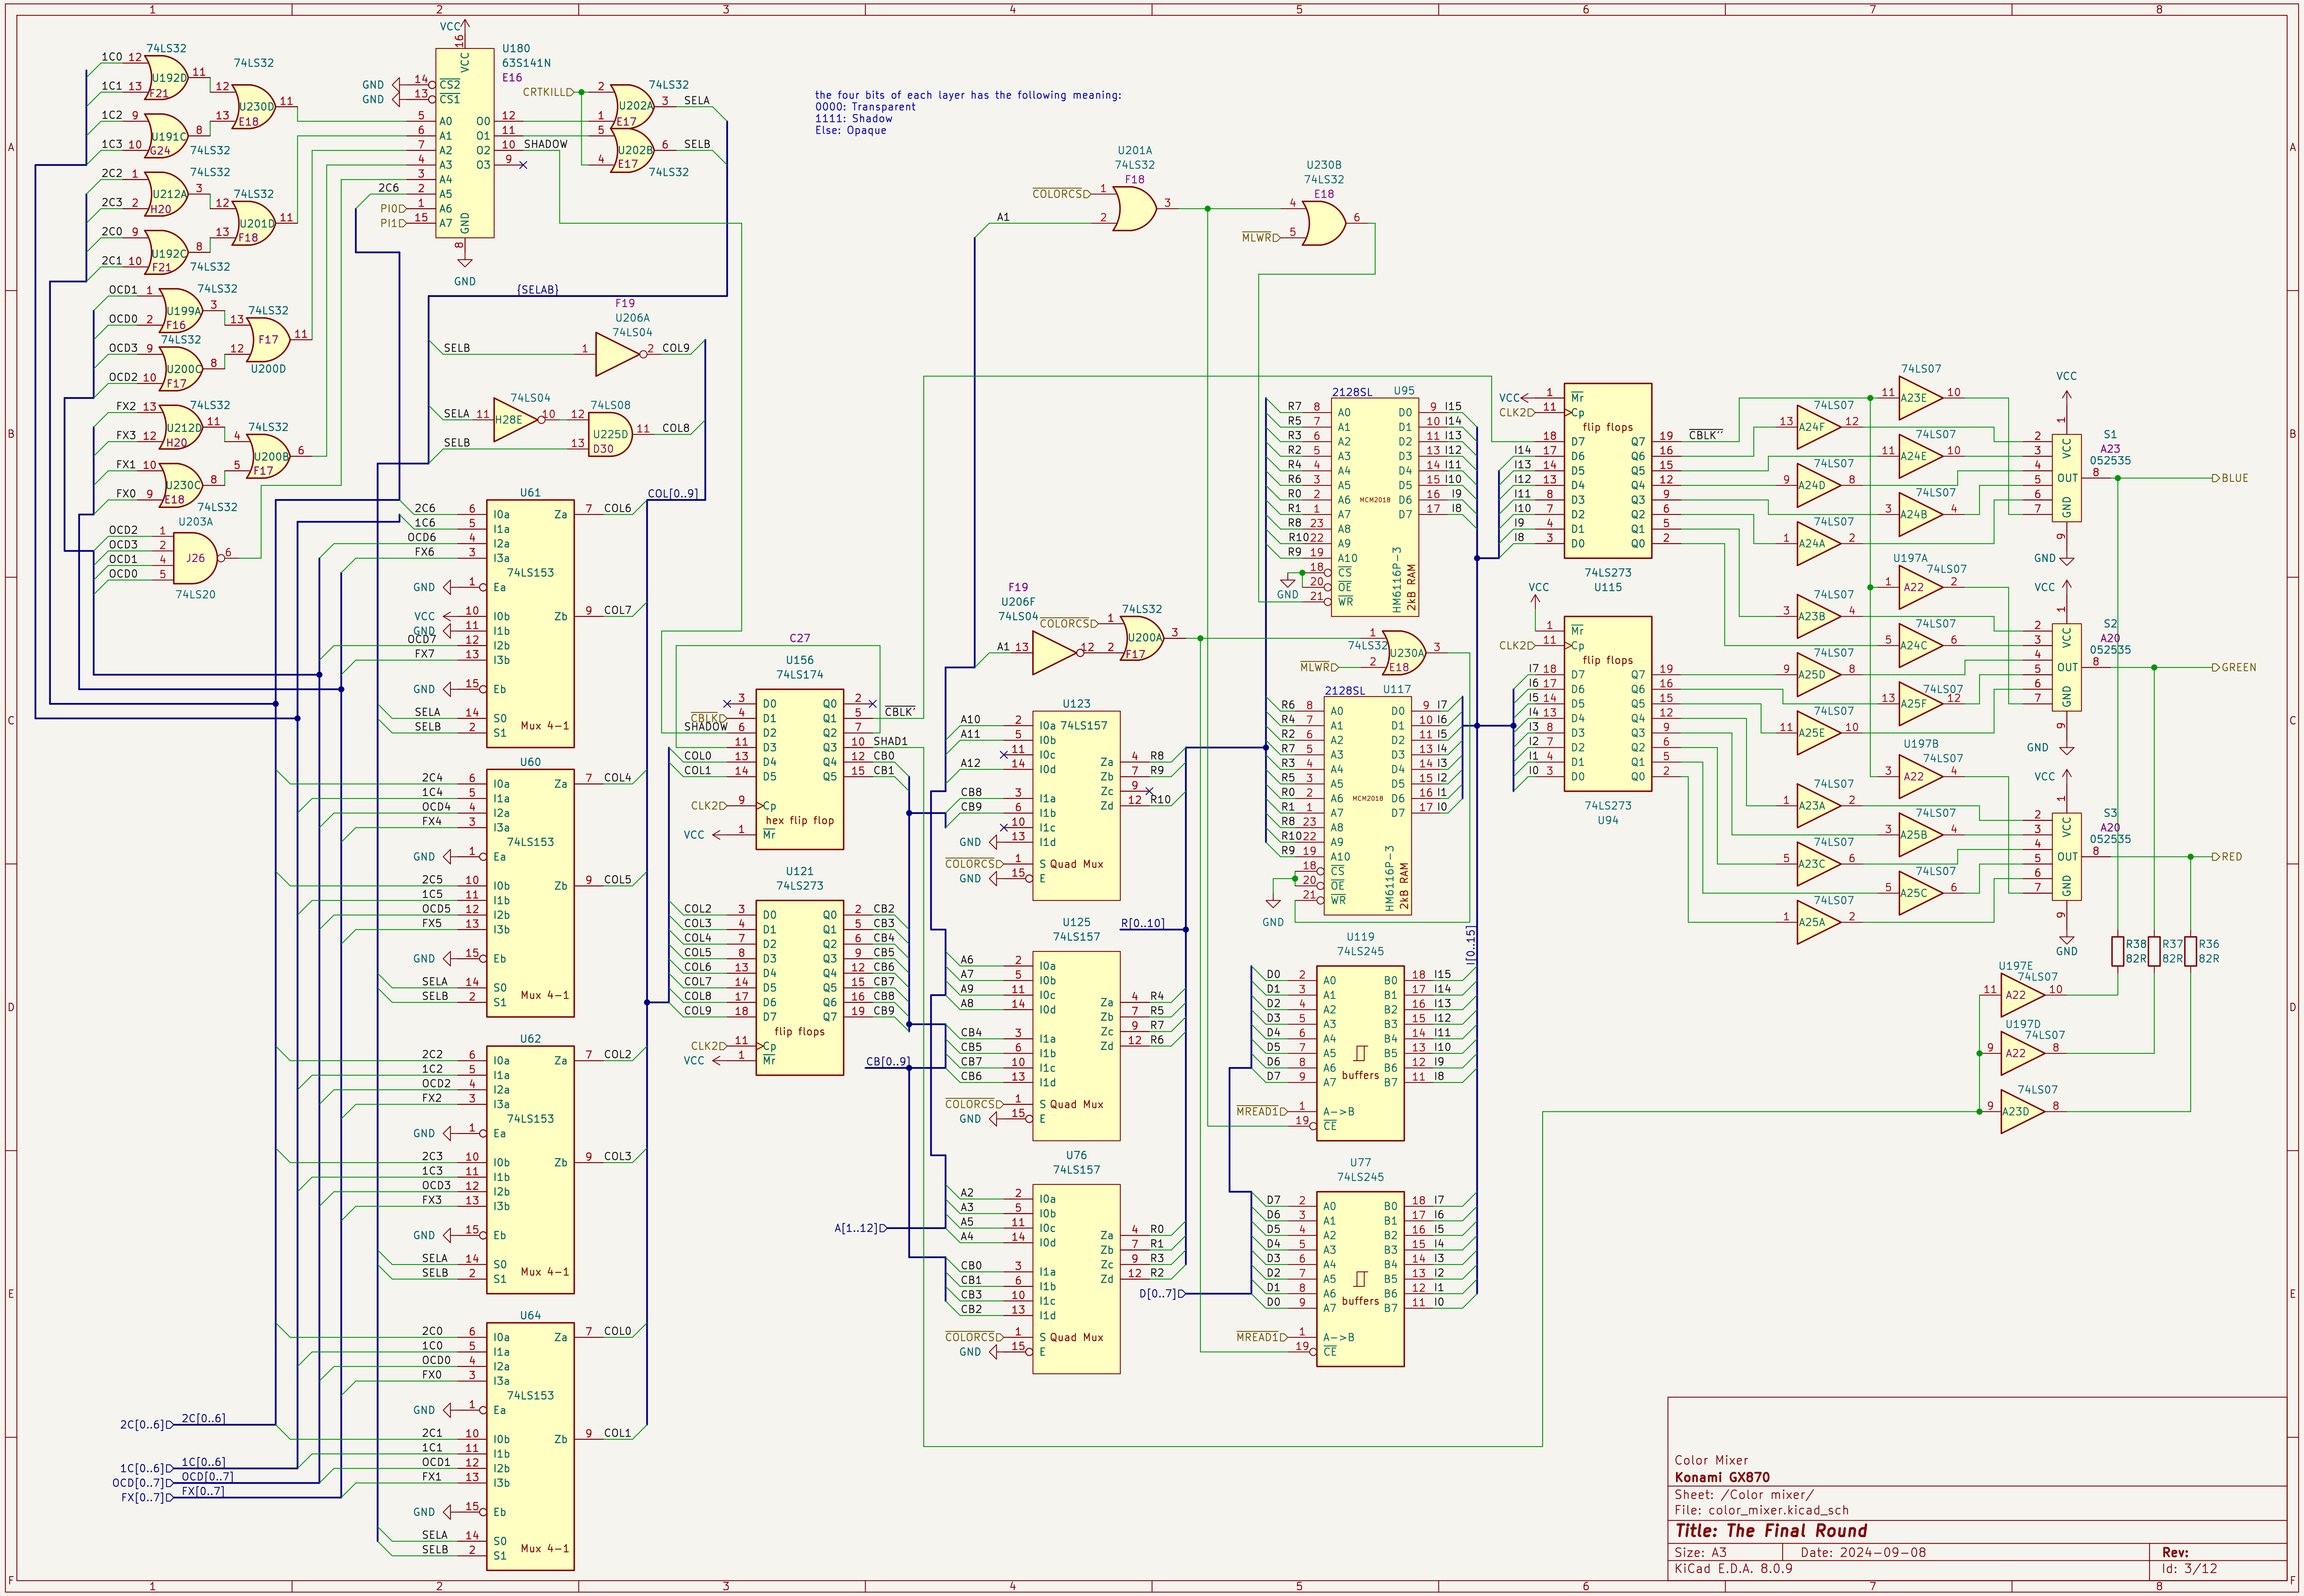

Color Mixer

Konami GX870

Sheet: /Color mixer/

File: color_mixer.kicad_sch

Title: The Final Round

Size: A3 | Date: 2024-09-08 | **Rev:**

KiCad E.D.A. 8.0.9 | Id: 3/12

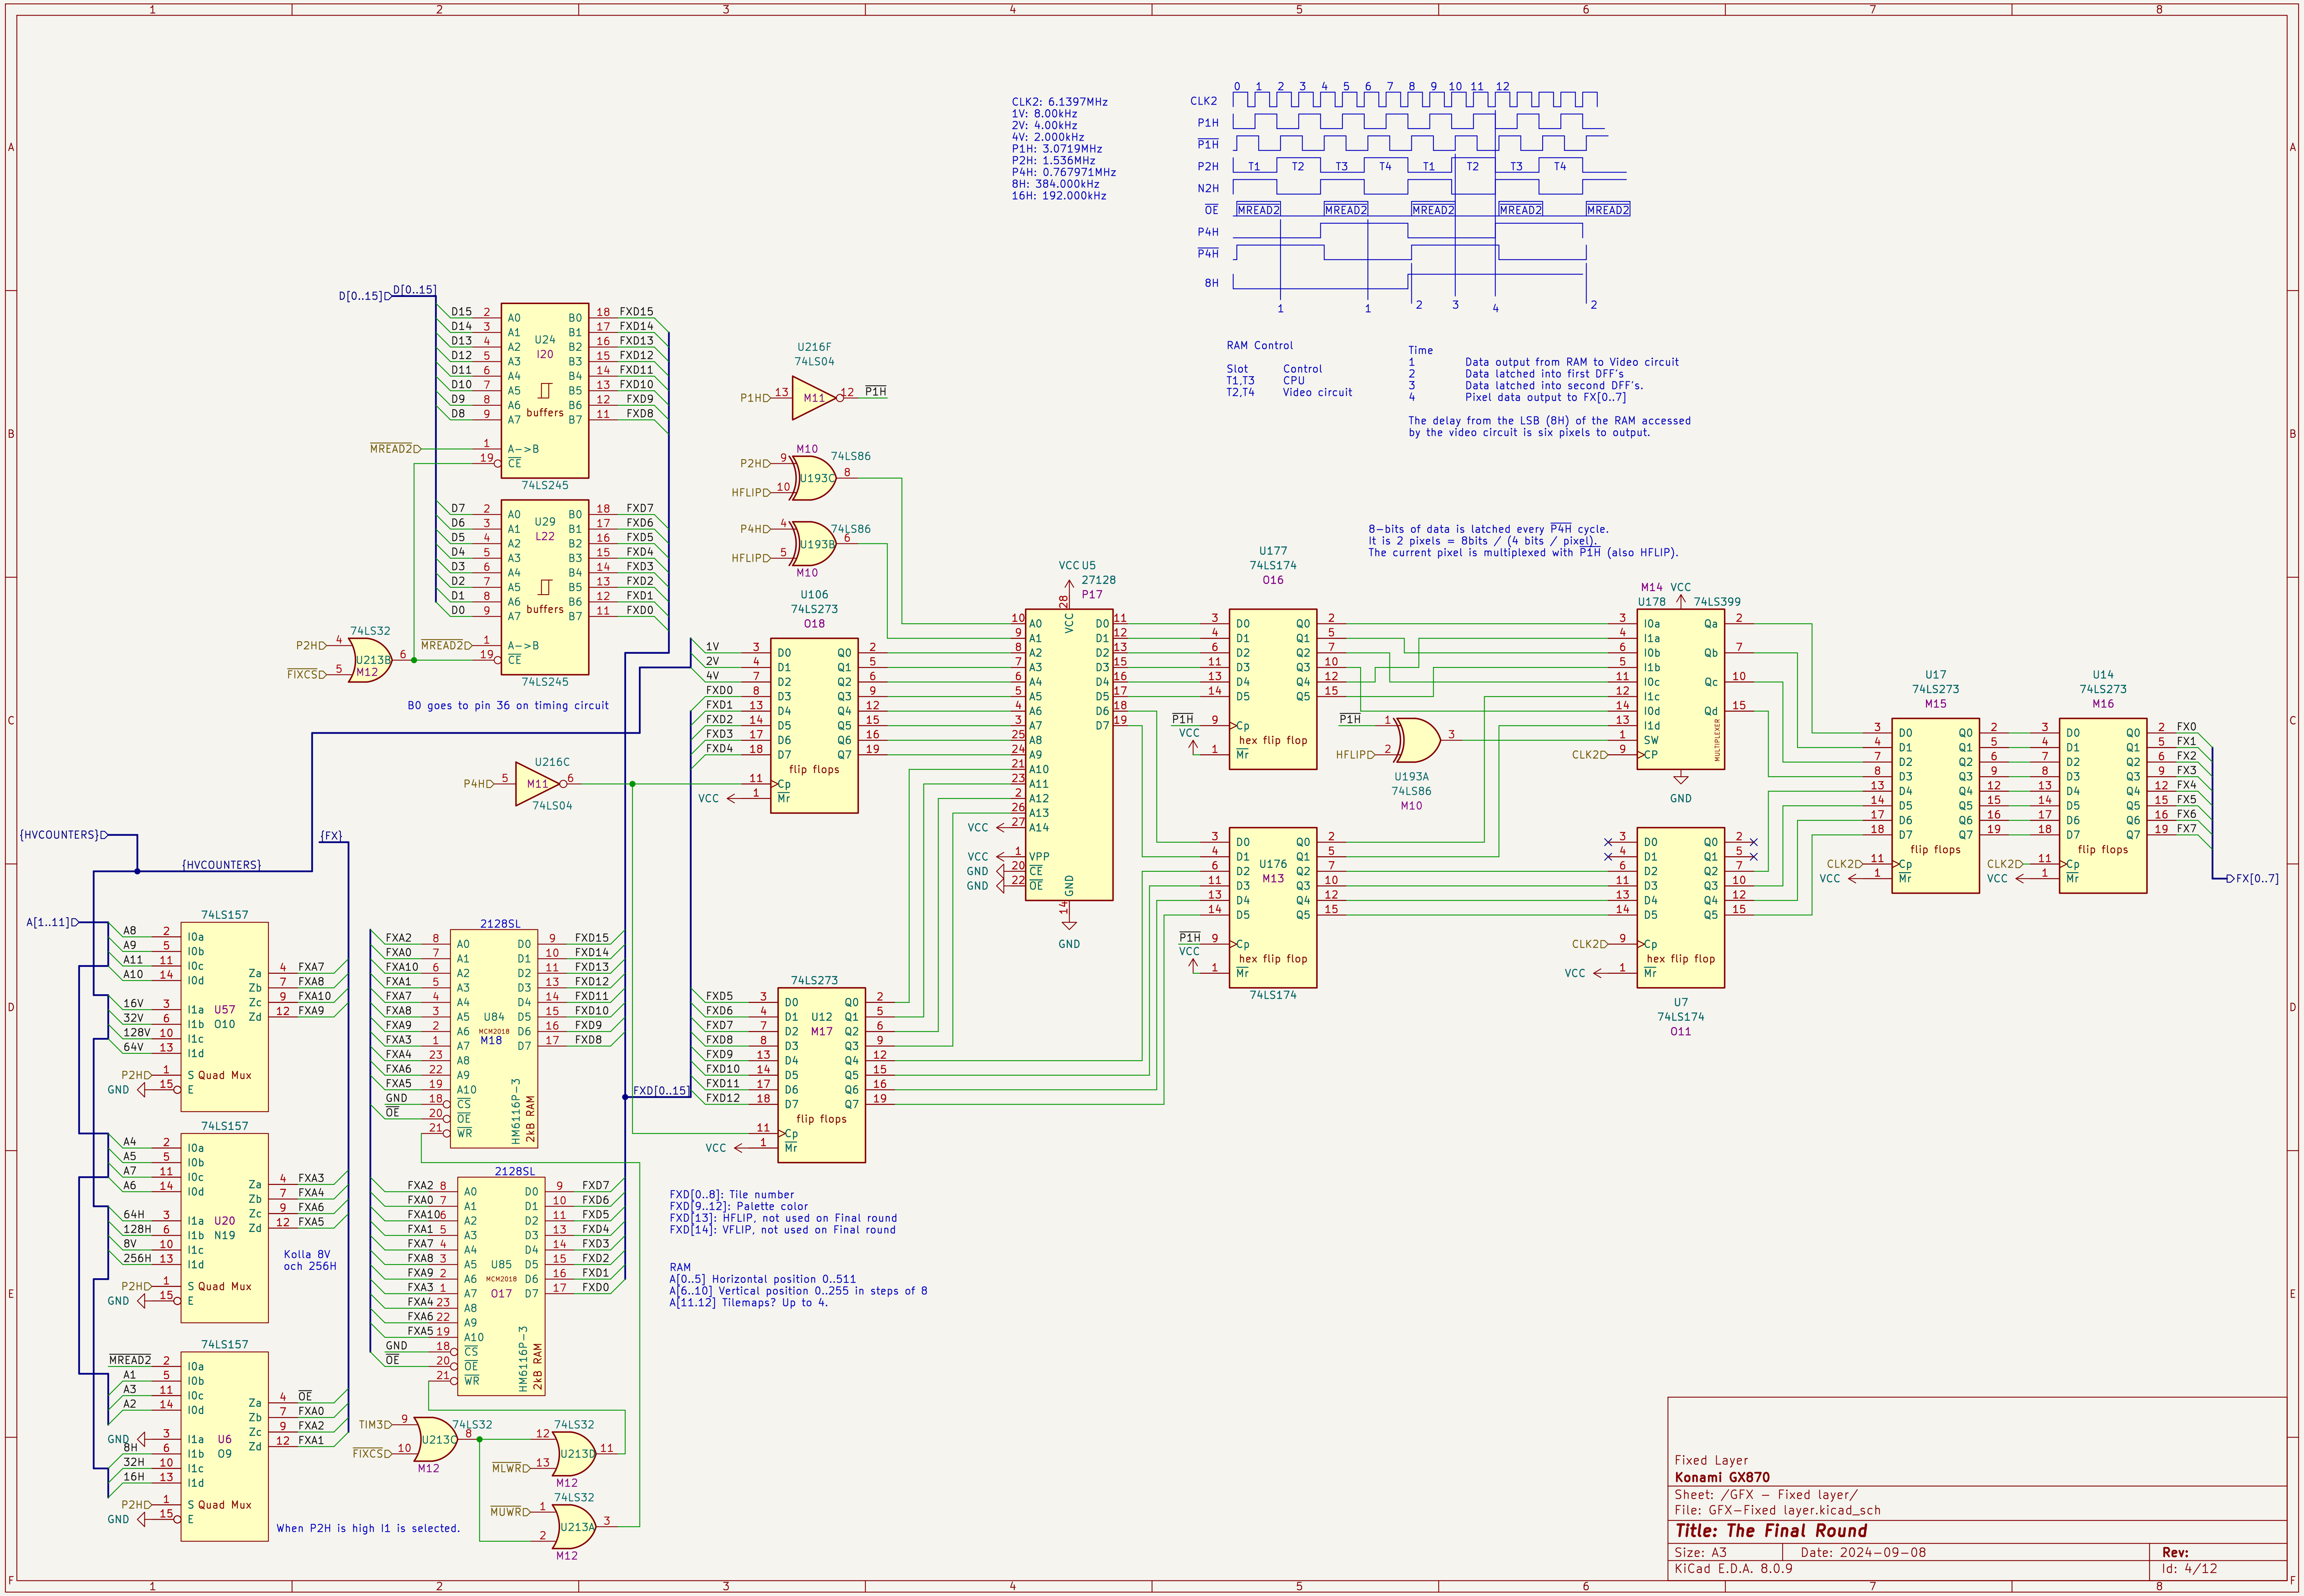

Fixed Layer
Konami GX870
Sheet: /GFX – Fixed layer/
File: GFX–Fixed layer.kicad_sch

Title: The Final Round

Size: A3 | Date: 2024-09-08 | Rev:
KiCad E.D.A. 8.0.9 | Id: 4/12

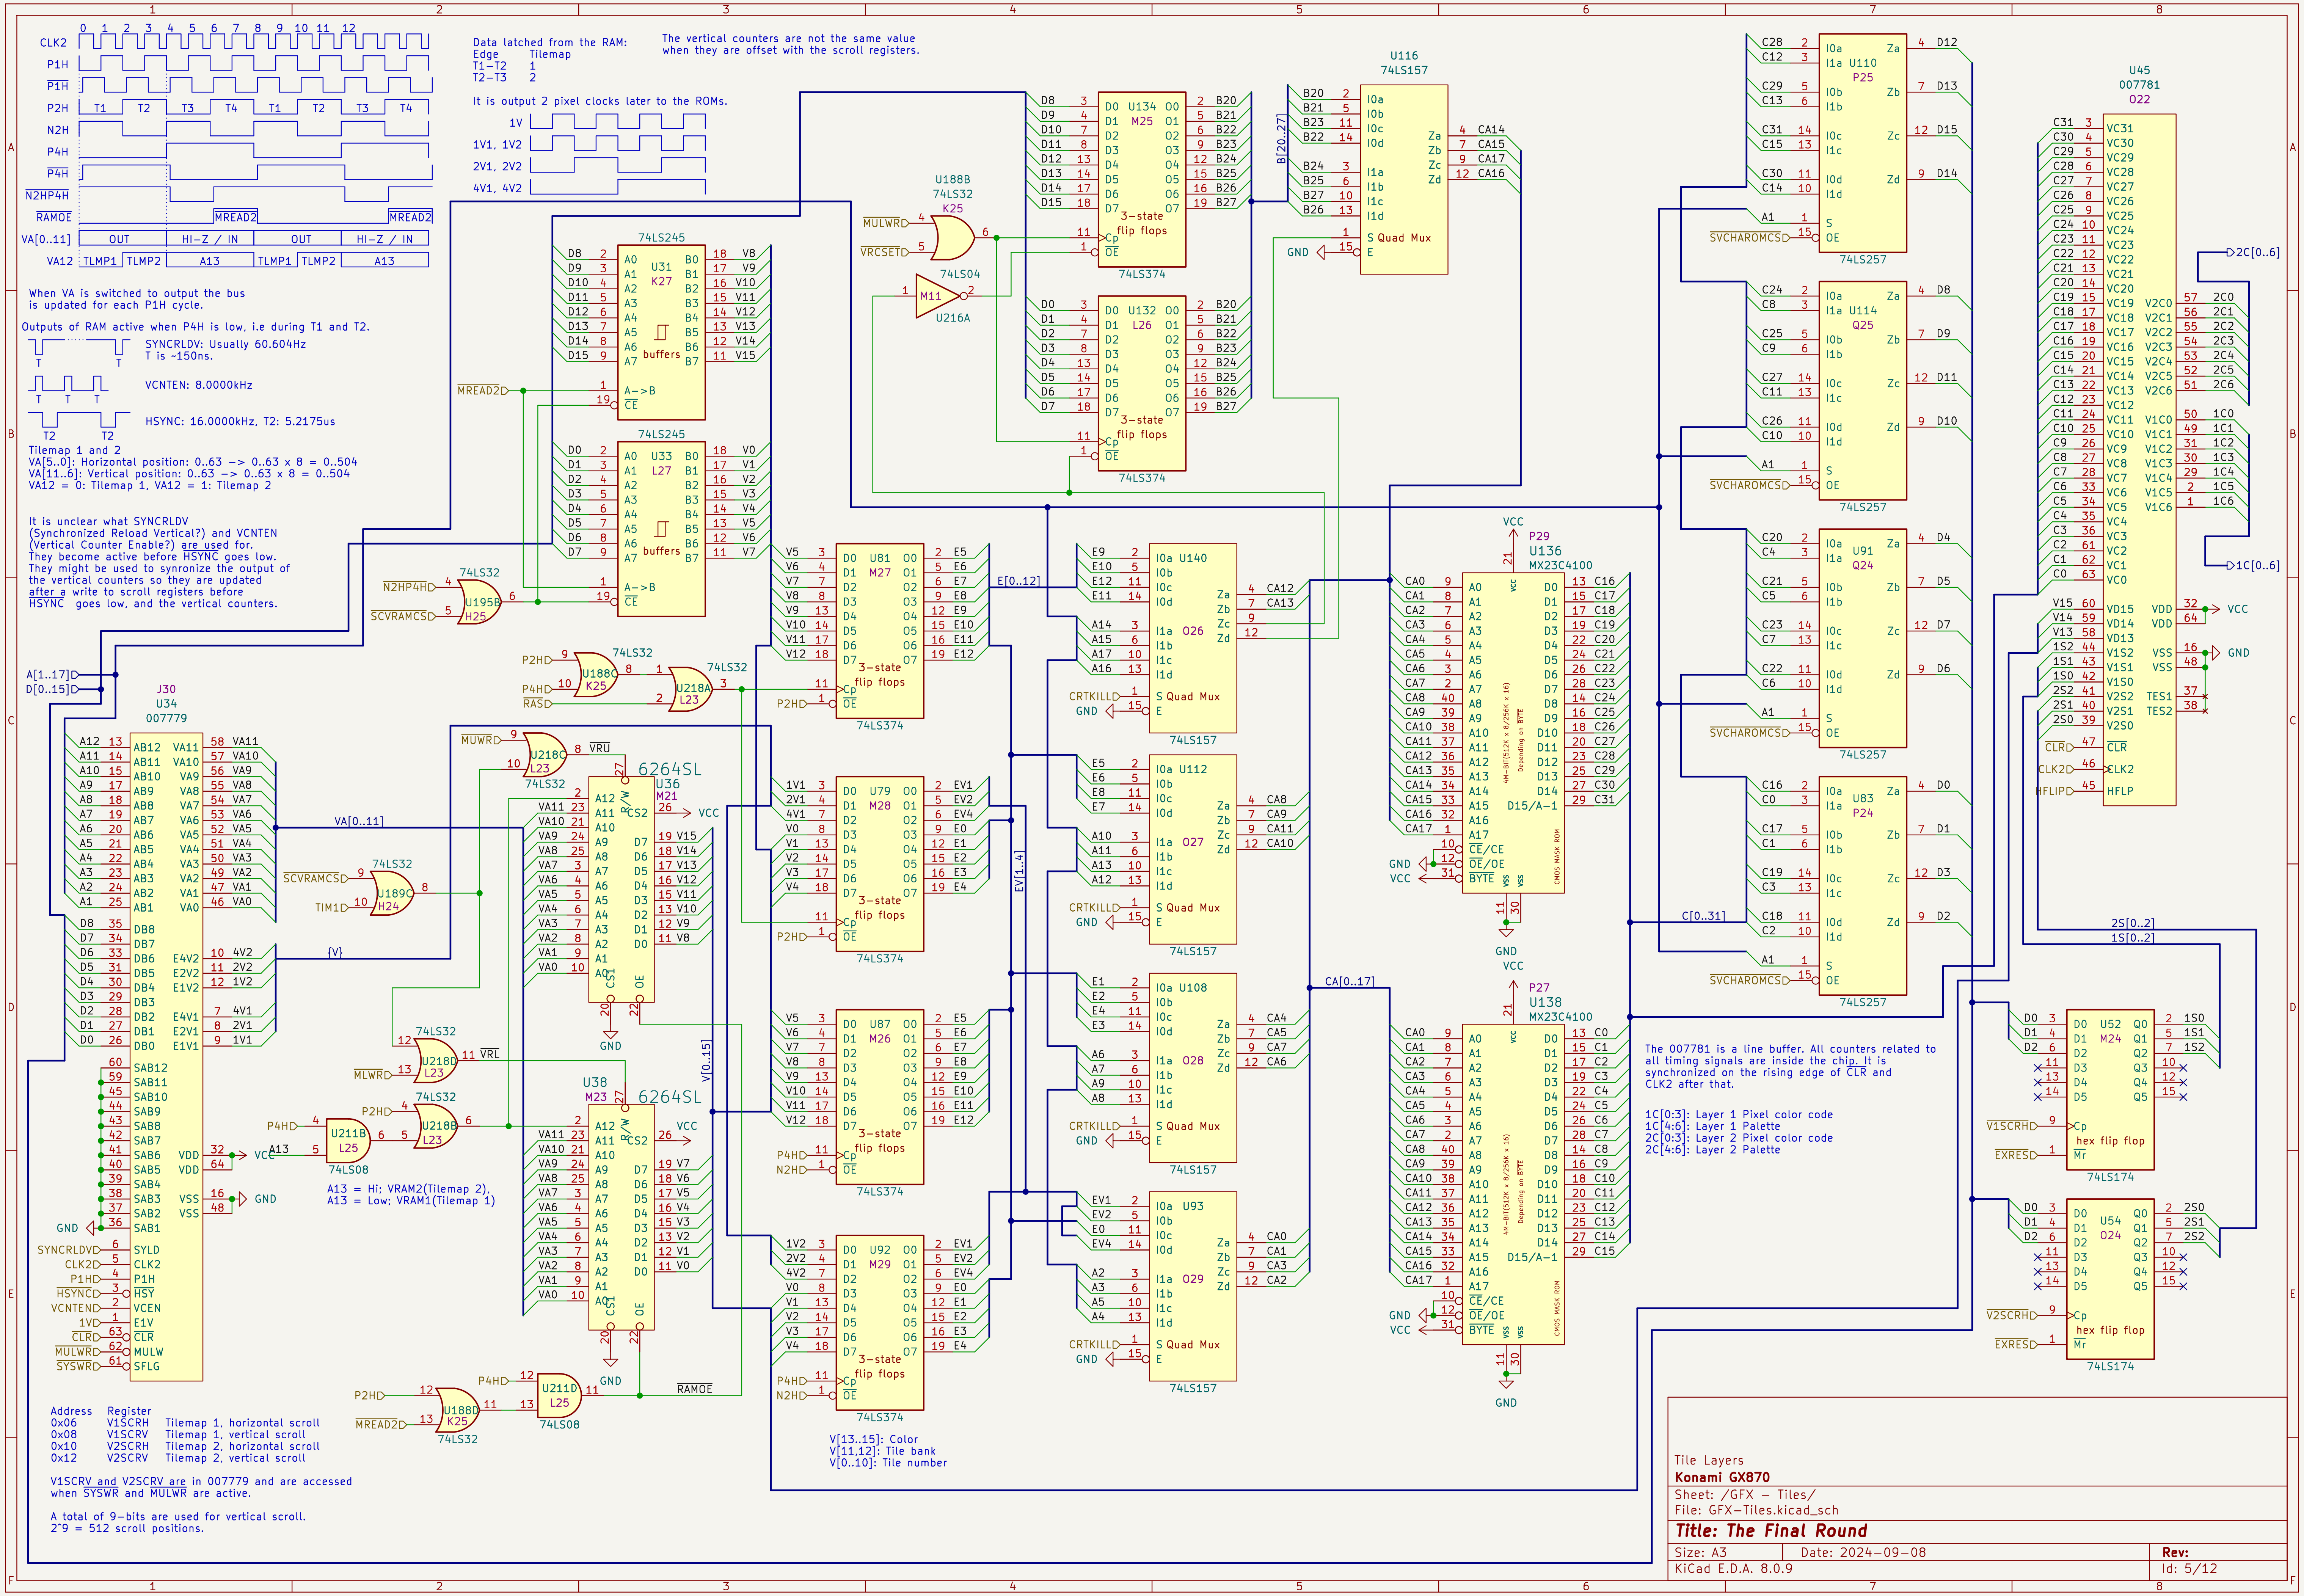

Data latched from the RAM:
Edge Tilemap
T1–T2 1
T2–T3 2
The vertical counters are not the same value when they are offset with the scroll registers.
It is output 2 pixel clocks later to the ROMs.
When VA is switched to output the bus is updated for each P1H cycle.
Outputs of RAM active when P4H is low, i.e during T1 and T2.
SYNCRLDV: Usually 60.604Hz
T is ~150ns.
VCNTEN: 8.0000kHz
HSYNC: 16.0000kHz, T2: 5.2175us
Tilemap 1 and 2
VA[5..0]: Horizontal position: 0..63 –> 0..63 x 8 = 0..504
VA[11..6]: Vertical position: 0..63 –> 0..63 x 8 = 0..504
VA12 = 0: Tilemap 1, VA12 = 1: Tilemap 2
It is unclear what SYNCRLDV (Synchronized Reload Vertical?) and VCNTEN (Vertical Counter Enable?) are used for. They become active before HSYNC goes low. They might be used to syncronize the output of the vertical counters so they are updated after a write to scroll registers before HSYNC goes low, and the vertical counters.
A13 = Hi; VRAM2(Tilemap 2).
A13 = Low; VRAM1(Tilemap 1)
Address Register
0x06 V1SCRH Tilemap 1, horizontal scroll
0x08 V1SCRV Tilemap 1, vertical scroll
0x10 V2SCRH Tilemap 2, horizontal scroll
0x12 V2SCRV Tilemap 2, vertical scroll
V1SCRV and V2SCRV are in 007779 and are accessed when SYSWR and MULWR are active.
A total of 9–bits are used for vertical scroll.
2^9 = 512 scroll positions.
V[13..15]: Color
V[11,12]: Tile bank
V[0..10]: Tile number
The 007781 is a line buffer. All counters related to all timing signals are inside the chip. It is synchronized on the rising edge of CLR and CLK2 after that.
1C[0:3]: Layer 1 Pixel color code
1C[4:6]: Layer 1 Palette
2C[0:3]: Layer 2 Pixel color code
2C[4:6]: Layer 2 Palette
Tile Layers
Konami GX870
Sheet: /GFX – Tiles/
File: GFX–Tiles.kicad_sch
Title: The Final Round
Size: A3 Date: 2024–09–08 Rev:
KiCad E.D.A. 8.0.9 Id: 5/12

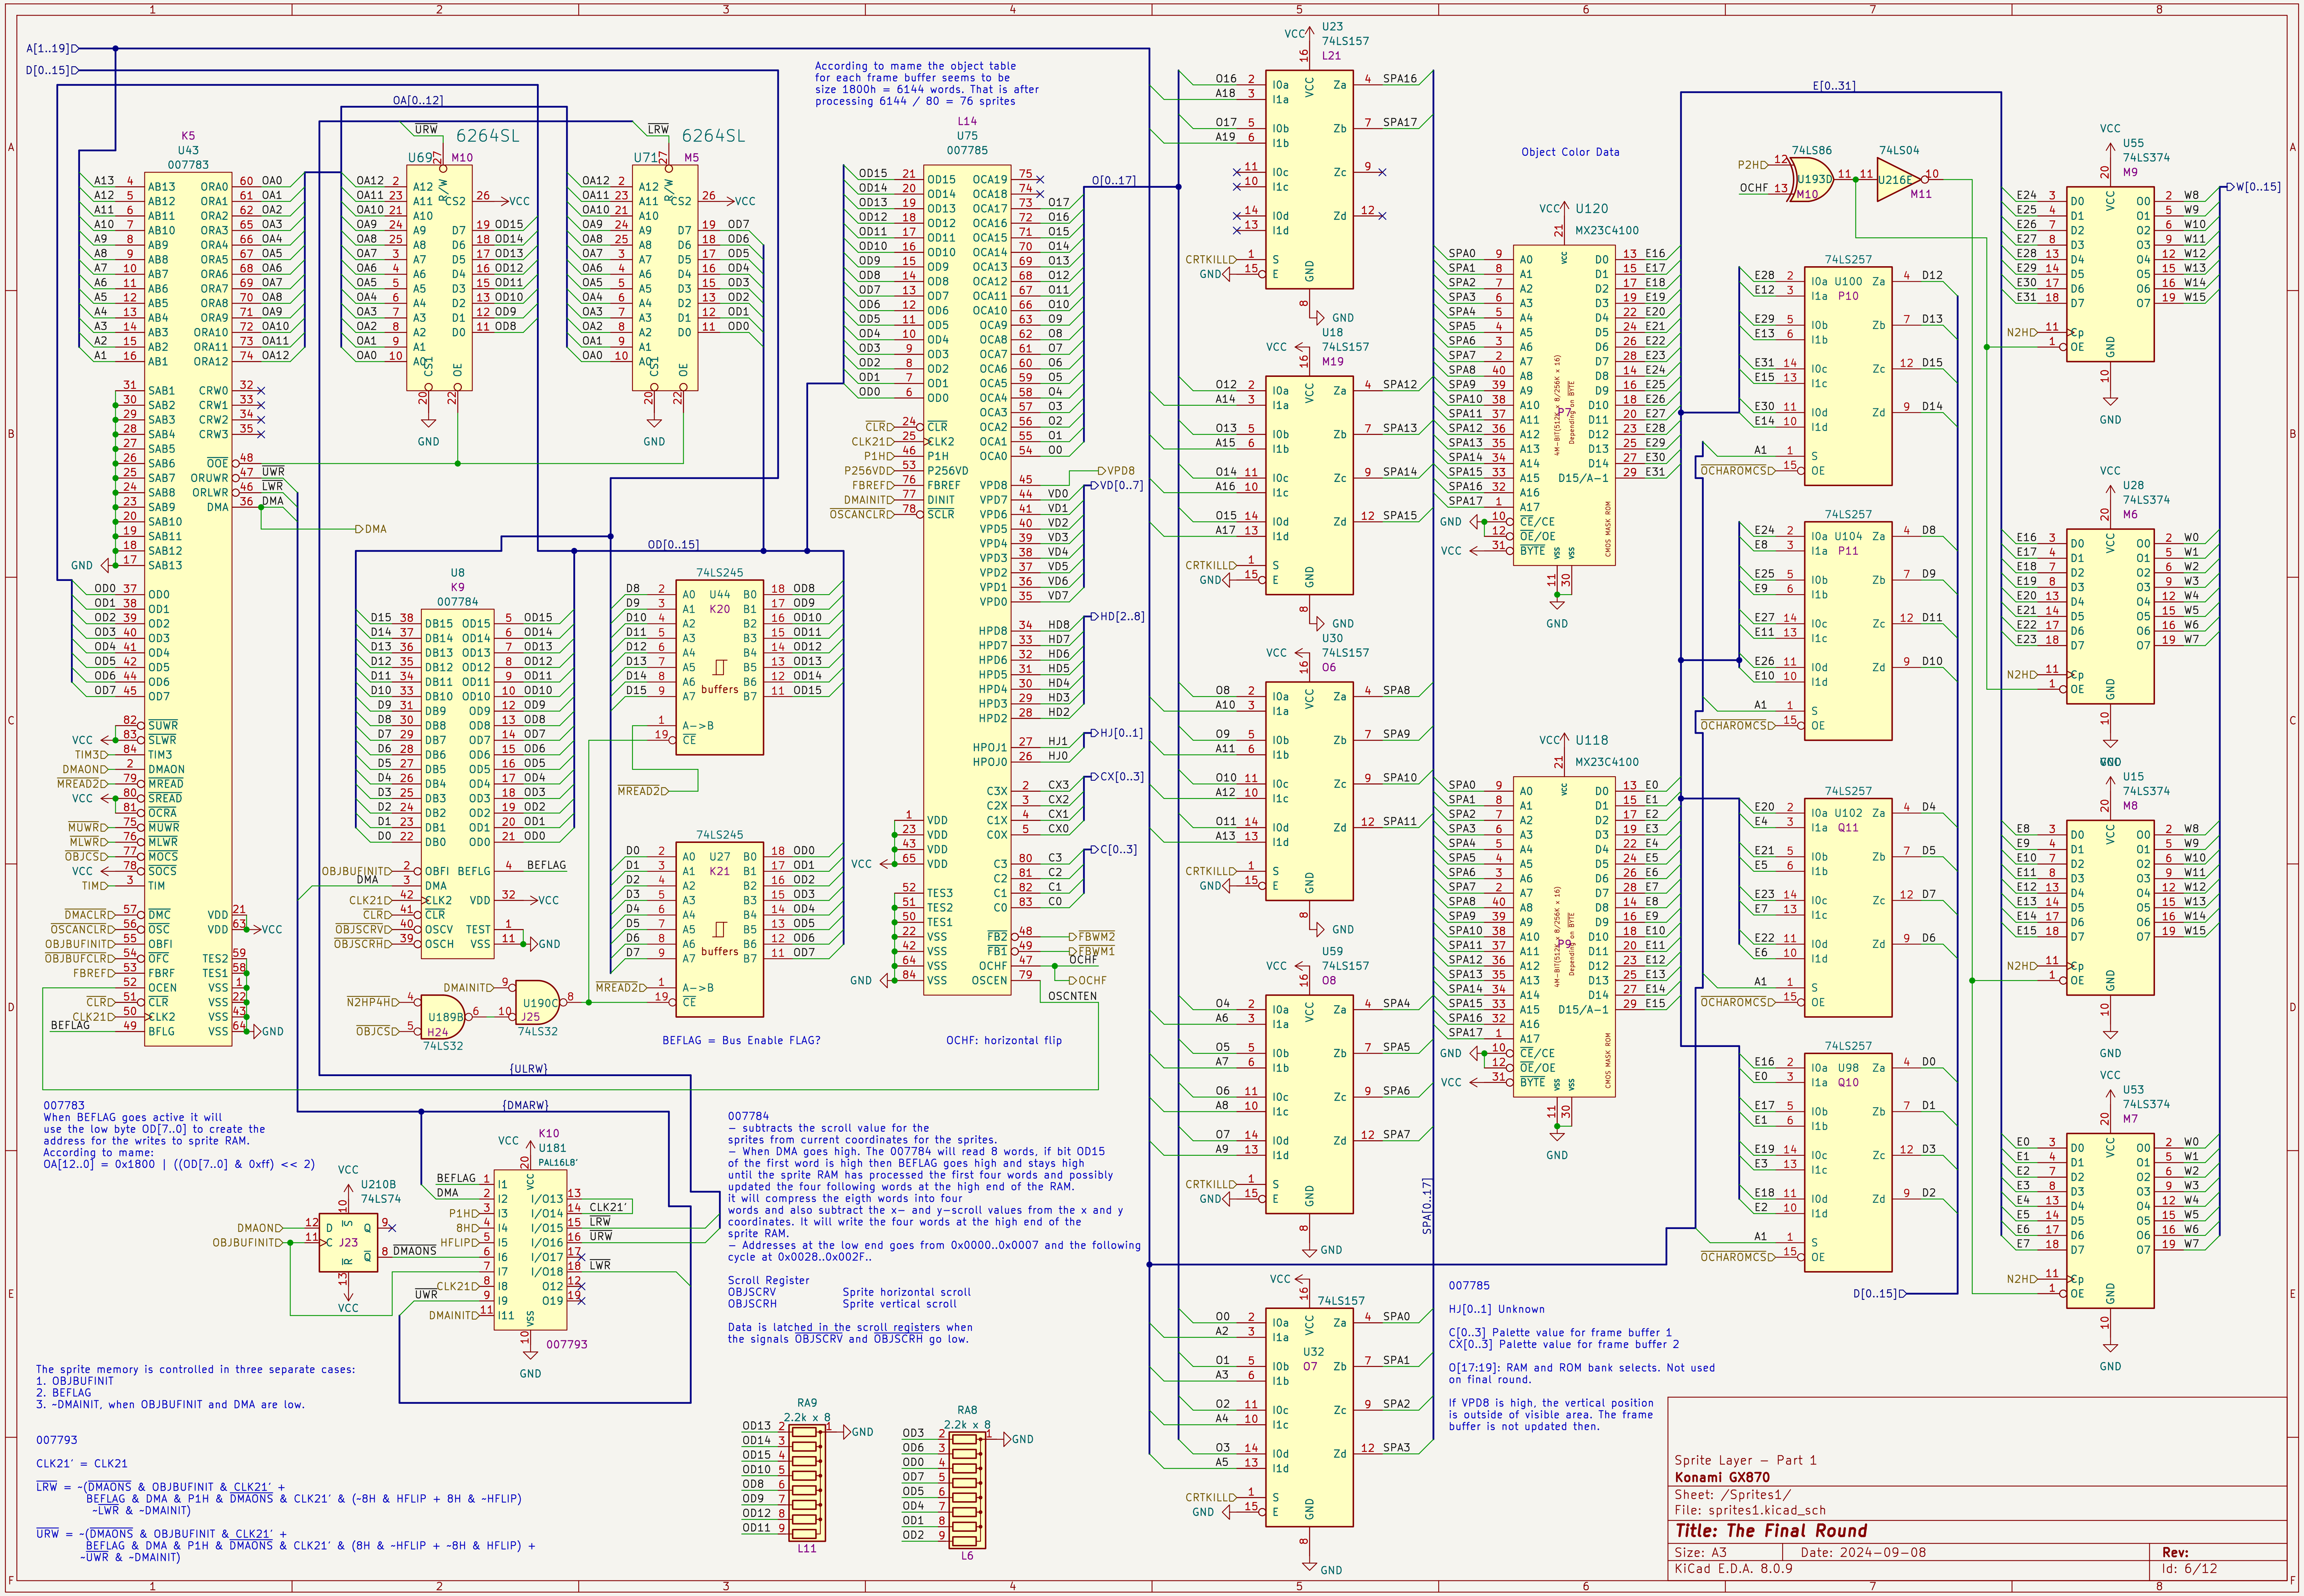

007783
When BEFLAG goes active it will use the low byte OD[7..0] to create the address for the writes to sprite RAM.
According to mame:
OA[12..0] = 0x1800 | ((OD[7..0] & 0xff) << 2)

007784
– subtracts the scroll value for the sprites from current coordinates for the sprites.
– When DMA goes high. The 007784 will read 8 words, if bit OD15 of the first word is high then BEFLAG goes high and stays high until the sprite RAM has processed the first four words and possibly updated the four following words at the high end of the RAM.
It will compress the eigth words into four words and also subtract the x– and y–scroll values from the x and y coordinates. It will write the four words at the high end of the sprite RAM.
– Addresses at the low end goes from 0x0000..0x0007 and the following cycle at 0x0028..0x002F..

Scroll Register
OBJSCRV Sprite horizontal scroll
OBJSCRH Sprite vertical scroll

Data is latched in the scroll registers when the signals OBJSCRV and OBJSCRH go low.

007785

HJ[0..1] Unknown

C[0..3] Palette value for frame buffer 1
CX[0..3] Palette value for frame buffer 2

O[17:19]: RAM and ROM bank selects. Not used on final round.

If VPD8 is high, the vertical position is outside of visible area. The frame buffer is not updated then.

The sprite memory is controlled in three separate cases:
1. OBJBUFINIT
2. BEFLAG
3. -DMAINIT, when OBJBUFINIT and DMA are low.

007793

CLK21' = CLK21

LRW = -(DMAONS & OBJBUFINIT & CLK21' +
BEFLAG & DMA & P1H & DMAONS & CLK21' & (-8H & HFLIP + 8H & -HFLIP)
-LWR & -DMAINIT)

URW = -(DMAONS & OBJBUFINIT & CLK21' +
BEFLAG & DMA & P1H & DMAONS & CLK21' & (8H & -HFLIP + -8H & HFLIP) +
-UWR & -DMAINIT)

Sprite Layer – Part 1
Konami GX870
Sheet: /Sprites1/
File: sprites1.kicad_sch

Title: The Final Round

Size: A3 Date: 2024-09-08 Rev:
KiCad E.D.A. 8.0.9 Id: 6/12

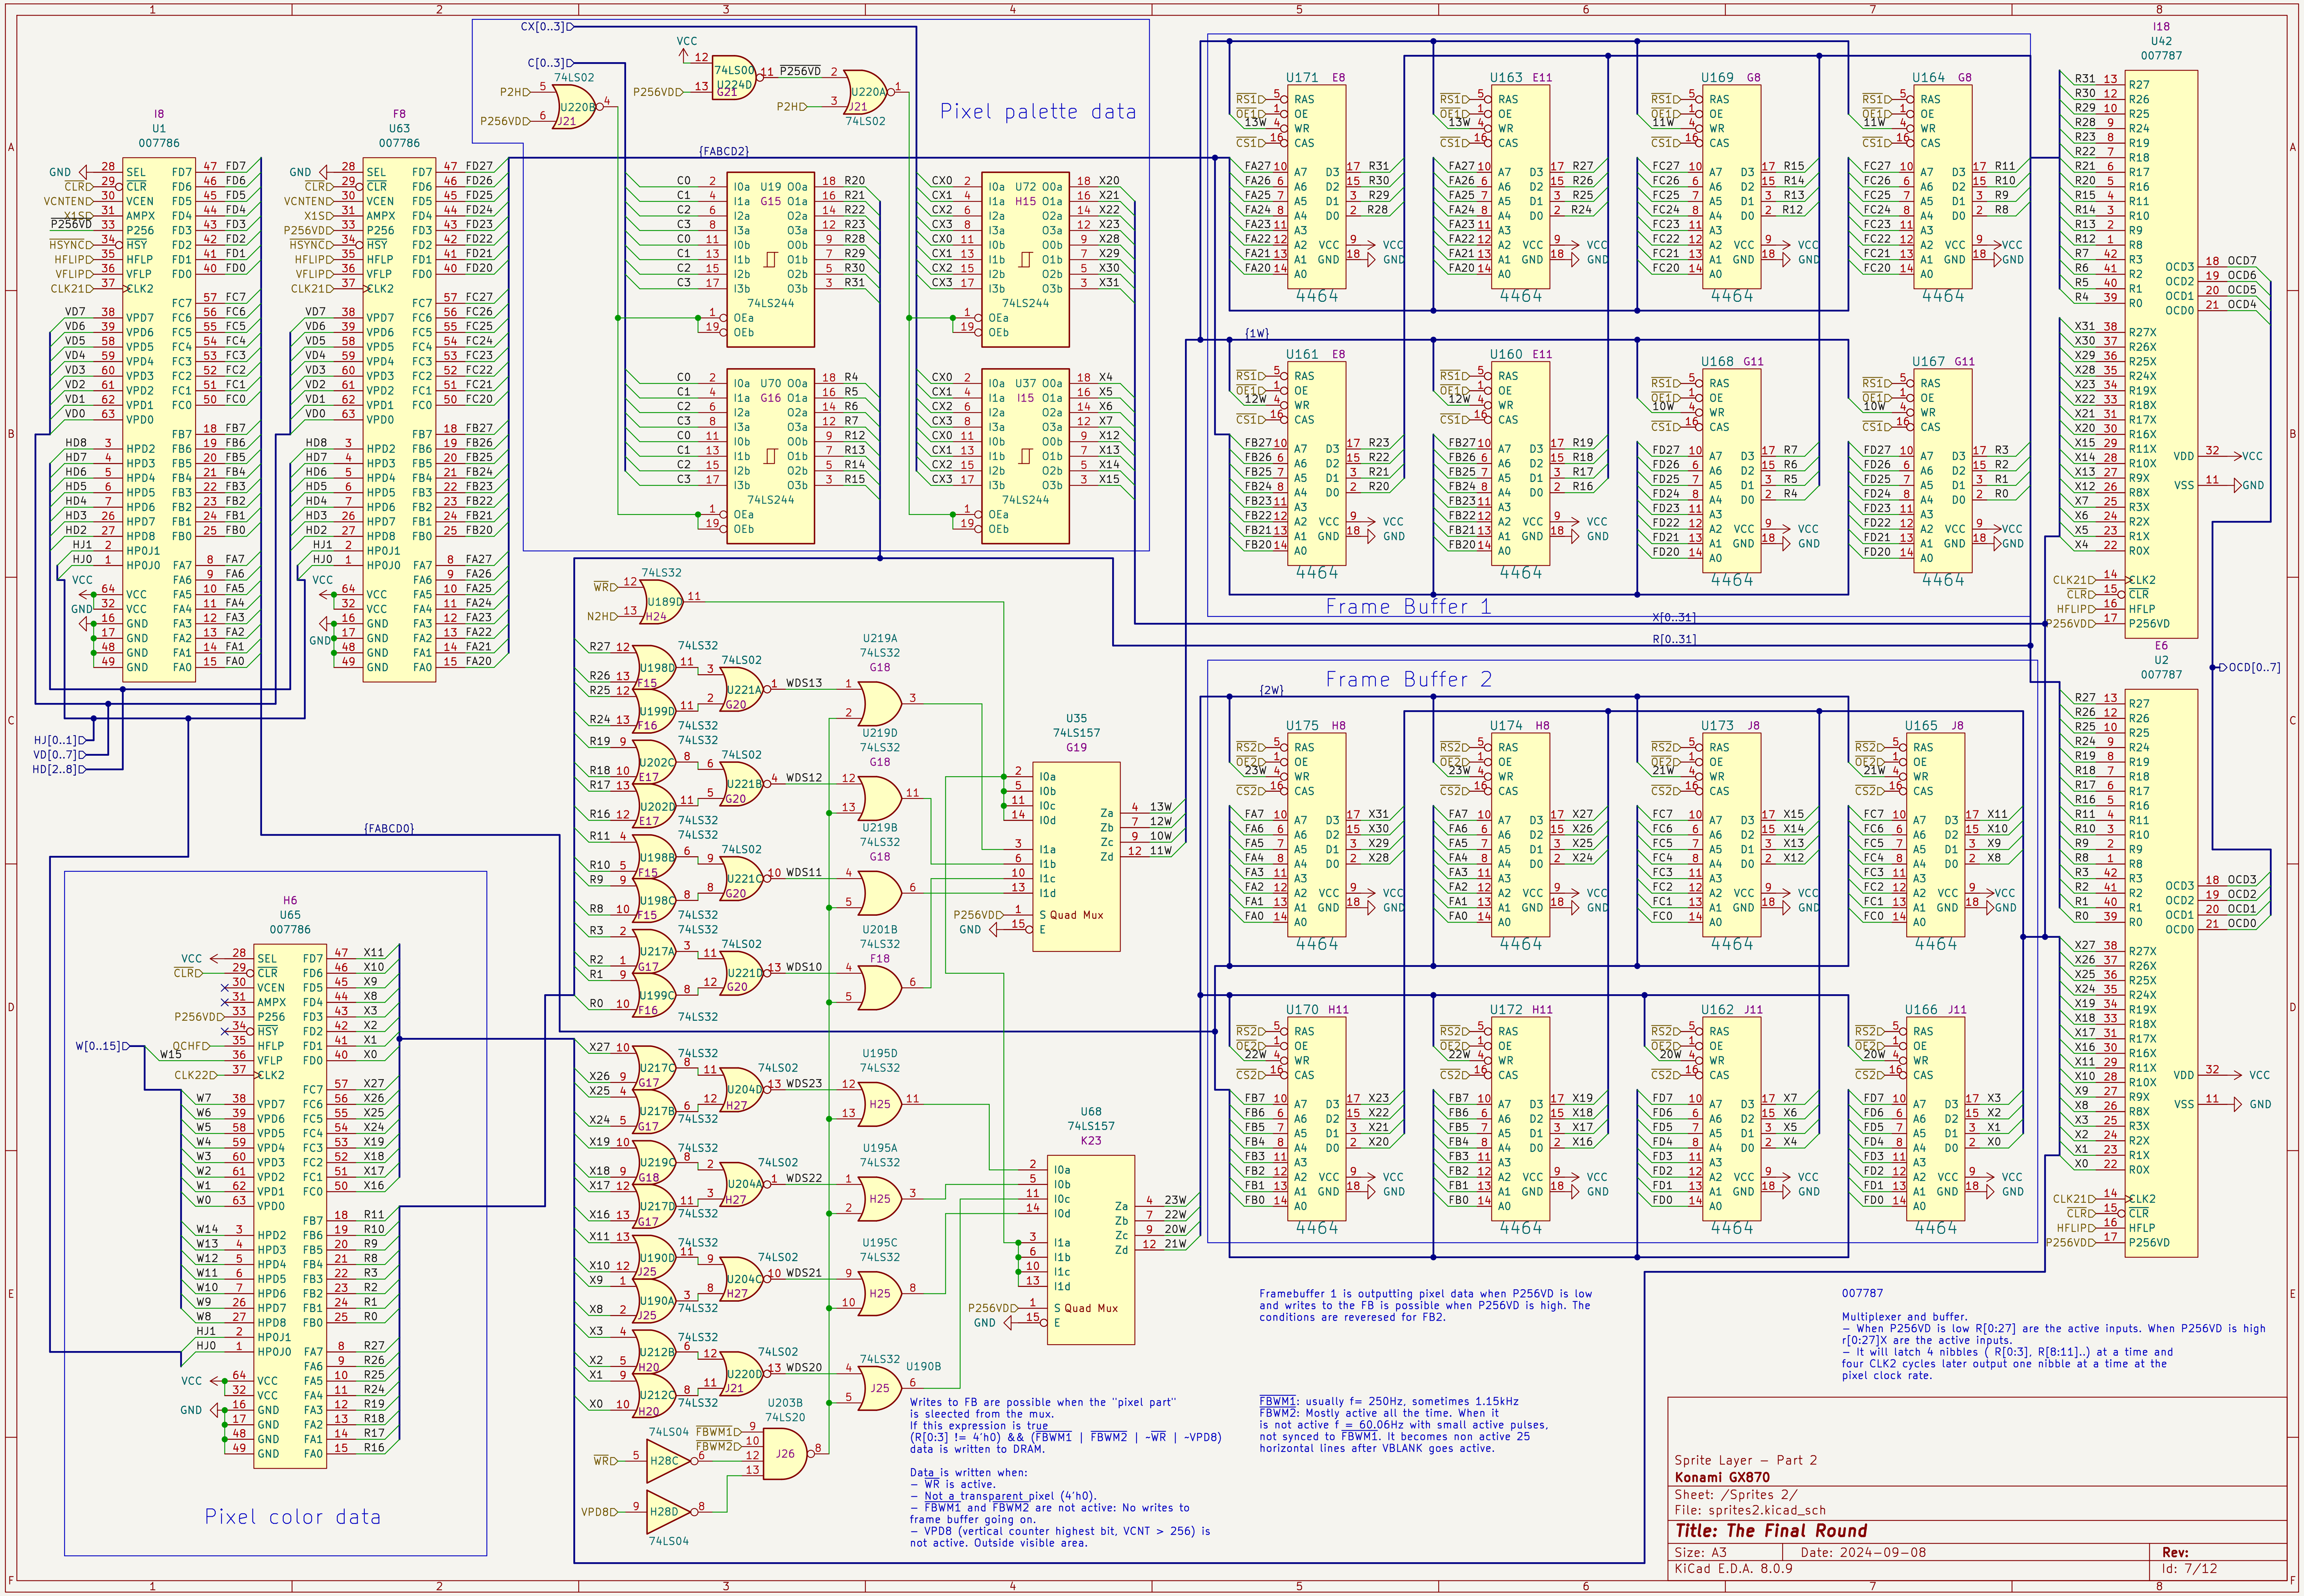

Framebuffer 1 is outputting pixel data when P256VD is low and writes to the FB is possible when P256VD is high. The conditions are reveresed for FB2.

Writes to FB are possible when the "pixel part" is sleected from the mux.
If this expression is true
(R[0:3] != 4'h0) && ($\overline{\text{FBWM1}}$ | $\overline{\text{FBWM2}}$ | ~$\overline{\text{WR}}$ | ~VPD8)
data is written to DRAM.

Data is written when:
- $\overline{\text{WR}}$ is active.
- Not a transparent pixel (4'h0).
- $\overline{\text{FBWM1}}$ and $\overline{\text{FBWM2}}$ are not active: No writes to frame buffer going on.
- VPD8 (vertical counter highest bit, VCNT > 256) is not active. Outside visible area.

$\overline{\text{FBWM1}}$: usually f= 250Hz, sometimes 1.15kHz
$\overline{\text{FBWM2}}$: Mostly active all the time. When it is not active f = 60.06Hz with small active pulses, not synced to $\overline{\text{FBWM1}}$. It becomes non active 25 horizontal lines after VBLANK goes active.

007787

Multiplexer and buffer.
- When P256VD is low R[0:27] are the active inputs. When P256VD is high r[0:27]X are the active inputs.
- It will latch 4 nibbles (R[0:3], R[8:11]..) at a time and four CLK2 cycles later output one nibble at a time at the pixel clock rate.

Sprite Layer – Part 2
Konami GX870
Sheet: /Sprites 2/
File: sprites2.kicad_sch
Title: The Final Round
Size: A3 Date: 2024-09-08 Rev:
KiCad E.D.A. 8.0.9 Id: 7/12

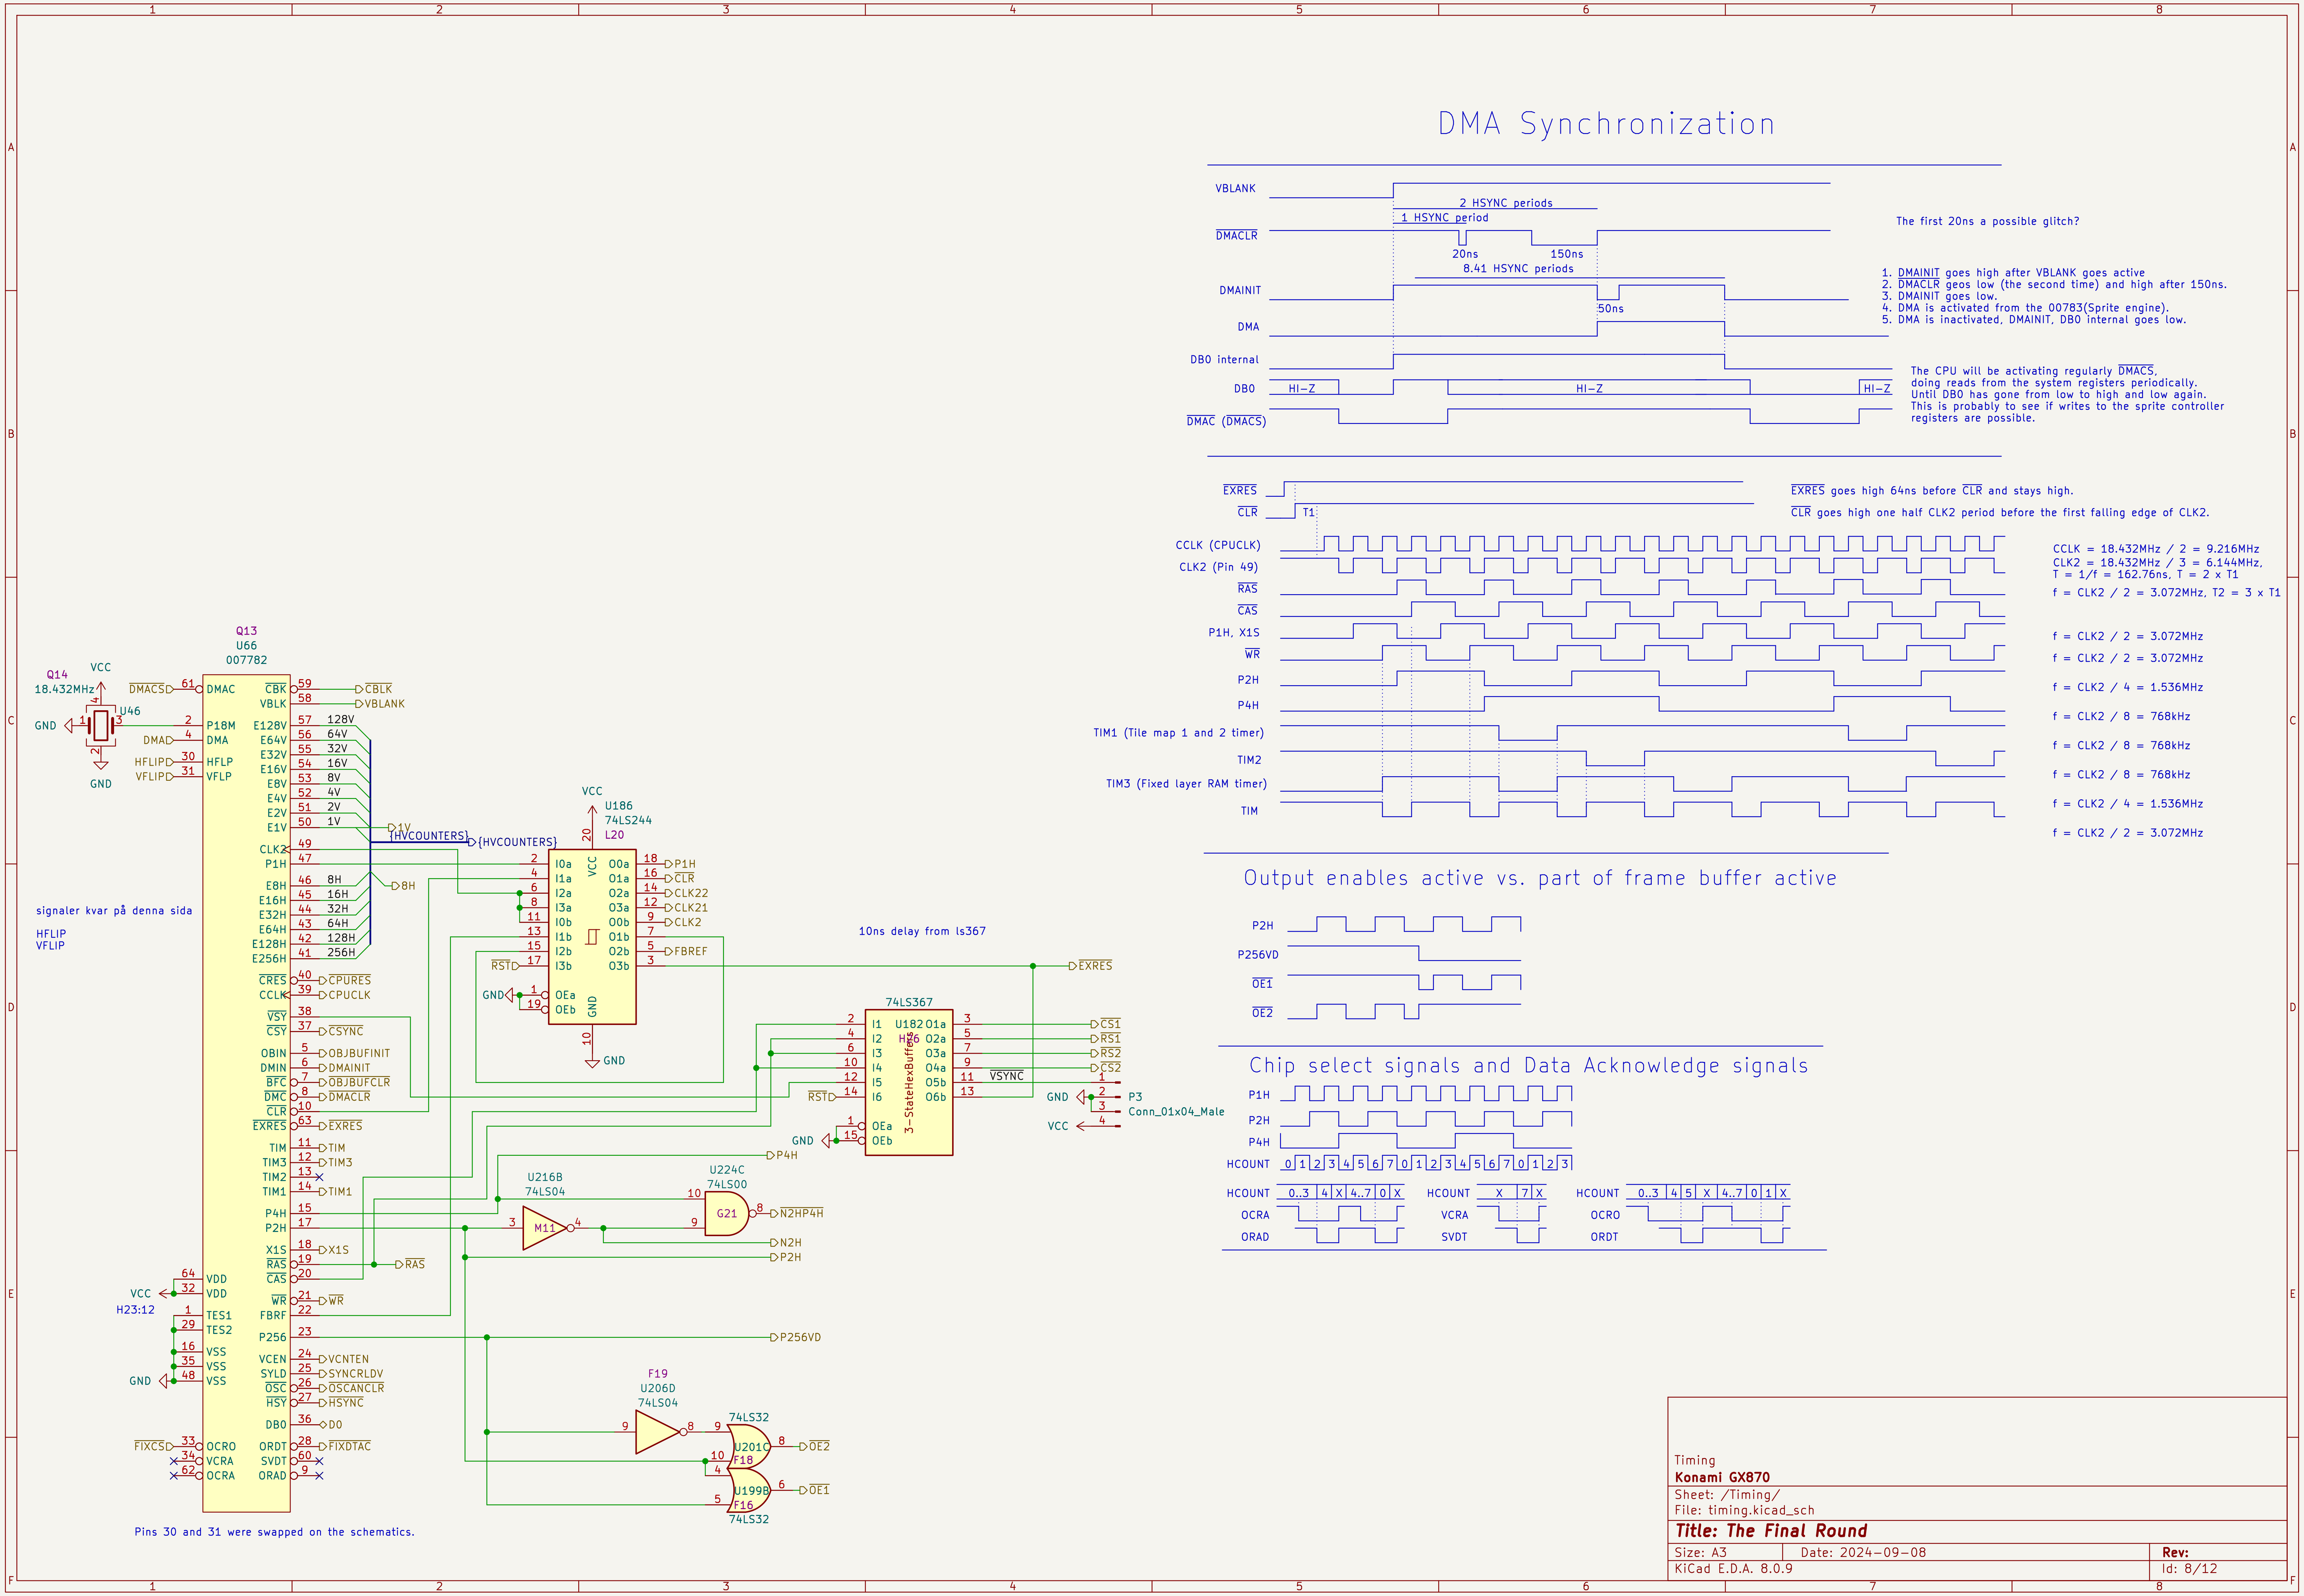

Timing
Konami GX870
Sheet: /Timing/
File: timing.kicad_sch

Title: The Final Round

Size: A3 | Date: 2024-09-08 | Rev:
KiCad E.D.A. 8.0.9 | Id: 8/12

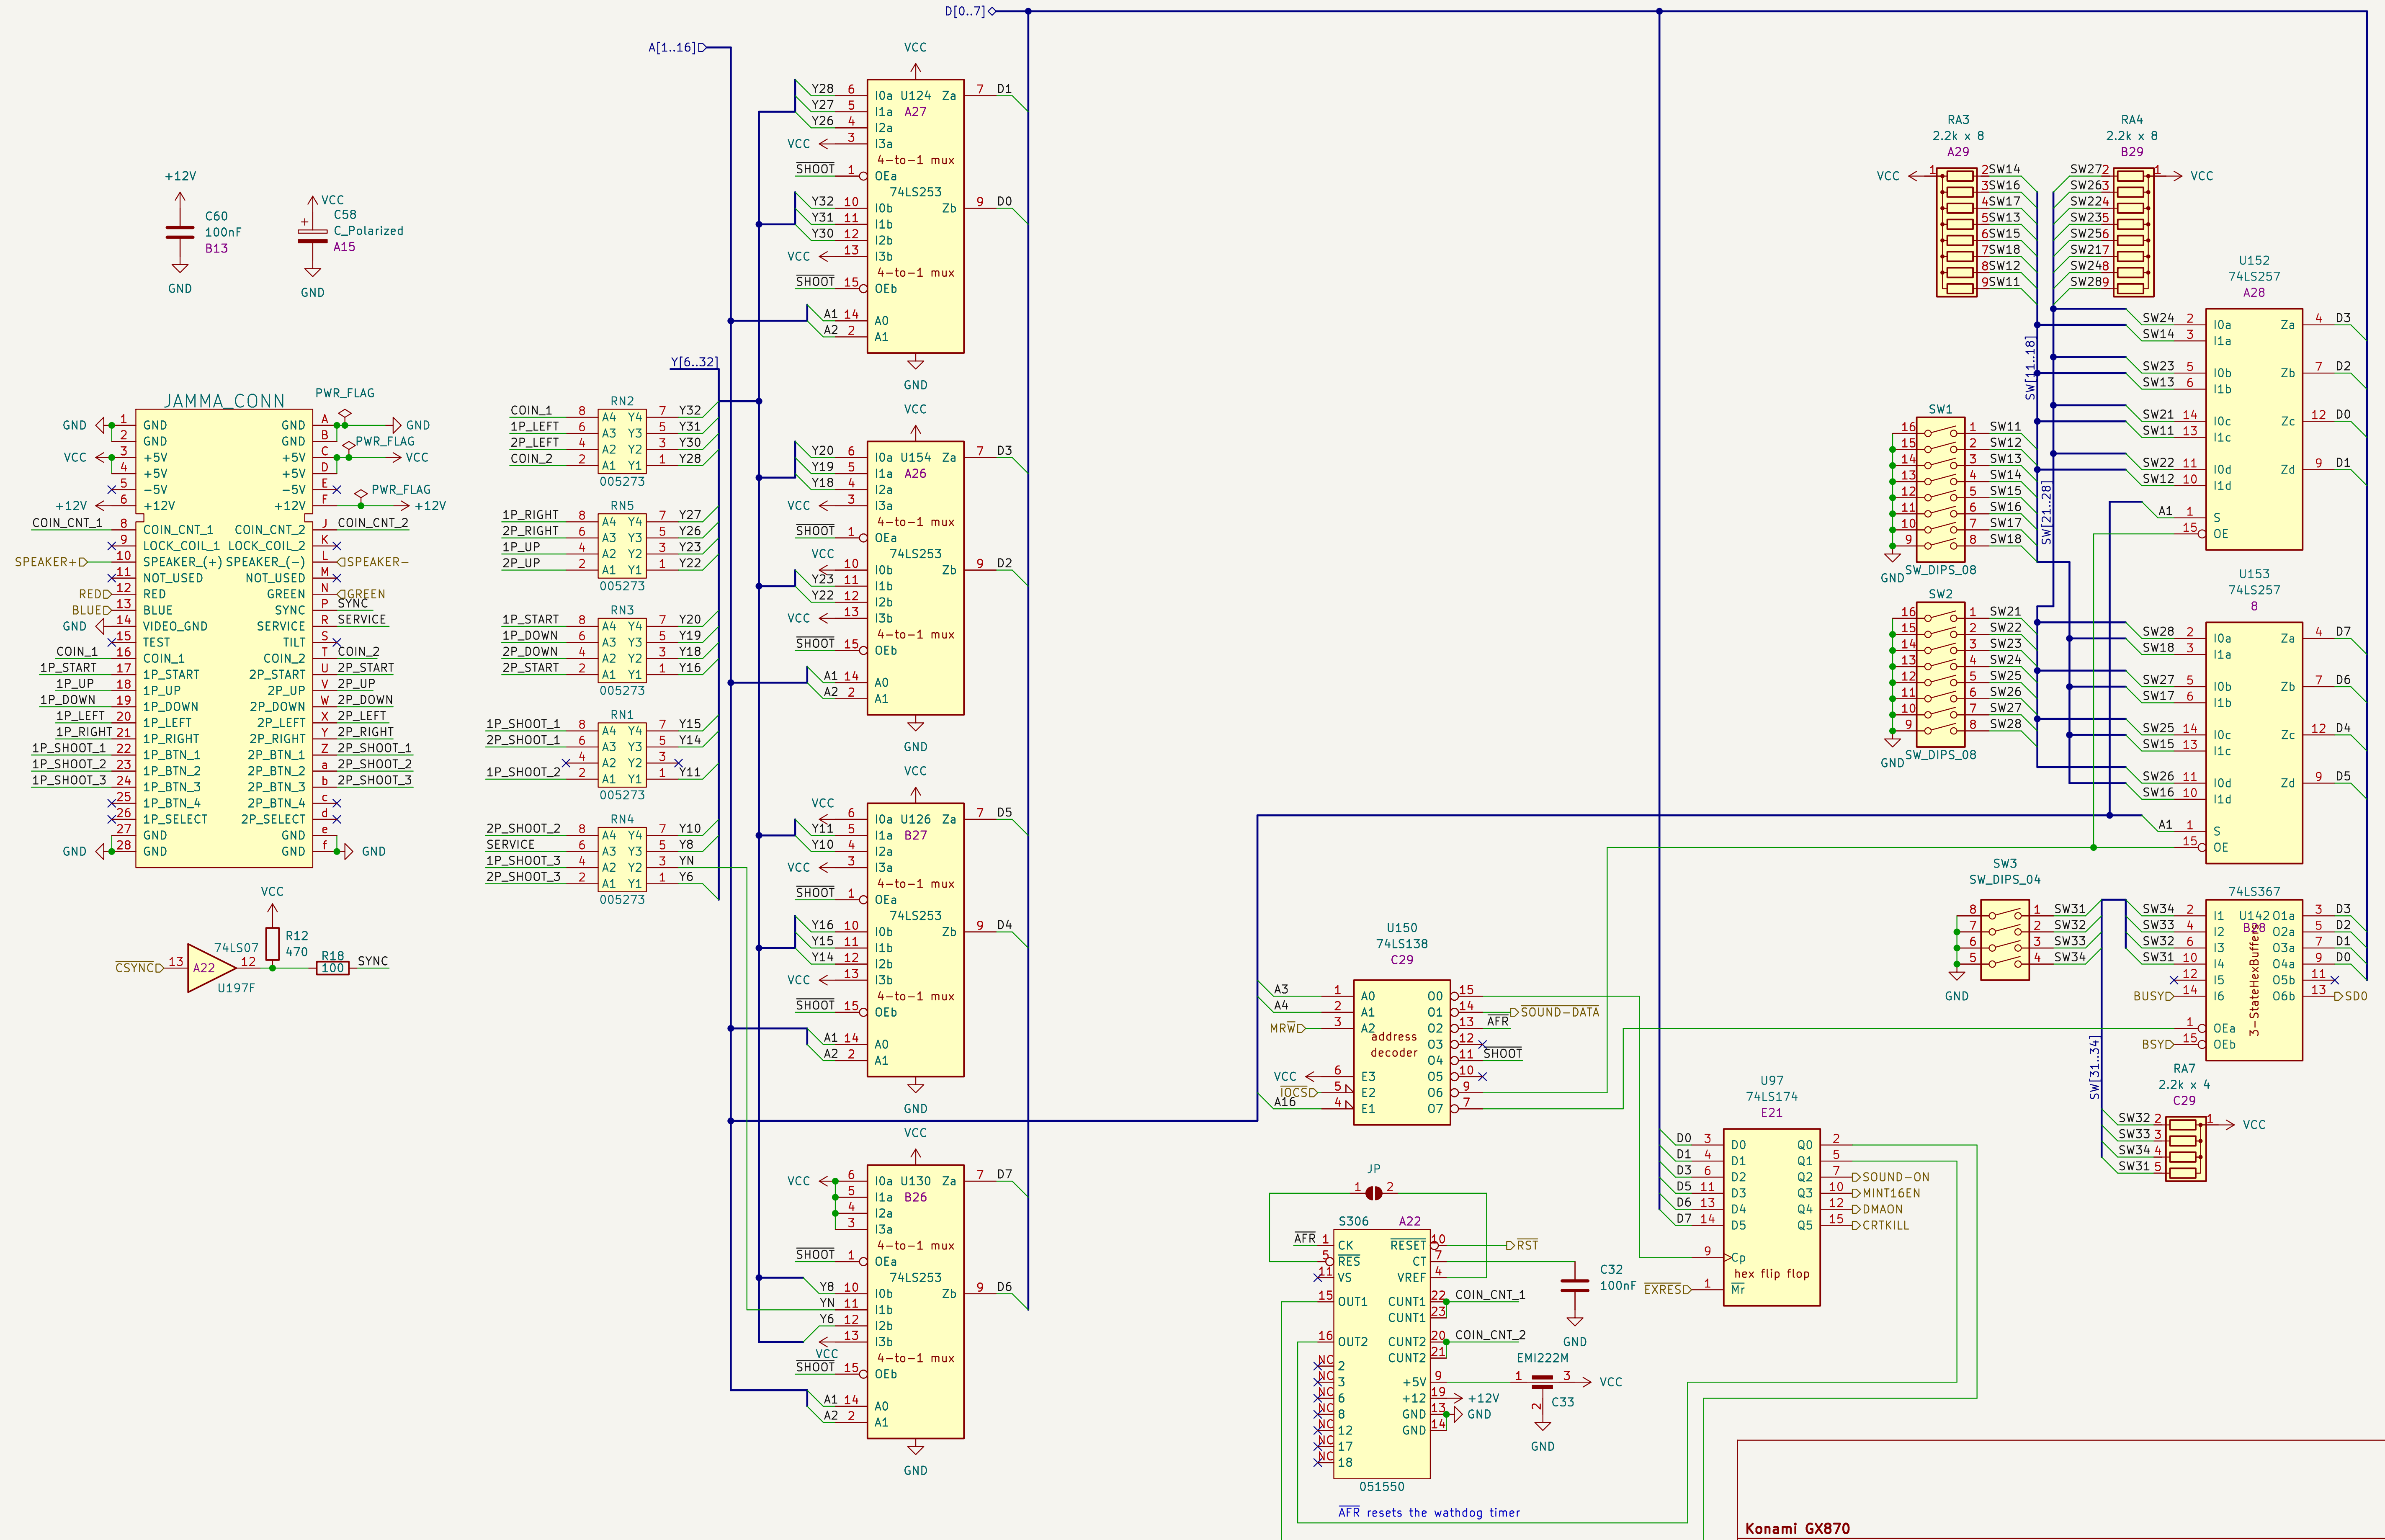

Konami GX870
Sheet: /IO/
File: io.kicad_sch

Title: The Final Round

Size: A3 | Date: 2024-09-08 | Rev:
KiCad E.D.A. 8.0.9 | Id: 9/12

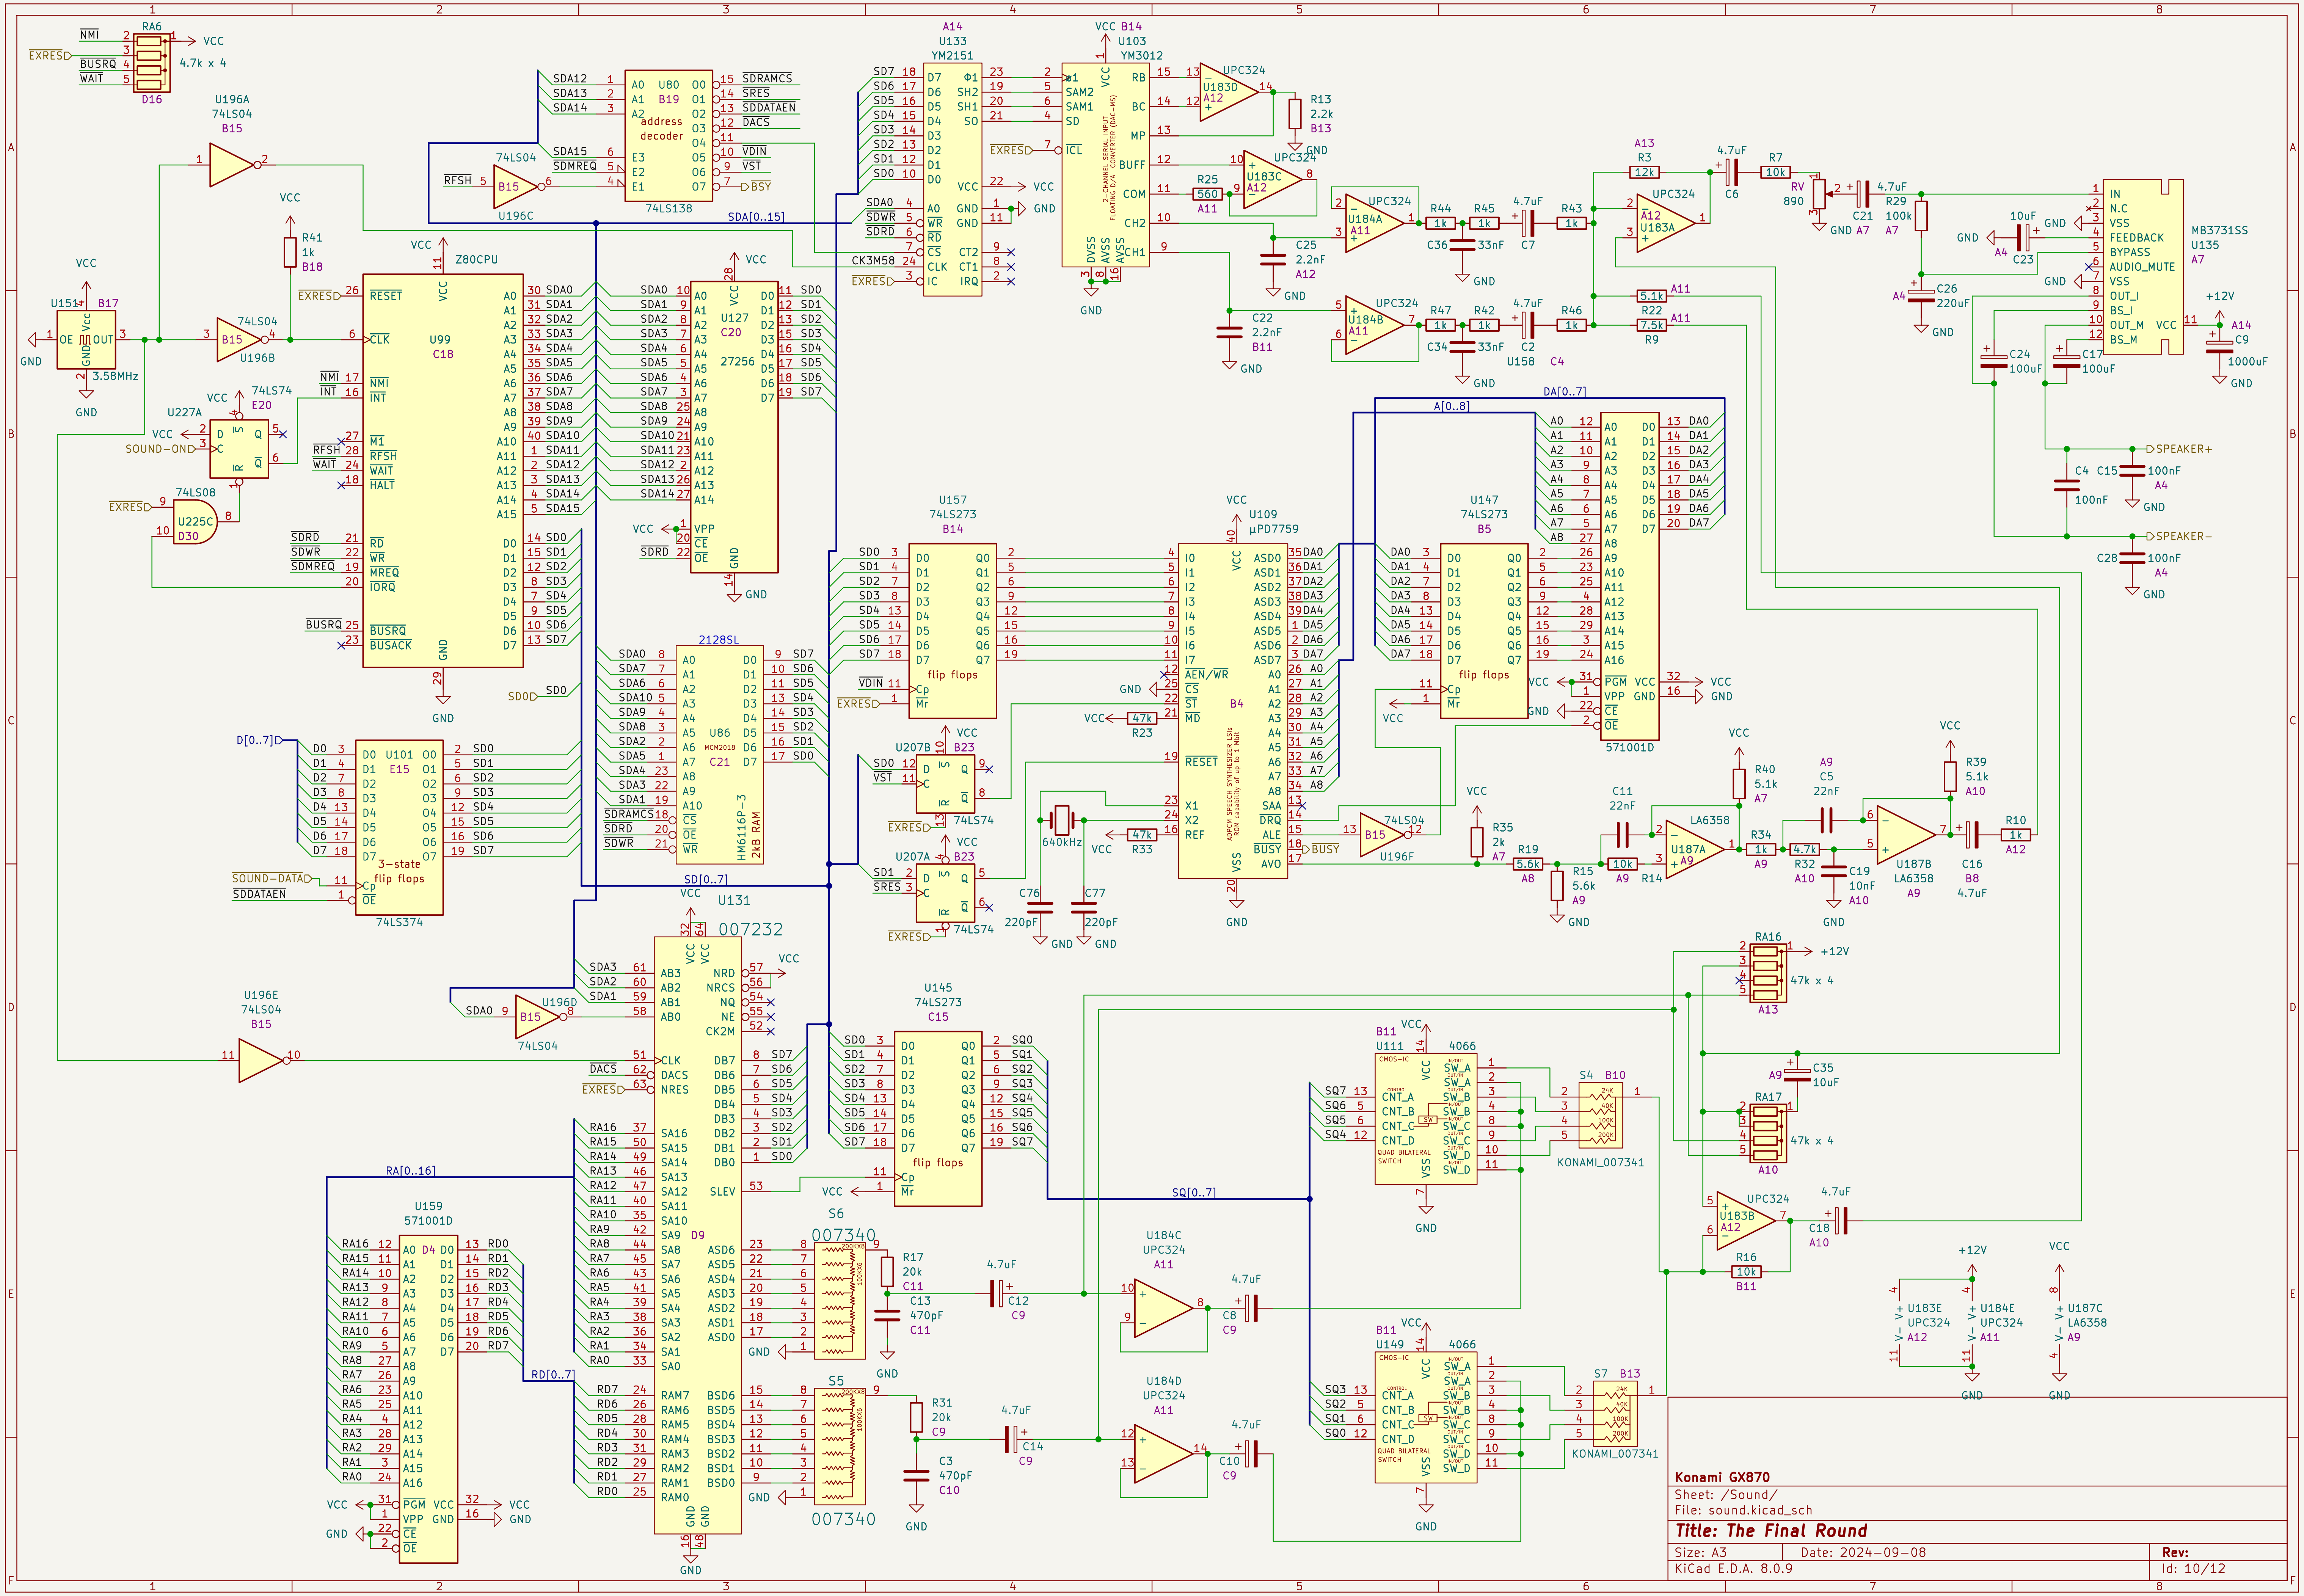
Konami GX870
Sheet: /Sound/
File: sound.kicad_sch
Title: The Final Round
Size: A3
Date: 2024-09-08
Rev:
KiCad E.D.A. 8.0.9
Id: 10/12

Horizontal signals

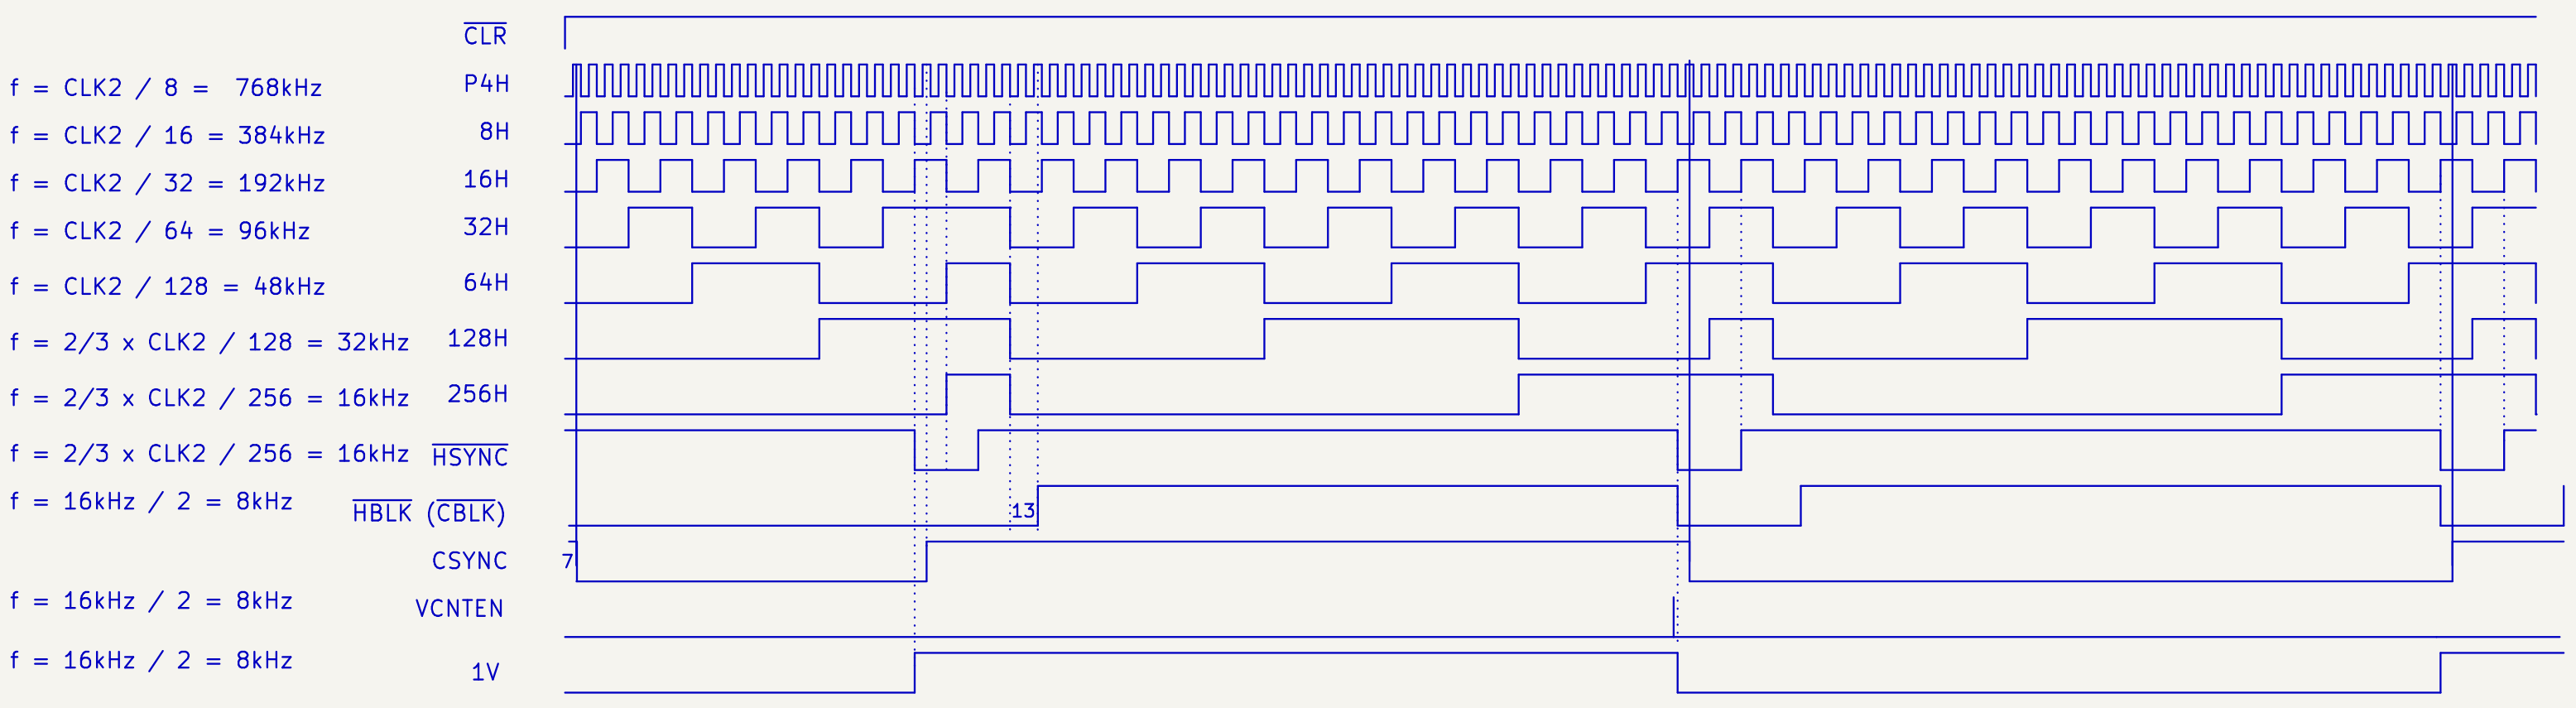

- The first VCNTEN is skipped after reset. It goes low 140ns before HSYNC goes low, and high again when HSYNC goes low. VCNTEN is active right before every second falling edge of HSYNC.

- CPURES goes high, and stays high, on the seventh falling edge of HSYNC.

The first HSYNC is at HCOUNT 175 after reset.

Vertical signals



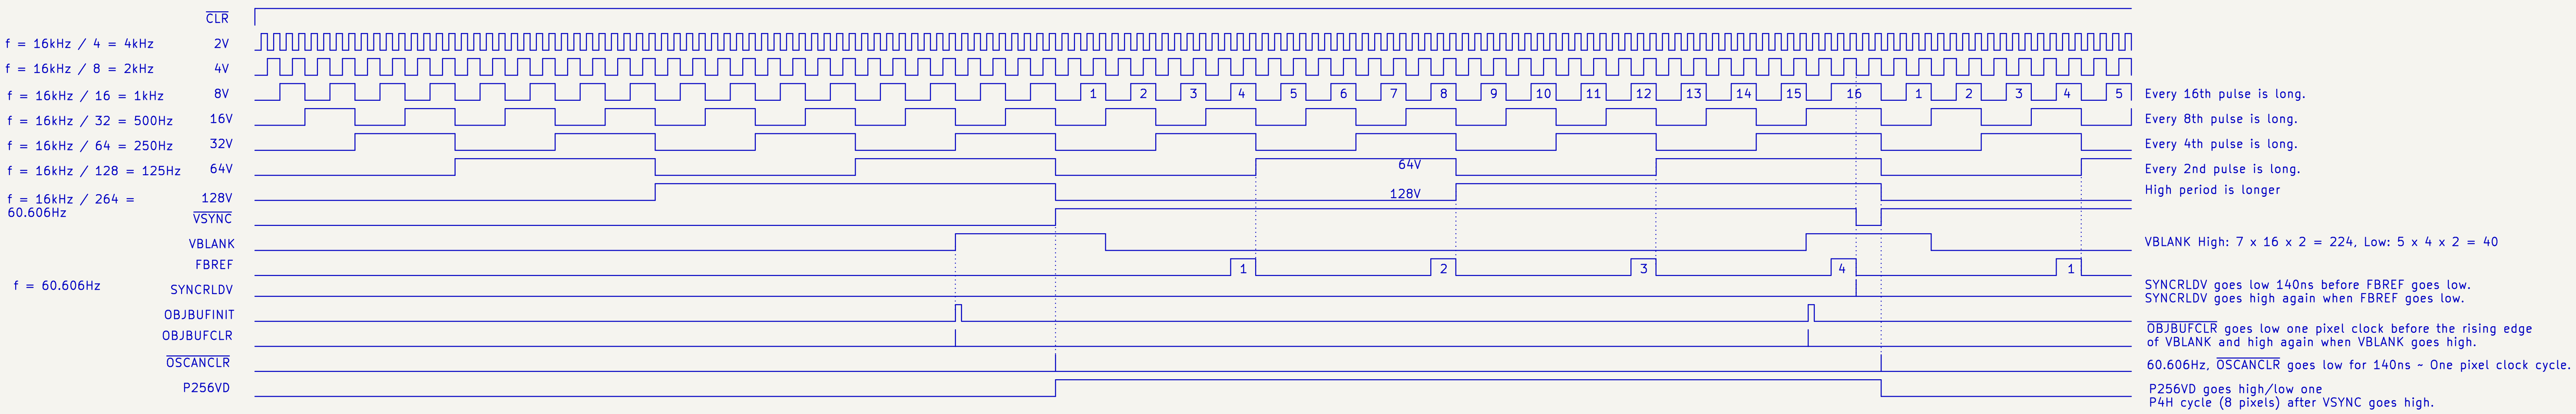

FBREF is measured at pin 22. At U186:3 FBREF is delayed by 22ns going high and 12ns going low.

Horizontal and vertical synch timing diagrams

The numbers in the HSYNC and HBLK diagrams are HSYNC cycles.
All edges are synchronised to the rising edge of CLK2.

Pixel clock CLK2 = 18.432MHz / 3 = 6.144MHz

Horizontal lines
HSYNC freq = 6.144MHz / 384 = 16kHz
HSYNC period = 1 / 16kHz = 62.5us
Pixels / line: 384
Active pixels: 320
Blank pixels: 64

Vertical lines
VSYNC freq = 16kHz / 264 = 60.606060Hz
VSYNC period = 1 / f = 264 / 16kHz = 16.5ms
scanlines / frame: 264
Active lines: 224
Blank lines: 40

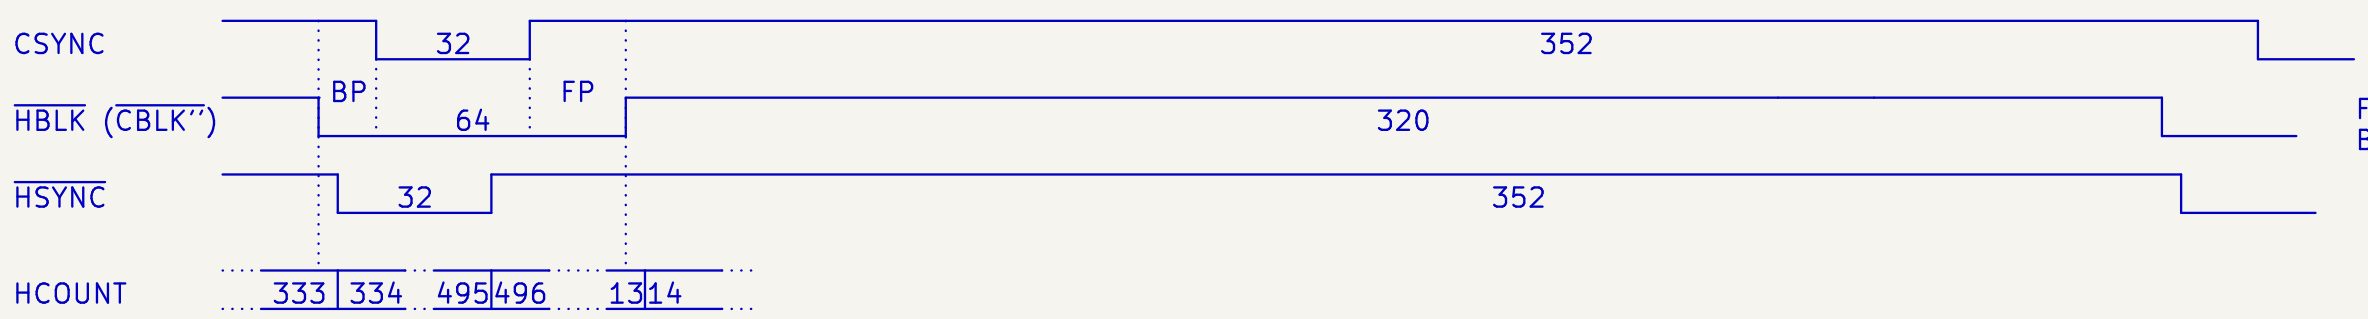

Front Porch (FP) 24 px.
Back Porch (BP) 8 px

The numbers in the VSYNC and VBLK diagrams are HSYNC cycles.
All edges are synchronised to the falling edge of HSYNC.



Front Porch (FP) and
Back Porch (BP) 16 HSYNC cycles.

HCOUNT is bits [256H, 128H, 64H, 32H, 16H, 8H, P4H, P2H, P1H]
VCOUNT is bits [128V, 64V, 32V, 16V, 8V, 4V, 2V, 1V]

CBLK'' is at the output of color mixer.

Konami GX870
Sheet: /Timing diagrams/
File: timing_diagrams.kicad_sch

Title: The Final Round

Size: A3	Date: 2024-09-08	**Rev:**
KiCad E.D.A. 8.0.9		Id: 11/12

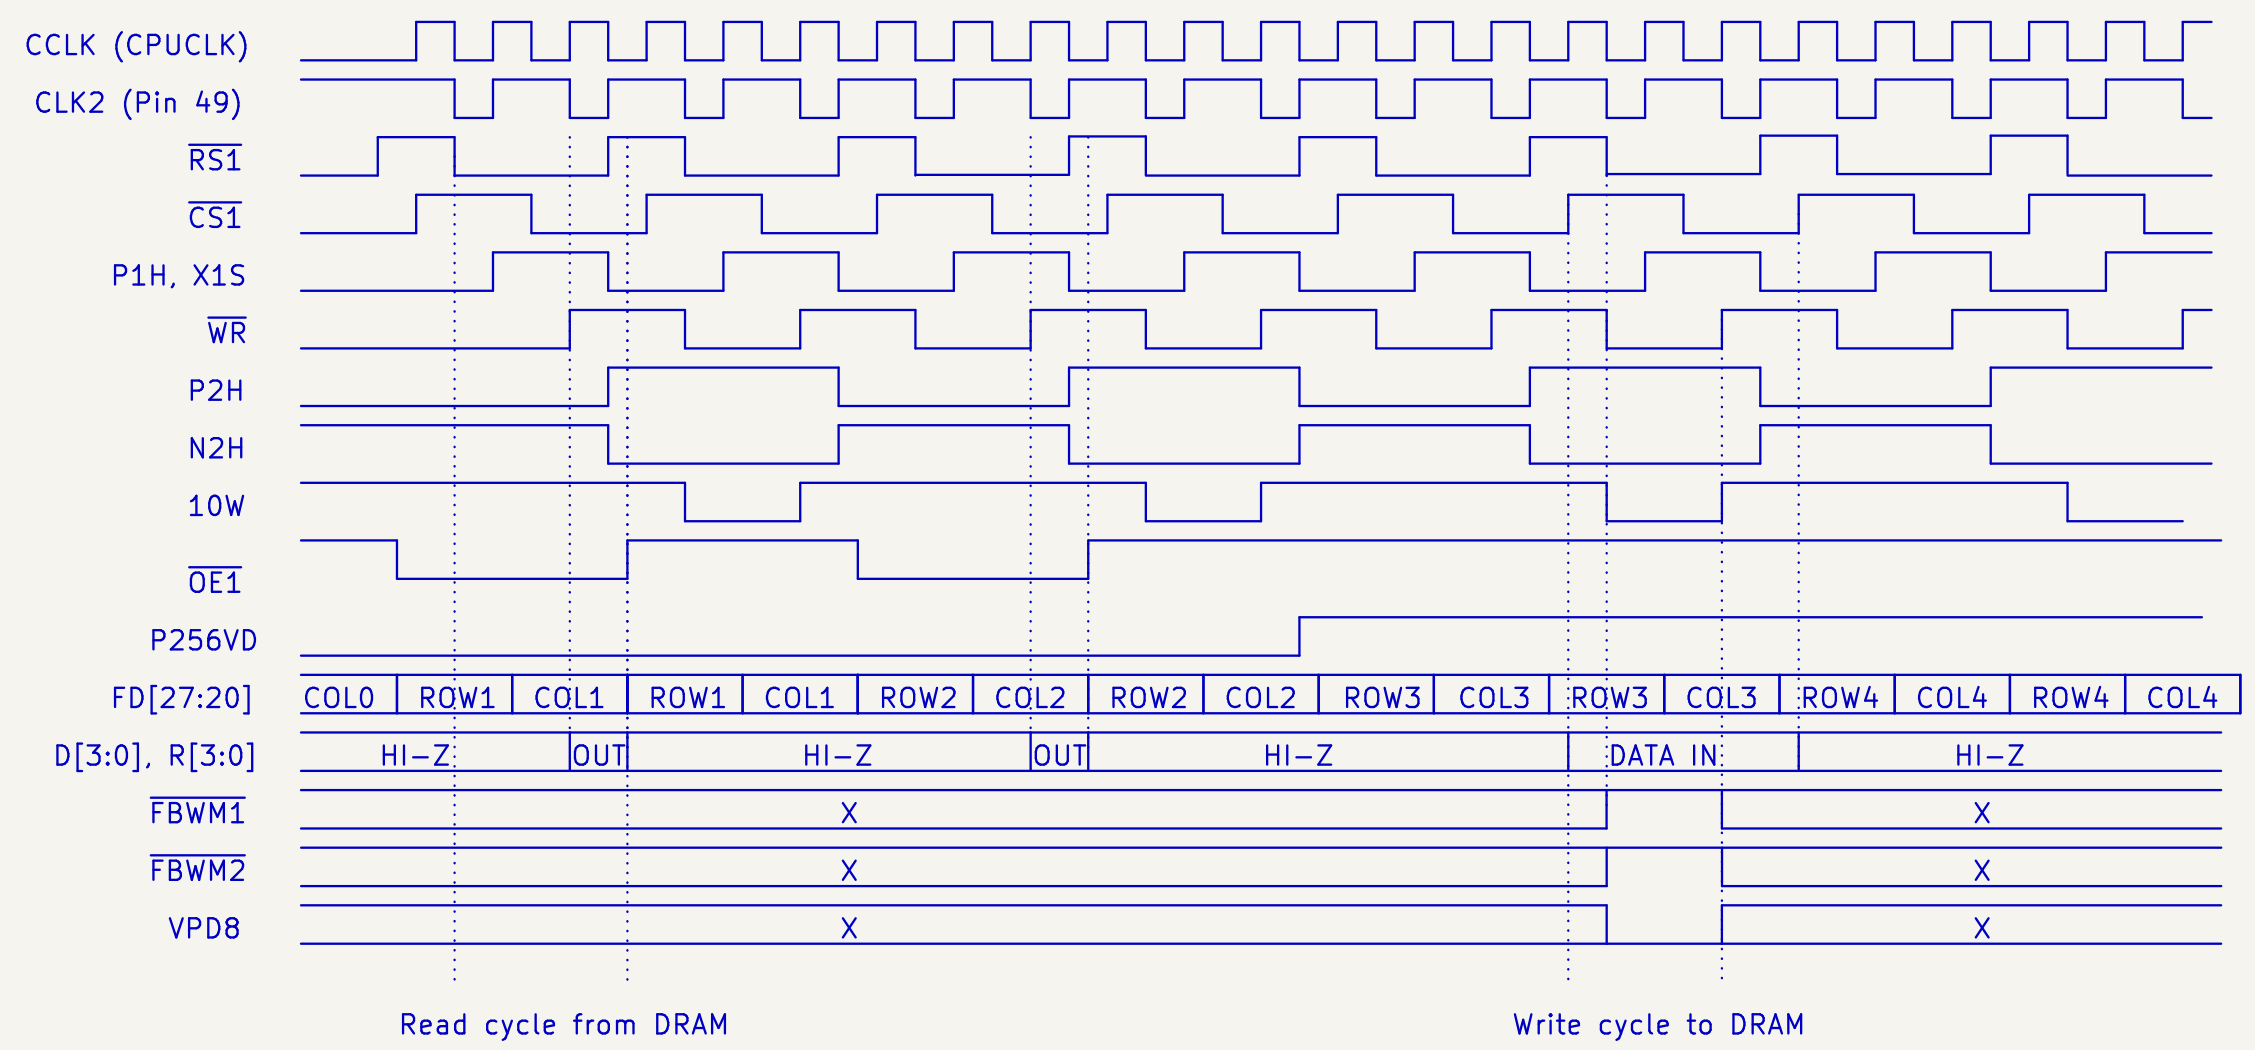

The same row and column addresses are repeated twice.
One for read cycle and the other for write cycles.

Konami GX870
Sheet: /Sprite timing diagrams/
File: sprite_timing_diagrams.kicad_sch

Title: The Final Round

Size: A3	Date: 2024-09-08	**Rev:**
KiCad E.D.A. 8.0.9		Id: 12/12