







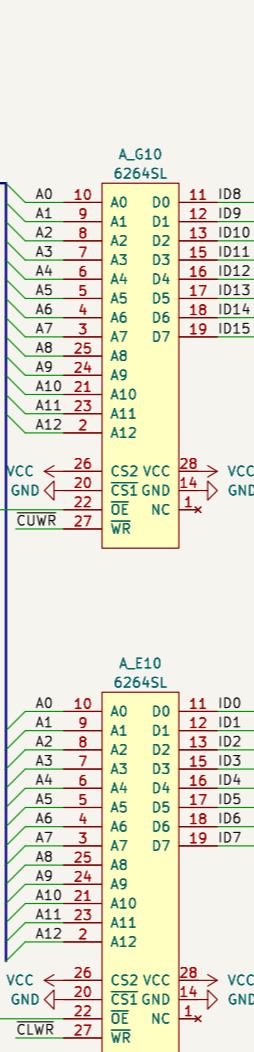
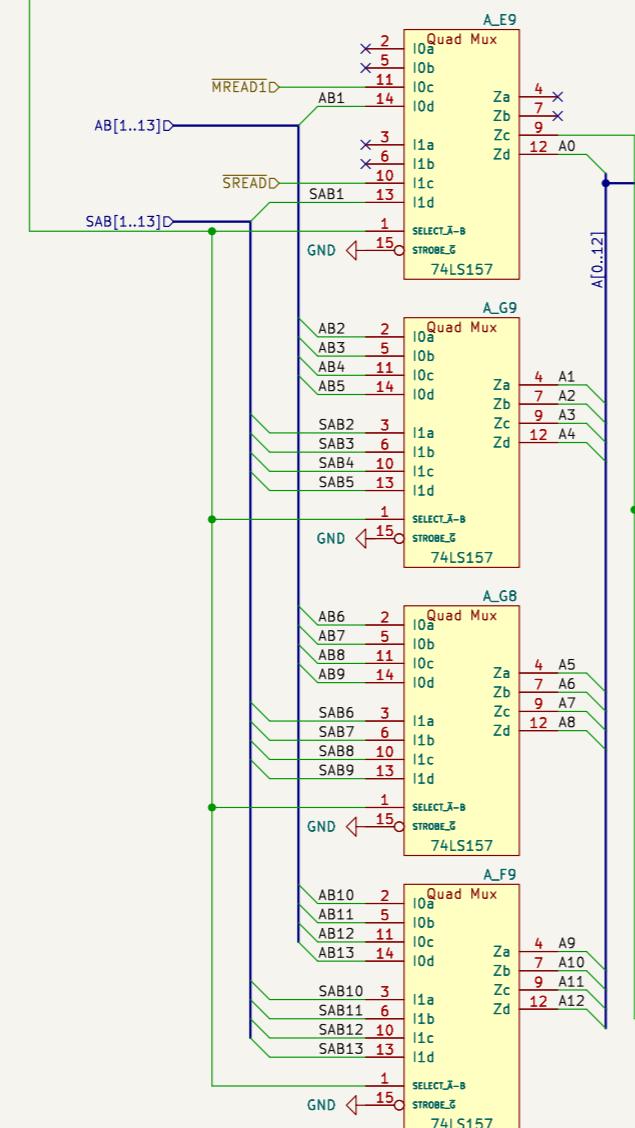


Konami 007790

$MCOMRD = \neg(MREAD1 \& \neg MCOMCS) = MREAD1 \mid MCOMCS$
 $SCOMRD = \neg(SREAD \& \neg SCOMCS)$
 $SWREN = \neg(SNMMPPX \& SREAD \& \neg SCOMCS)$
 $MWREN = \neg(SNMMPPX \& MREAD1 \& \neg MCOMCS)$
 $CLWR = \neg(CLWR \& \neg SNMMPPX \& SREAD \& \neg SCOMCS \& \neg CPUCLK \mid \neg SNMMPPX \& MREAD1 \& \neg MCOMCS \& \neg CPUCLK)$
 $CUWR = \neg(CUWR \& \neg SNMMPPX \& SREAD \& \neg SCOMCS \& \neg CPUCLK \mid \neg MUWR \& \neg SNMMPPX \& MREAD1 \& \neg MCOMCS \& \neg CPUCLK)$

A All AND logic can be converted to OR form. But since AND logic and inverters are used in the PAL16LB device it is kept in that form. The equations follow verilog syntax. The active low signals are not inverted, the bar is there only to show activeness.

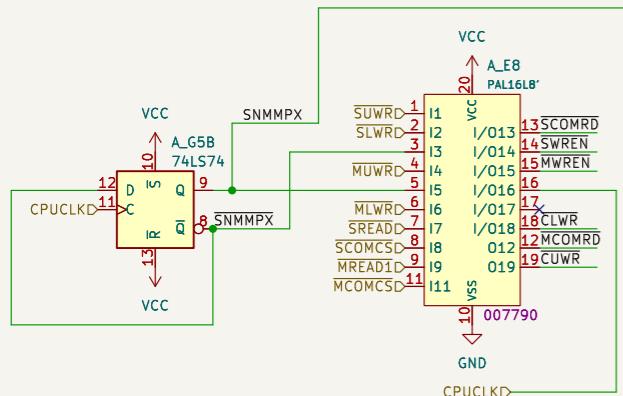

This is from jammarcade.net

Pin 1 = SEL – changes whether the Q outputs require a rising edge clock or not.
Pin 2 = OEQ – Output enable for the Y outputs else they are inputs. Active LOW
Pin 21 = OEQ – Output enable for the Q (clocked) outputs else they are inputs. Active LOW
Pin 12 = CLK – Clock input

Pins 3–10 = Y outputs – normal outputs. If OEQ is LOW these pins become outputs mirroring the state of the Q input pins. SEL and CLK pins are not used in this mode.

Pins 13–20 = Q outputs – clocked outputs. If OEQ is LOW these pins become outputs. If SEL is HIGH and CLK is HIGH these outputs will mirror the state of the Y inputs. If SEL is LOW then the outputs will only change state on a rising edge CLK.


Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903


Sheet: /Shared Resources/
File: shared_resources.kicad_sch


Title: Twin 16 – Rev B


Size: A3 Date: 2024-09-08
KiCad E.D.A. 8.0.9

Rev: Id: 4/20

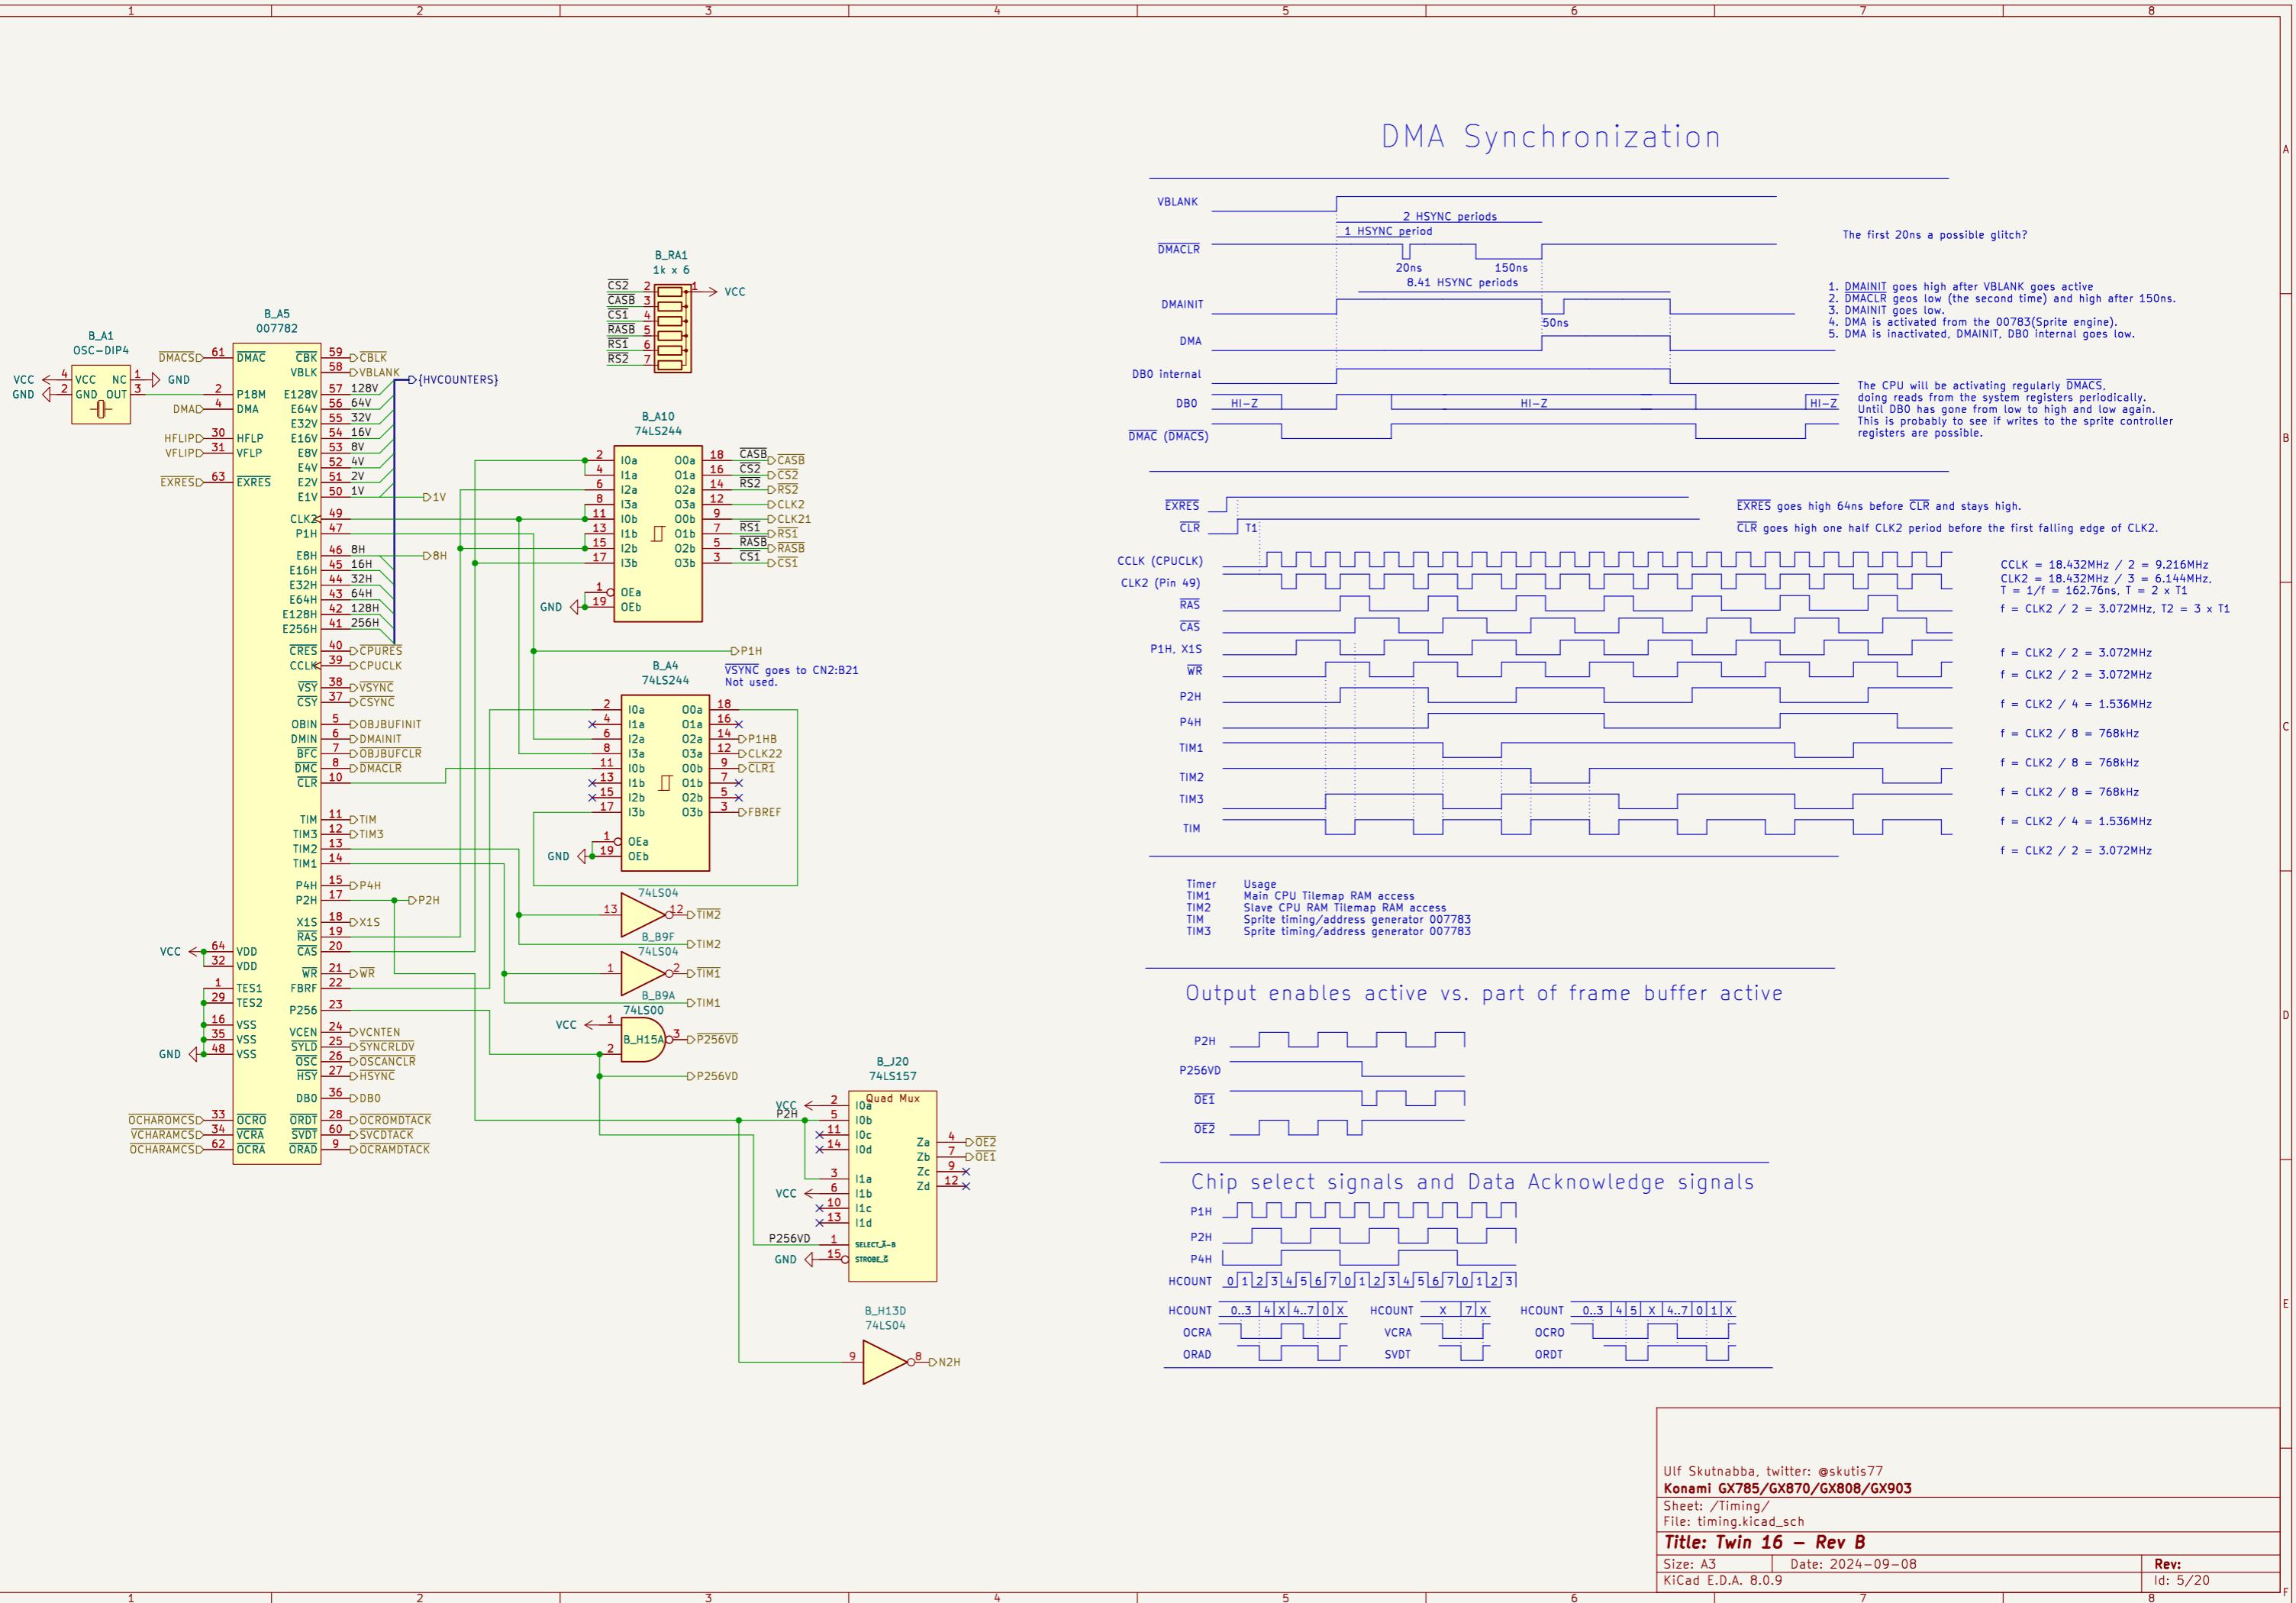


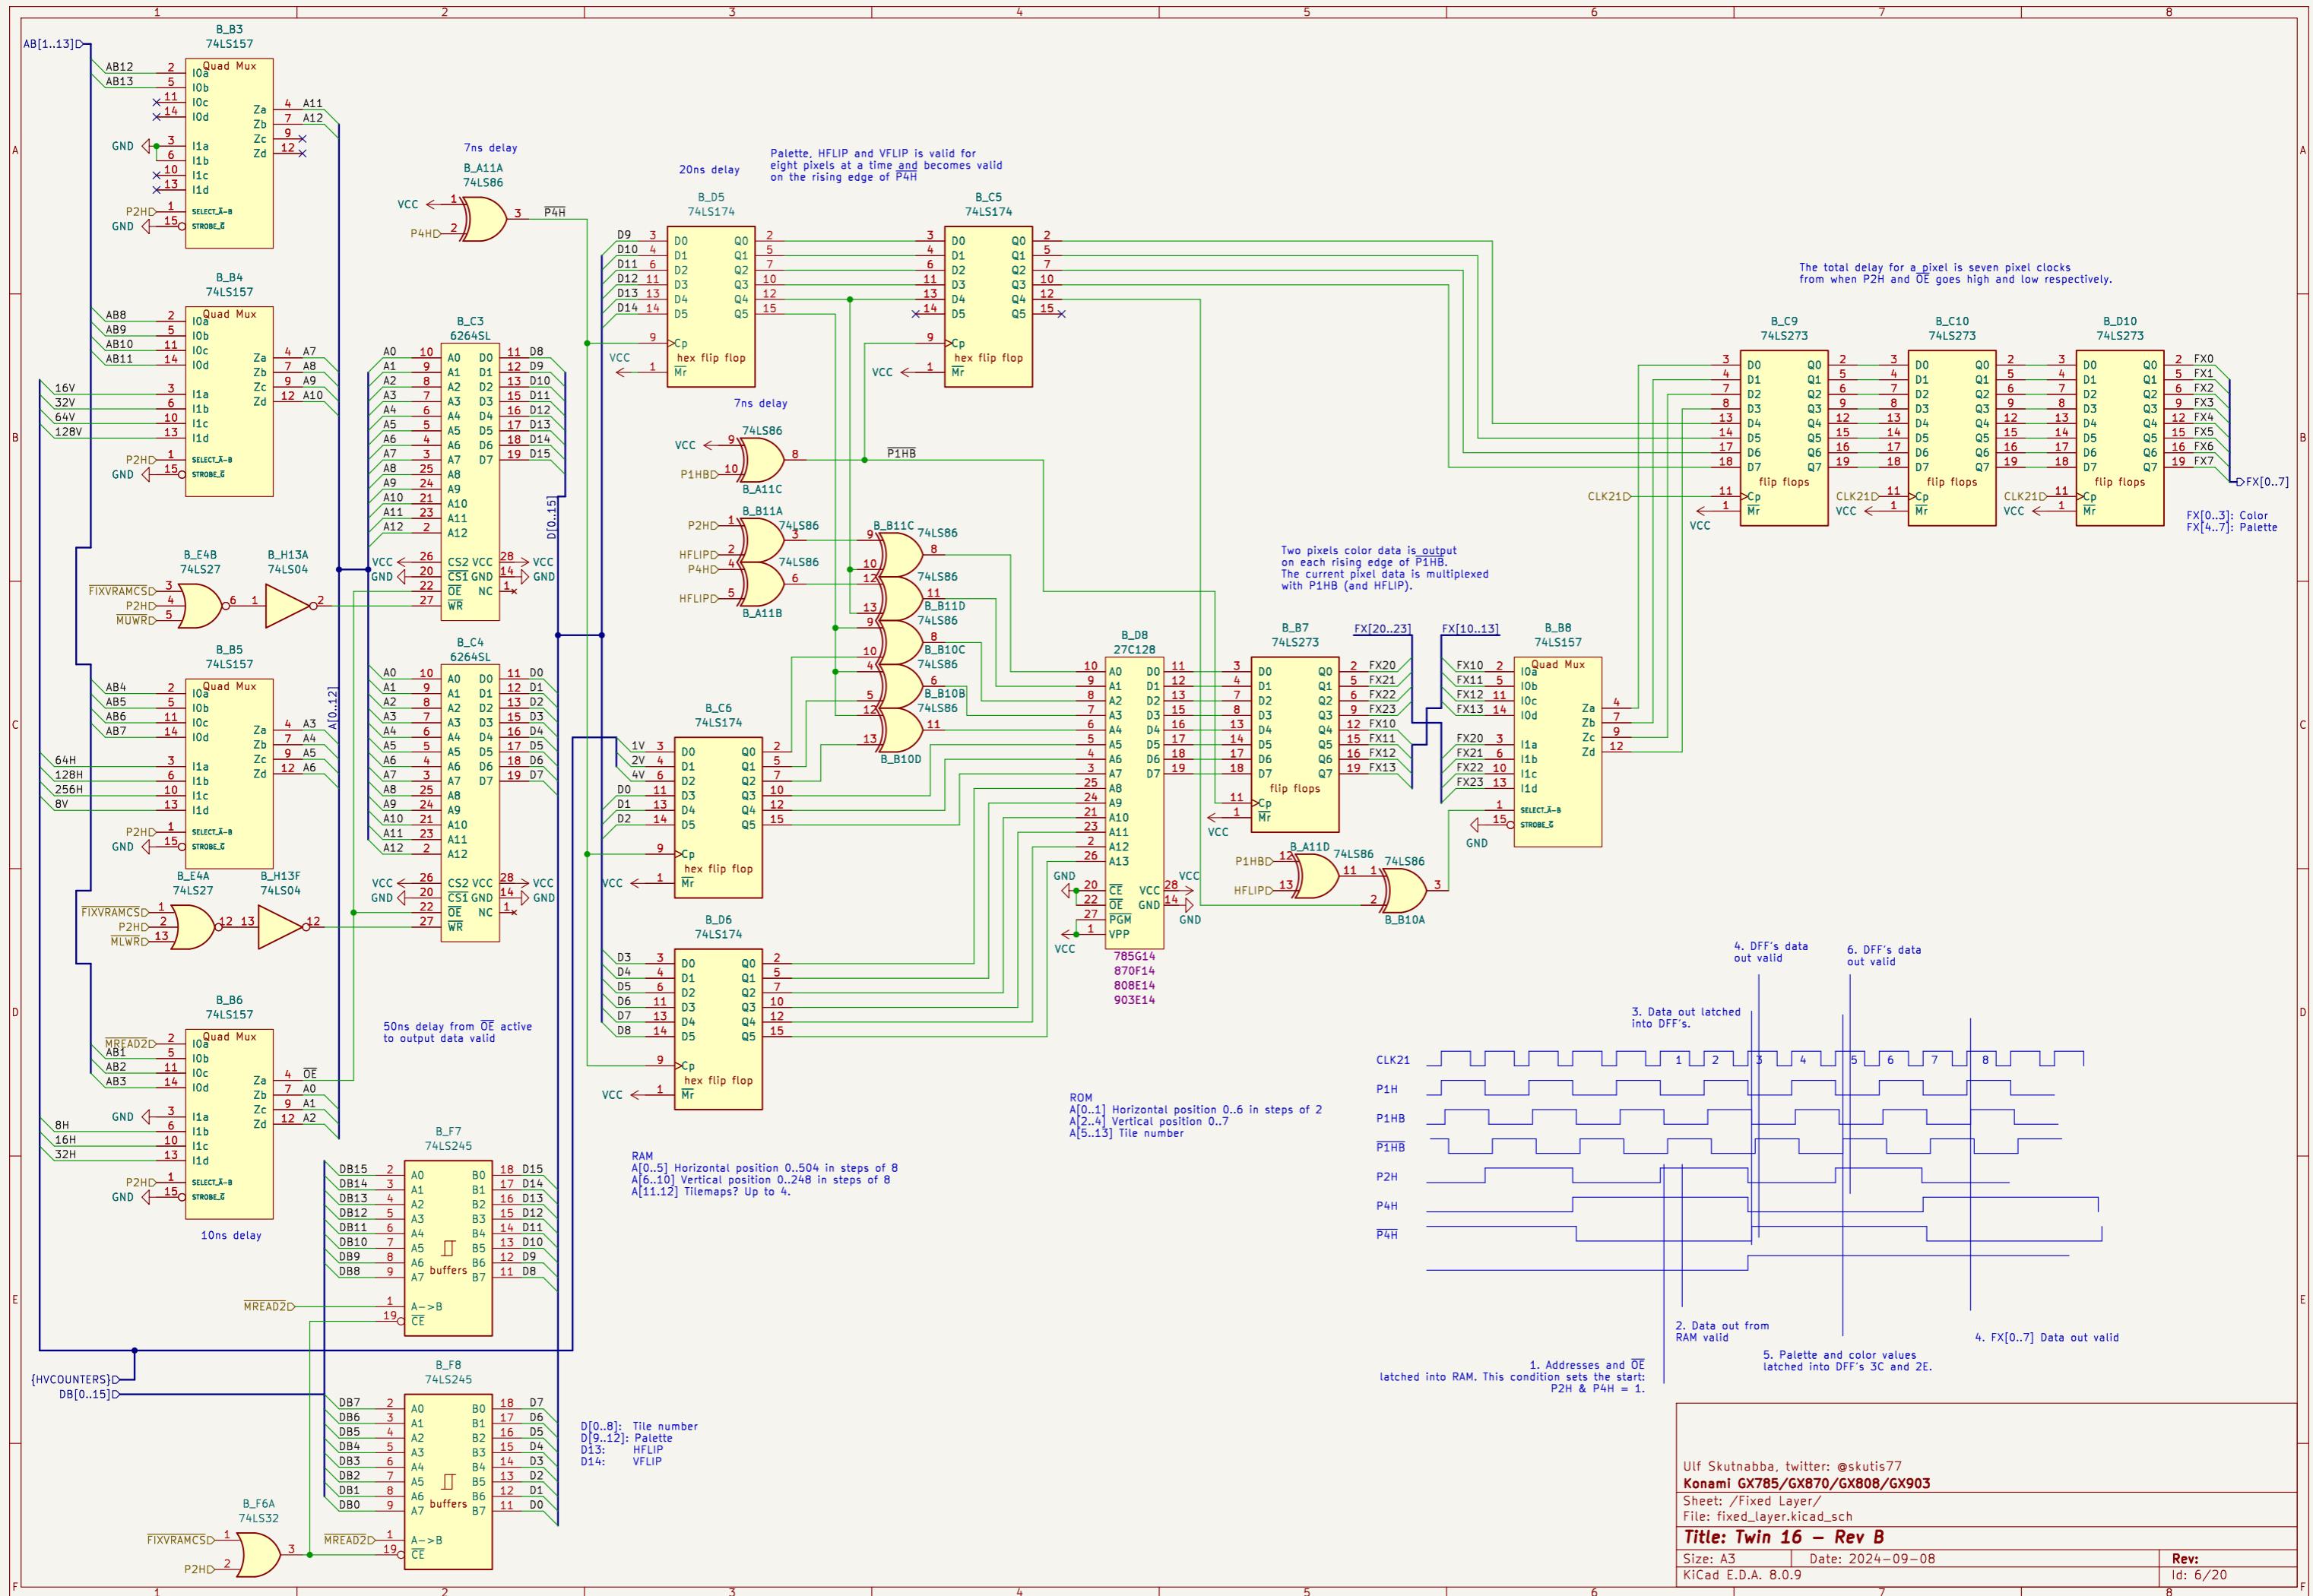


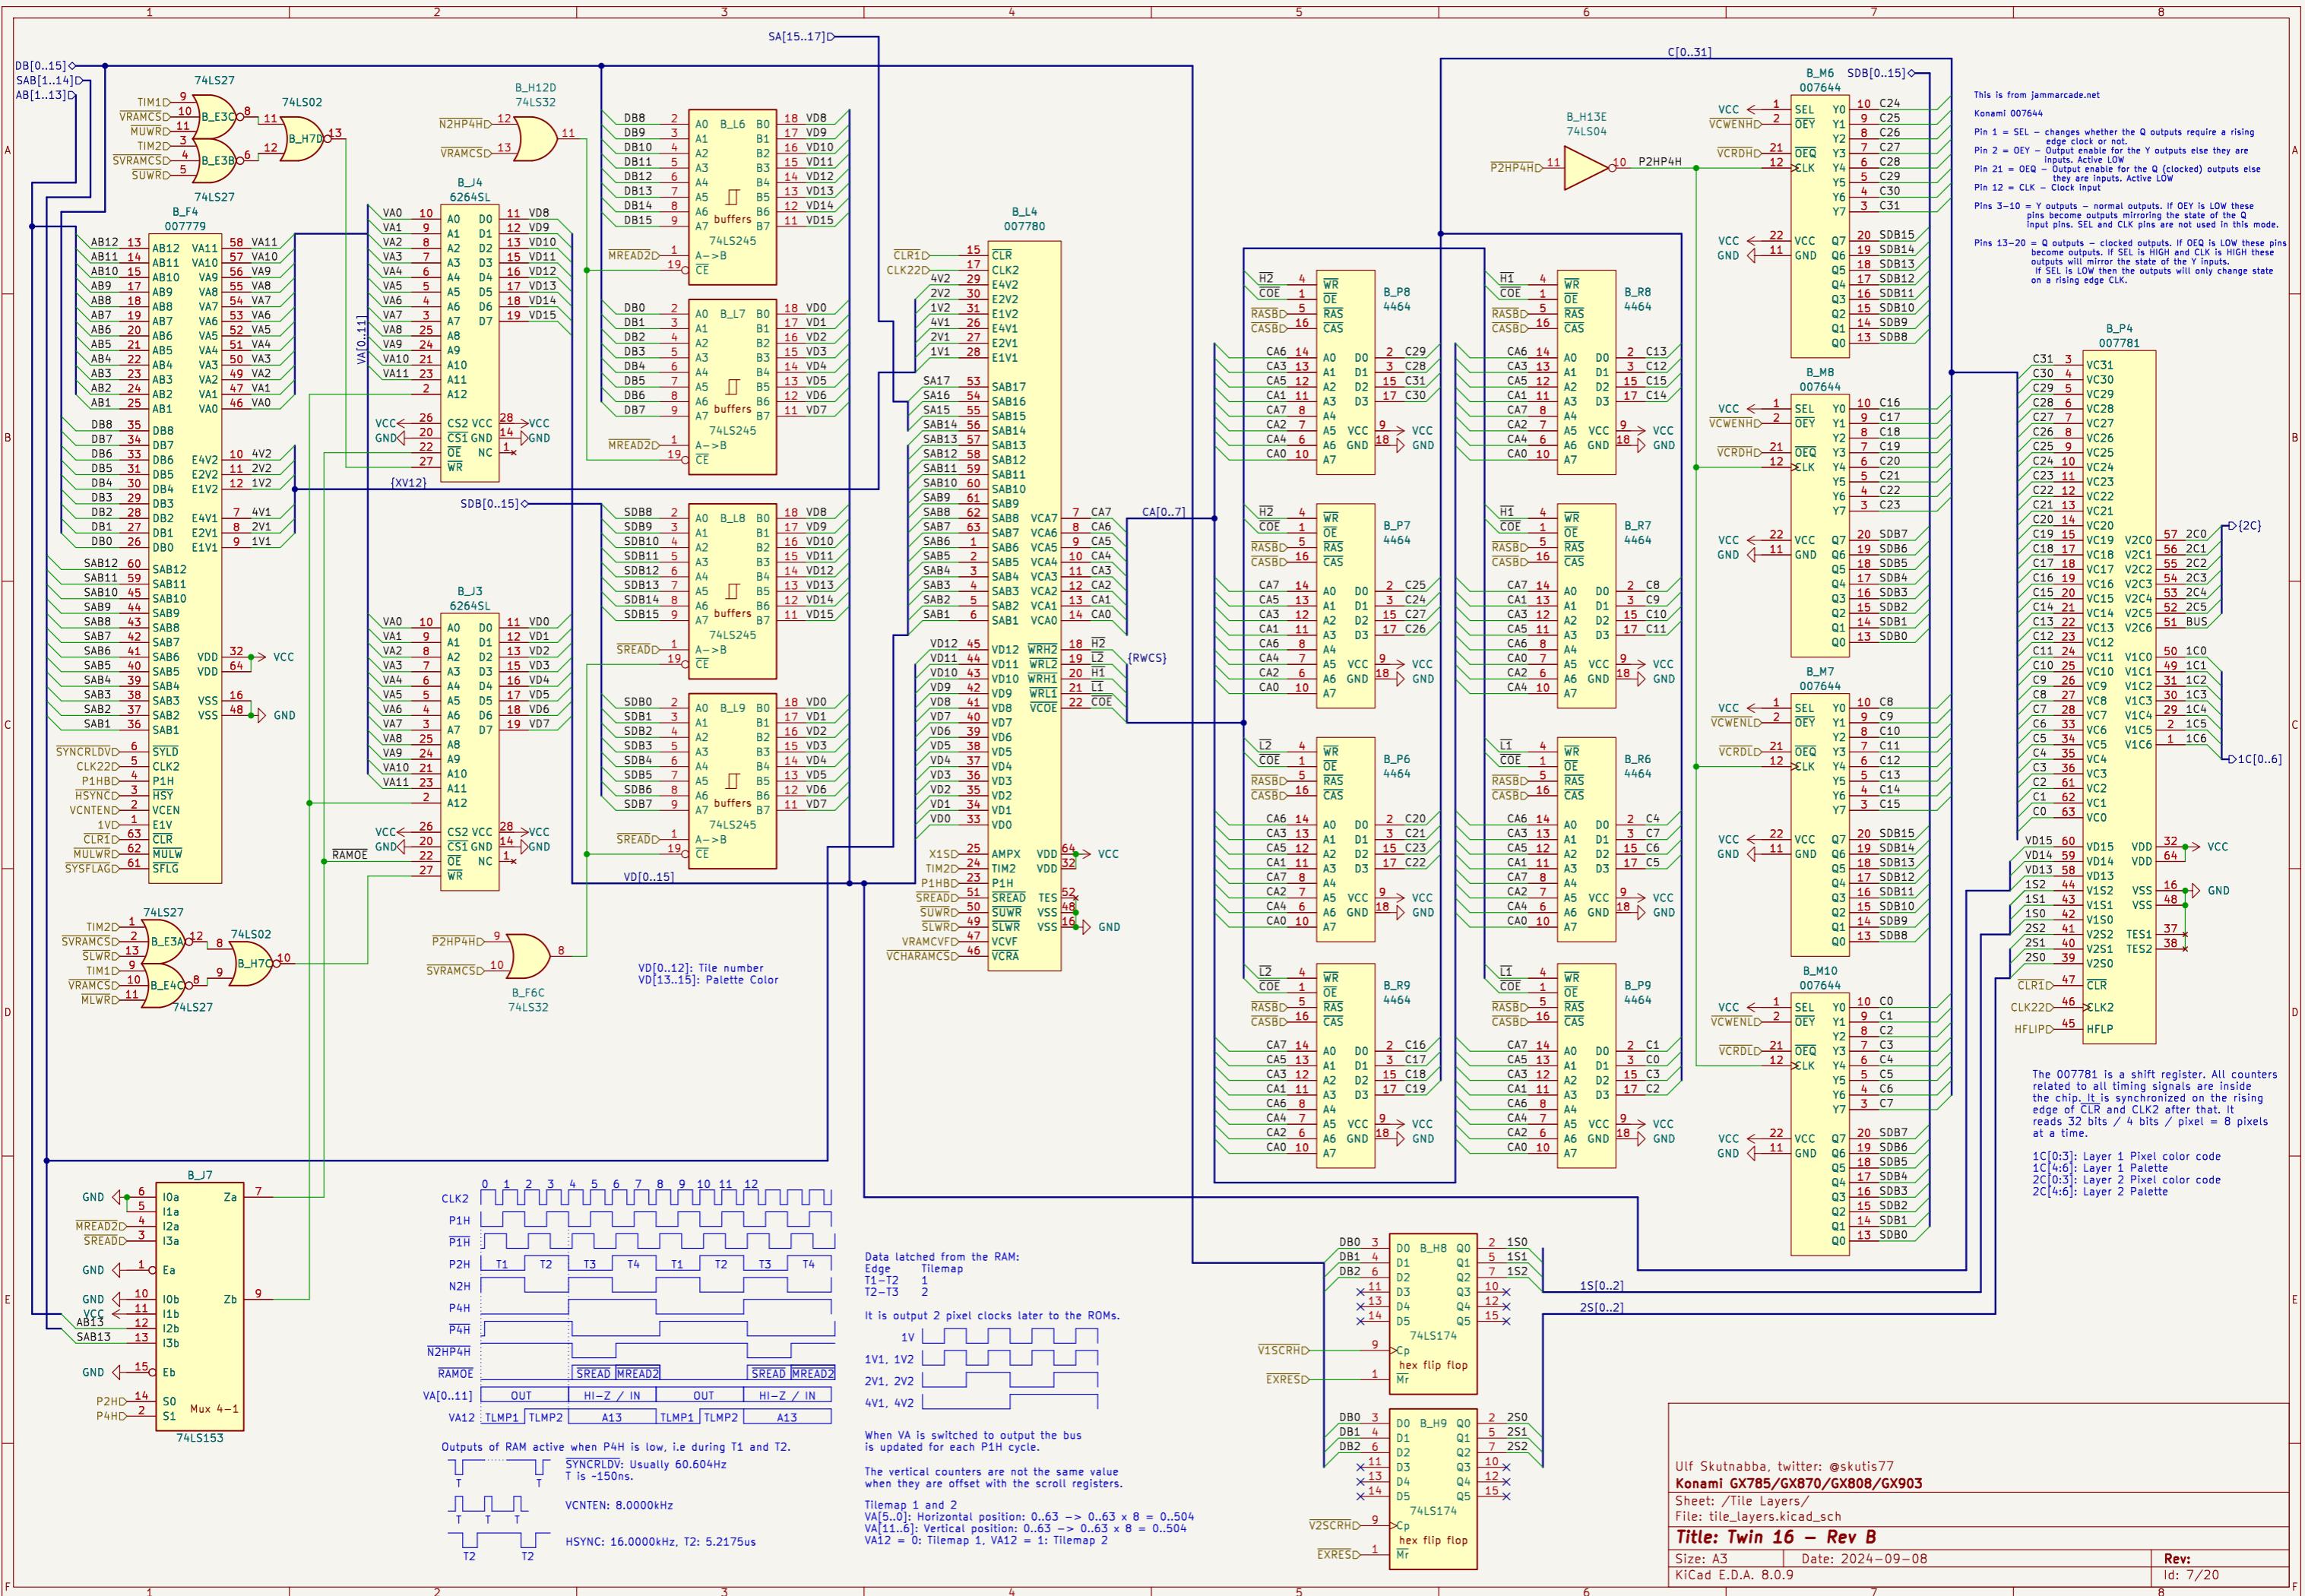


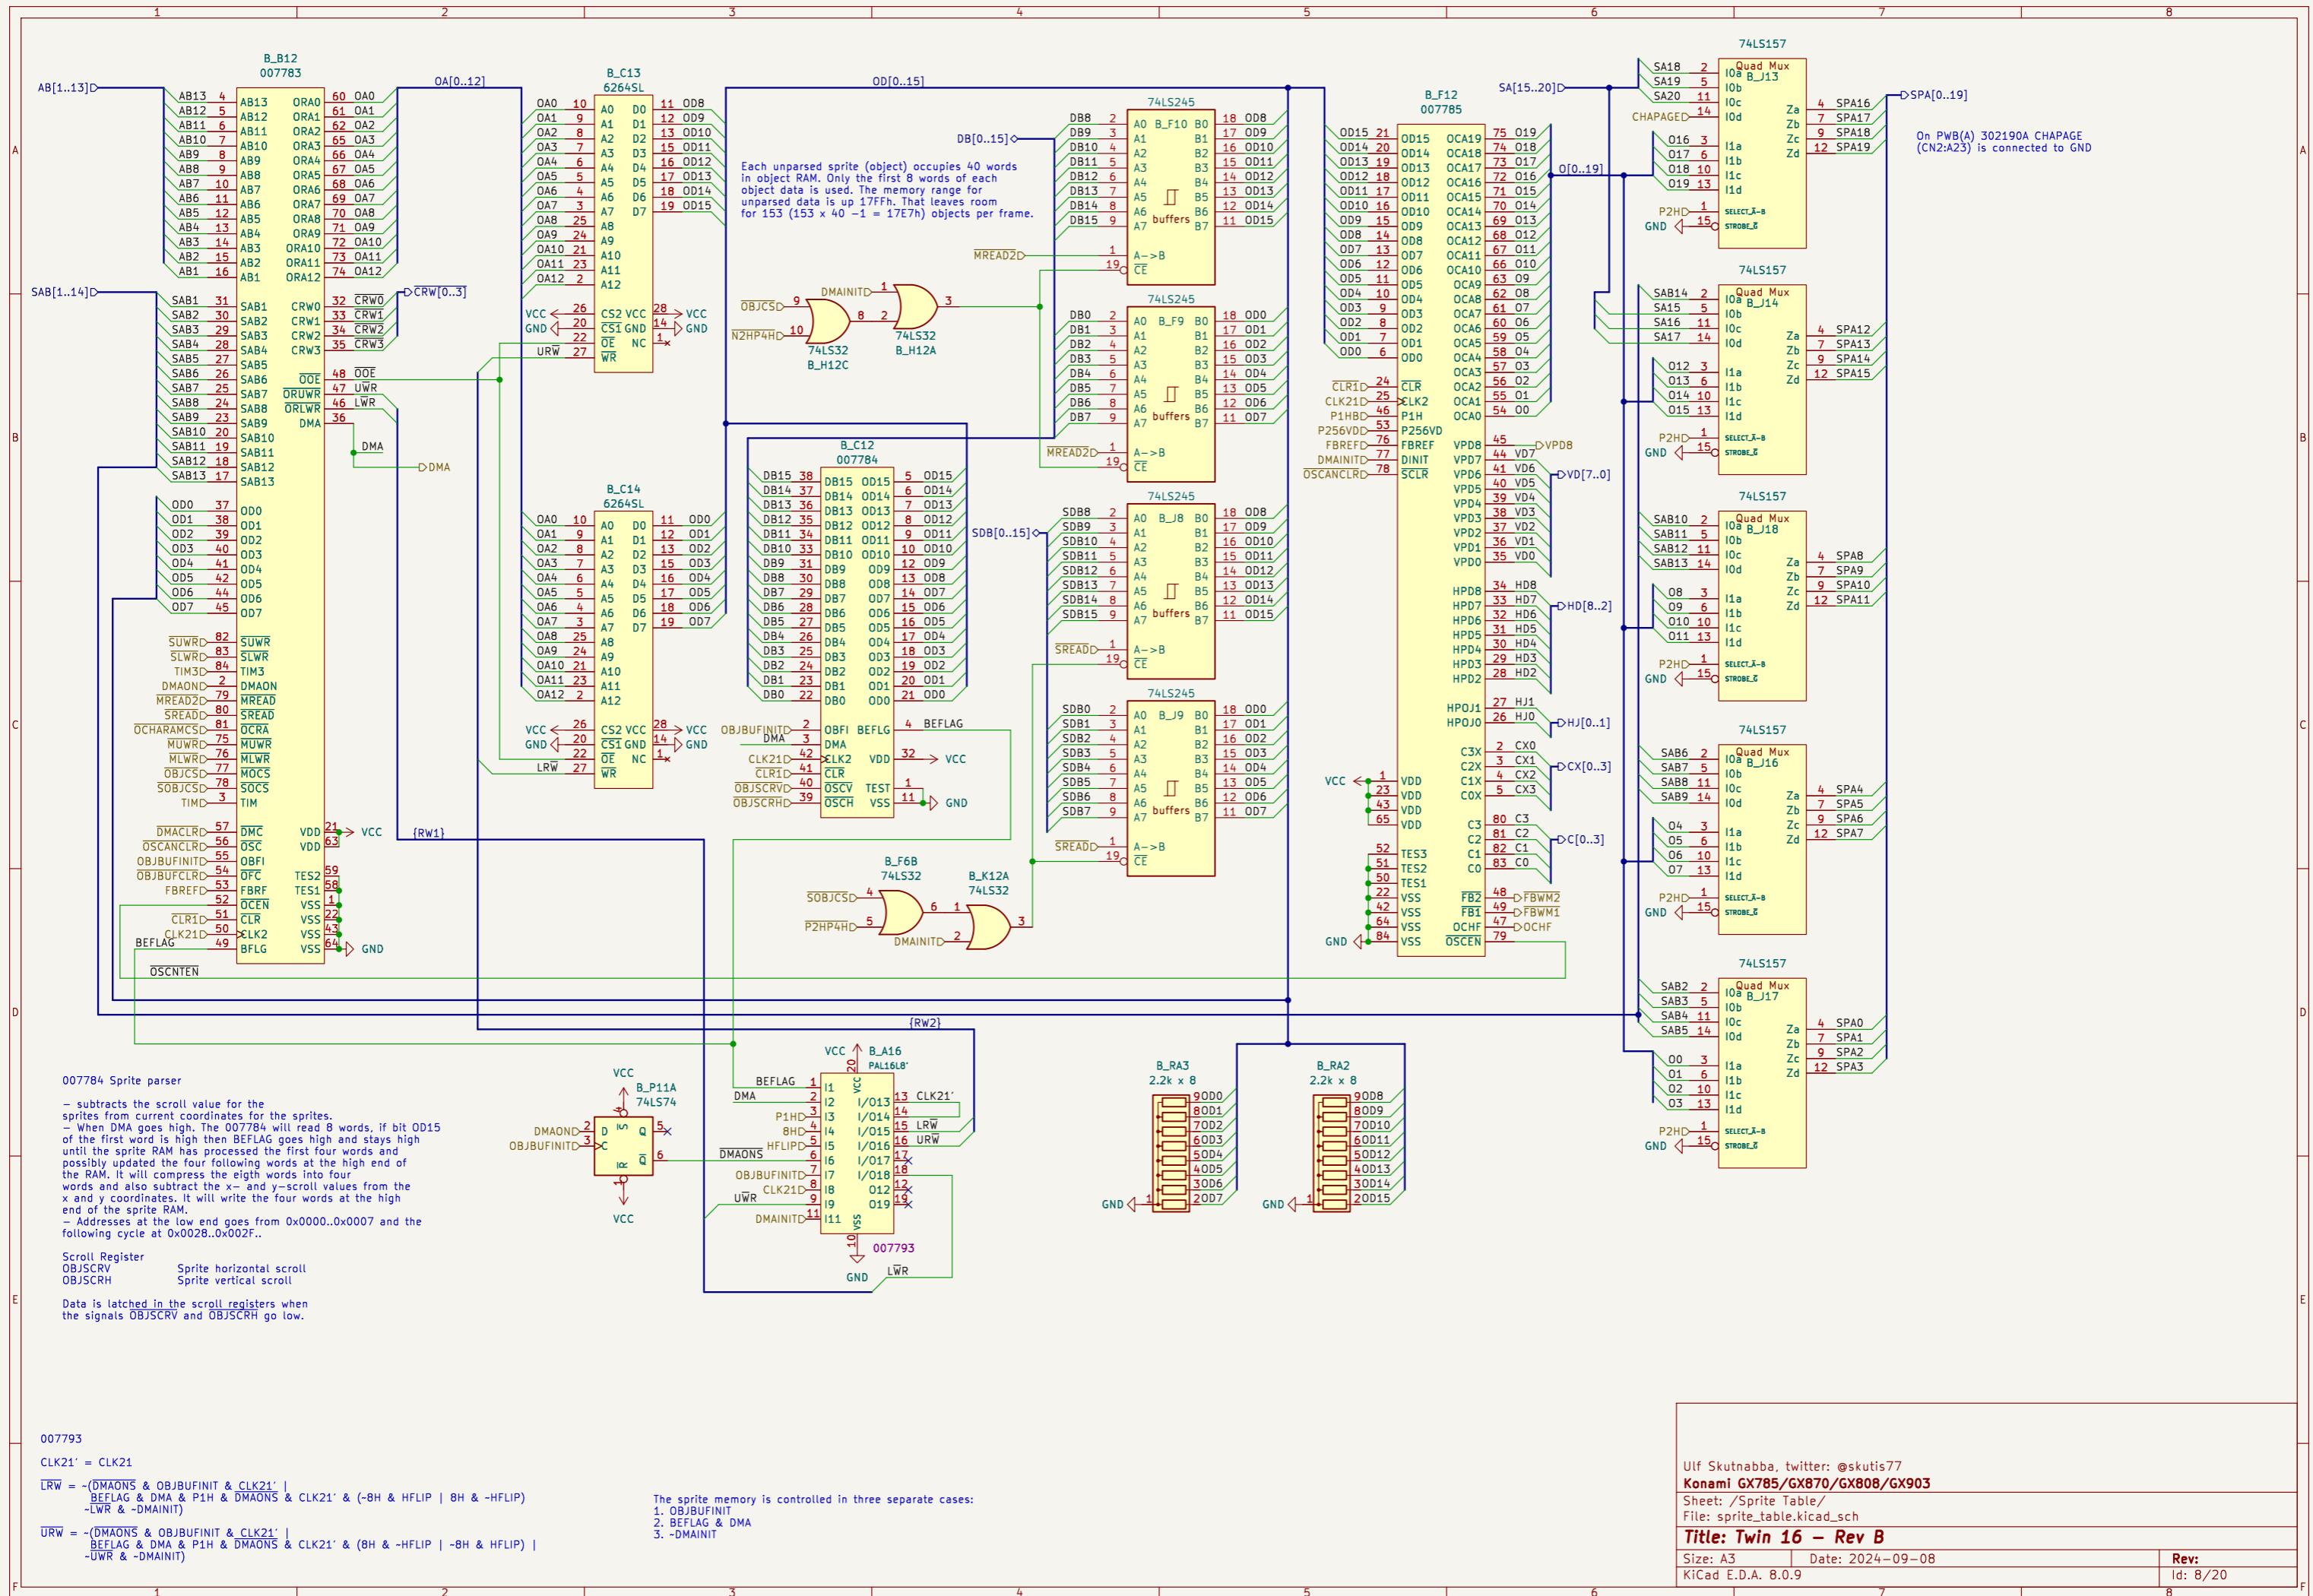



Graphics ROM and RAM

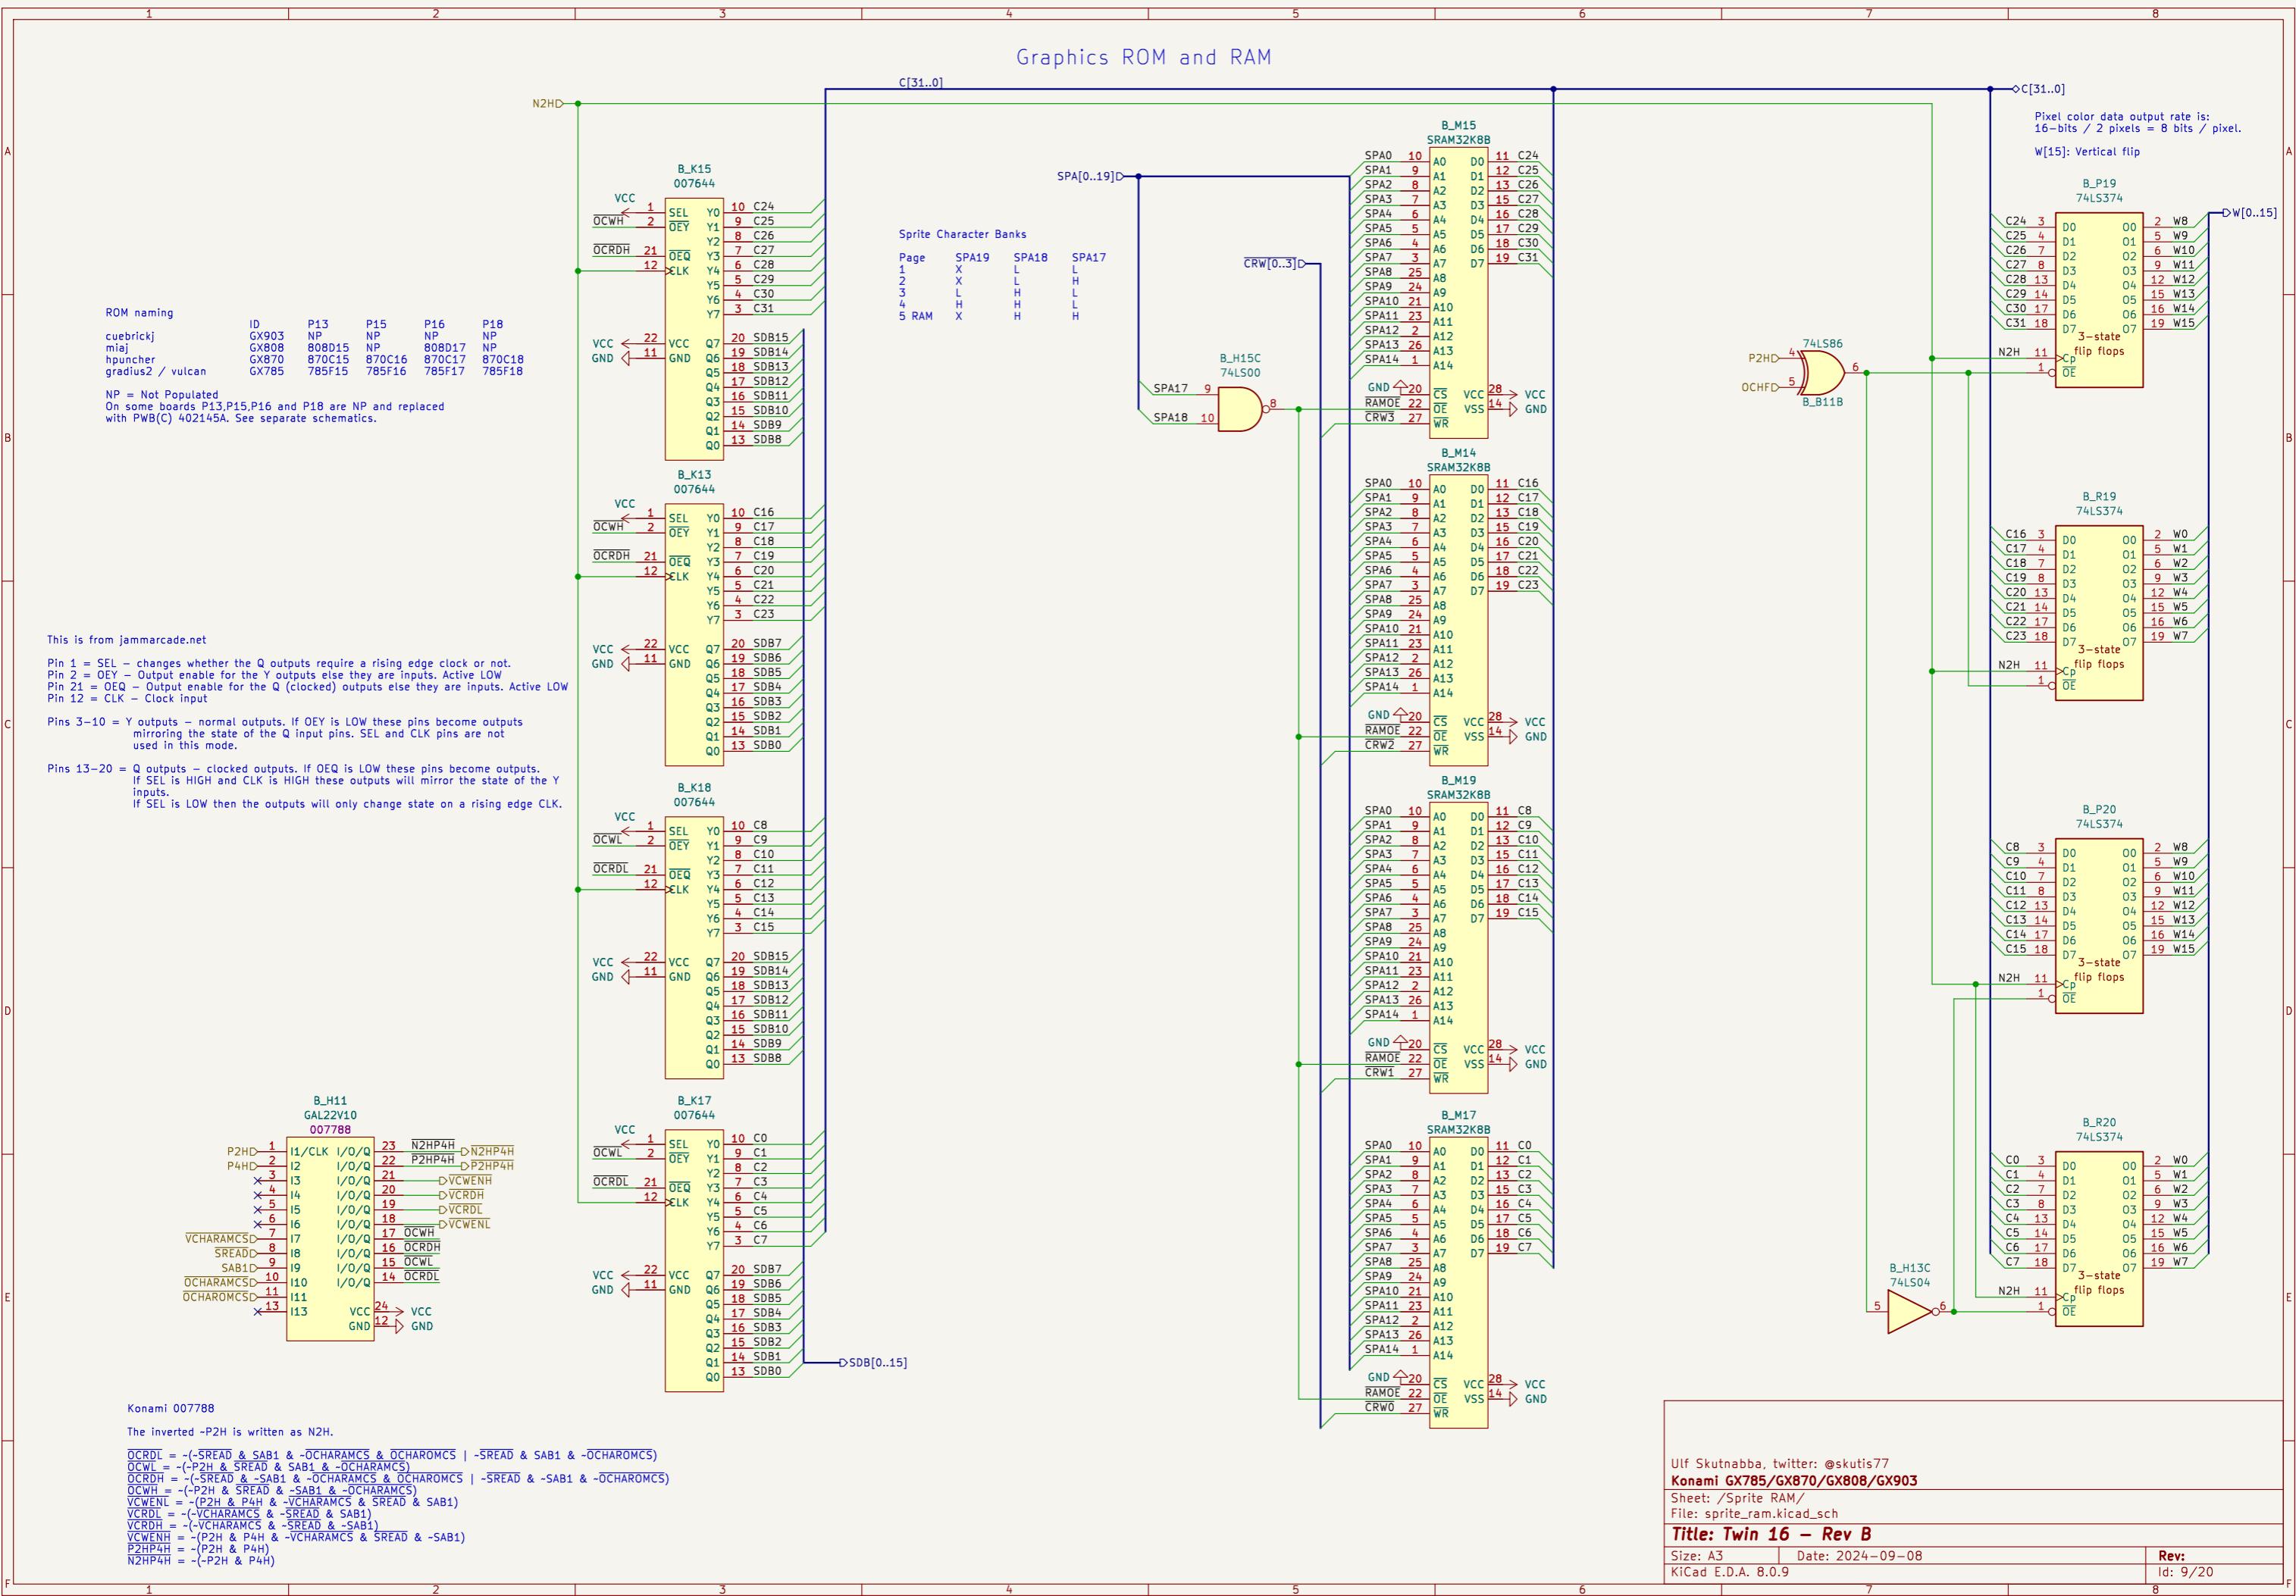

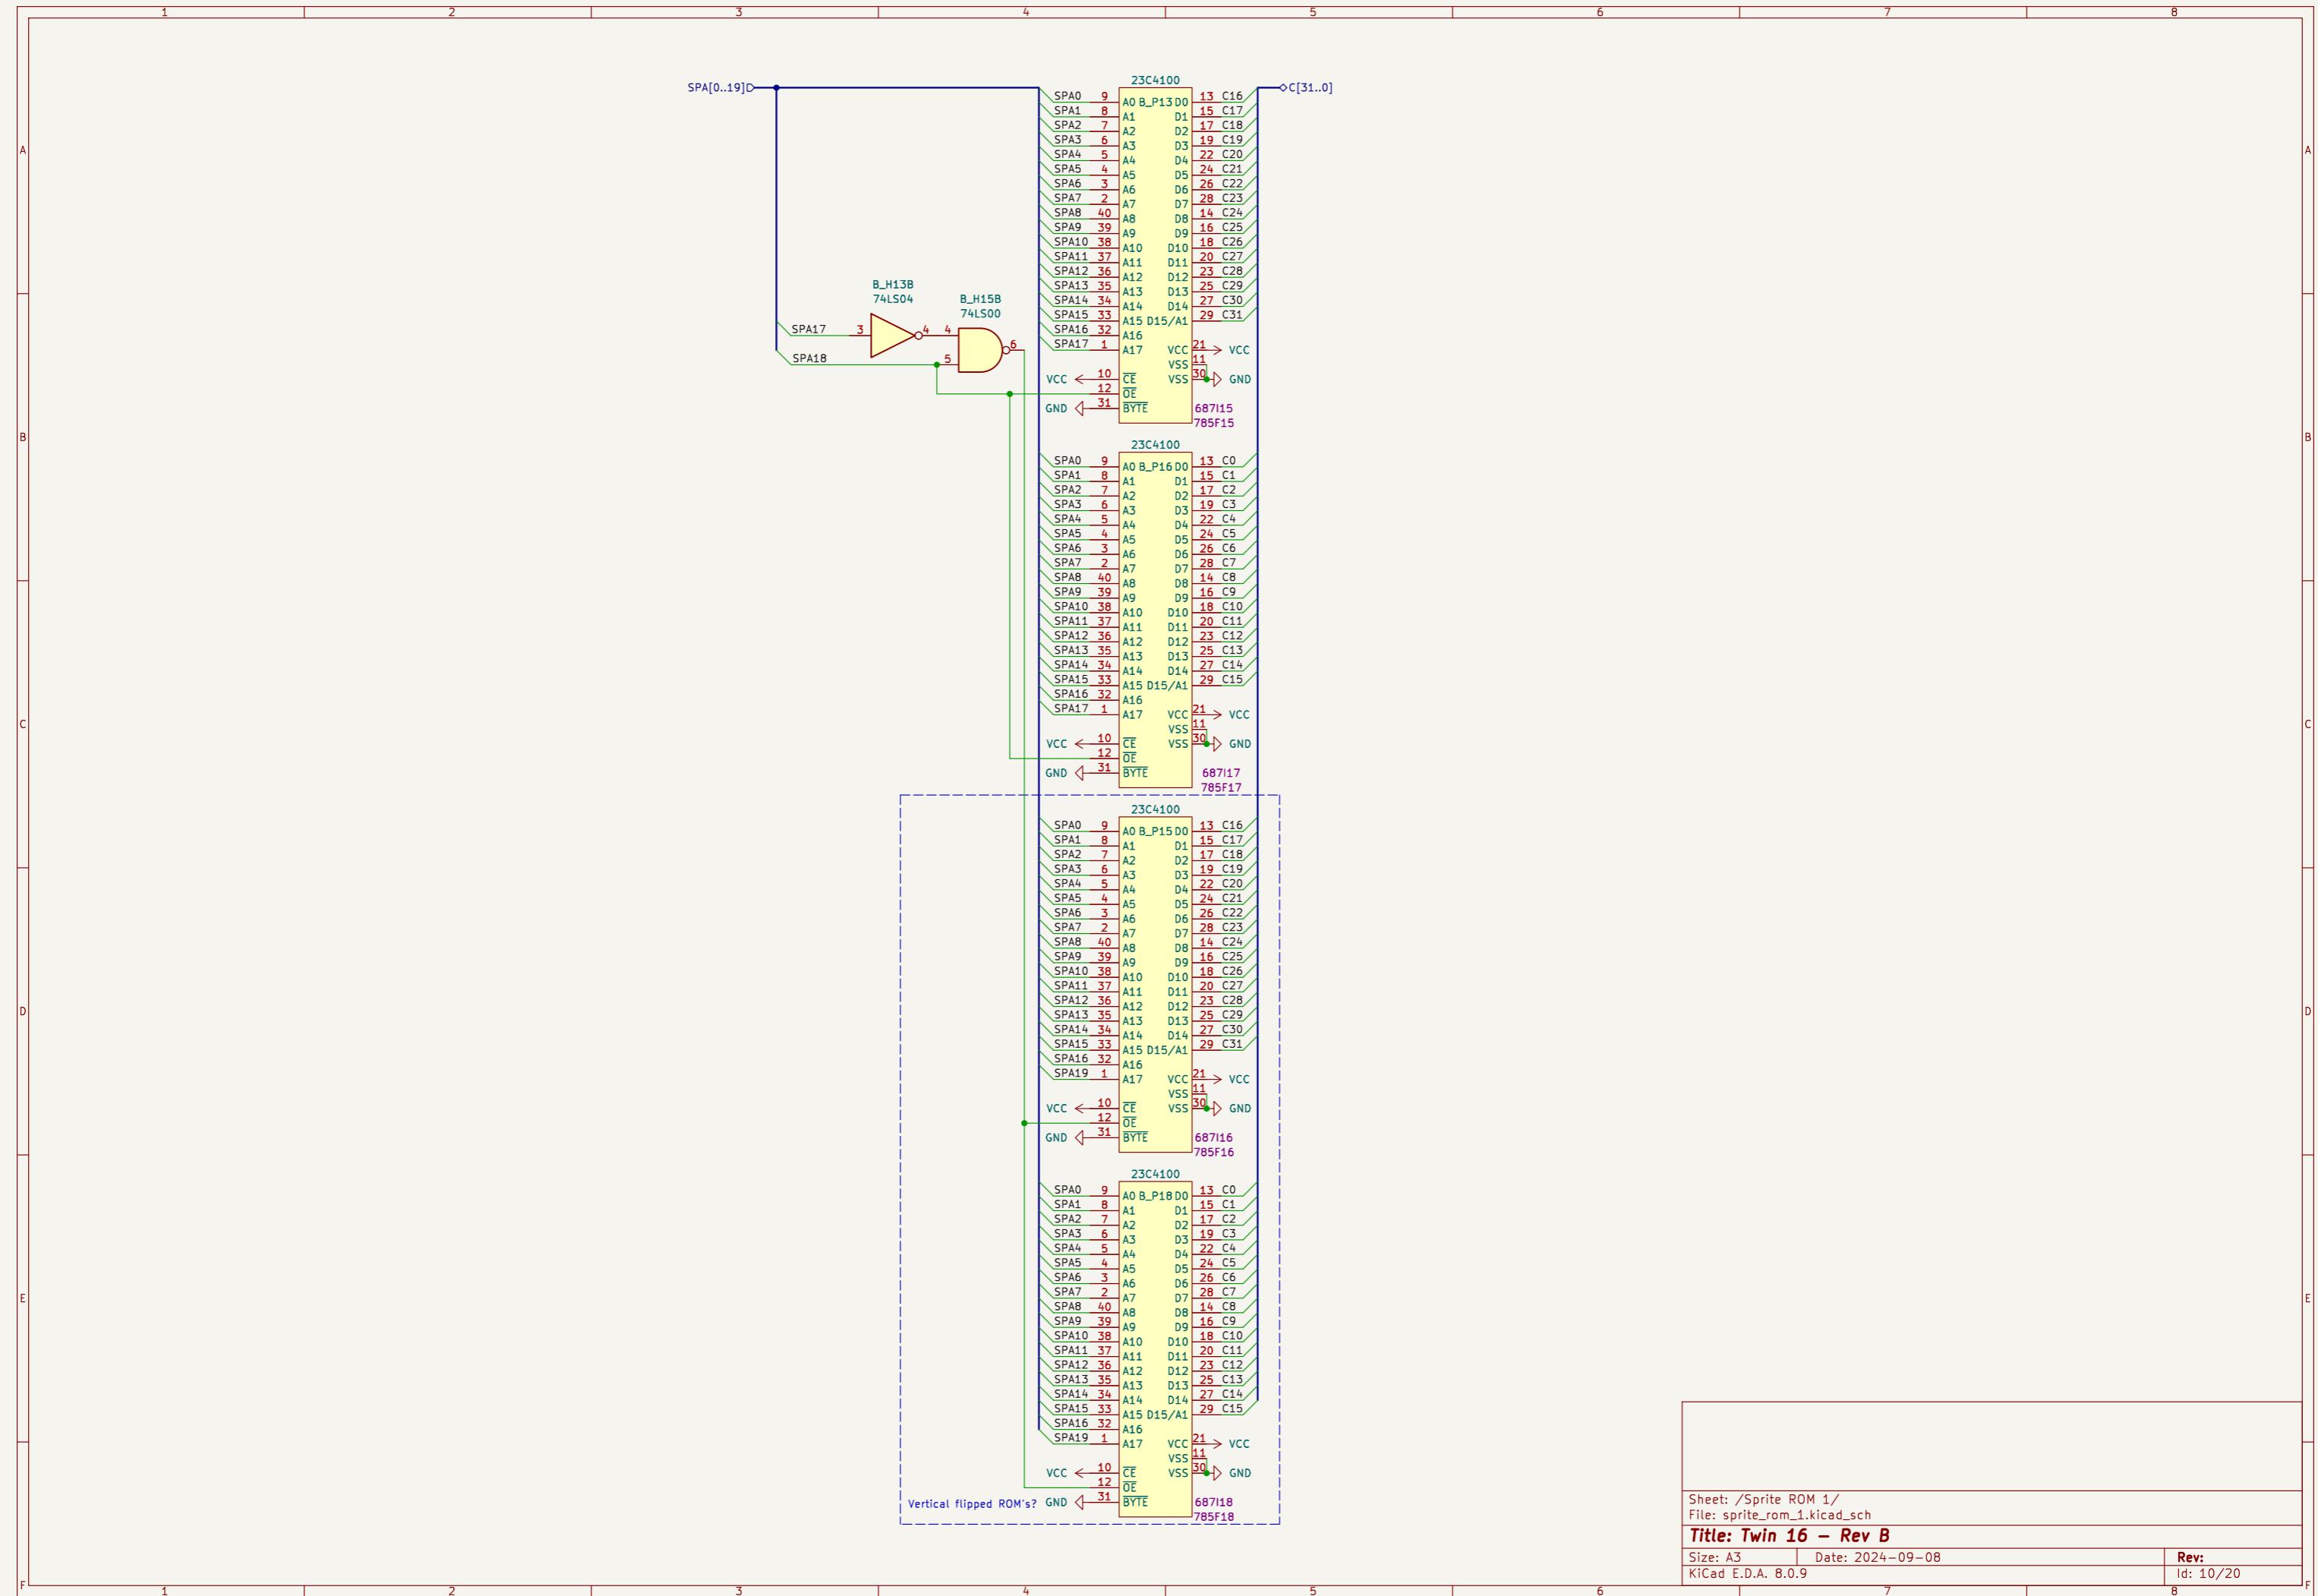

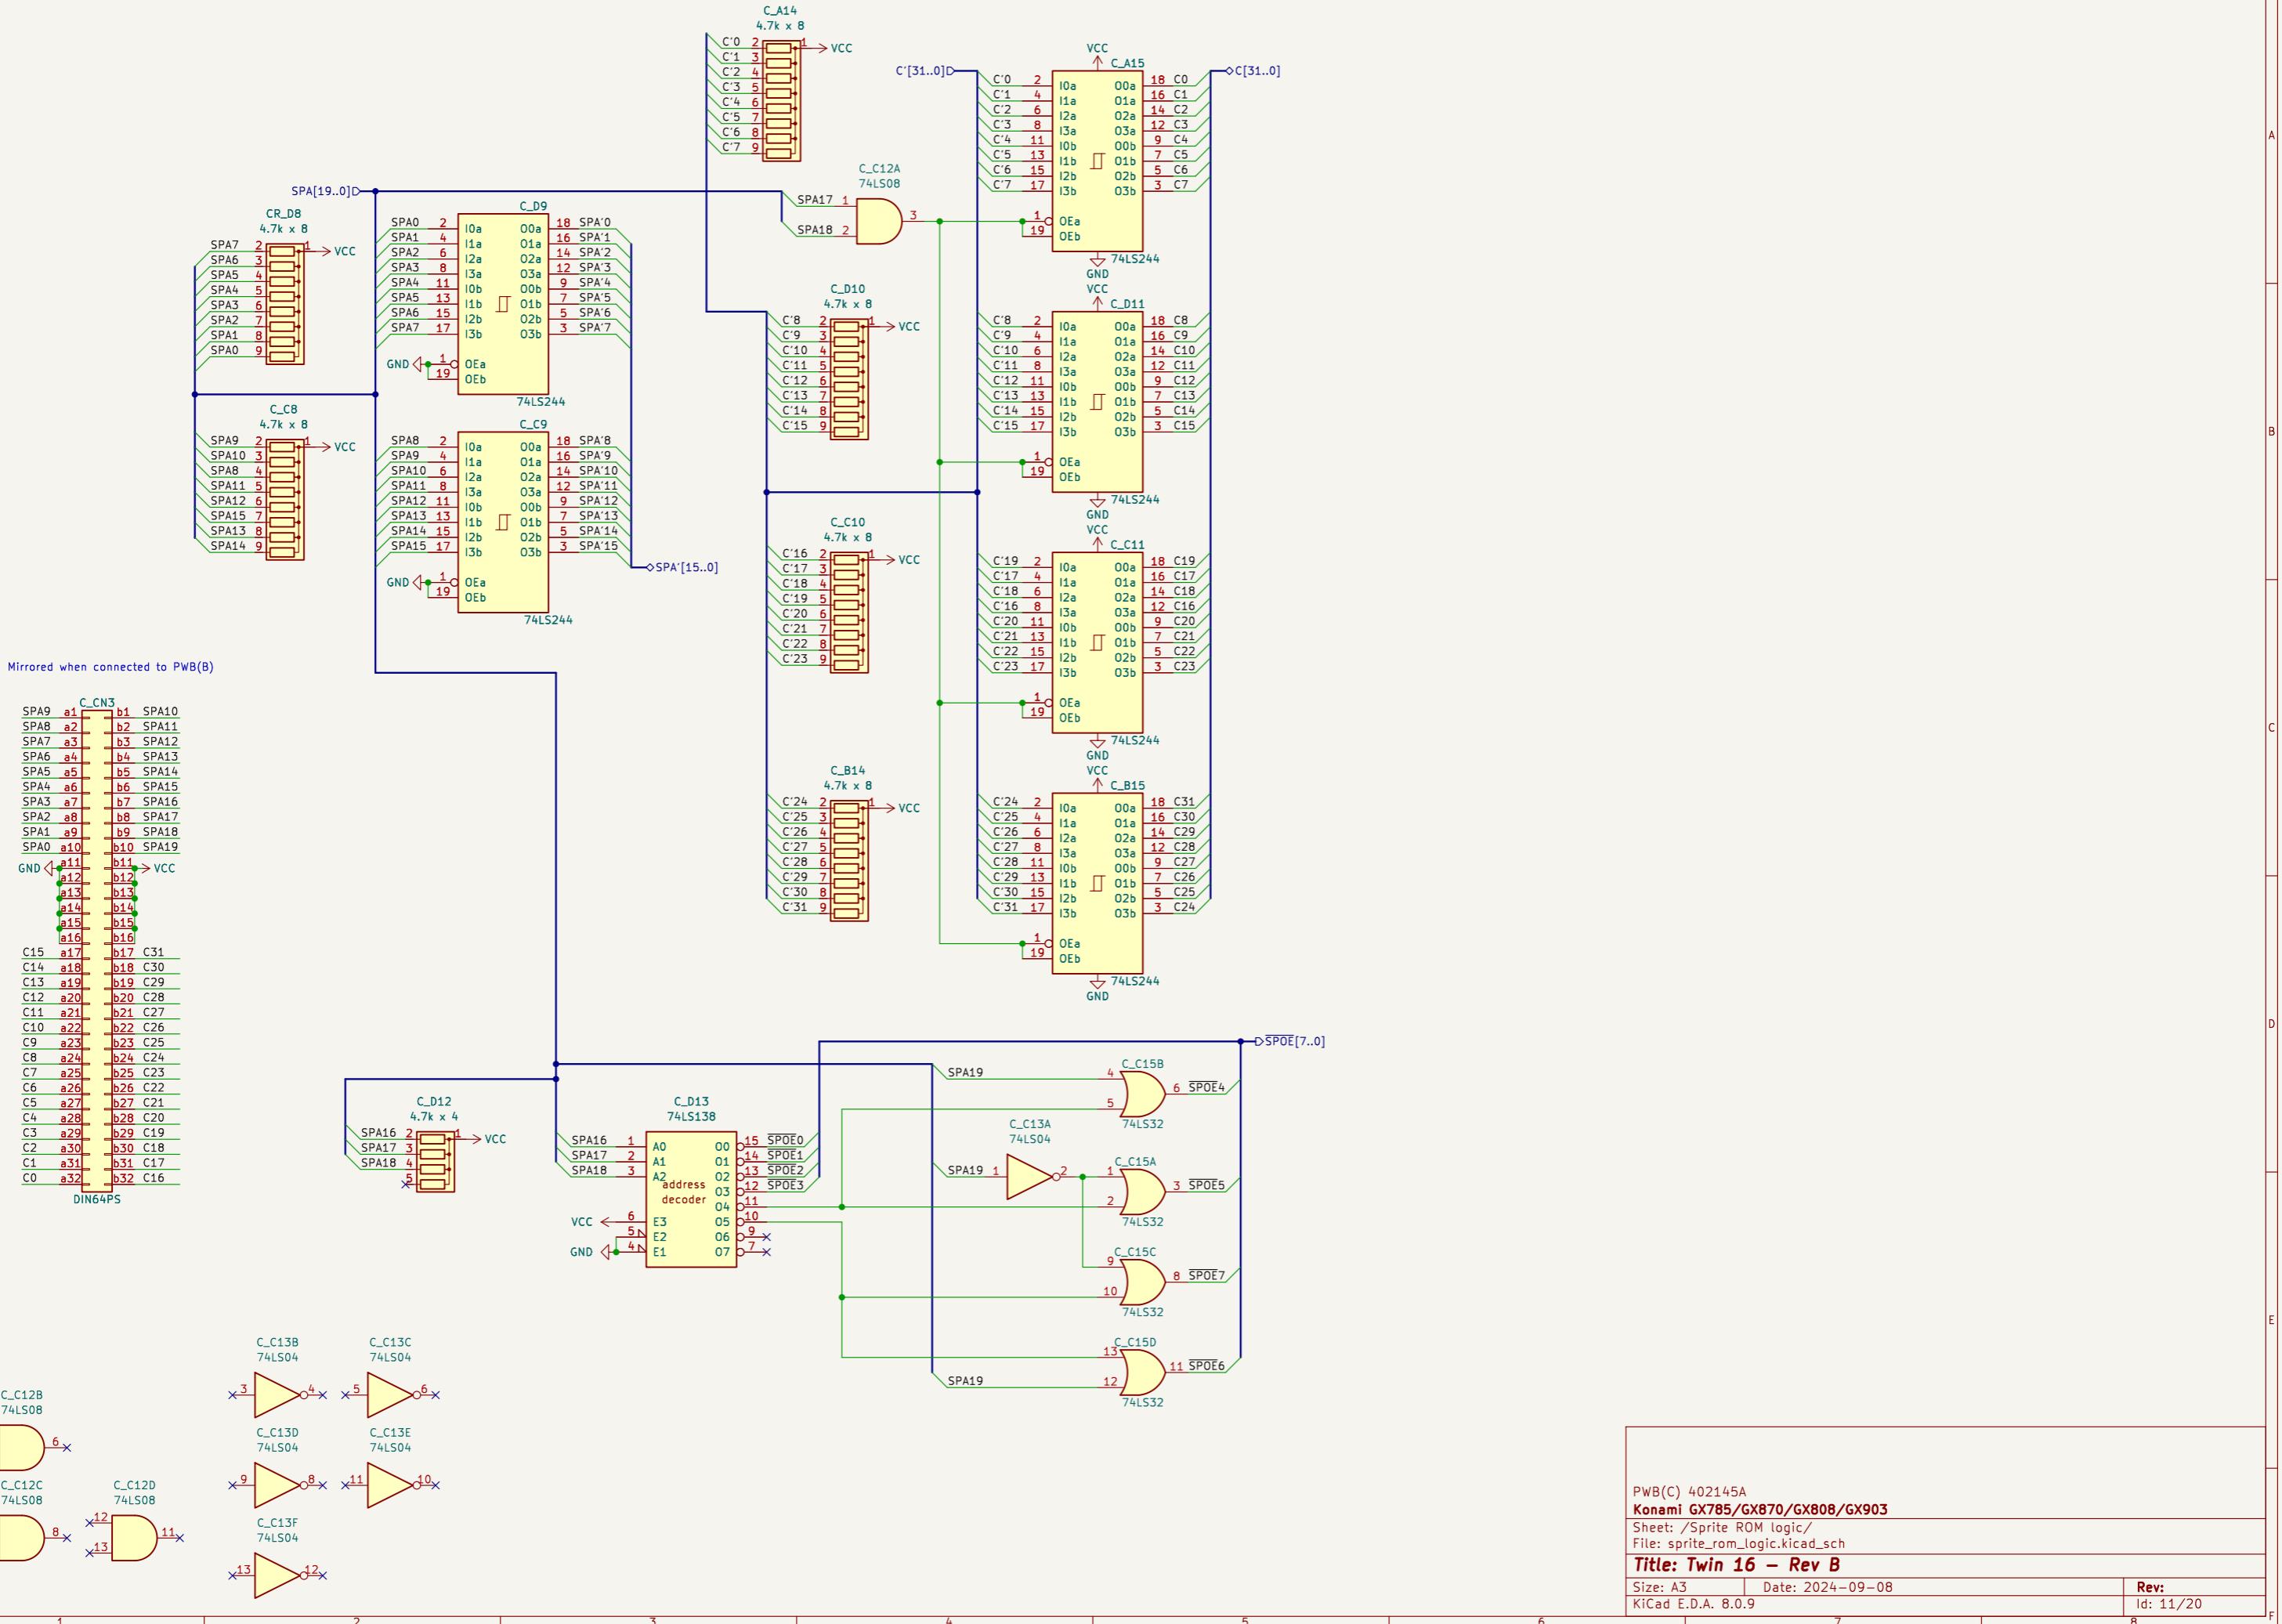

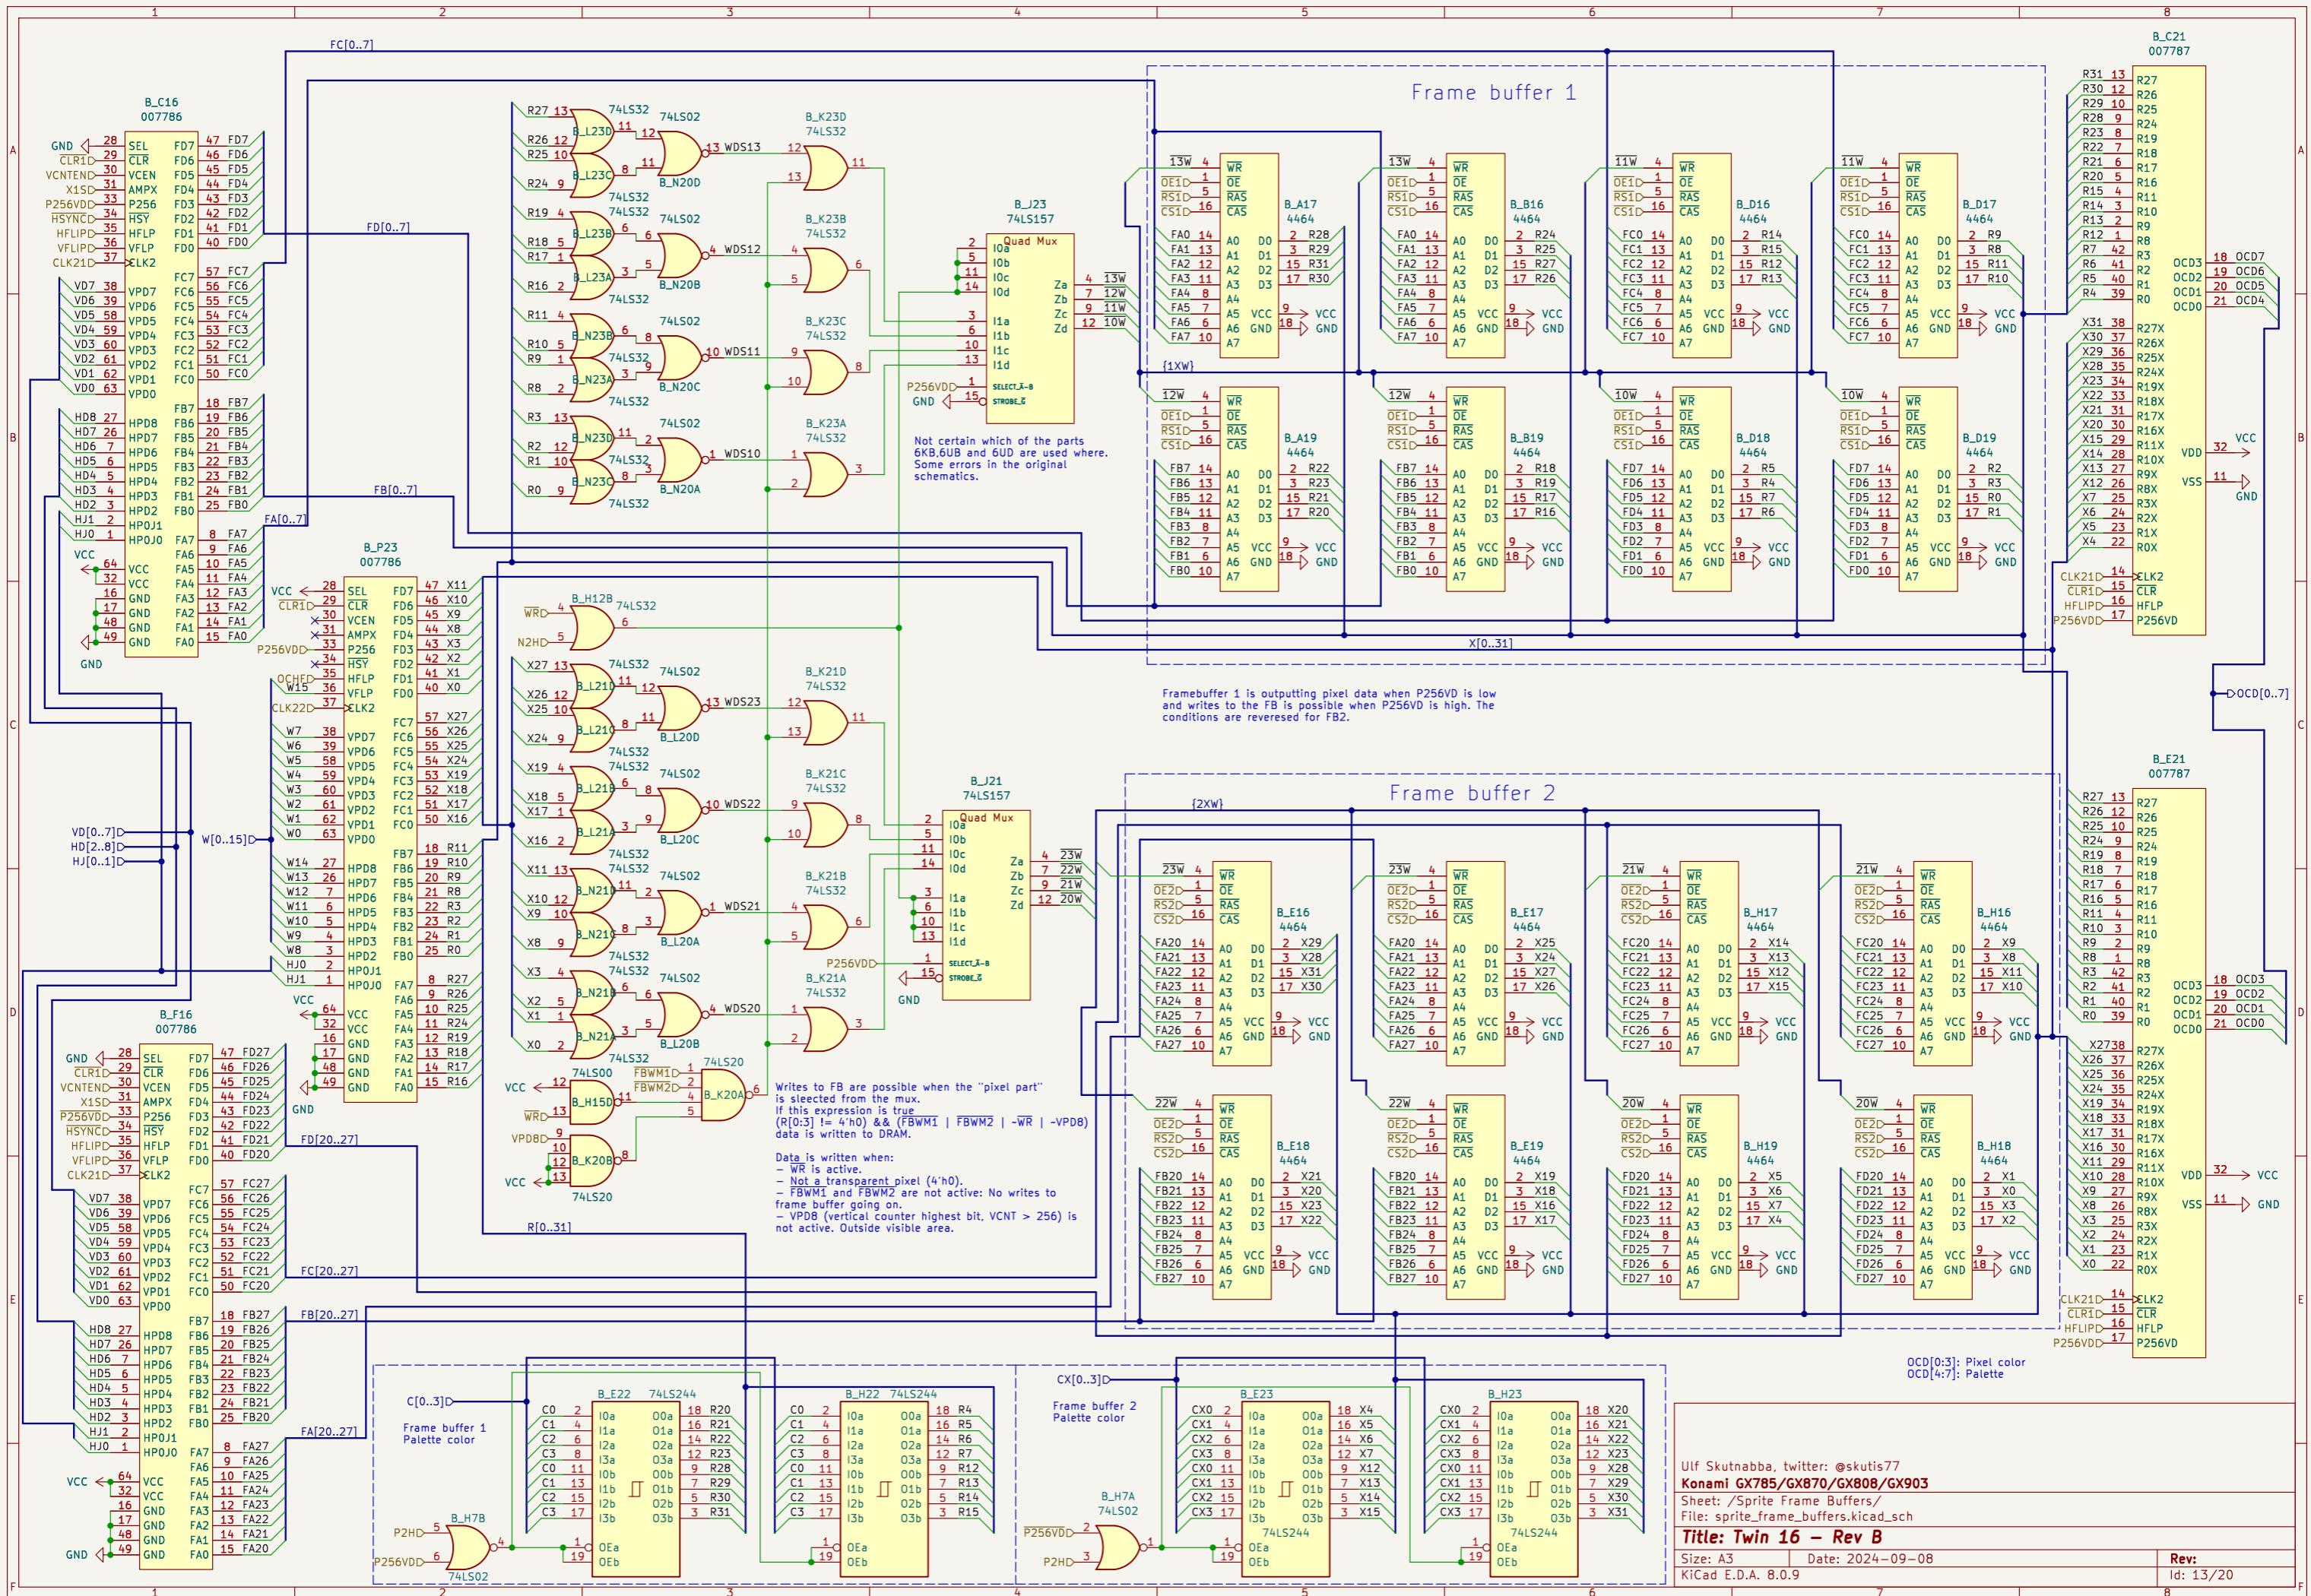

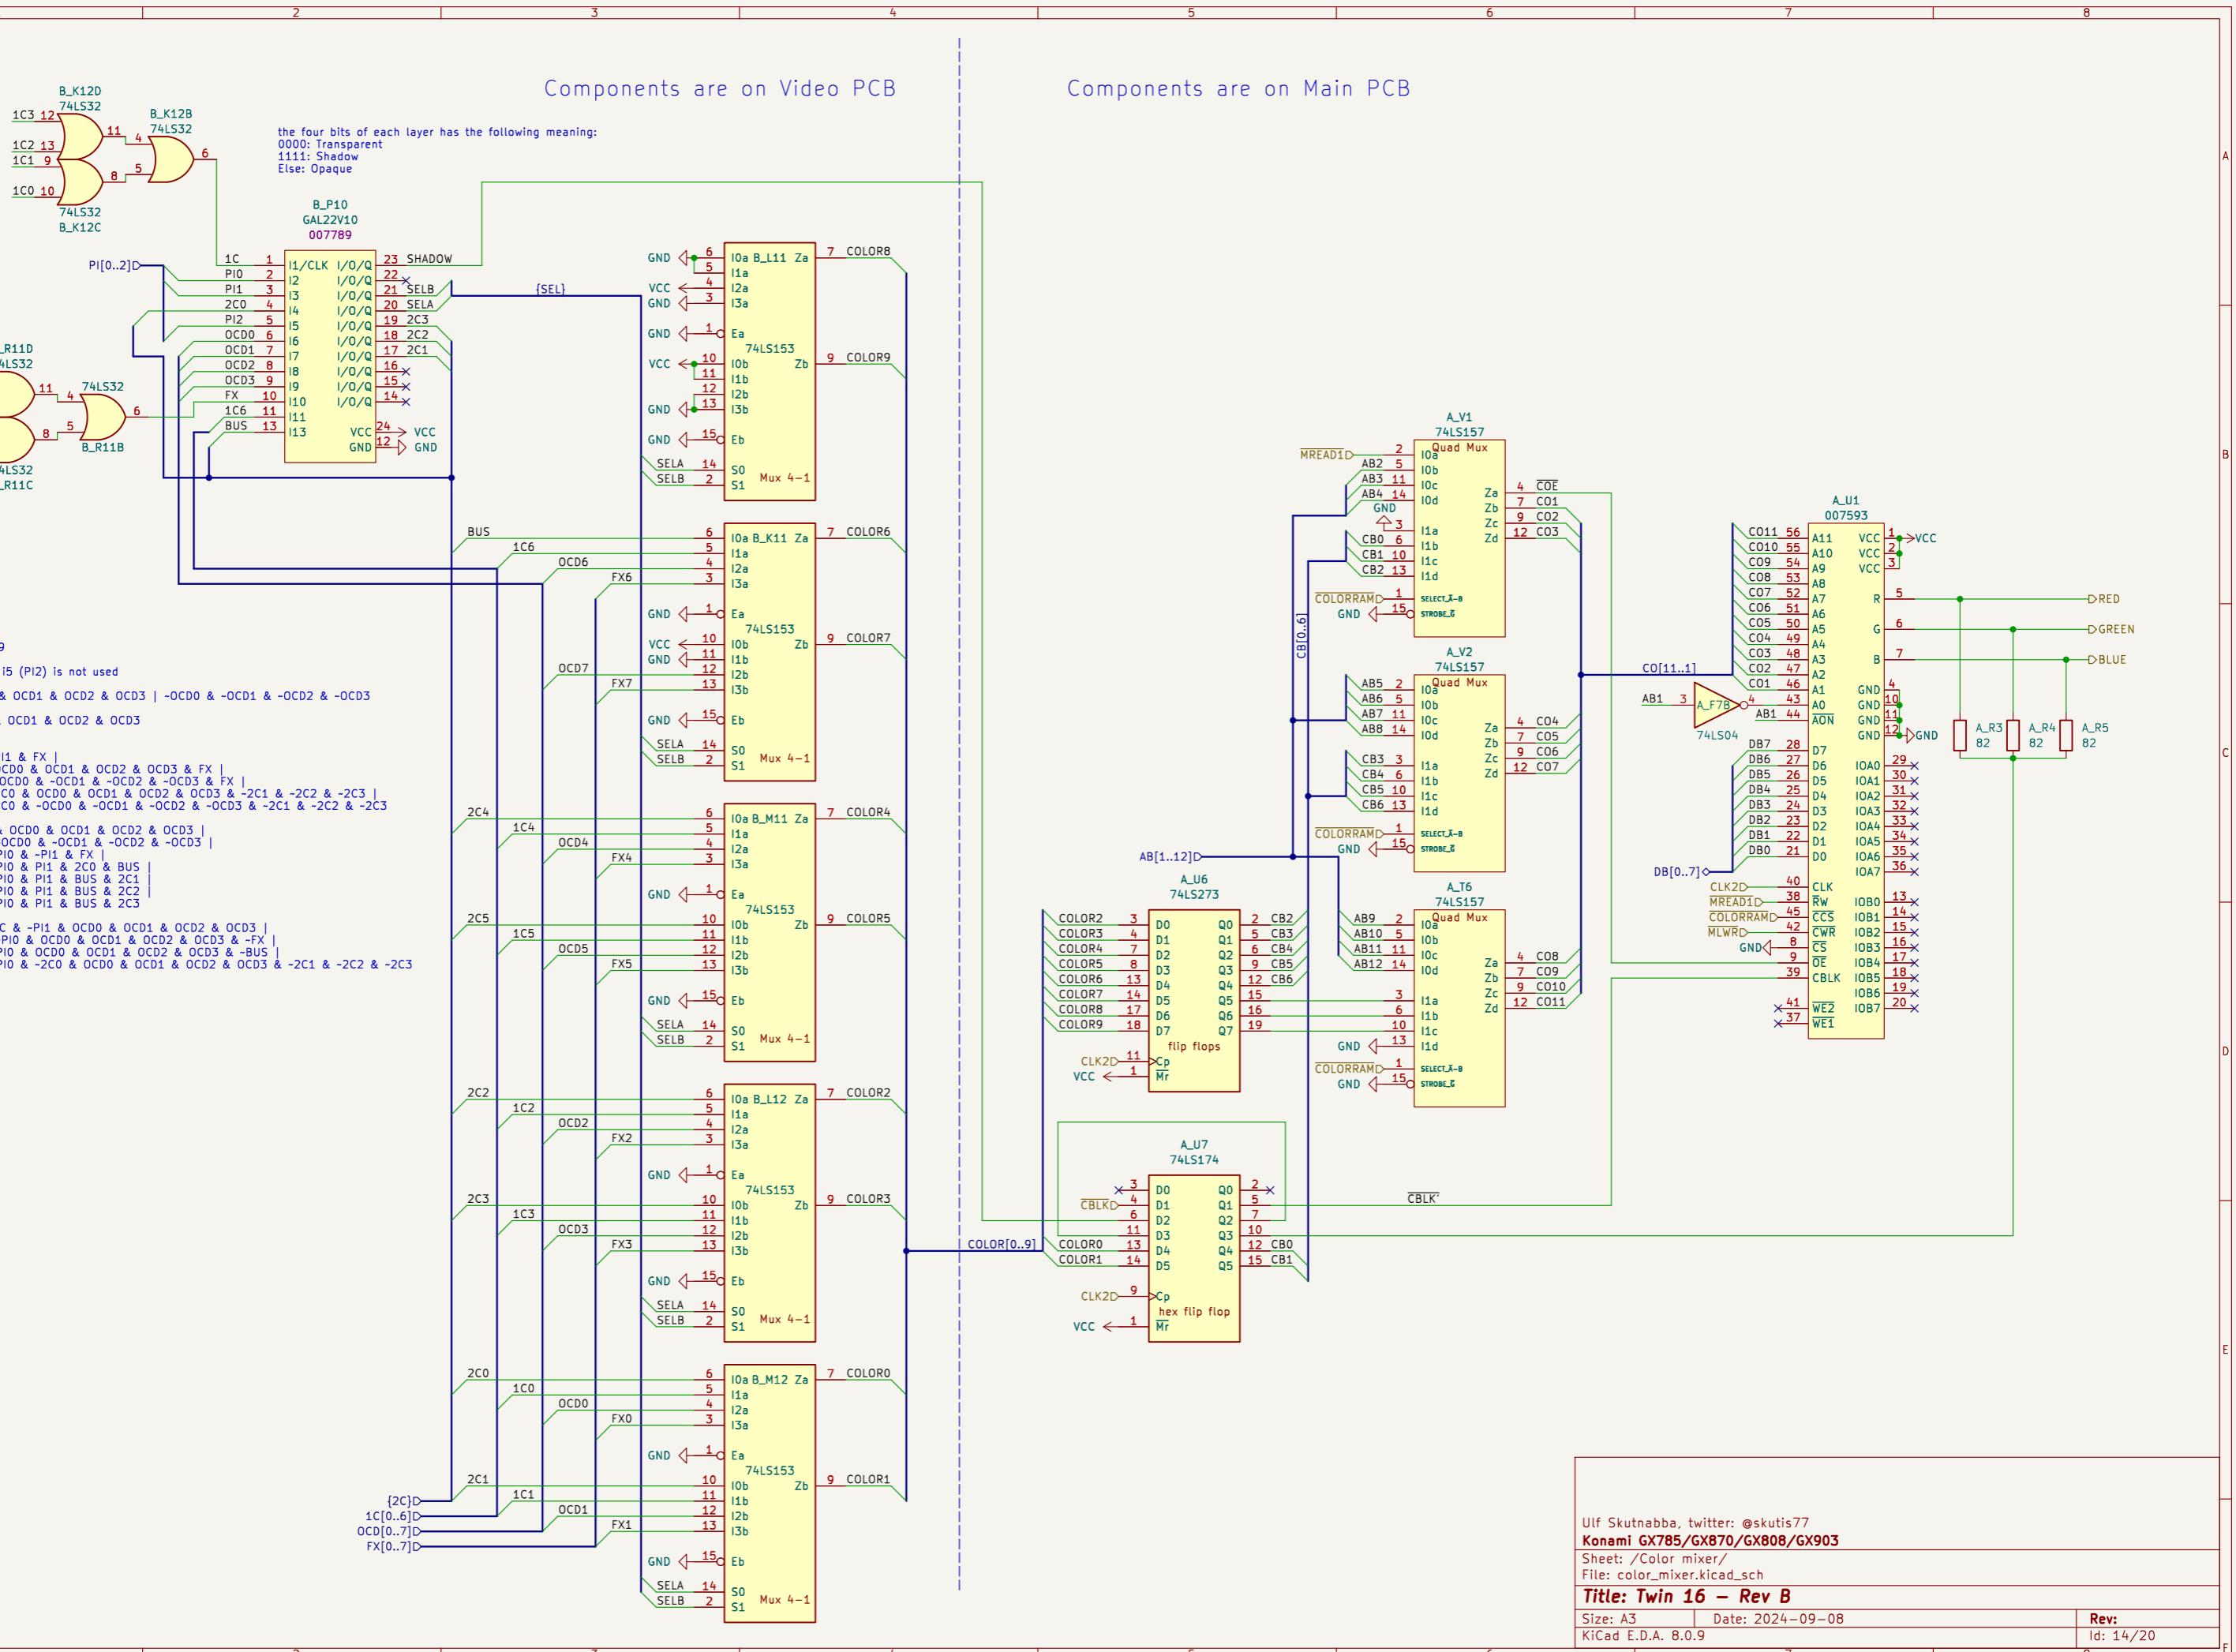


Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903


Sheet: /Color mixer/
File: color_mixer.kicad_sch

Title: Twin 16 – Rev B


Size: A3 Date: 2024-09-08
KiCad E.D.A. 8.0.9

Rev: Id: 14/20

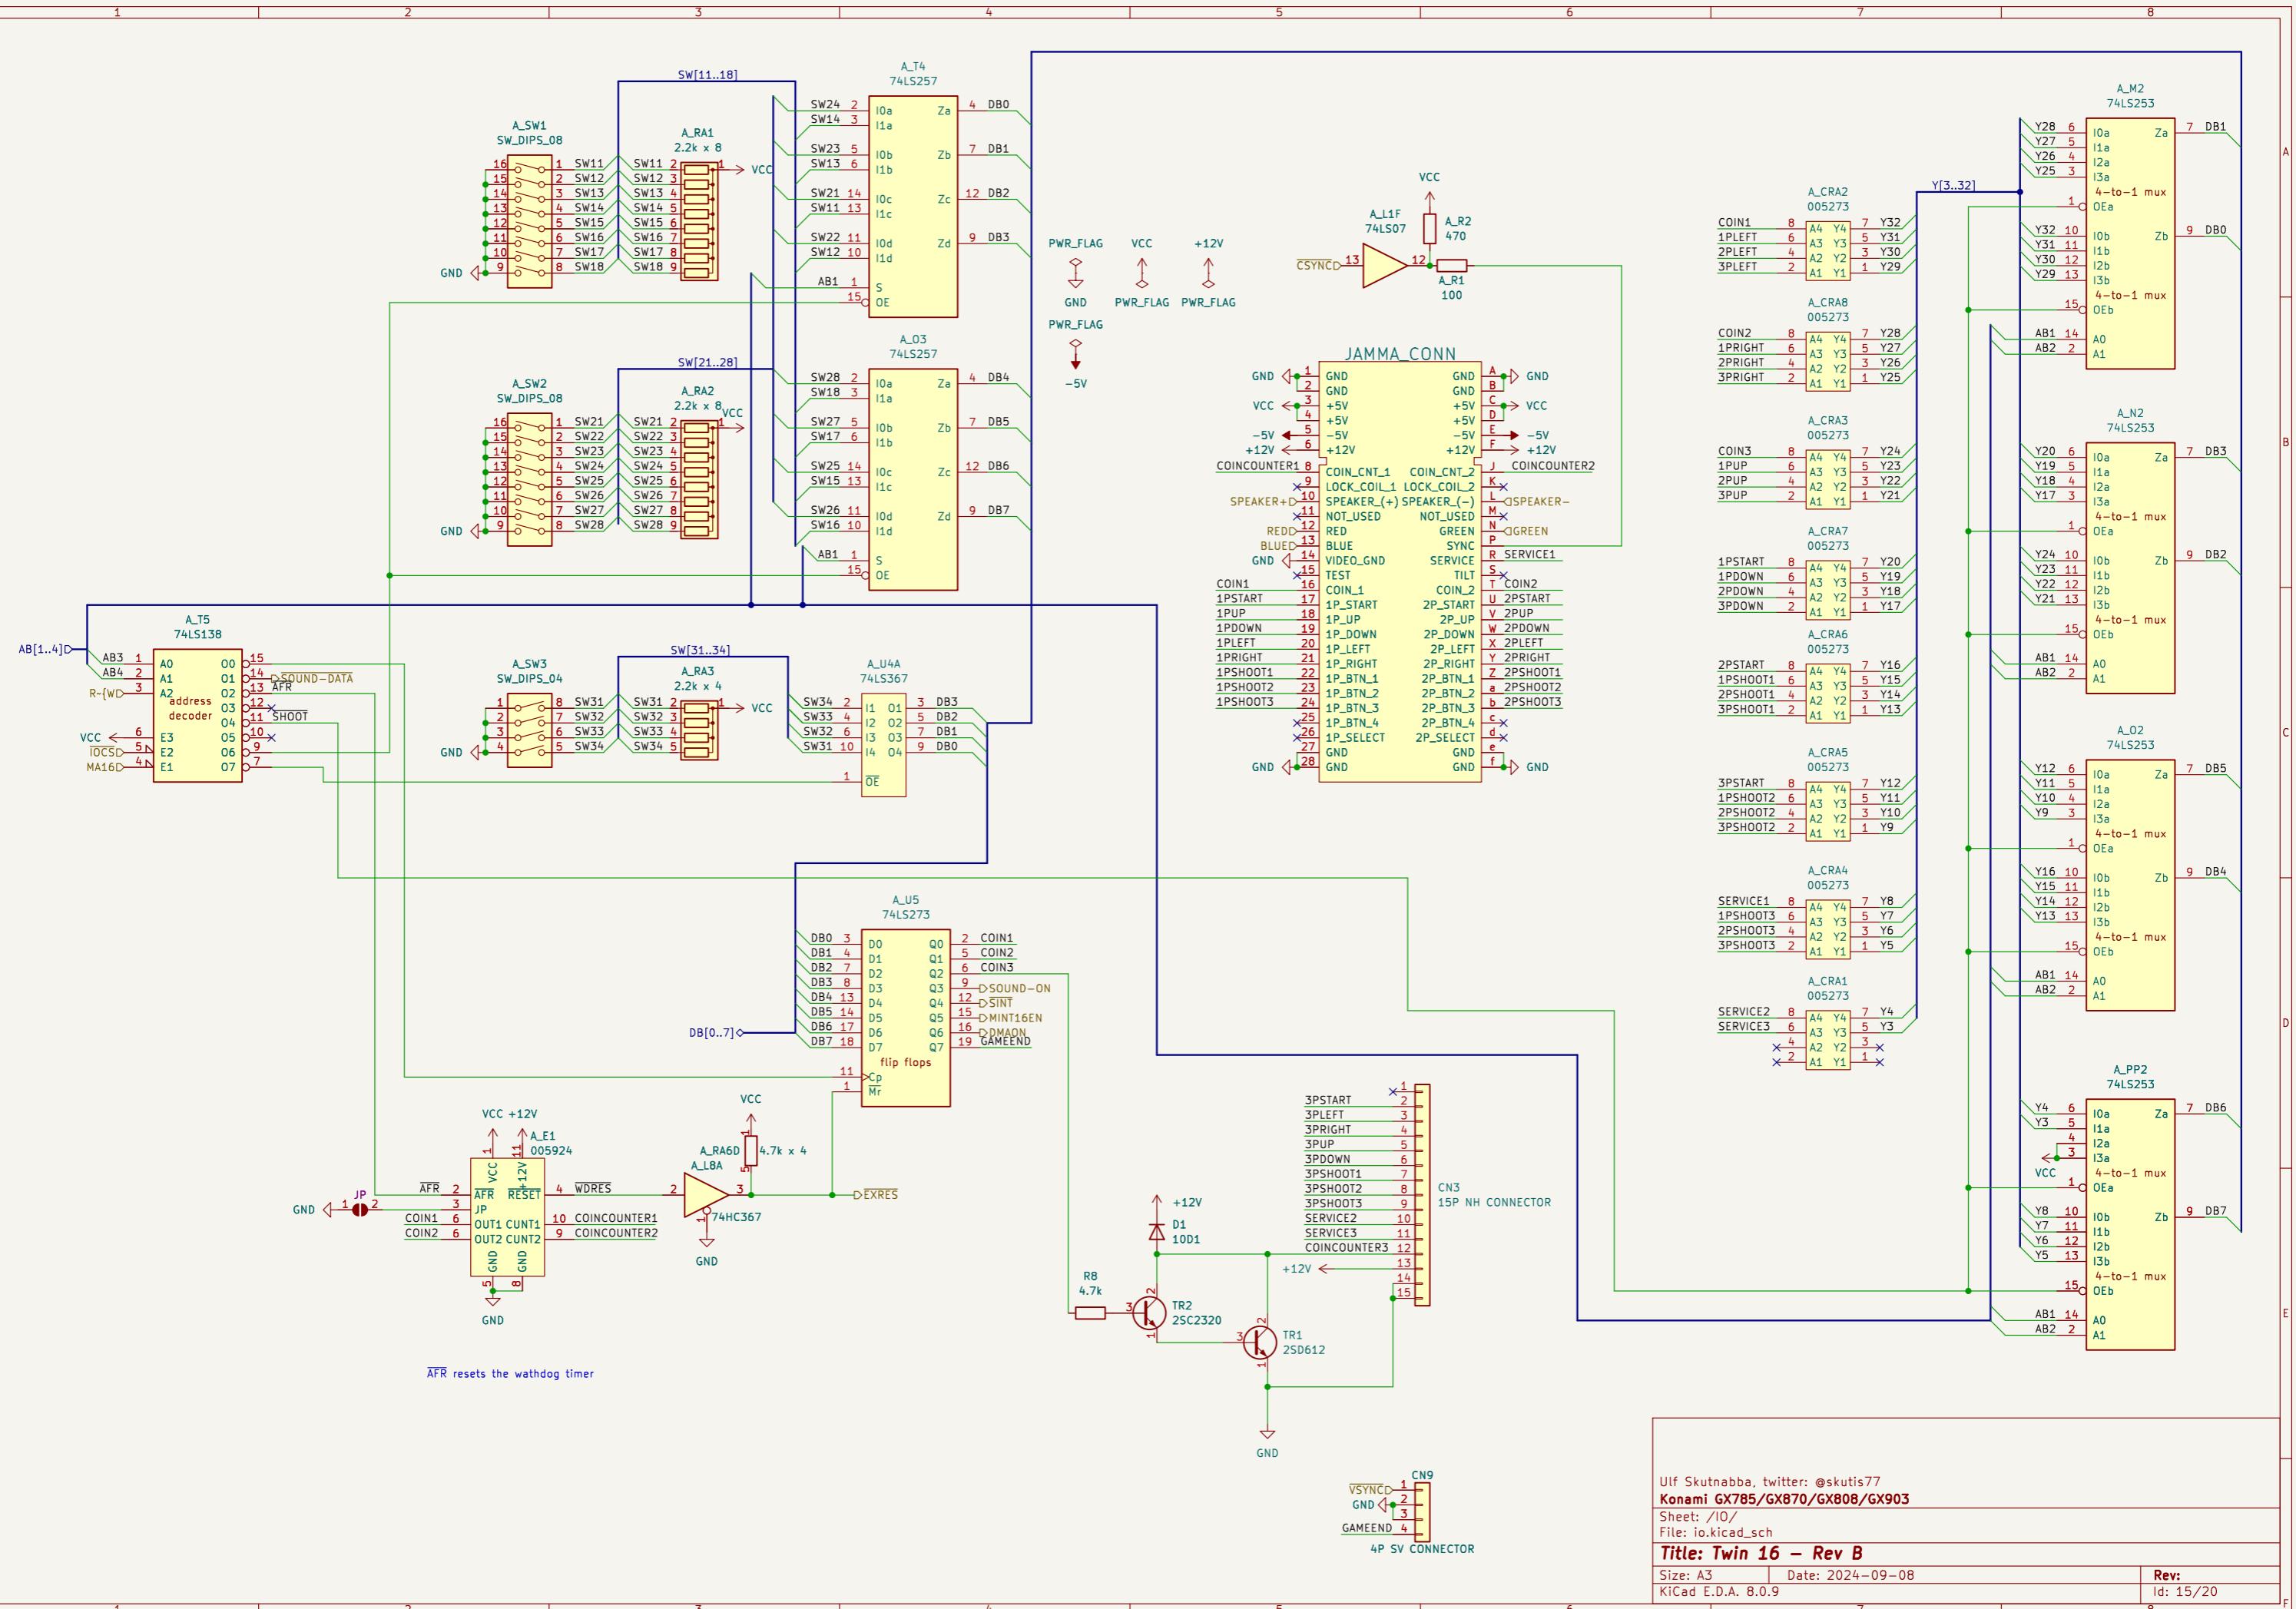

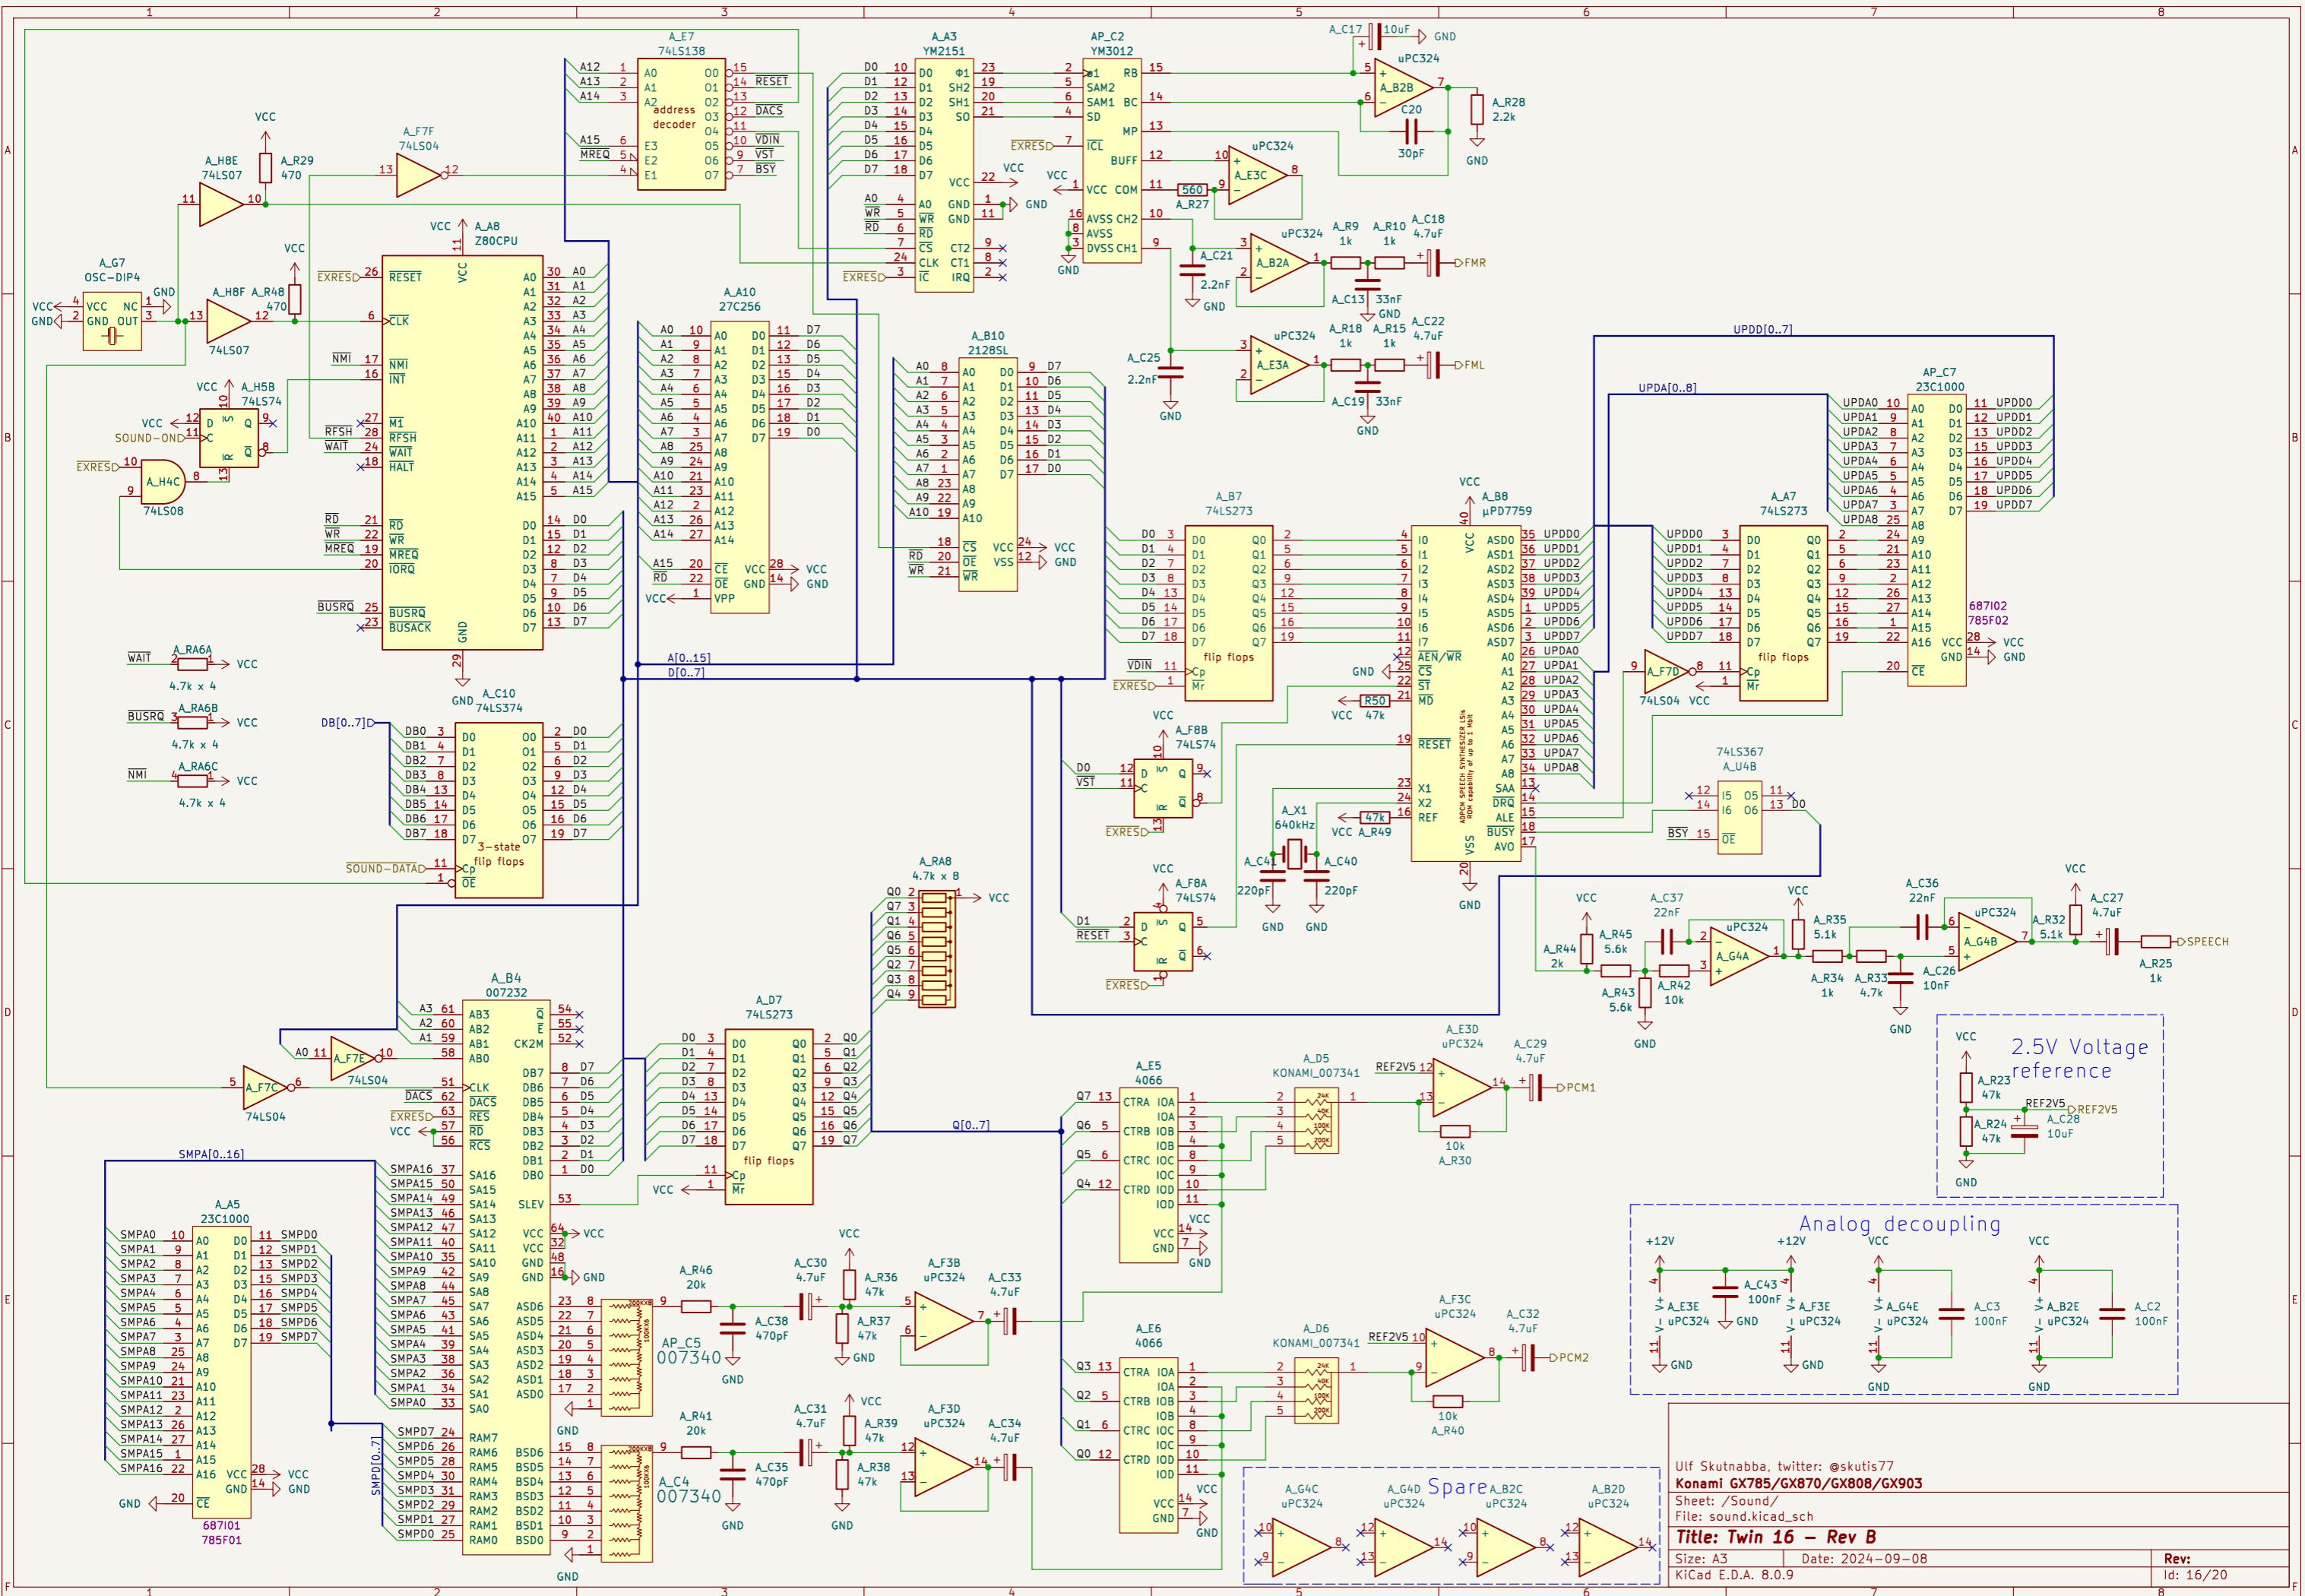

1 2 3 4 5 6 7 8

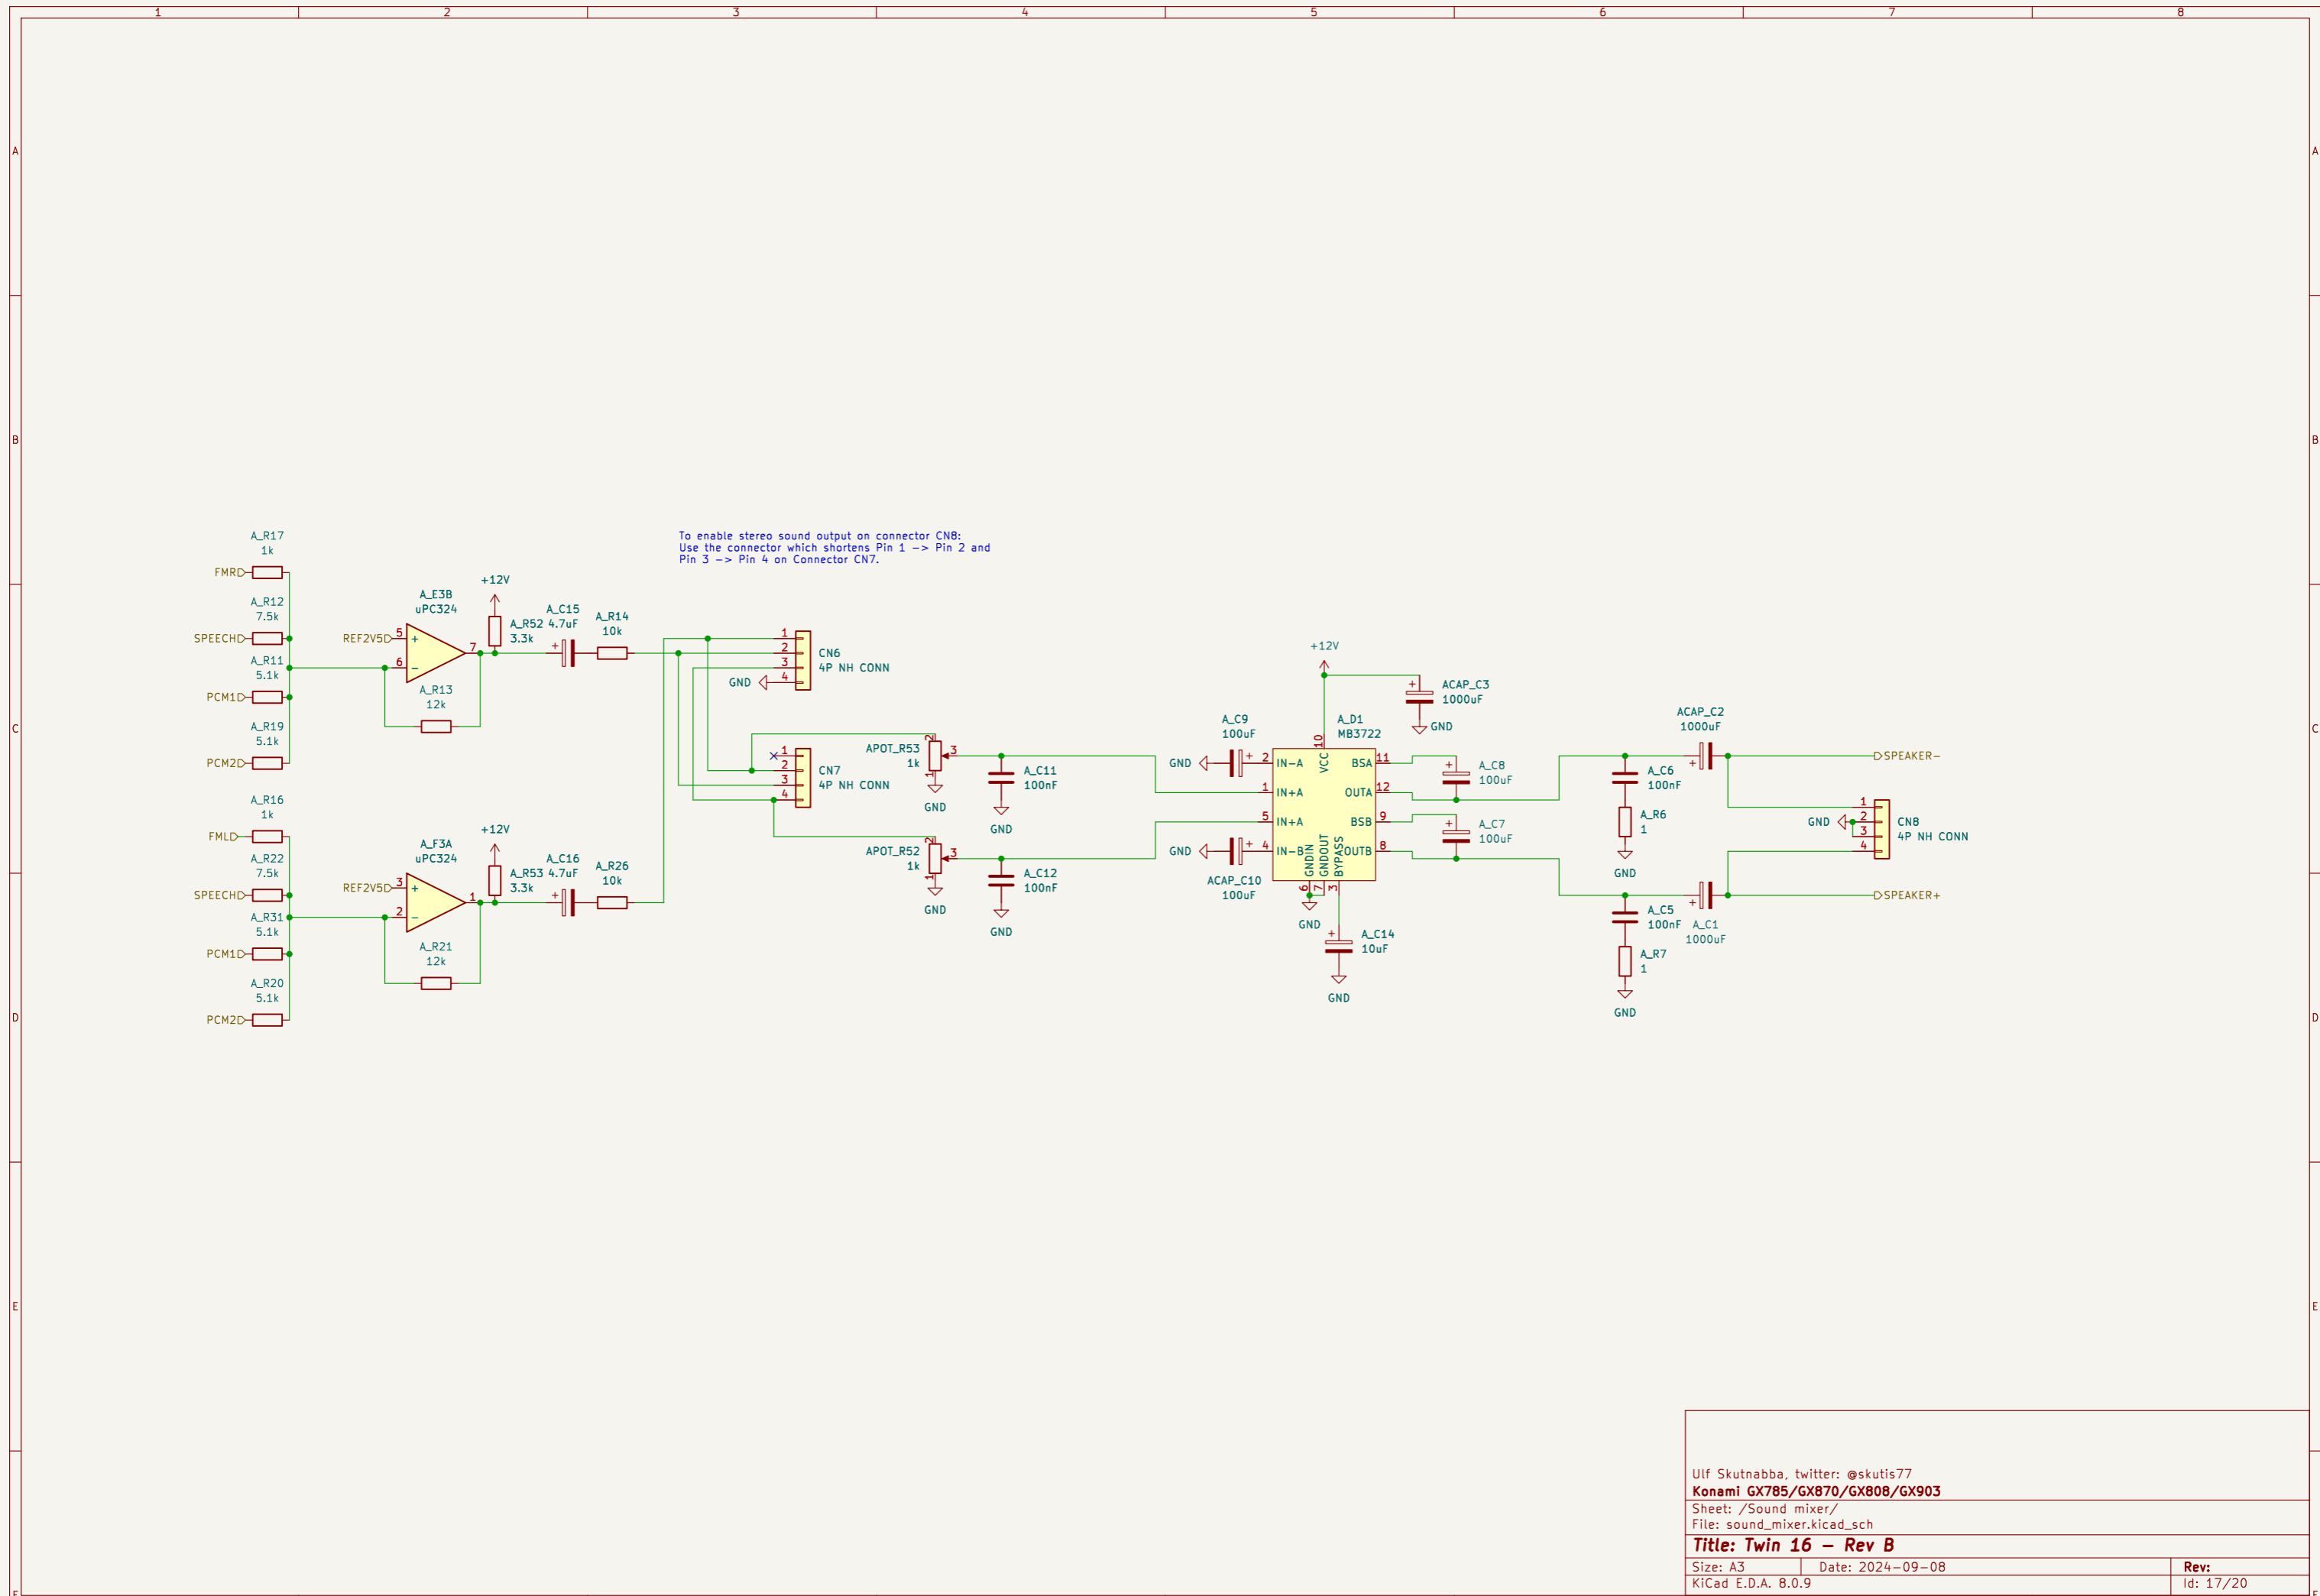

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Sound mixer/

File: sound_mixer.kicad_sch


Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08


KiCad E.D.A. 8.0.9

Rev:

Id: 17/20

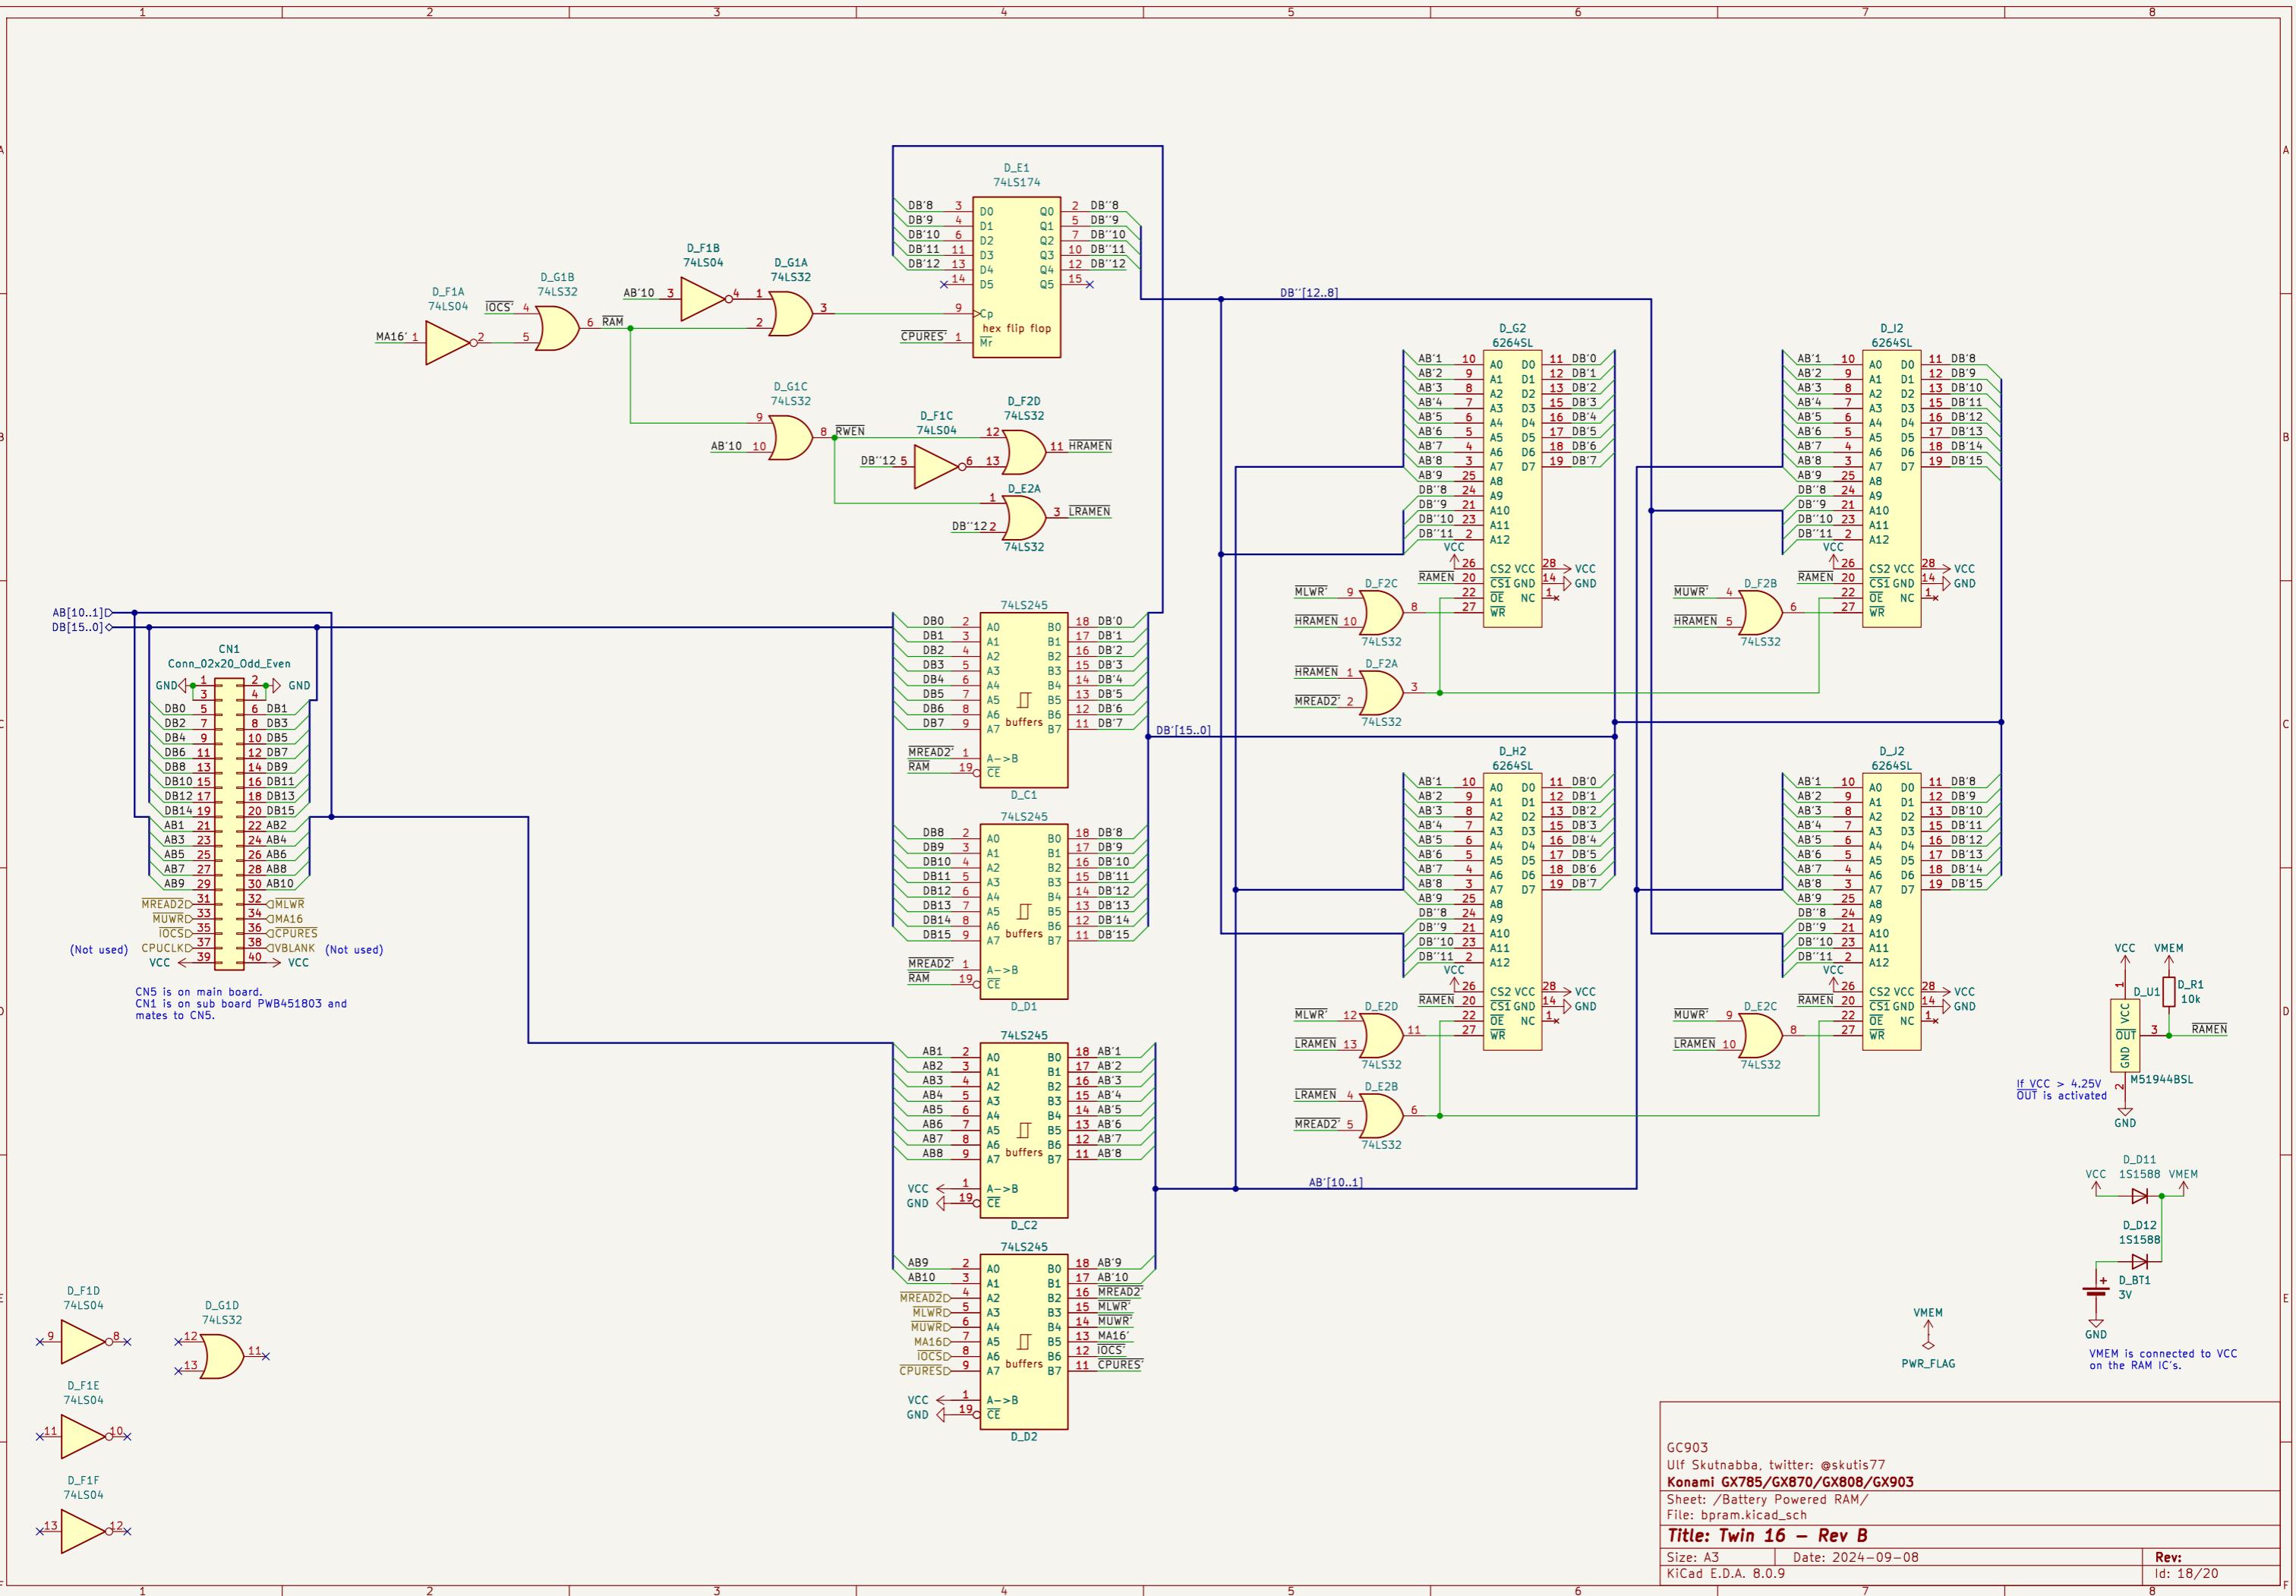



Horizontal signals

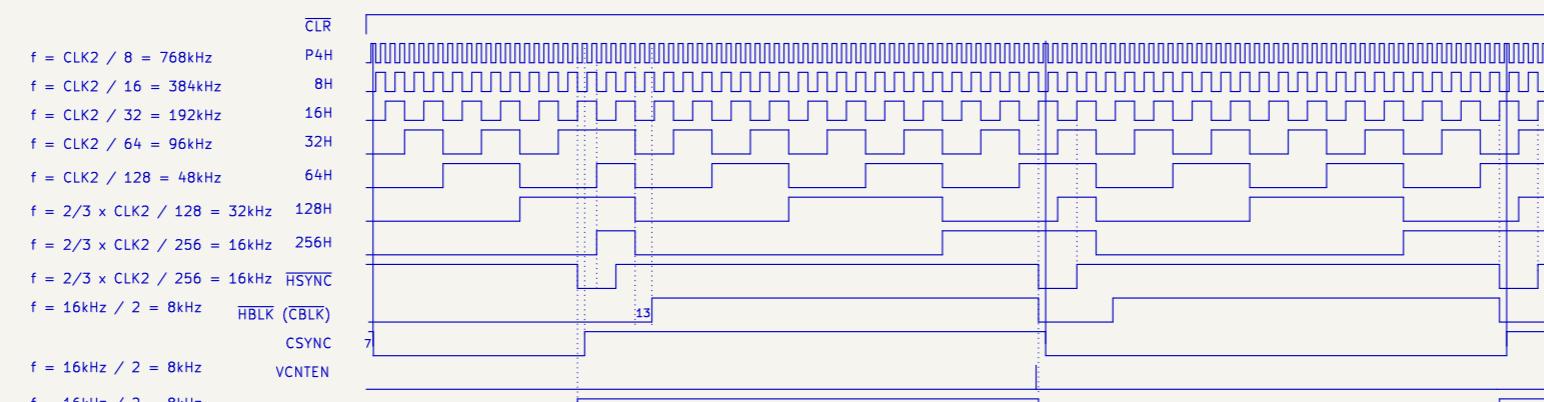

– The first VCNTEN is skipped after reset.
It goes low 140ns before HSYNC goes low,
and high again when HSYNC goes low.
VCNTEN is active right before every second falling edge of
HSYNC.

– CSYNC goes high, and stays high, on the seventh falling edge
of HSYNC.

Vertical signals

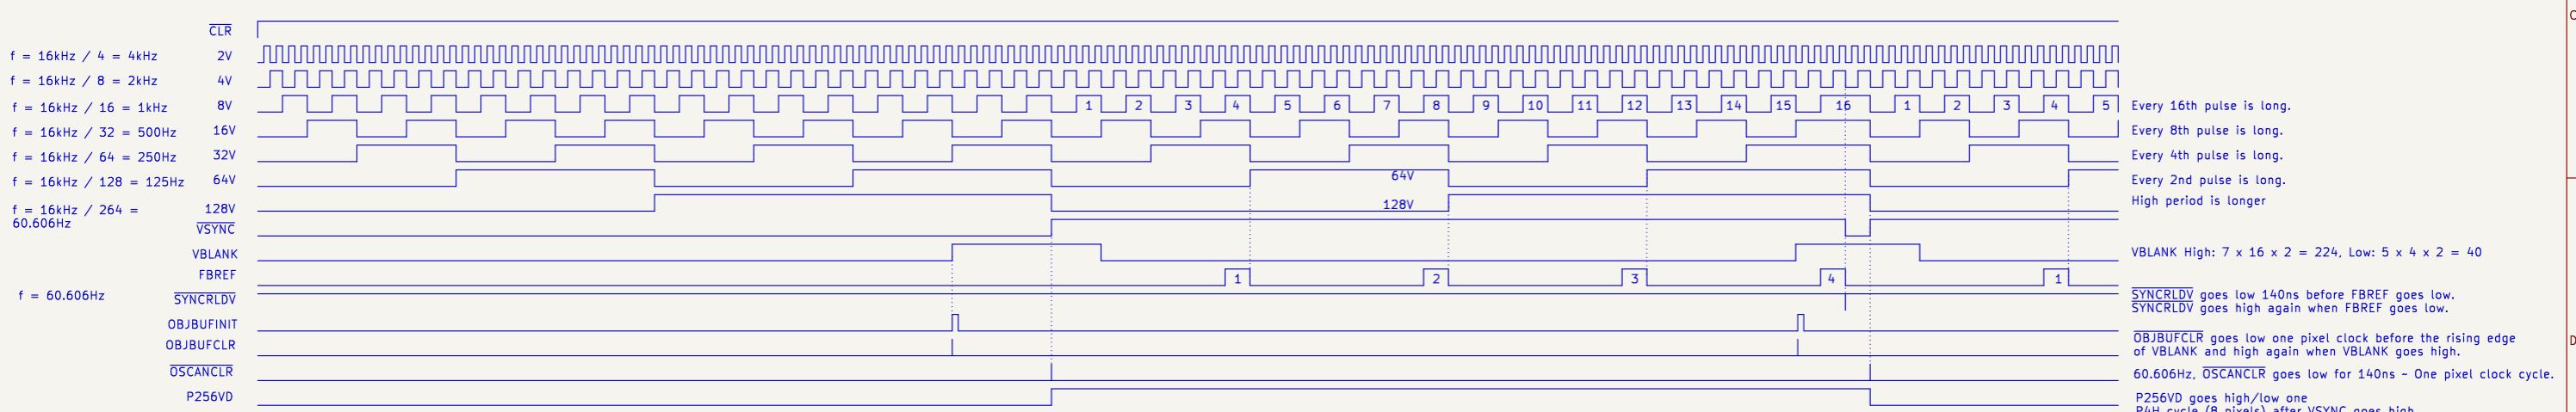

Horizontal and vertical synch timing diagrams

The numbers in the HSYNC and HBLK diagrams are HSYNC cycles.
All edges are synchronised to the rising edge of CLK2.

Pixel clock CLK2 = 18.432MHz / 3 = 6.144MHz

Horizontal lines

HSYNC freq = 6.144MHz / 384 = 16kHz
HSYNC period = 1 / 16kHz = 62.5us

Pixels / line: 384

Active pixels: 320


Blank pixels: 64

Vertical lines

HSYNC freq = 16kHz / 264 = 60.606060Hz
HSYNC period = 1 / f = 264 / 16kHz = 16.5ms
scanlines / frame: 264


Active lines: 224

Blank lines: 40

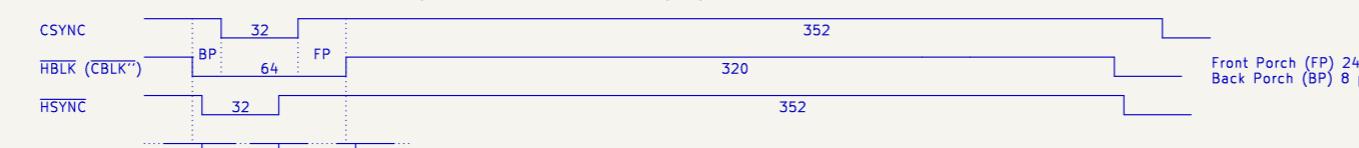

Front Porch (FP) 24 px,
Back Porch (BP) 8 px

The numbers in the VSYNC and VBLK diagrams are HSYNC cycles.
All edges are synchronised to the falling edge of HSYNC.

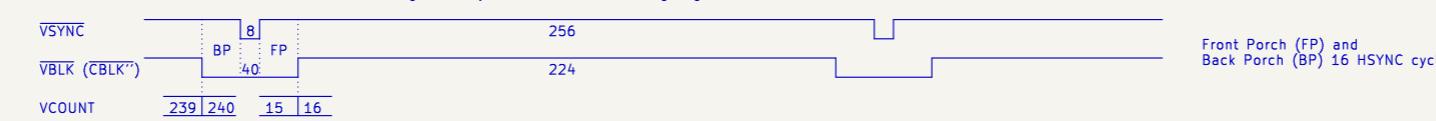

Front Porch (FP) and
Back Porch (BP) 16 HSYNC cycles.

HCOUNT is bits [256H, 128H, 64H, 32H, 16H, 8H, P4H, P2H, P1H]
VCOUNT is bits [128V, 64V, 32V, 16V, 8V, 4V, 2V, 1V]

CBLK'' is at the output of color mixer 007593.
CBLK' is shifted inside the 007593 one pixel clock.

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903

Sheet: /Timing diagrams/
File: timing_diagrams.kicad_sch

Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08
KiCad E.D.A. 8.0.9

Rev:
Id: 19/20

A

B

C

D

E

F

A


B

C

D

E

F

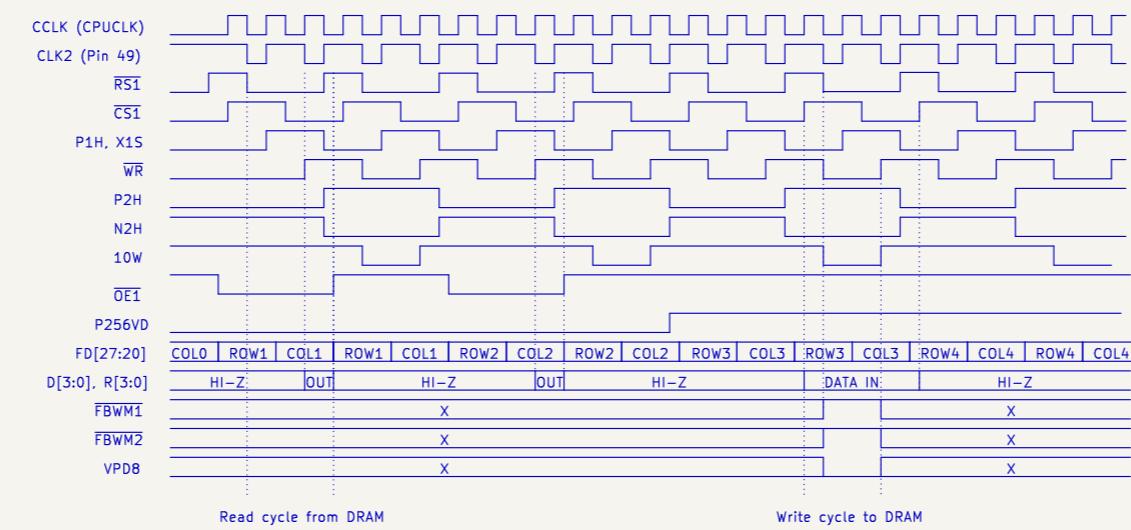

The same row and column addresses are repeated twice.
One for read cycle and the other for write cycles.

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903

Sheet: /Sprite timing diagrams/
File: sprite_timing_diagrams.kicad_sch

Title: Twin 16 – Rev B

Size: A3 | Date: 2024-09-08
KiCad E.D.A. 8.0.9

Rev:
Id: 20/20