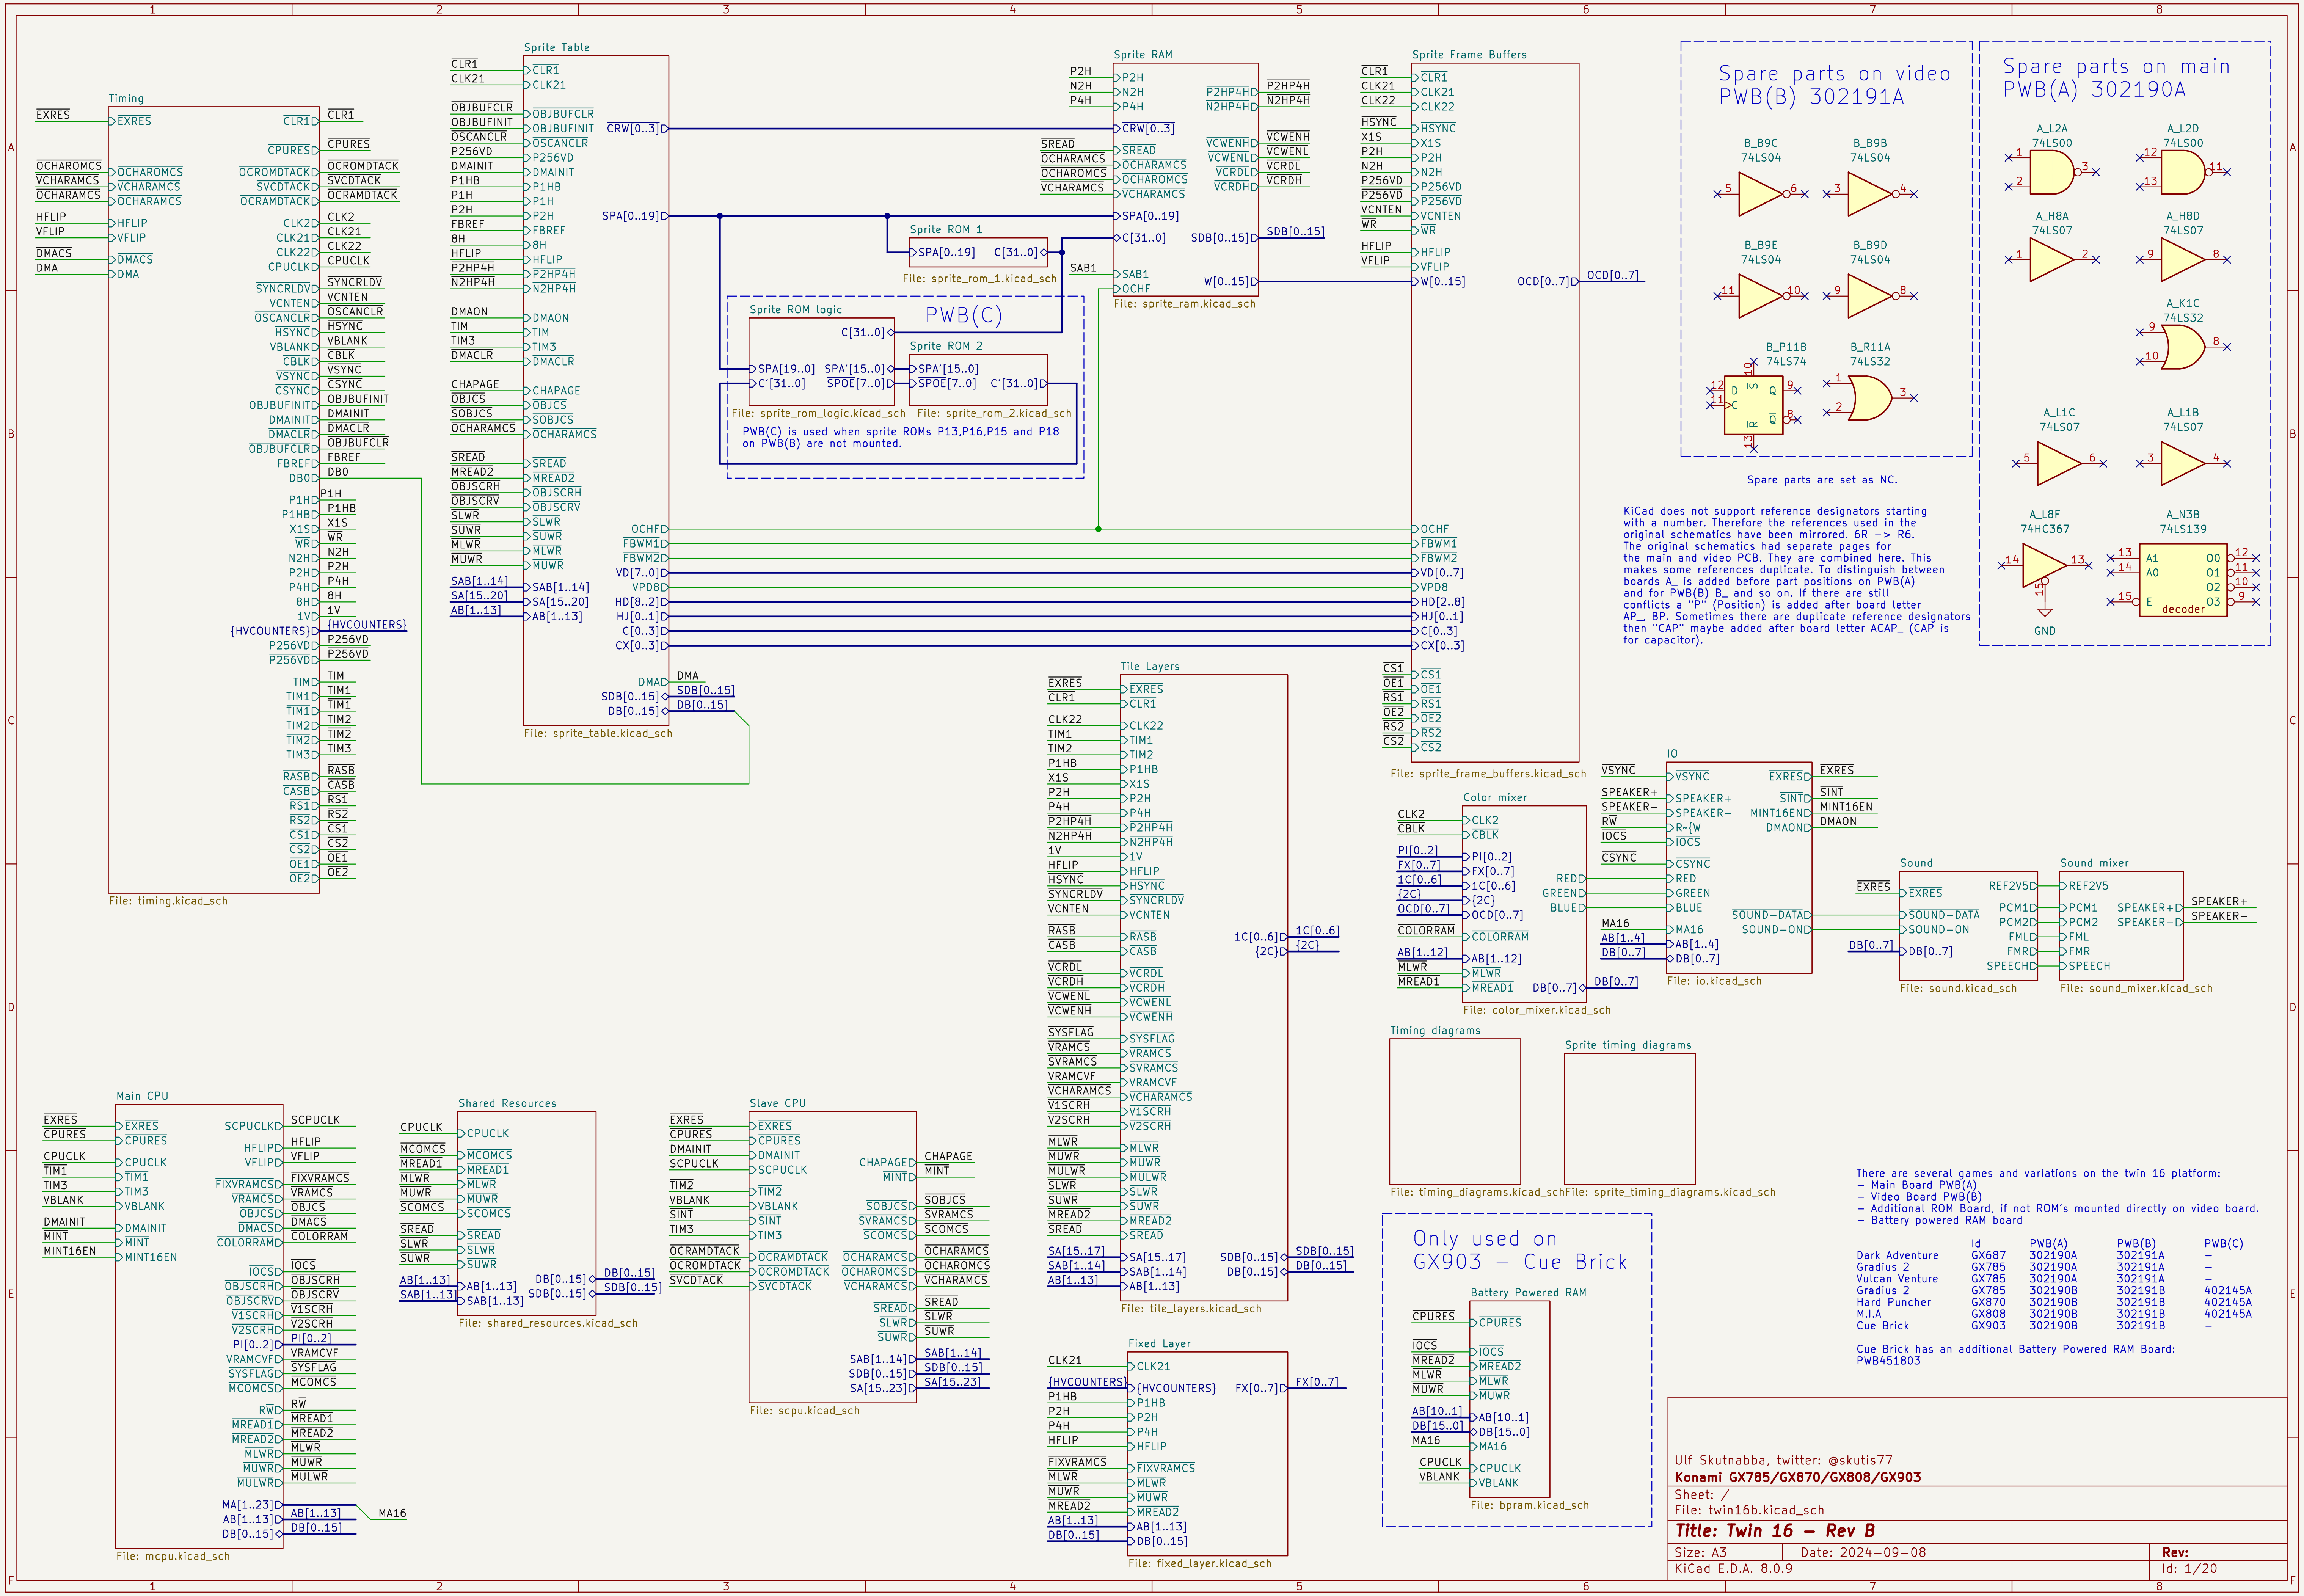

KiCad does not support reference designators starting with a number. Therefore the references used in the original schematics have been mirrored. 6R -> R6. The original schematics had separate pages for the main and video PCB. They are combined here. This makes some references duplicate. To distinguish between boards A_ is added before part positions on PWB(A) and for PWB(B) B_ and so on. If there are still conflicts a "P" (Position) is added after board letter AP_, BP. Sometimes there are duplicate reference designators then "CAP" maybe added after board letter ACAP_ (CAP is for capacitor).

There are several games and variations on the twin 16 platform:
- Main Board PWB(A)
- Video Board PWB(B)
- Additional ROM Board, if not ROM's mounted directly on video board.
- Battery powered RAM board

	Id	PWB(A)	PWB(B)	PWB(C)
Dark Adventure	GX687	302190A	302191A	–
Gradius 2	GX785	302190A	302191A	–
Vulcan Venture	GX785	302190A	302191A	–
Gradius 2	GX785	302190B	302191B	402145A
Hard Puncher	GX870	302190B	302191B	402145A
M.I.A	GX808	302190B	302191B	402145A
Cue Brick	GX903	302190B	302191B	–

Cue Brick has an additional Battery Powered RAM Board: PWB451803

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /
File: twin16b.kicad_sch
Title: Twin 16 – Rev B
Size: A3 Date: 2024-09-08 Rev:
KiCad E.D.A. 8.0.9 Id: 1/20

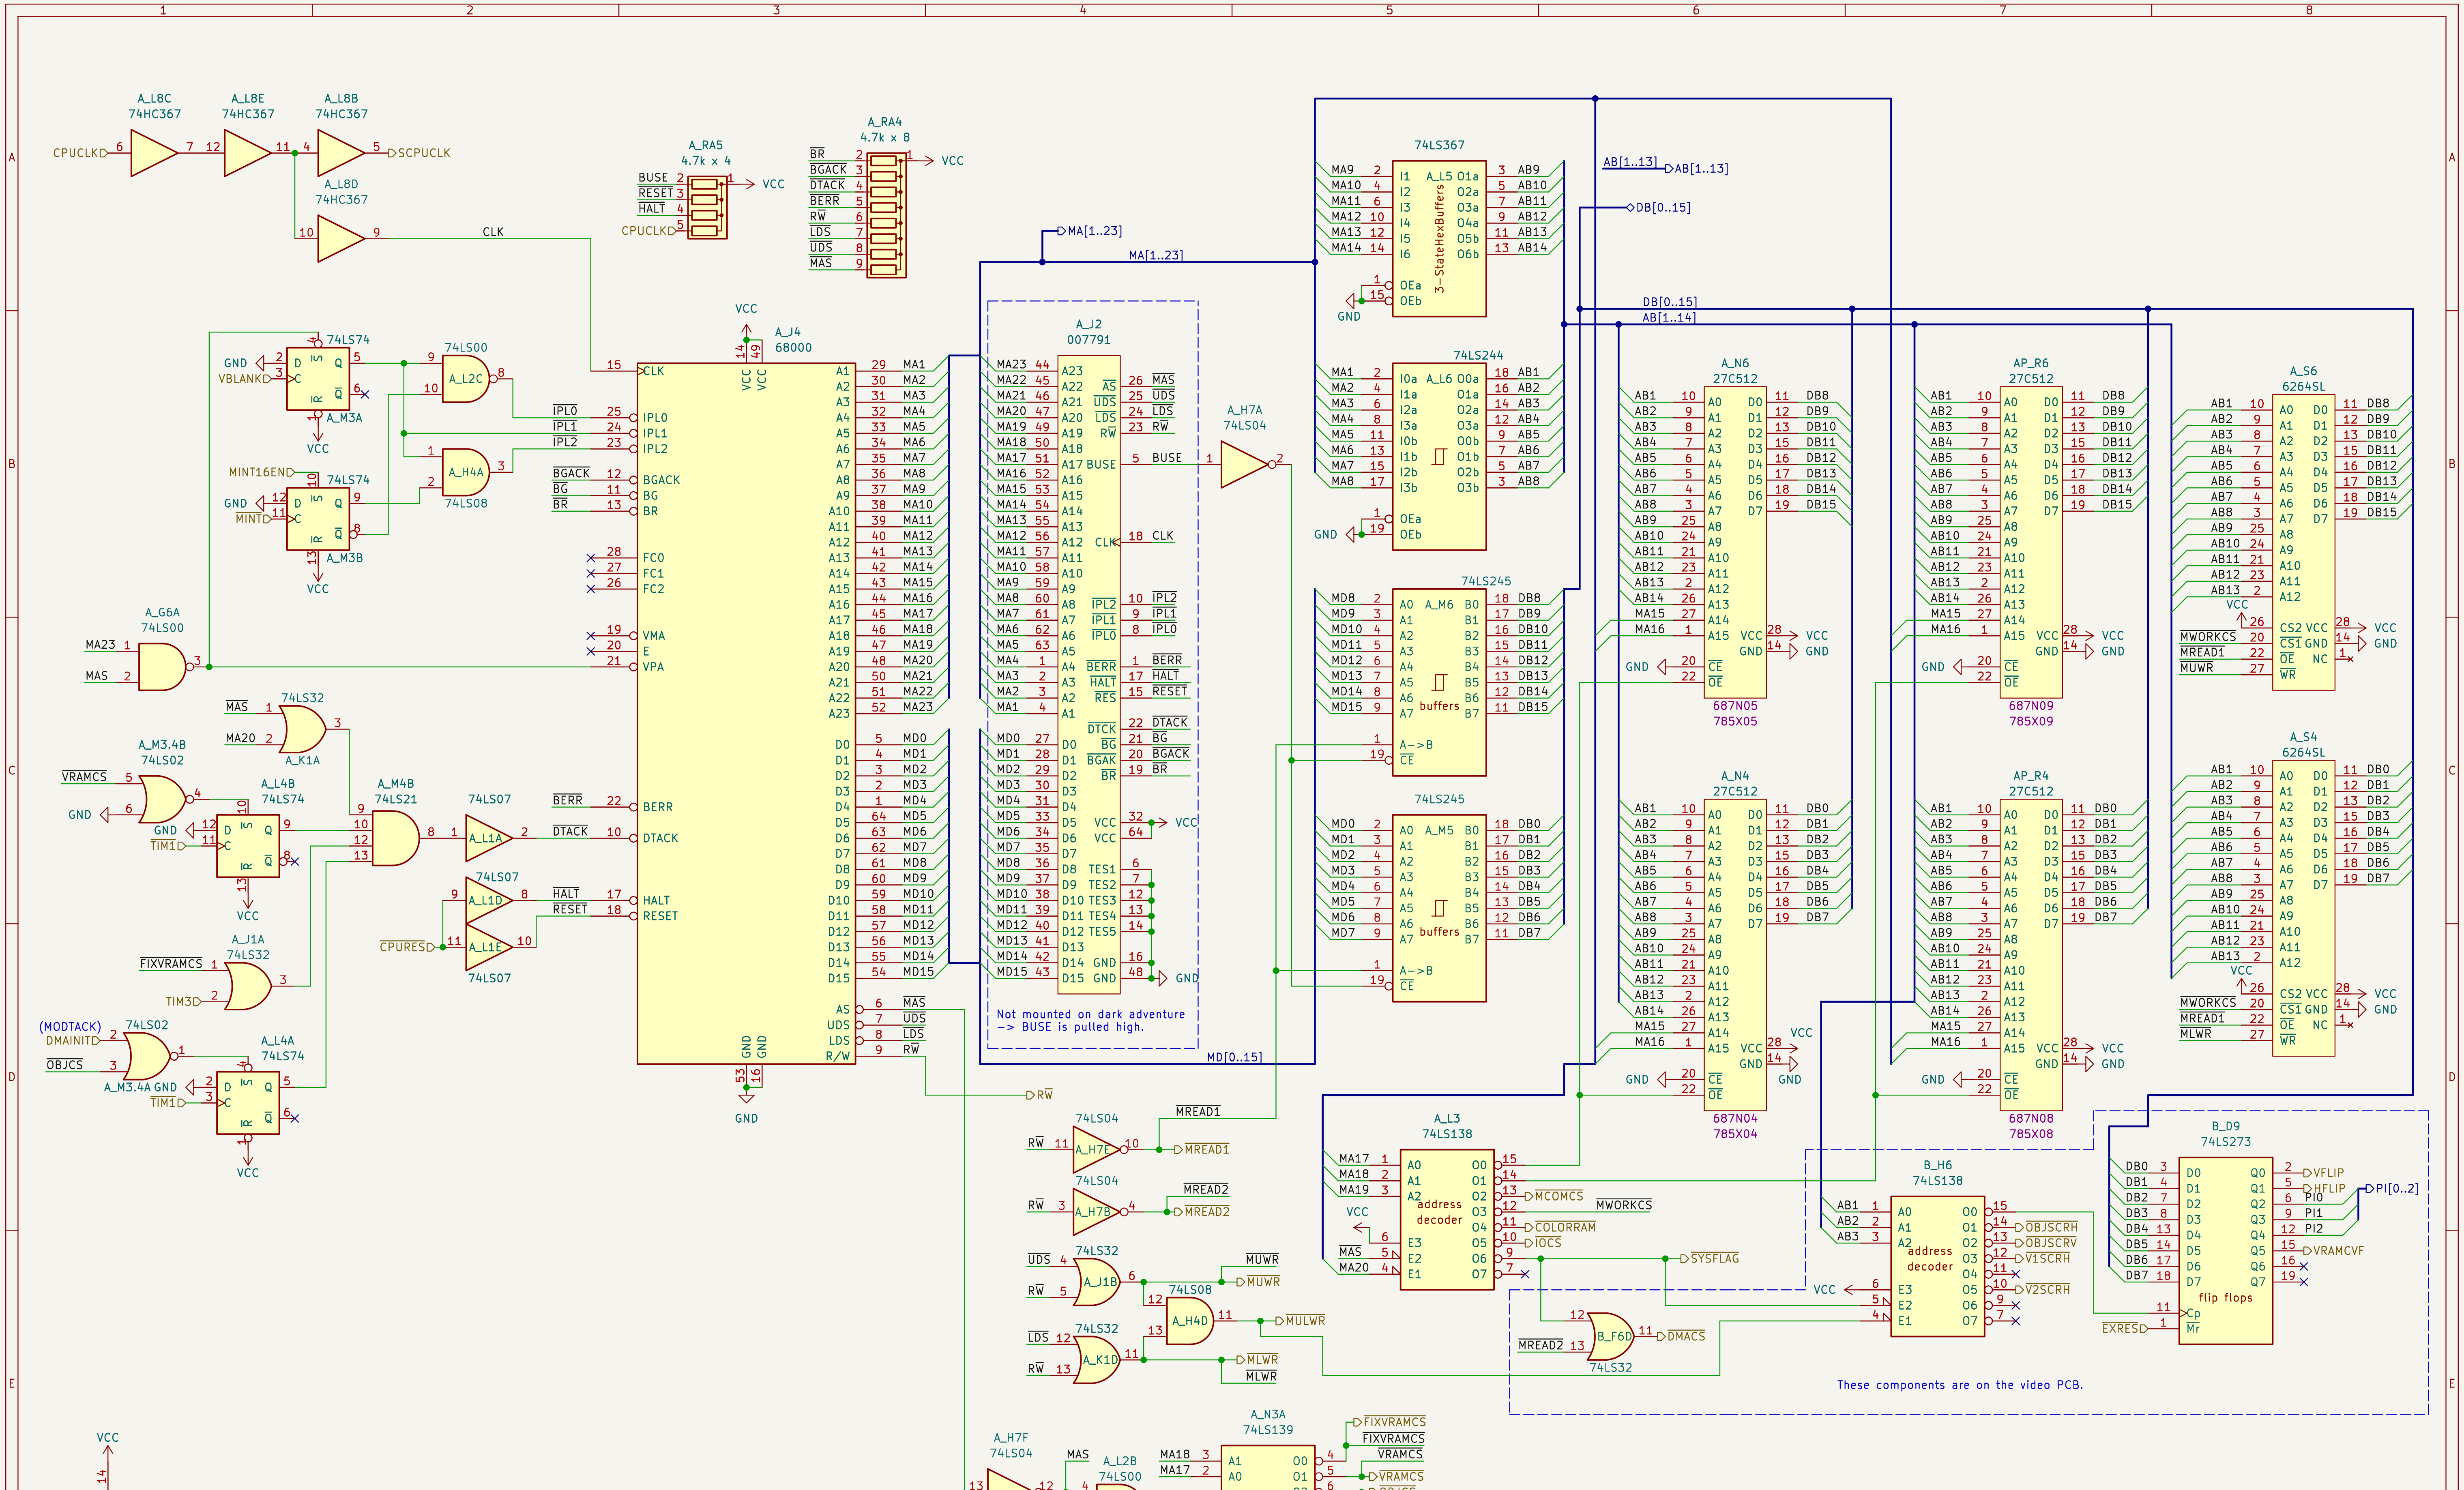

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Main CPU/

File: mcpu.kicad_sch

Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08 Rev:

KiCad E.D.A. 8.0.9 Id: 2/20

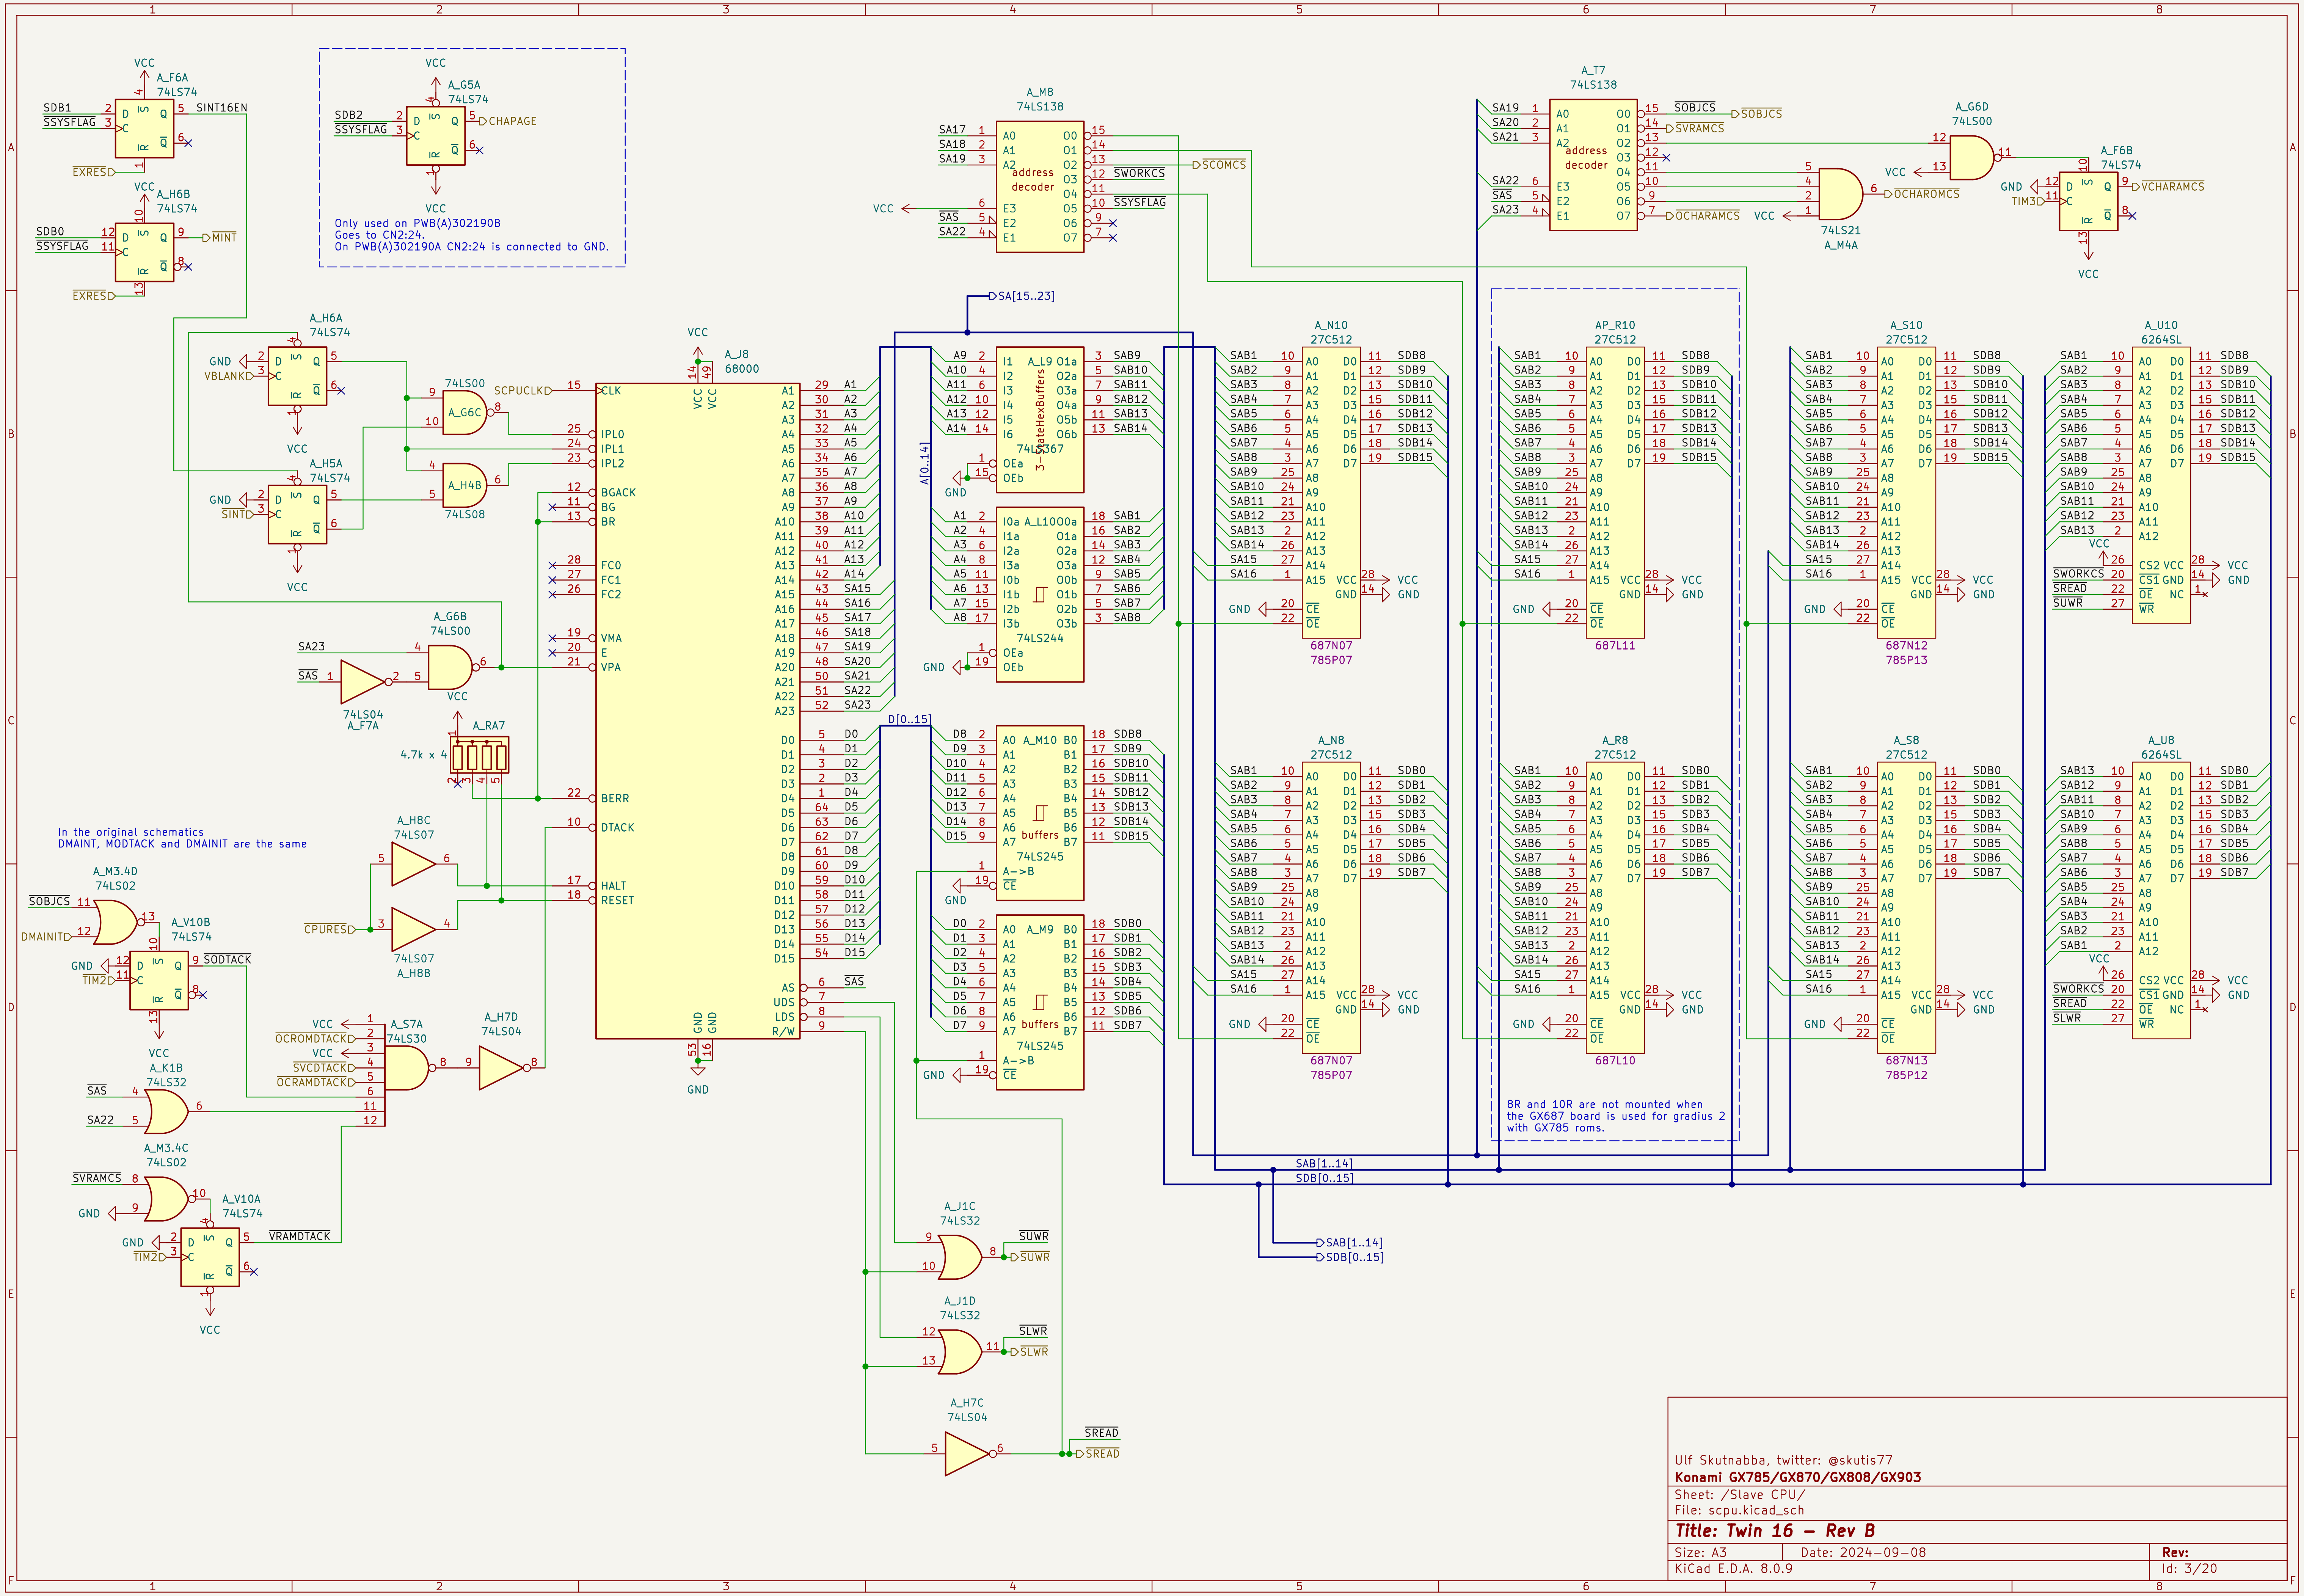

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Slave CPU/

File: scpu.kicad_sch

Title: Twin 16 — Rev B

Size: A3 | Date: 2024-09-08 | Rev:

KiCad E.D.A. 8.0.9 | Id: 3/20

Konami 007790

```
MCOMRD = ~(~MREAD1 & ~MCOMCS) = MREAD1 | MCOMCS
SCOMRD = ~(~SREAD & ~SCOMCS)
SWREN = ~(~SNMMPX & SREAD & ~SCOMCS)
MWREN = ~(~SNMMPX & MREAD1 & ~MCOMCS)
CLWR = ~(~SLWR & ~SNMMPX & SNMMPX & SREAD & ~SCOMCS & ~CPUCLK | ~SNMMPX & ~MLWR & MREAD1 & ~MCOMCS & ~CPUCLK)
CUWR = ~(~SUWR & ~SNMMPX & SNMMPX & SREAD & ~SCOMCS & ~CPUCLK | ~MUWR & ~SNMMPX & MREAD1 & ~MCOMCS & ~CPUCLK)
```

All AND logic can be converted to OR form. But since AND logic and inverters are used in the PAL16L8 device it is kept in that form.
The equations follow verilog syntax. The active low signals are not inverted, the bar is there only to show activeness.

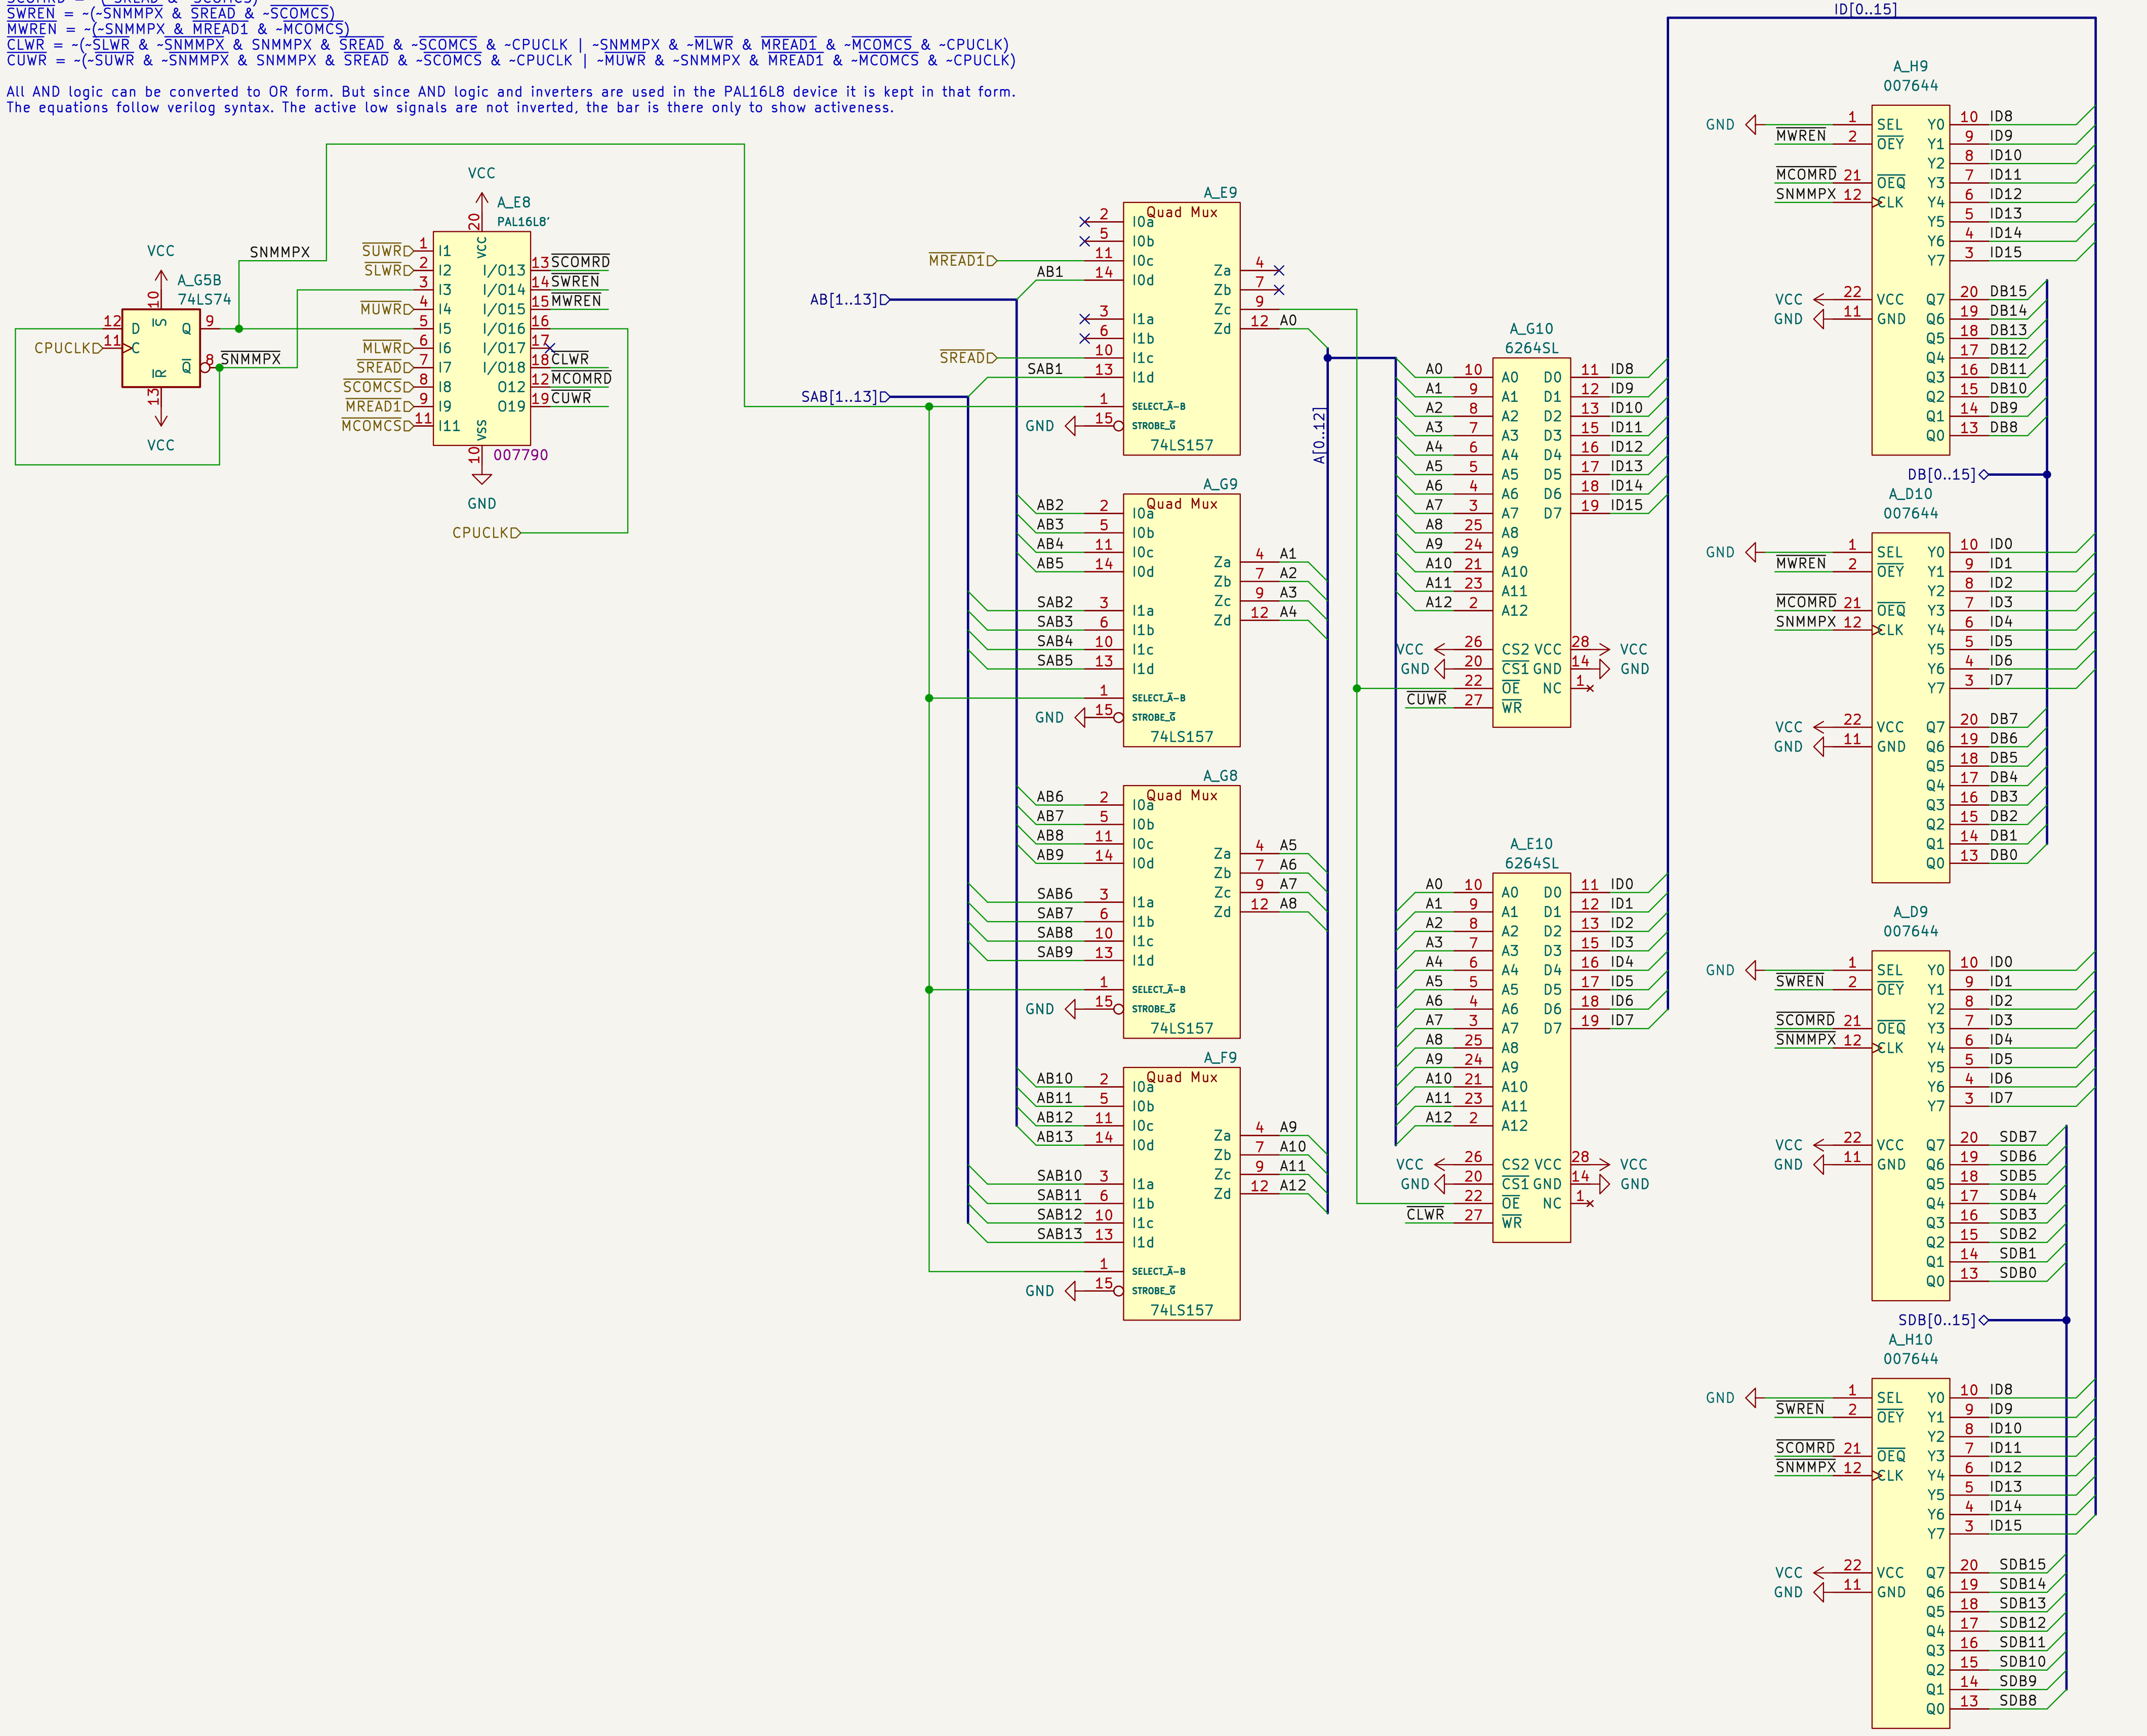

This is from jammarcade.net

Pin 1 = SEL – changes whether the Q outputs require a rising edge clock or not.
Pin 2 = OEY – Output enable for the Y outputs else they are inputs. Active LOW
Pin 21 = OEQ – Output enable for the Q (clocked) outputs else they are inputs. Active LOW
Pin 12 = CLK – Clock input

Pins 3–10 = Y outputs – normal outputs. If OEY is LOW these pins become outputs mirroring the state of the Q input pins. SEL and CLK pins are not used in this mode.

Pins 13–20 = Q outputs – clocked outputs. If OEQ is LOW these pins become outputs.
If SEL is HIGH and CLK is HIGH these outputs will mirror the state of the Y inputs.
If SEL is LOW then the outputs will only change state on a rising edge CLK.

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Shared Resources/
File: shared_resources.kicad_sch

Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08 Rev:
KiCad E.D.A. 8.0.9 Id: 4/20

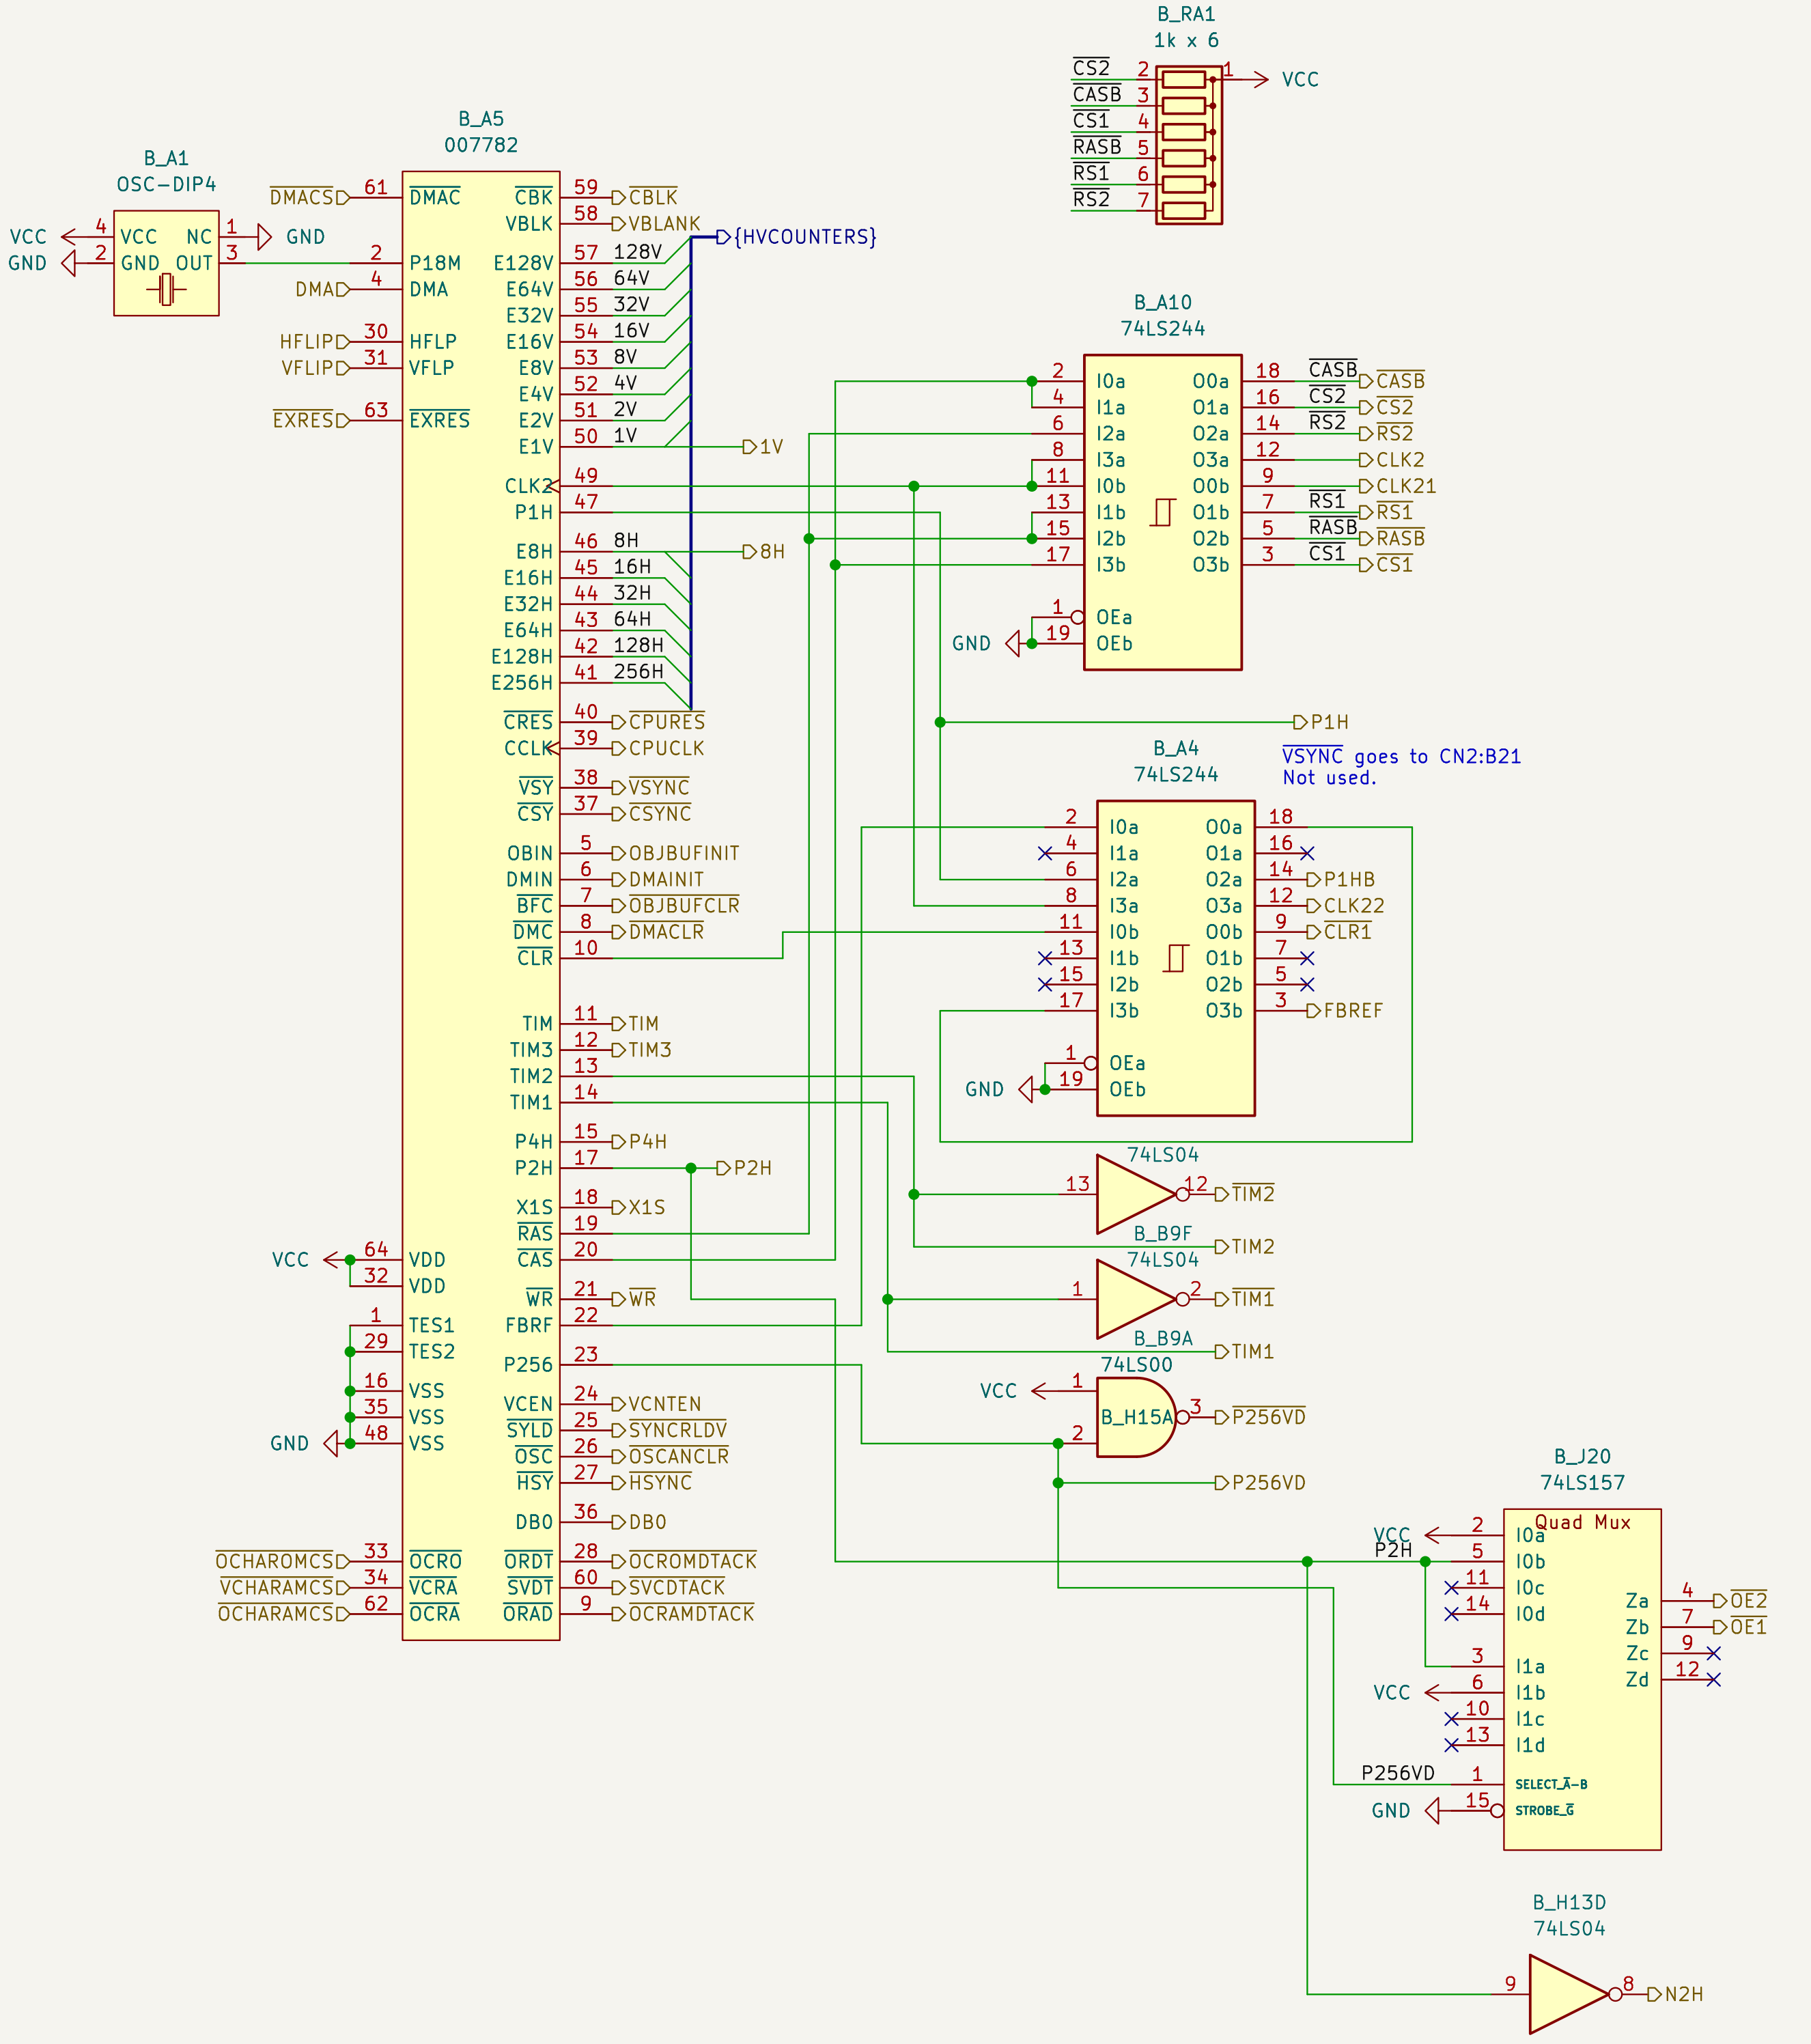

DMA Synchronization

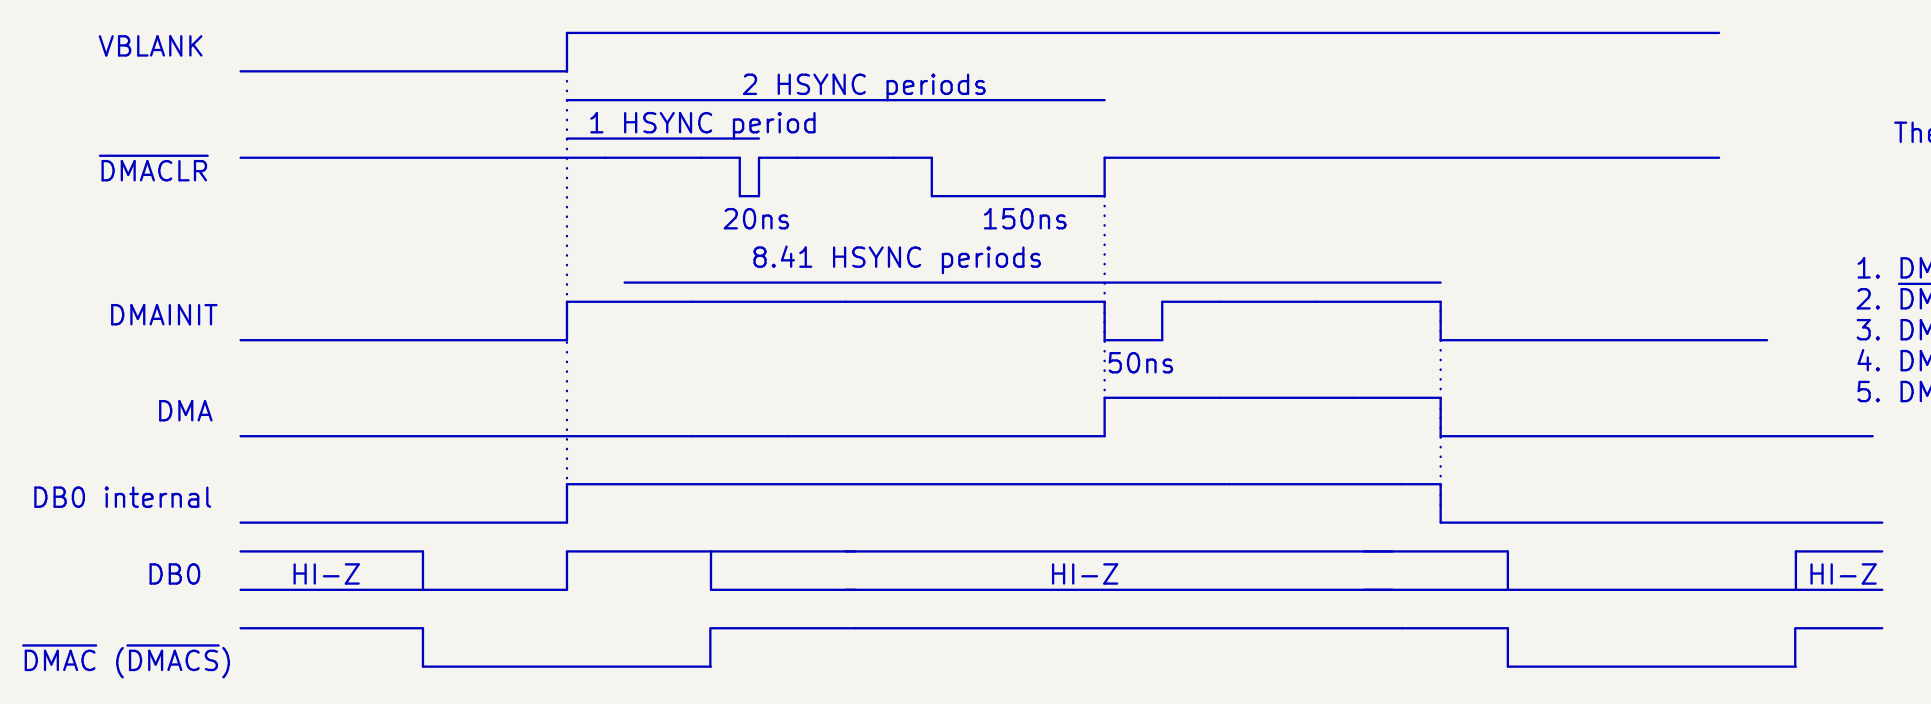

The first 20ns a possible glitch?

1. DMAINIT goes high after VBLANK goes active
2. DMACLR geos low (the second time) and high after 150ns.
3. DMAINIT goes low.
4. DMA is activated from the 00783(Sprite engine).
5. DMA is inactivated, DMAINIT, DB0 internal goes low.

The CPU will be activating regularly DMACS, doing reads from the system registers periodically. Until DB0 has gone from low to high and low again. This is probably to see if writes to the sprite controller registers are possible.

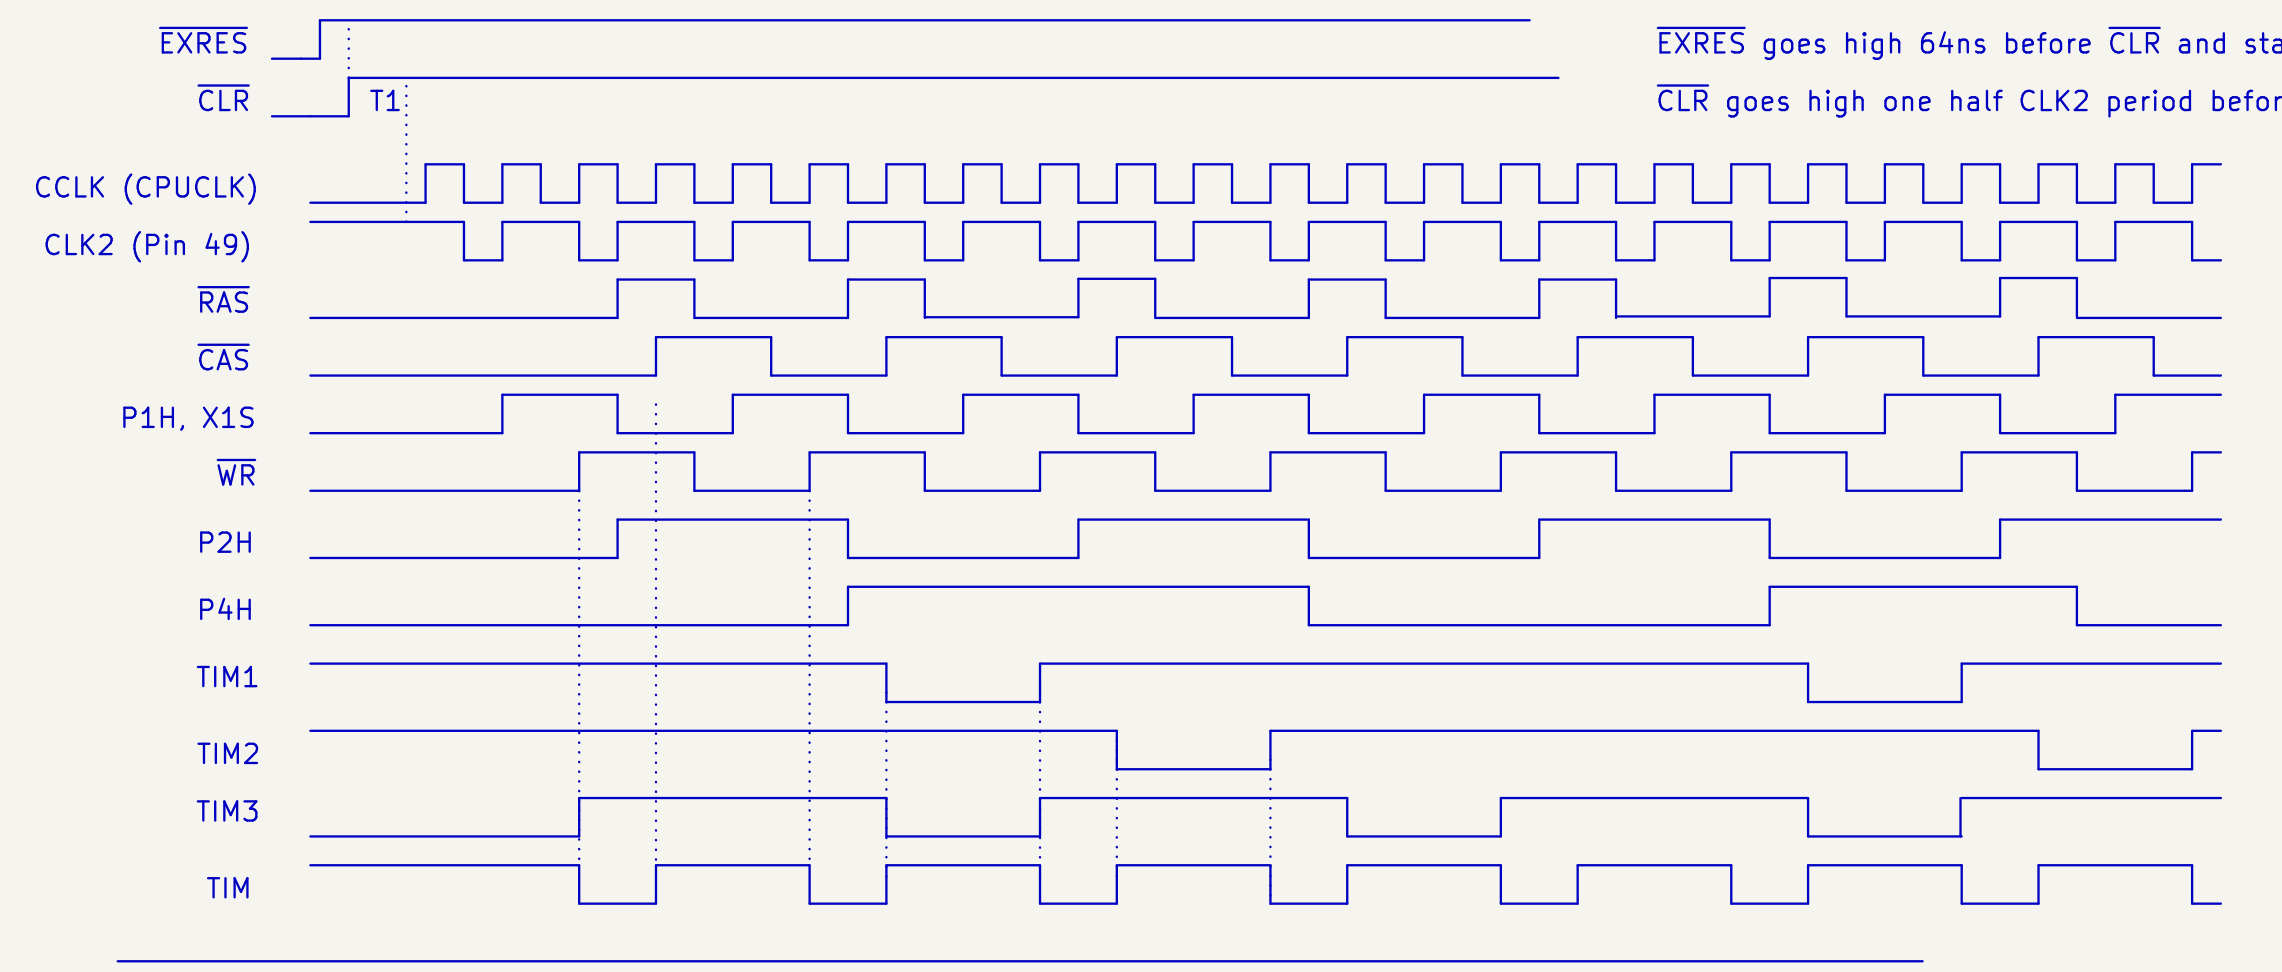

EXRES goes high 64ns before CLR and stays high.

CLR goes high one half CLK2 period before the first falling edge of CLK2.

CCLK = 18.432MHz / 2 = 9.216MHz
CLK2 = 18.432MHz / 3 = 6.144MHz,
T = 1/f = 162.76ns, T = 2 x T1
f = CLK2 / 2 = 3.072MHz, T2 = 3 x T1

f = CLK2 / 2 = 3.072MHz
f = CLK2 / 2 = 3.072MHz
f = CLK2 / 4 = 1.536MHz
f = CLK2 / 8 = 768kHz
f = CLK2 / 8 = 768kHz
f = CLK2 / 8 = 768kHz
f = CLK2 / 4 = 1.536MHz
f = CLK2 / 2 = 3.072MHz

Timer	Usage
TIM1	Main CPU Tilemap RAM access
TIM2	Slave CPU RAM Tilemap RAM access
TIM	Sprite timing/address generator 007783
TIM3	Sprite timing/address generator 007783

Output enables active vs. part of frame buffer active

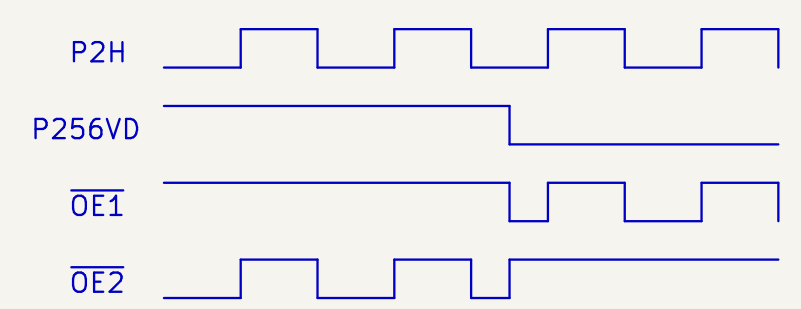

Chip select signals and Data Acknowledge signals

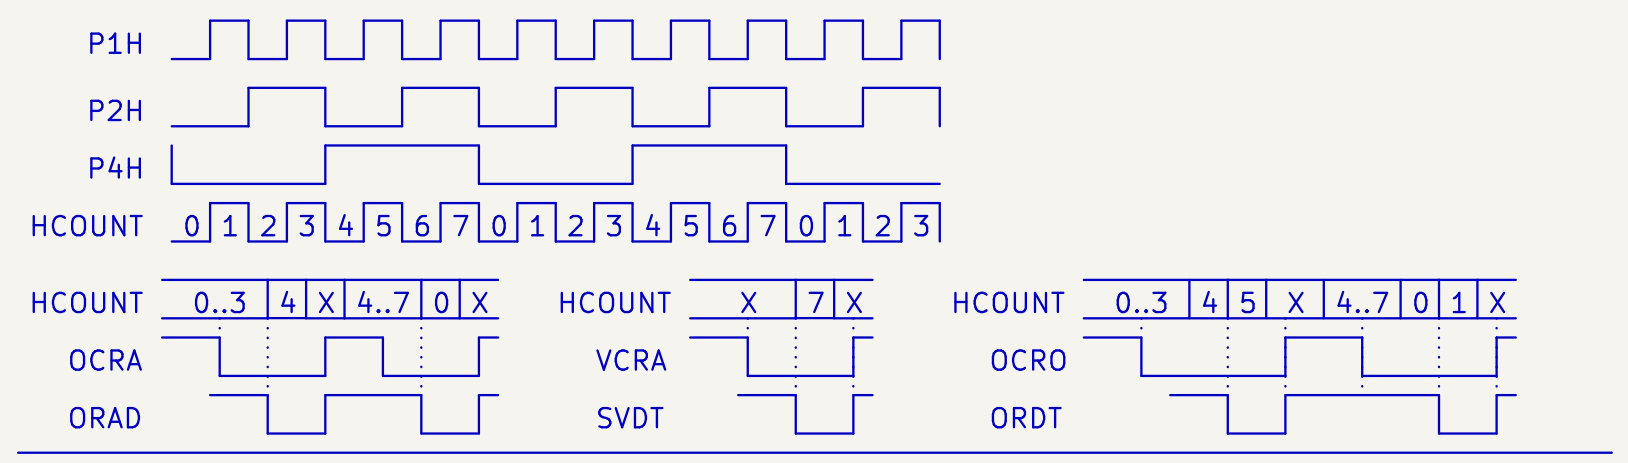

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /Timing/
File: timing.kicad_sch
Title: Twin 16 — Rev B
Size: A3 | Date: 2024-09-08 | Rev:
KiCad E.D.A. 8.0.9 | Id: 5/20

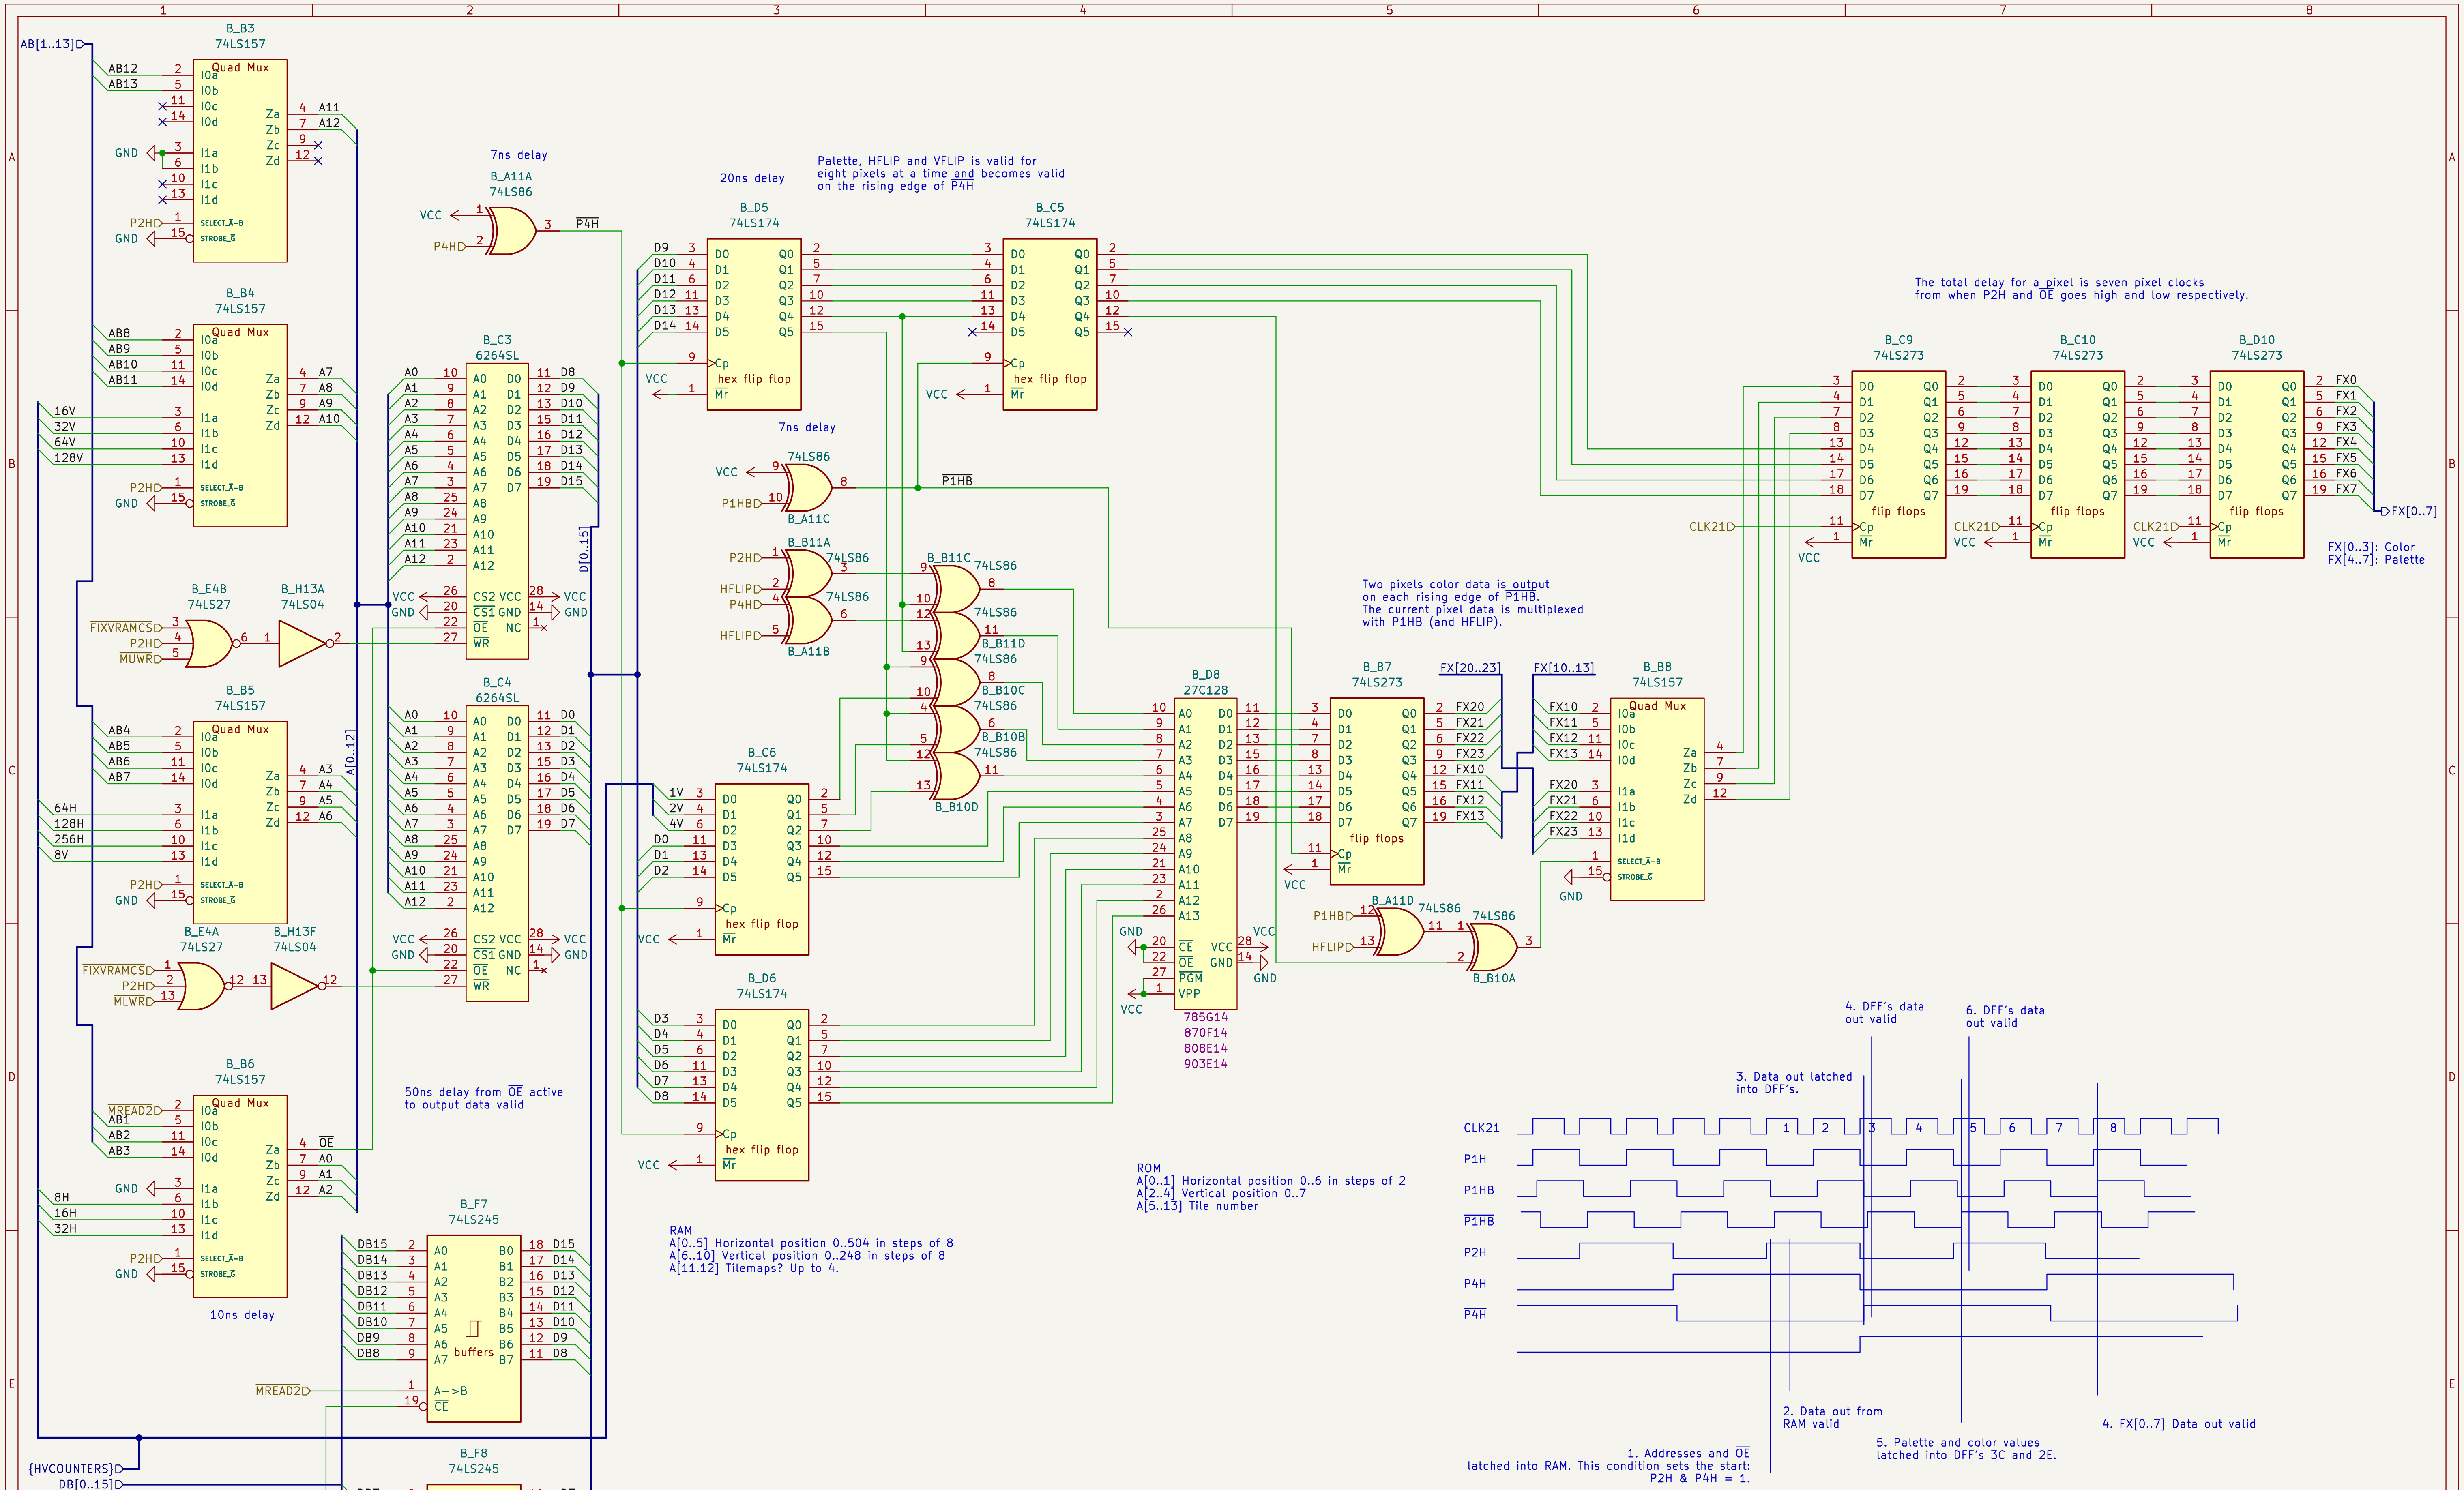

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Fixed Layer/

File: fixed_layer.kicad_sch

Title: Twin 16 – Rev B

Size: A3 | Date: 2024-09-08 | Rev:

KiCad E.D.A. 8.0.9 | Id: 6/20

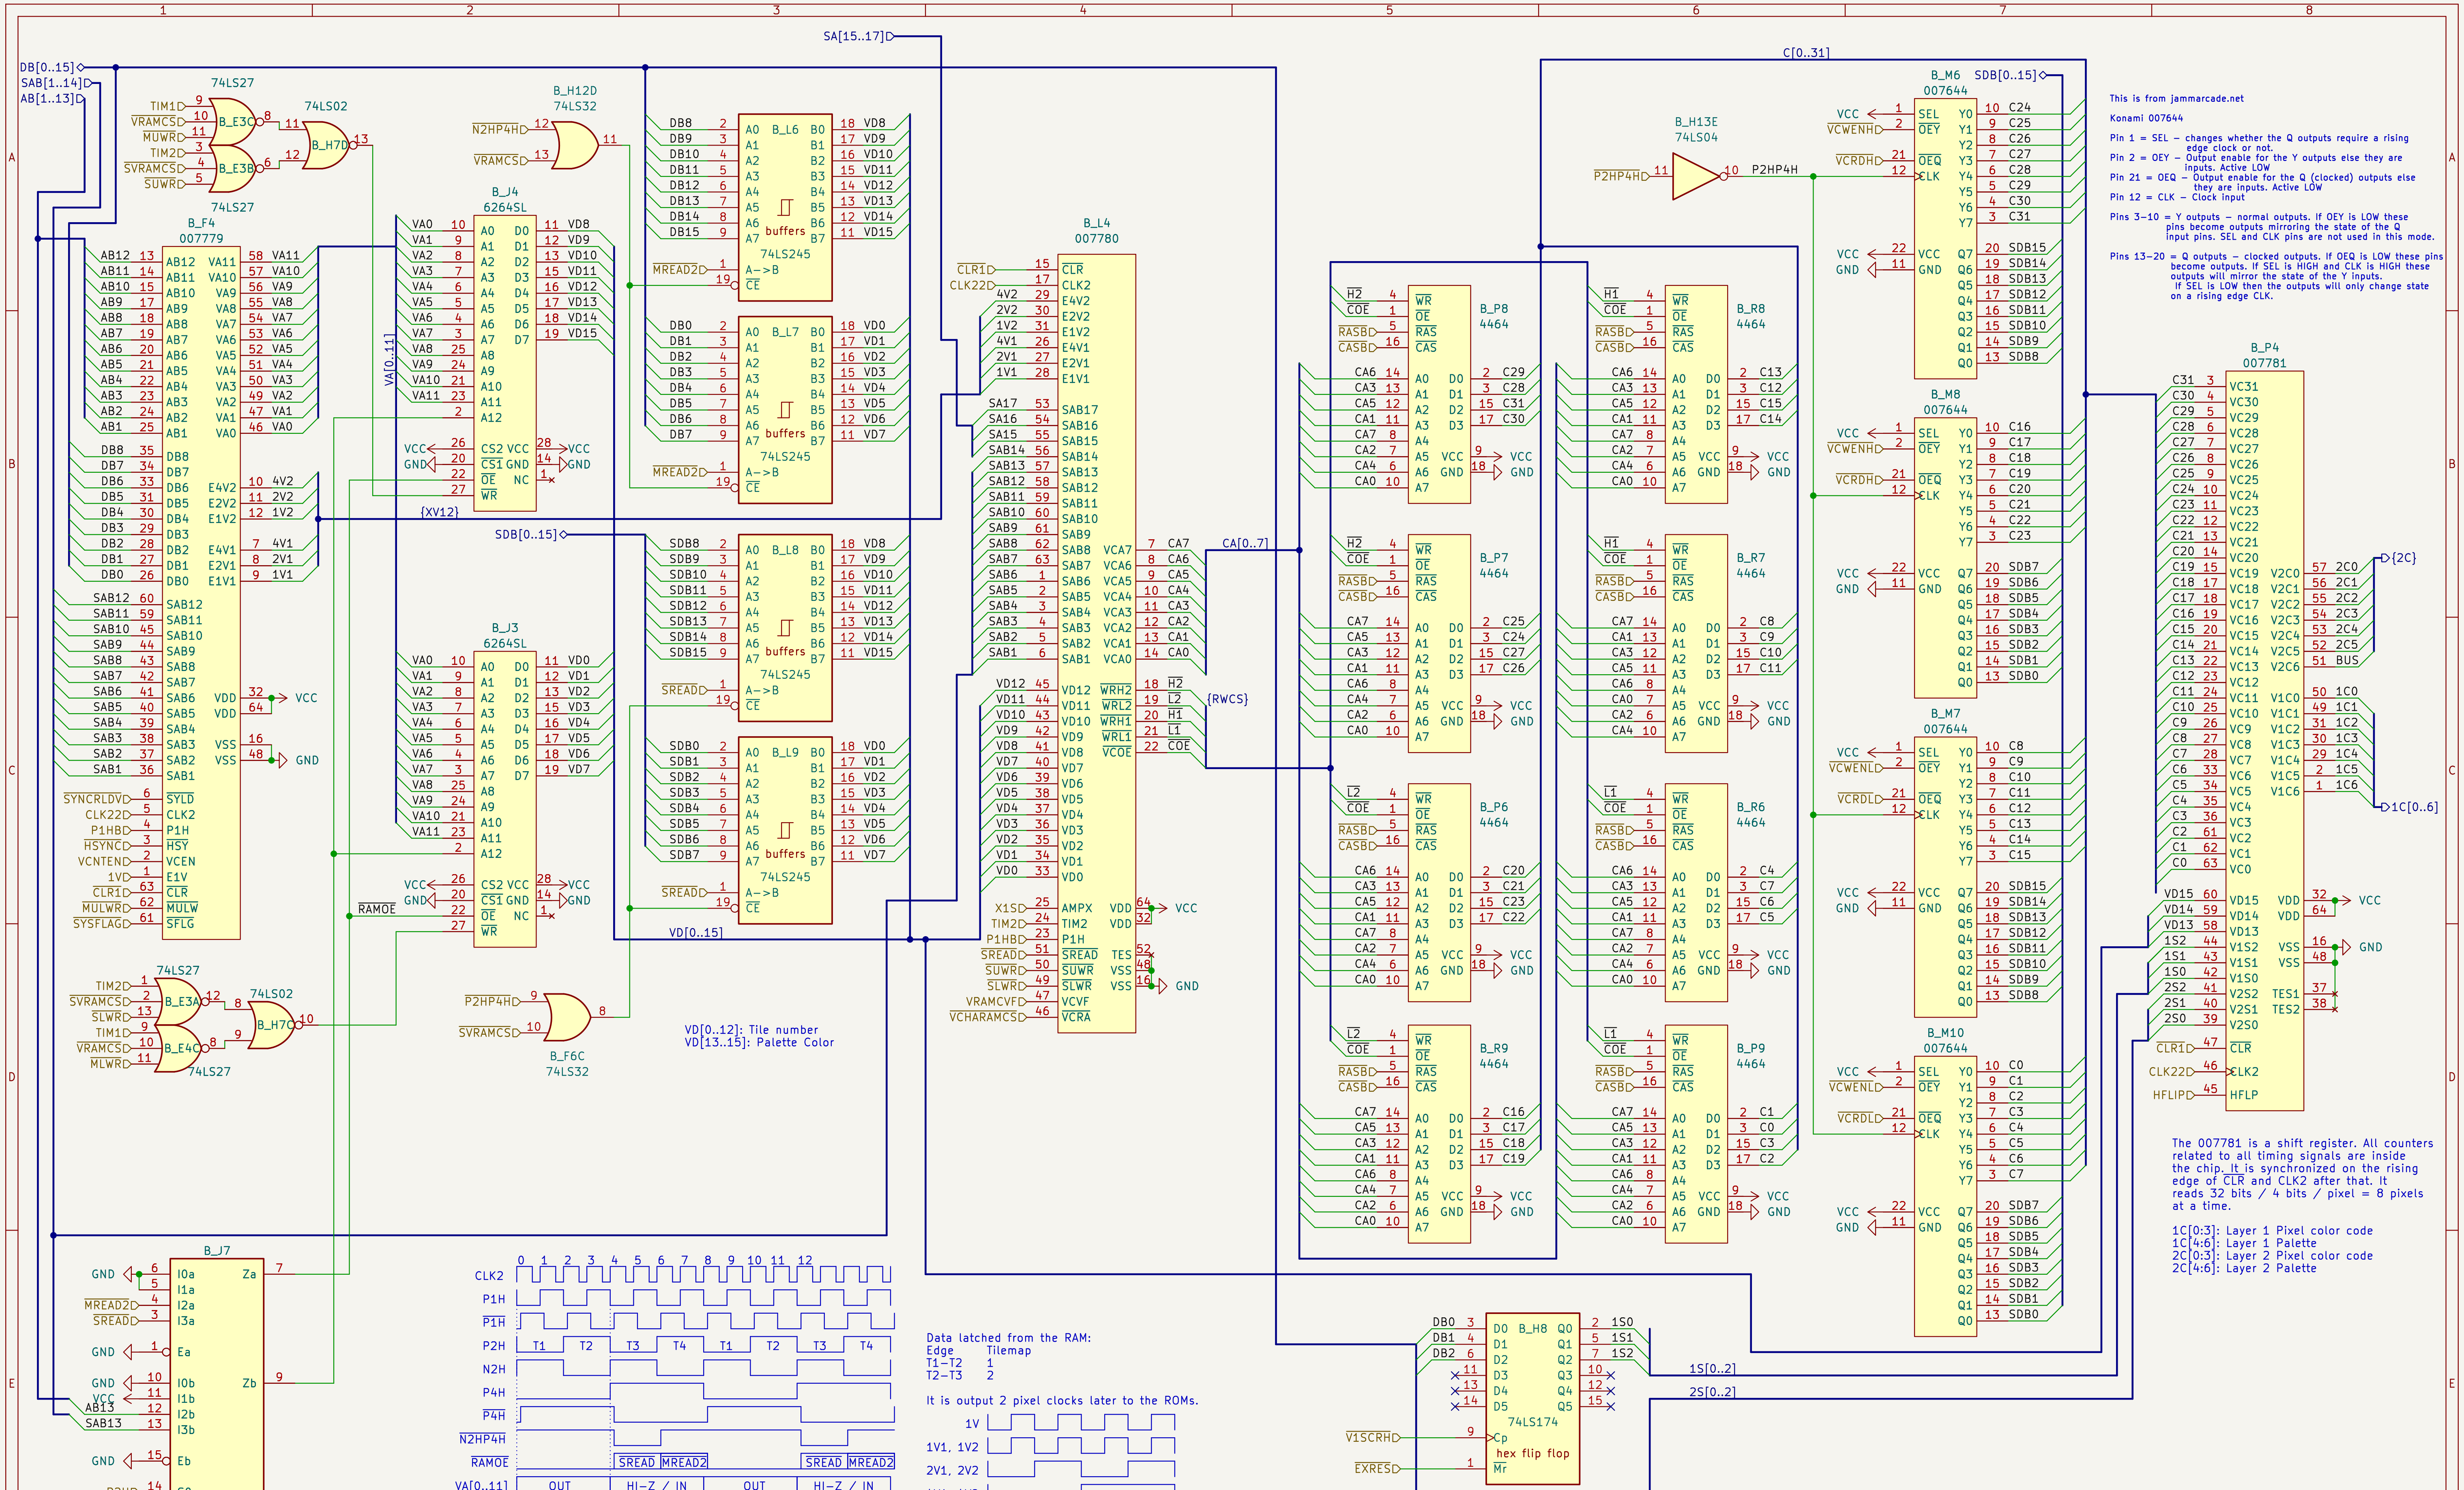

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Tile Layers/

File: tile_layers.kicad_sch

Title: Twin 16 – Rev B

Size: A3	Date: 2024-09-08	**Rev:**
KiCad E.D.A. 8.0.9		Id: 7/20

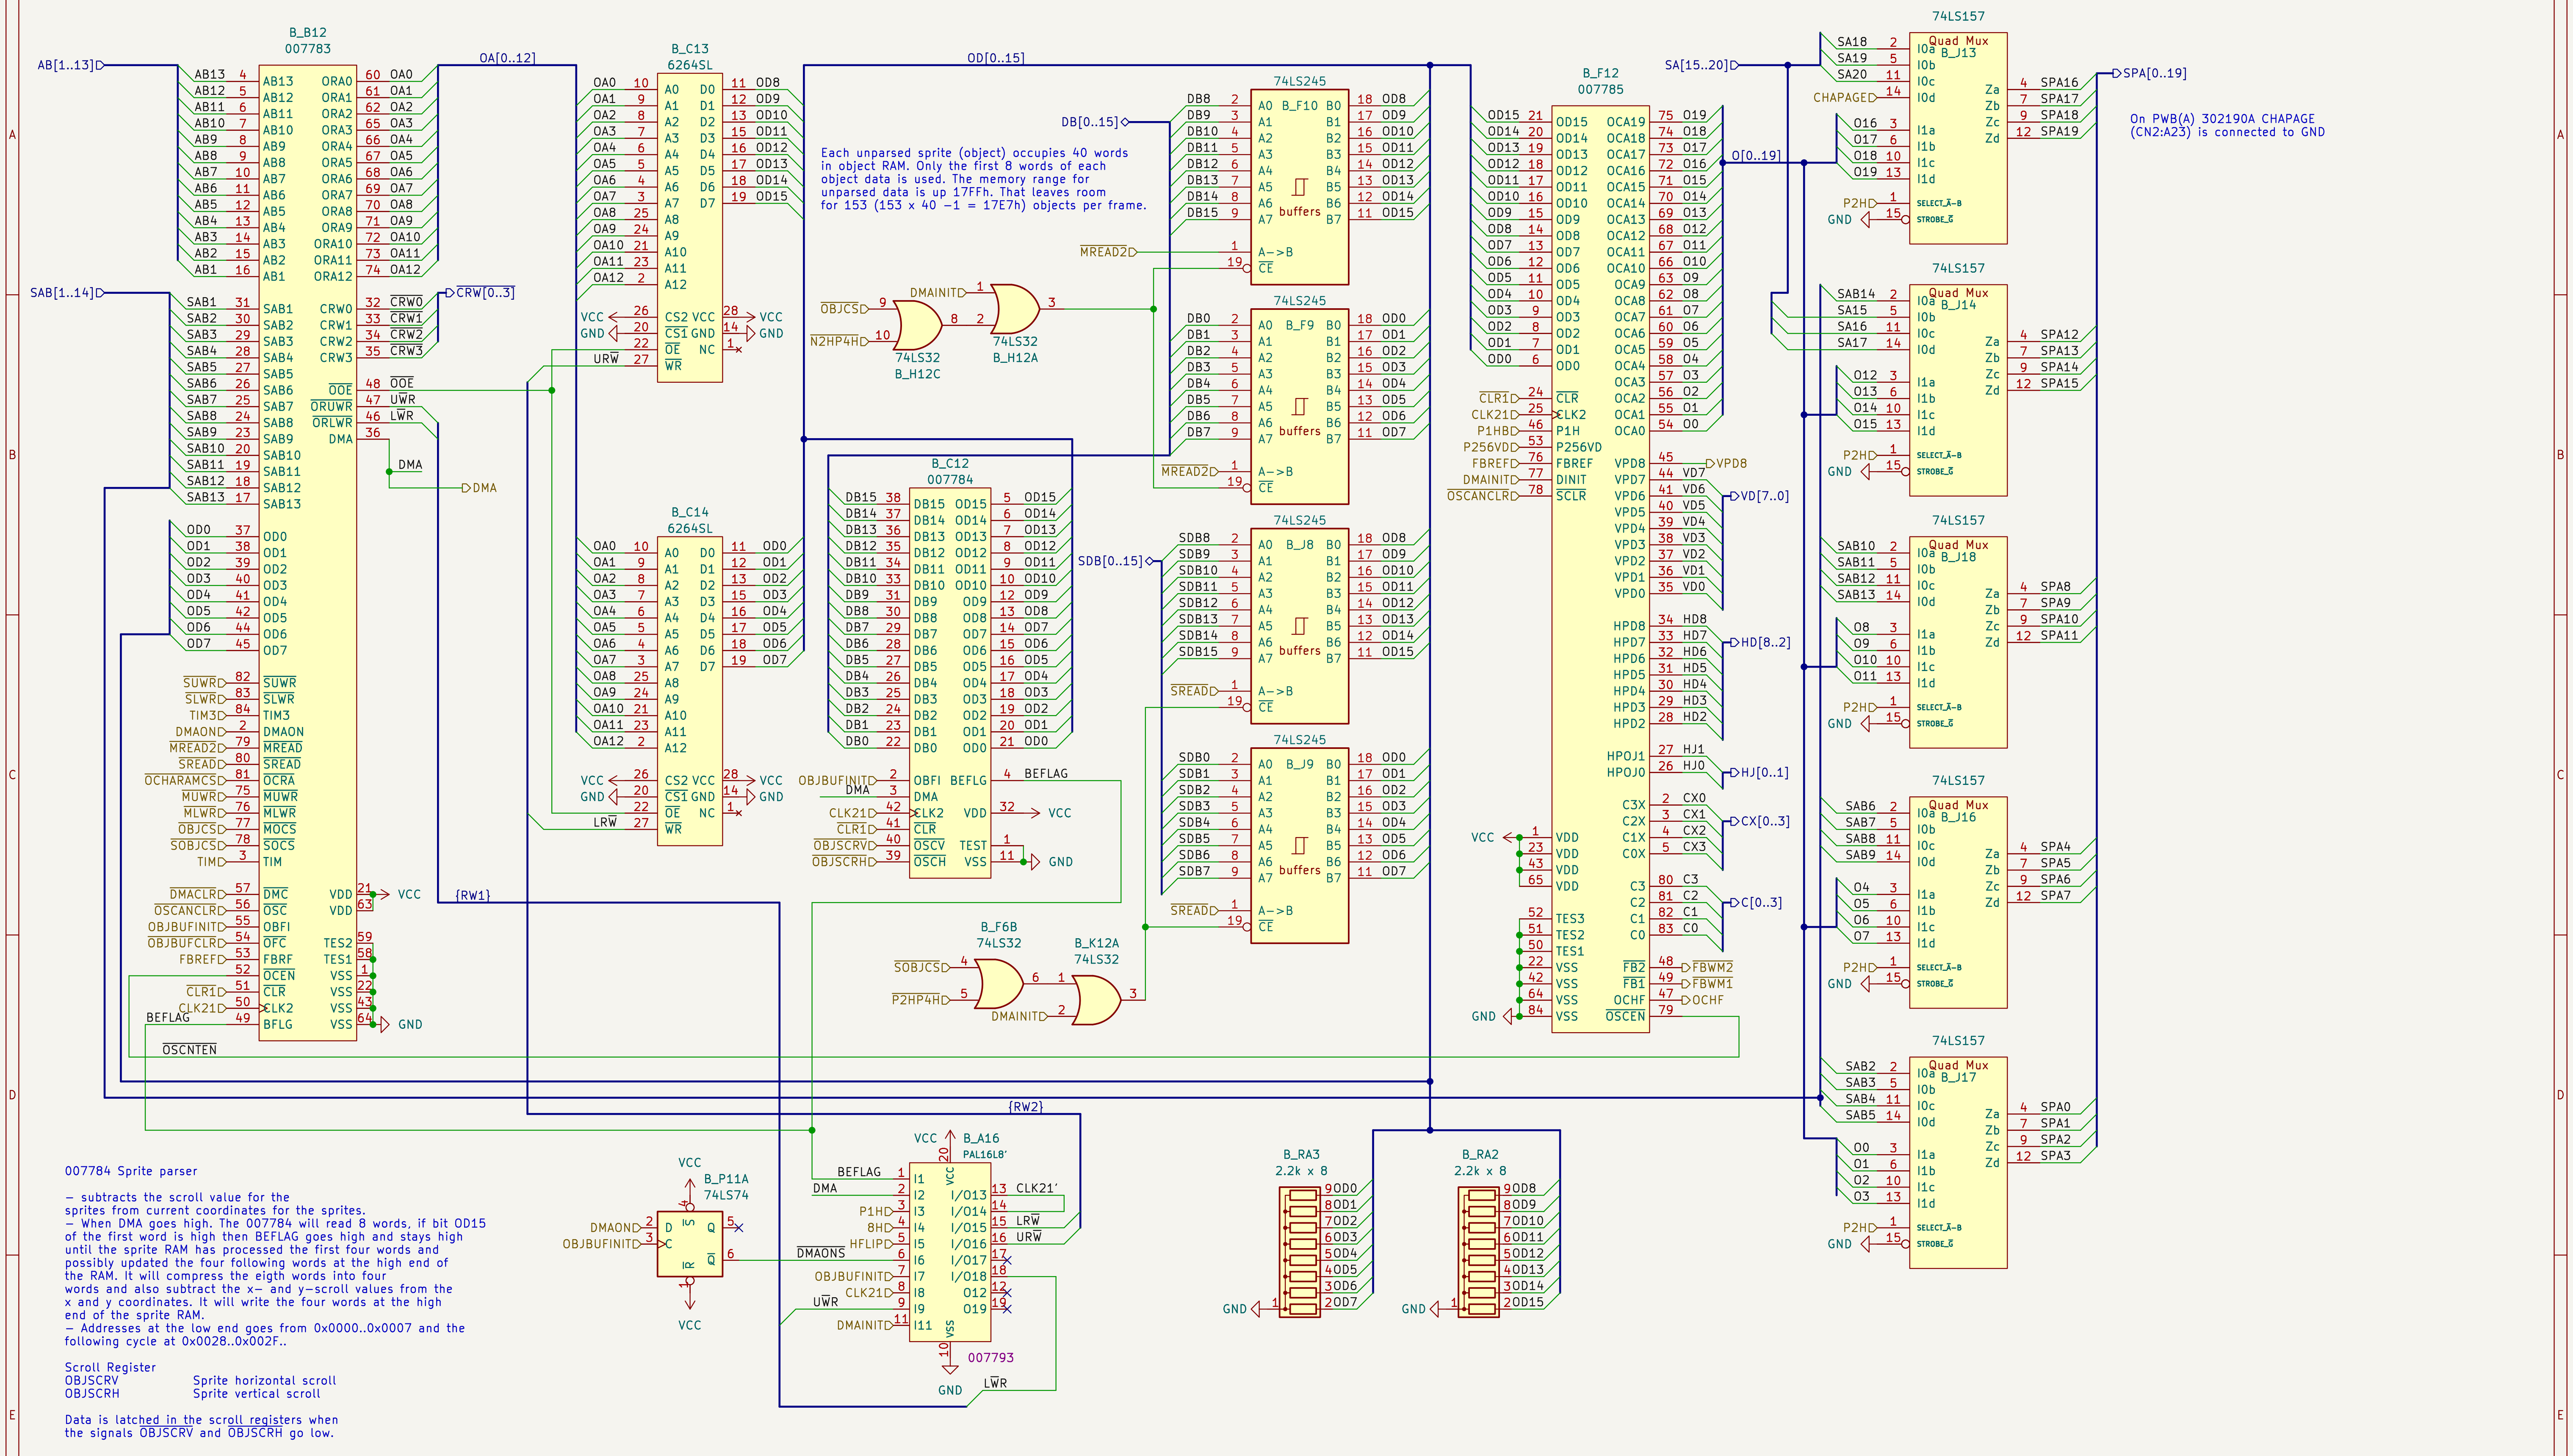

Each unparsed sprite (object) occupies 40 words in object RAM. Only the first 8 words of each object data is used. The memory range for unparsed data is up 17FFh. That leaves room for 153 (153 x 40 − 1 = 17E7h) objects per frame.

On PWB(A) 302190A CHAPAGE (CN2:A23) is connected to GND

007784 Sprite parser

− subtracts the scroll value for the sprites from current coordinates for the sprites.
− When DMA goes high. The 007784 will read 8 words, if bit OD15 of the first word is high then BEFLAG goes high and stays high until the sprite RAM has processed the first four words and possibly updated the four following words at the high end of the RAM. It will compress the eigth words into four words and also subtract the x− and y−scroll values from the x and y coordinates. It will write the four words at the high end of the sprite RAM.
− Addresses at the low end goes from 0x0000..0x0007 and the following cycle at 0x0028..0x002F..

Scroll Register
OBJSCRV Sprite horizontal scroll
OBJSCRH Sprite vertical scroll

Data is latched in the scroll registers when the signals OBJSCRV and OBJSCRH go low.

007793

CLK21' = CLK21

$\overline{LRW}$ = −($\overline{DMAONS}$ & OBJBUFINIT & $\overline{CLK21'}$ |
BEFLAG & DMA & P1H & DMAONS & CLK21' & (−8H & HFLIP | 8H & −HFLIP)
−LWR & −DMAINIT)

$\overline{URW}$ = −($\overline{DMAONS}$ & OBJBUFINIT & $\overline{CLK21'}$ |
BEFLAG & DMA & P1H & DMAONS & CLK21' & (8H & −HFLIP | −8H & HFLIP) |
−UWR & −DMAINIT)

The sprite memory is controlled in three separate cases:
1. OBJBUFINIT
2. BEFLAG & DMA
3. −DMAINIT

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903
Sheet: /Sprite Table/
File: sprite_table.kicad_sch

Title: Twin 16 − Rev B

Size: A3 Date: 2024-09-08 Rev:
KiCad E.D.A. 8.0.9 Id: 8/20

Graphics ROM and RAM

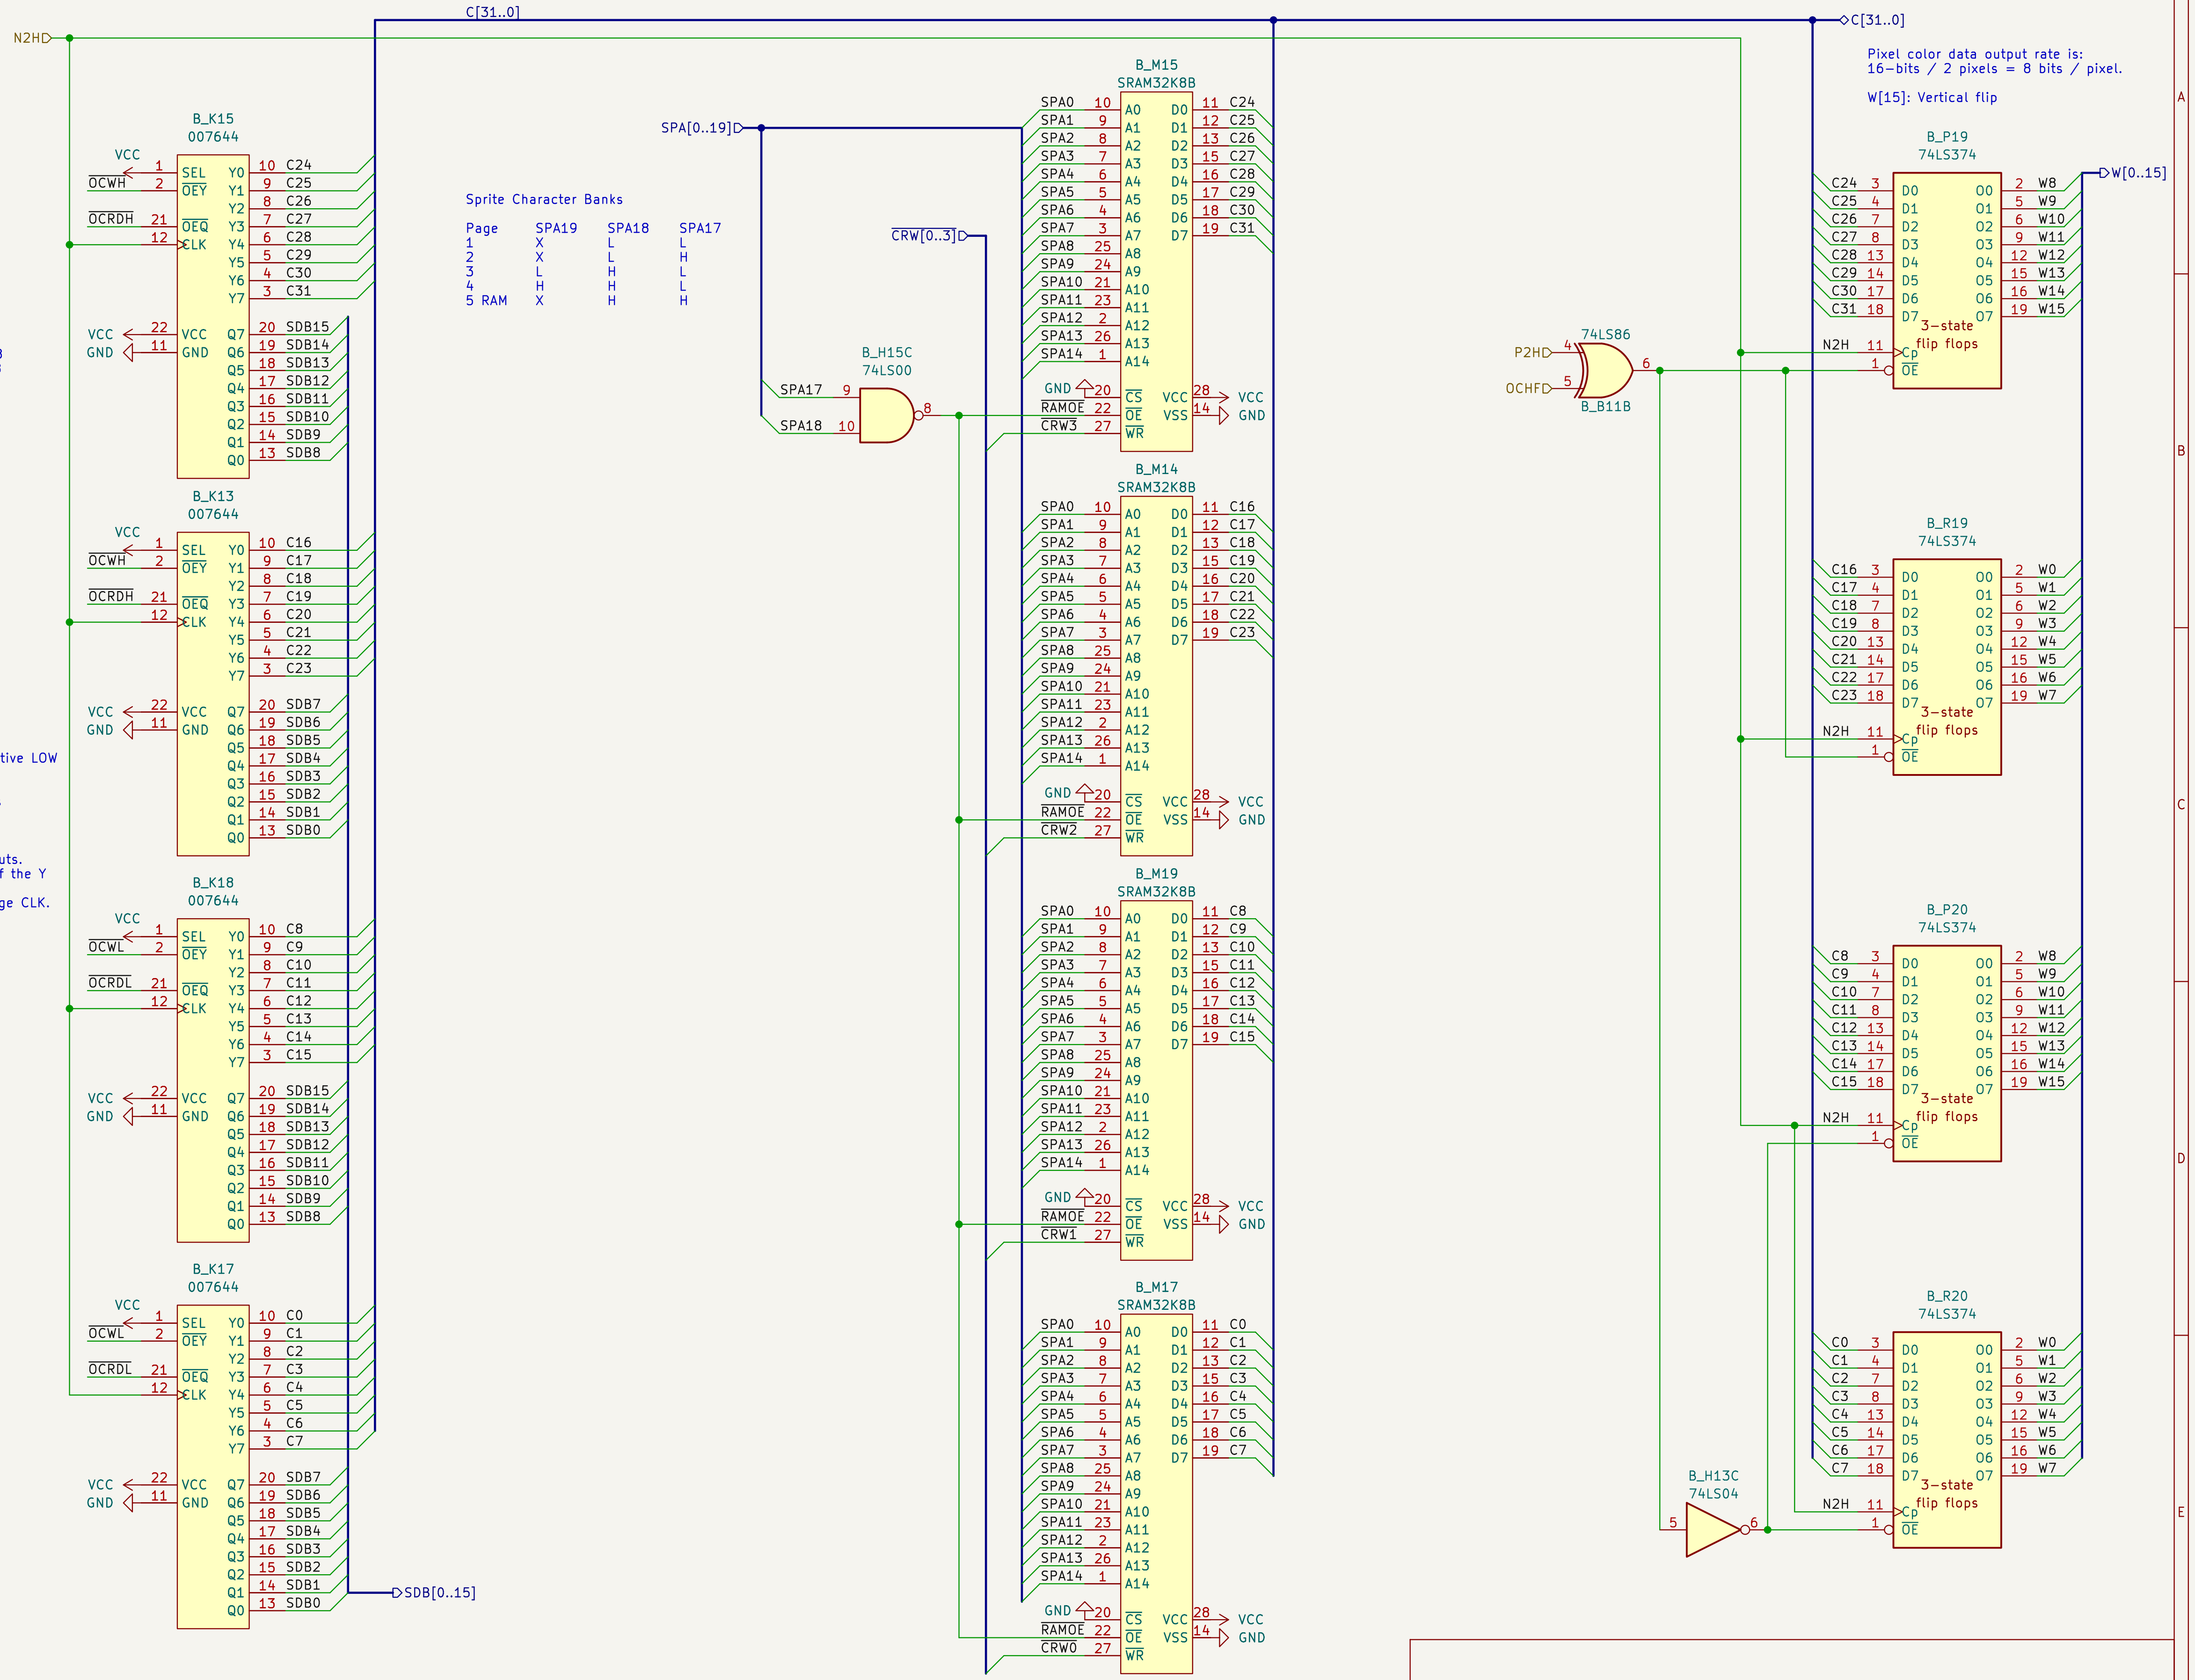

ROM naming

	ID	P13	P15	P16	P18
cuebrickj	GX903	NP	NP	NP	NP
miaj	GX808	808D15	NP	808D17	NP
hpuncher	GX870	870C15	870C16	870C17	870C18
gradius2 / vulcan	GX785	785F15	785F16	785F17	785F18

NP = Not Populated
On some boards P13,P15,P16 and P18 are NP and replaced with PWB(C) 402145A. See separate schematics.

Sprite Character Banks

Page	SPA19	SPA18	SPA17
1	X	L	L
2	X	L	H
3	L	H	L
4	H	H	L
5 RAM	X	H	H

This is from jammarcade.net

Pin 1 = SEL – changes whether the Q outputs require a rising edge clock or not.
Pin 2 = OEY – Output enable for the Y outputs else they are inputs. Active LOW
Pin 21 = OEQ – Output enable for the Q (clocked) outputs else they are inputs. Active LOW
Pin 12 = CLK – Clock input

Pins 3–10 = Y outputs – normal outputs. If OEY is LOW these pins become outputs mirroring the state of the Q input pins. SEL and CLK pins are not used in this mode.

Pins 13–20 = Q outputs – clocked outputs. If OEQ is LOW these pins become outputs.
If SEL is HIGH and CLK is HIGH these outputs will mirror the state of the Y inputs.
If SEL is LOW then the outputs will only change state on a rising edge CLK.

Konami 007788

The inverted ~P2H is written as N2H.

$\overline{\text{OCRDL}}$ = ~(~$\overline{\text{SREAD}}$ & SAB1 & ~$\overline{\text{OCHARAMCS}}$ & $\overline{\text{OCHAROMCS}}$ | ~$\overline{\text{SREAD}}$ & SAB1 & ~$\overline{\text{OCHAROMCS}}$)
$\overline{\text{OCWL}}$ = ~(~P2H & $\overline{\text{SREAD}}$ & SAB1 & ~$\overline{\text{OCHARAMCS}}$)
$\overline{\text{OCRDH}}$ = ~(~$\overline{\text{SREAD}}$ & ~SAB1 & ~$\overline{\text{OCHARAMCS}}$ & $\overline{\text{OCHAROMCS}}$ | ~$\overline{\text{SREAD}}$ & ~SAB1 & ~$\overline{\text{OCHAROMCS}}$)
$\overline{\text{OCWH}}$ = ~(~P2H & $\overline{\text{SREAD}}$ & ~SAB1 & ~$\overline{\text{OCHARAMCS}}$)
$\overline{\text{VCWENL}}$ = ~(P2H & P4H & ~$\overline{\text{VCHARAMCS}}$ & SREAD & SAB1)
$\overline{\text{VCRDL}}$ = ~(~$\overline{\text{VCHARAMCS}}$ & ~$\overline{\text{SREAD}}$ & SAB1)
$\overline{\text{VCRDH}}$ = ~(~$\overline{\text{VCHARAMCS}}$ & ~$\overline{\text{SREAD}}$ & ~SAB1)
$\overline{\text{VCWENH}}$ = ~(P2H & P4H & ~$\overline{\text{VCHARAMCS}}$ & SREAD & ~SAB1)
$\overline{\text{P2HP4H}}$ = ~(P2H & P4H)
$\overline{\text{N2HP4H}}$ = ~(~P2H & P4H)

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903
Sheet: /Sprite RAM/
File: sprite_ram.kicad_sch
Title: Twin 16 – Rev B
Size: A3 Date: 2024-09-08 Rev:
KiCad E.D.A. 8.0.9 Id: 9/20

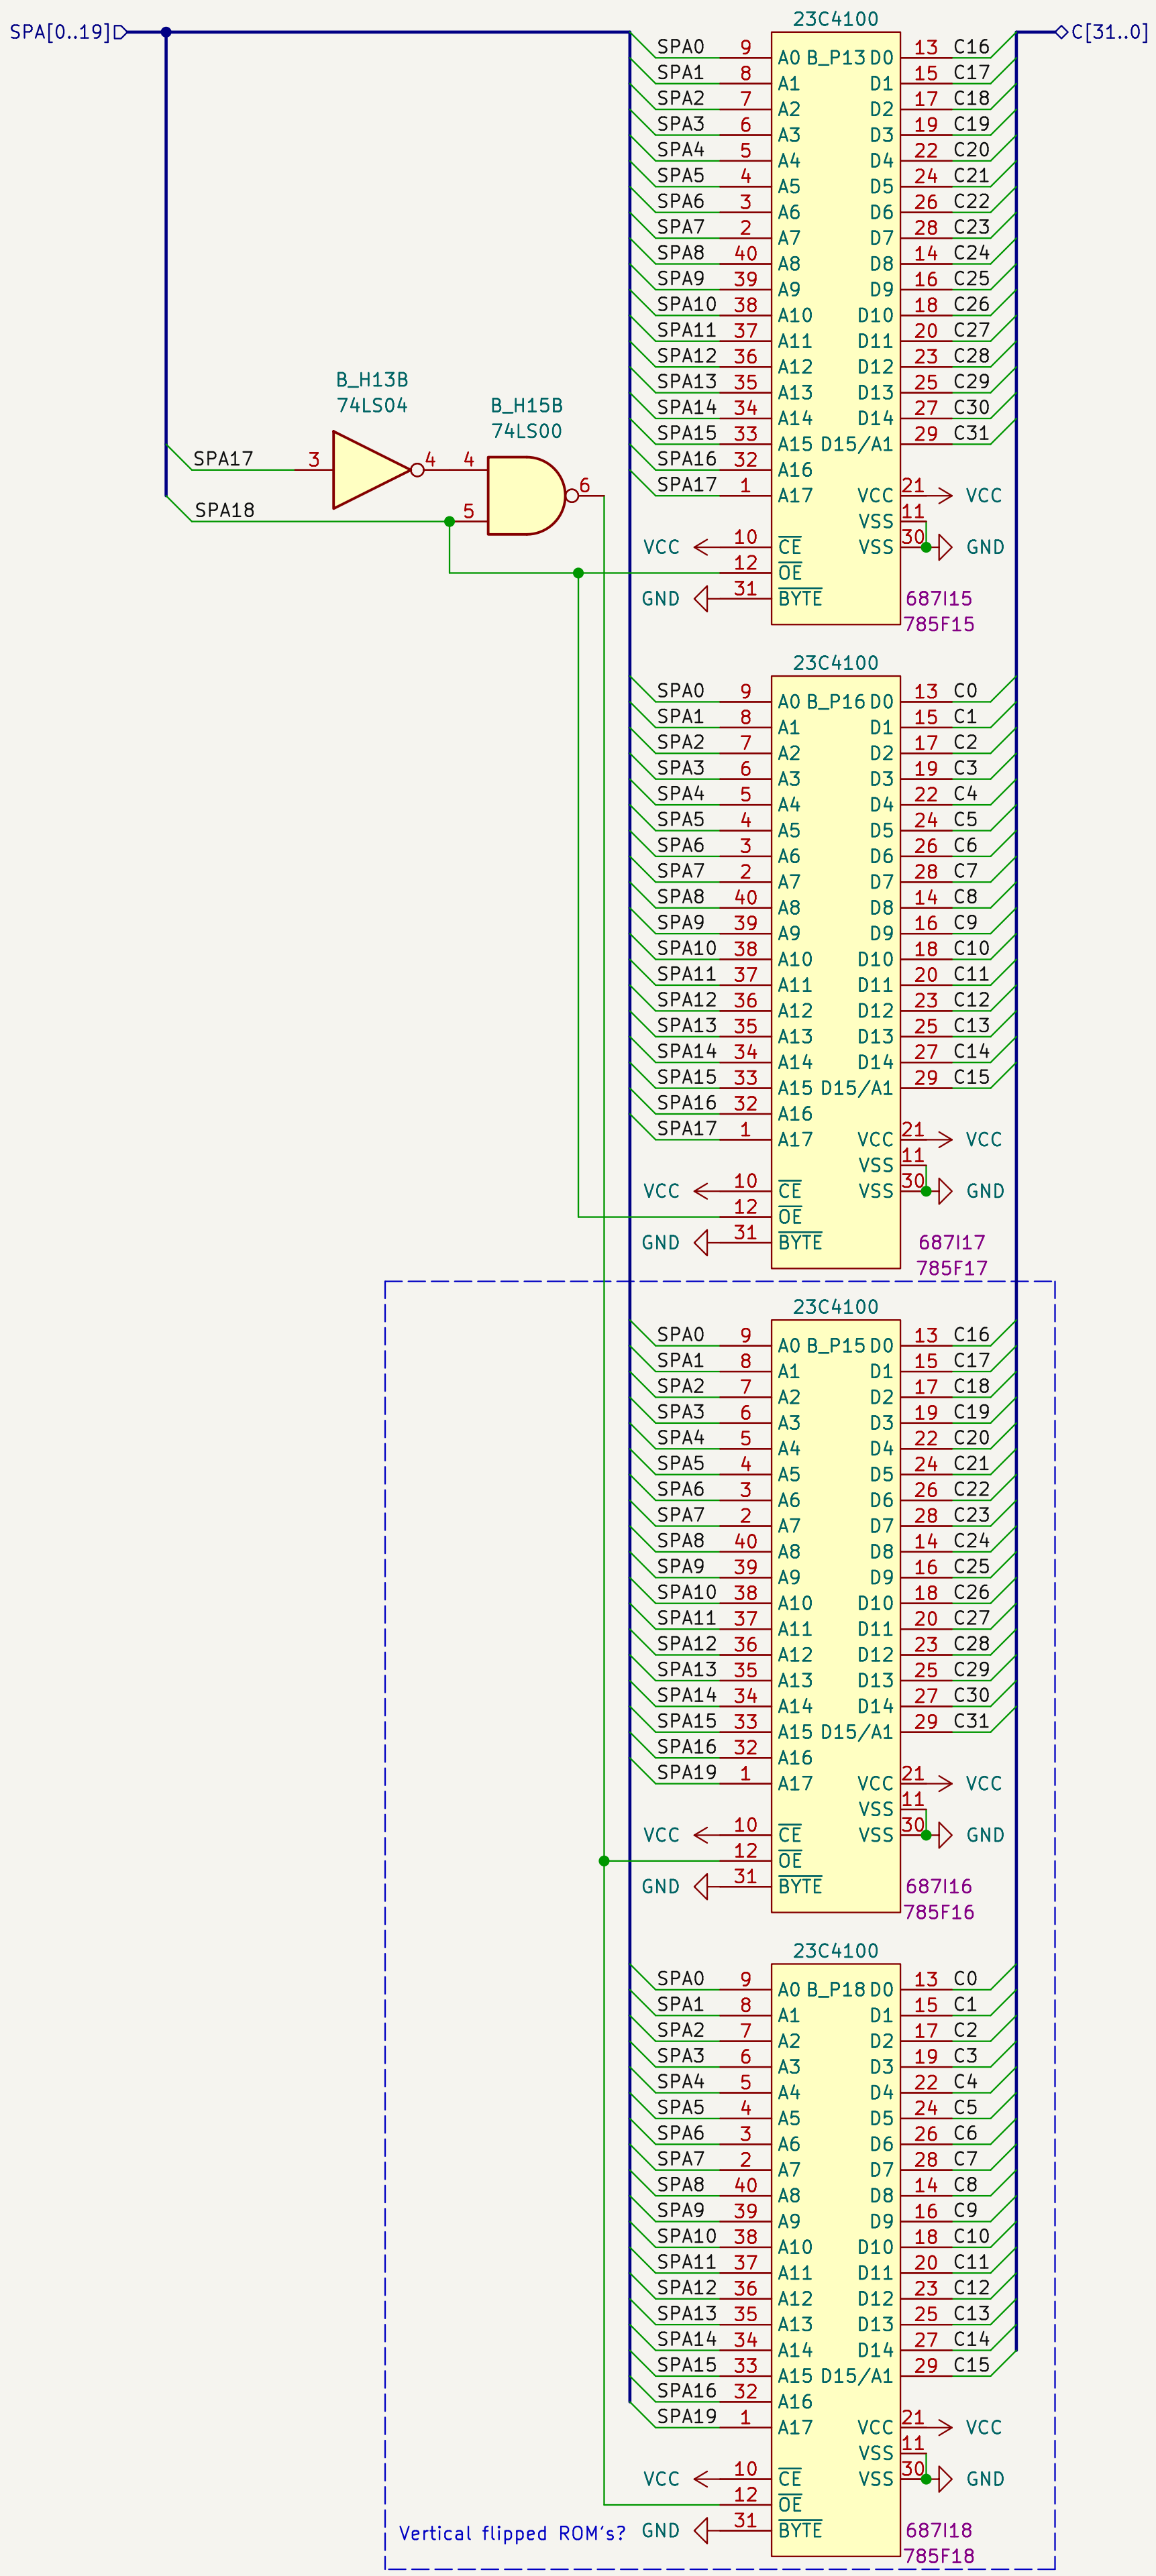

Sheet: /Sprite ROM 1/
File: sprite_rom_1.kicad_sch

Title: Twin 16 – Rev B

Size: A3	Date: 2024-09-08	Rev:
KiCad E.D.A. 8.0.9		Id: 10/20

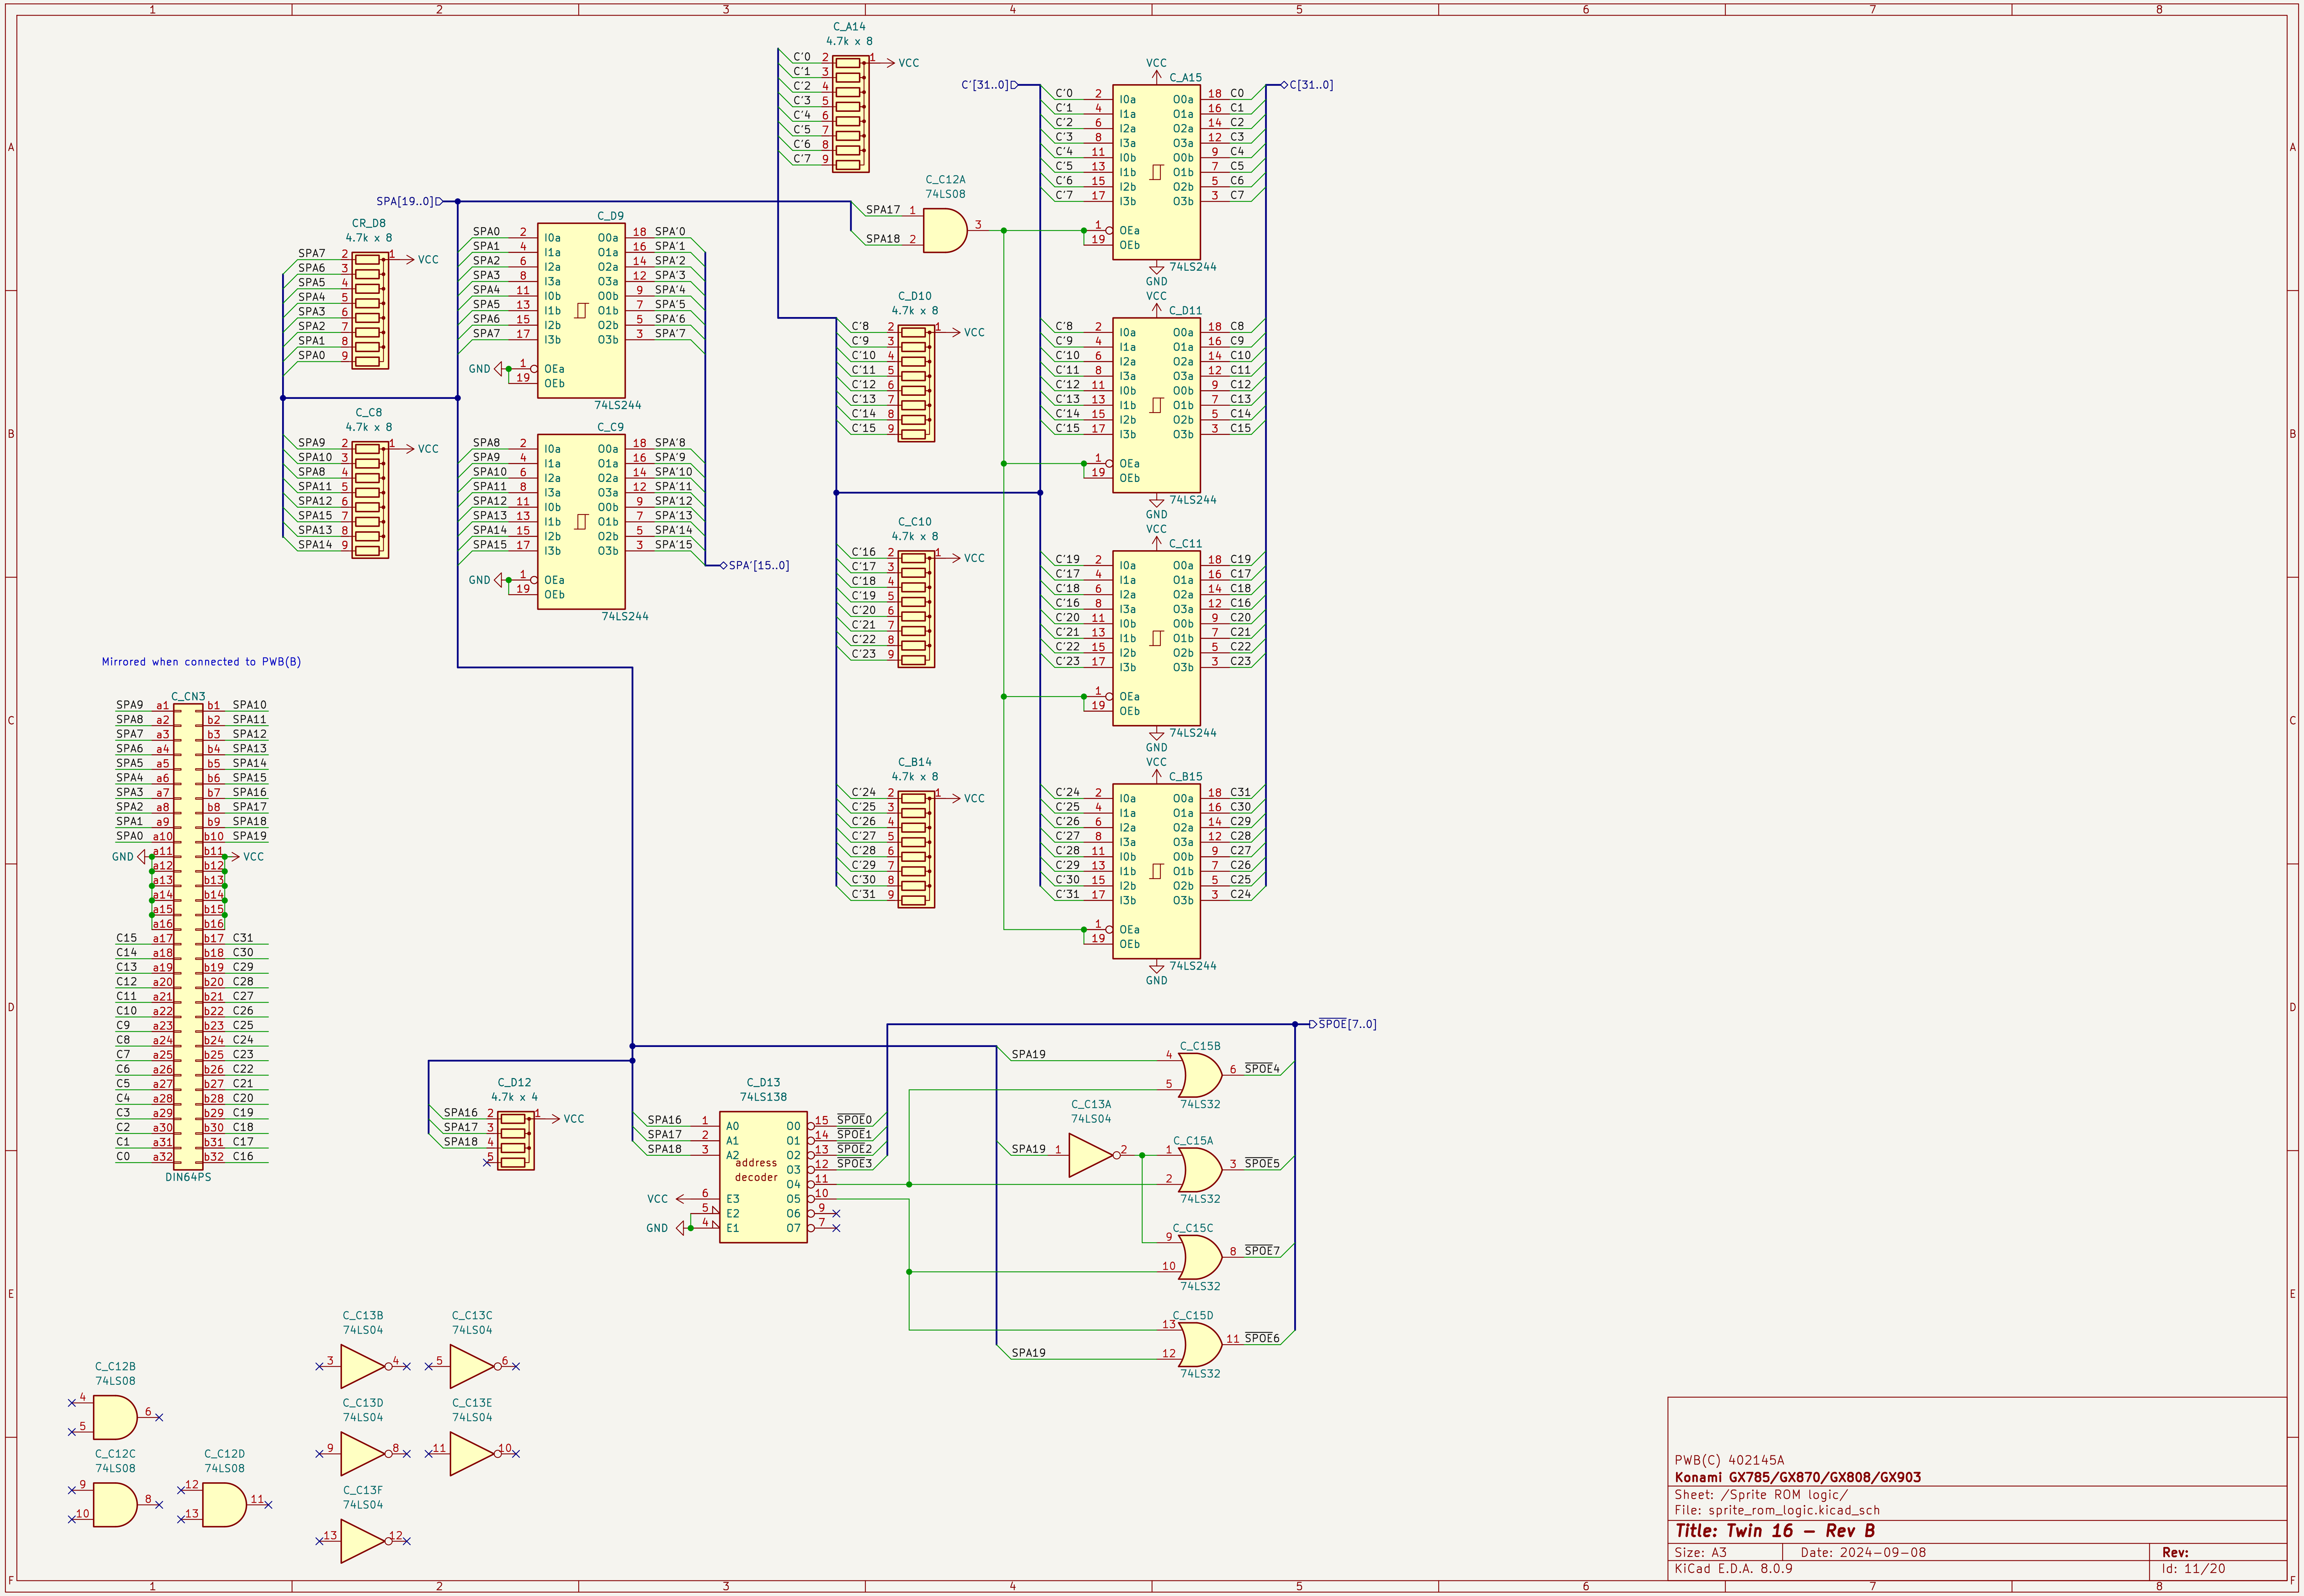

PWB(C) 402145A

Konami GX785/GX870/GX808/GX903

Sheet: /Sprite ROM logic/

File: sprite_rom_logic.kicad_sch

Title: Twin 16 — Rev B

Size: A3 | Date: 2024-09-08 | **Rev:**

KiCad E.D.A. 8.0.9 | Id: 11/20

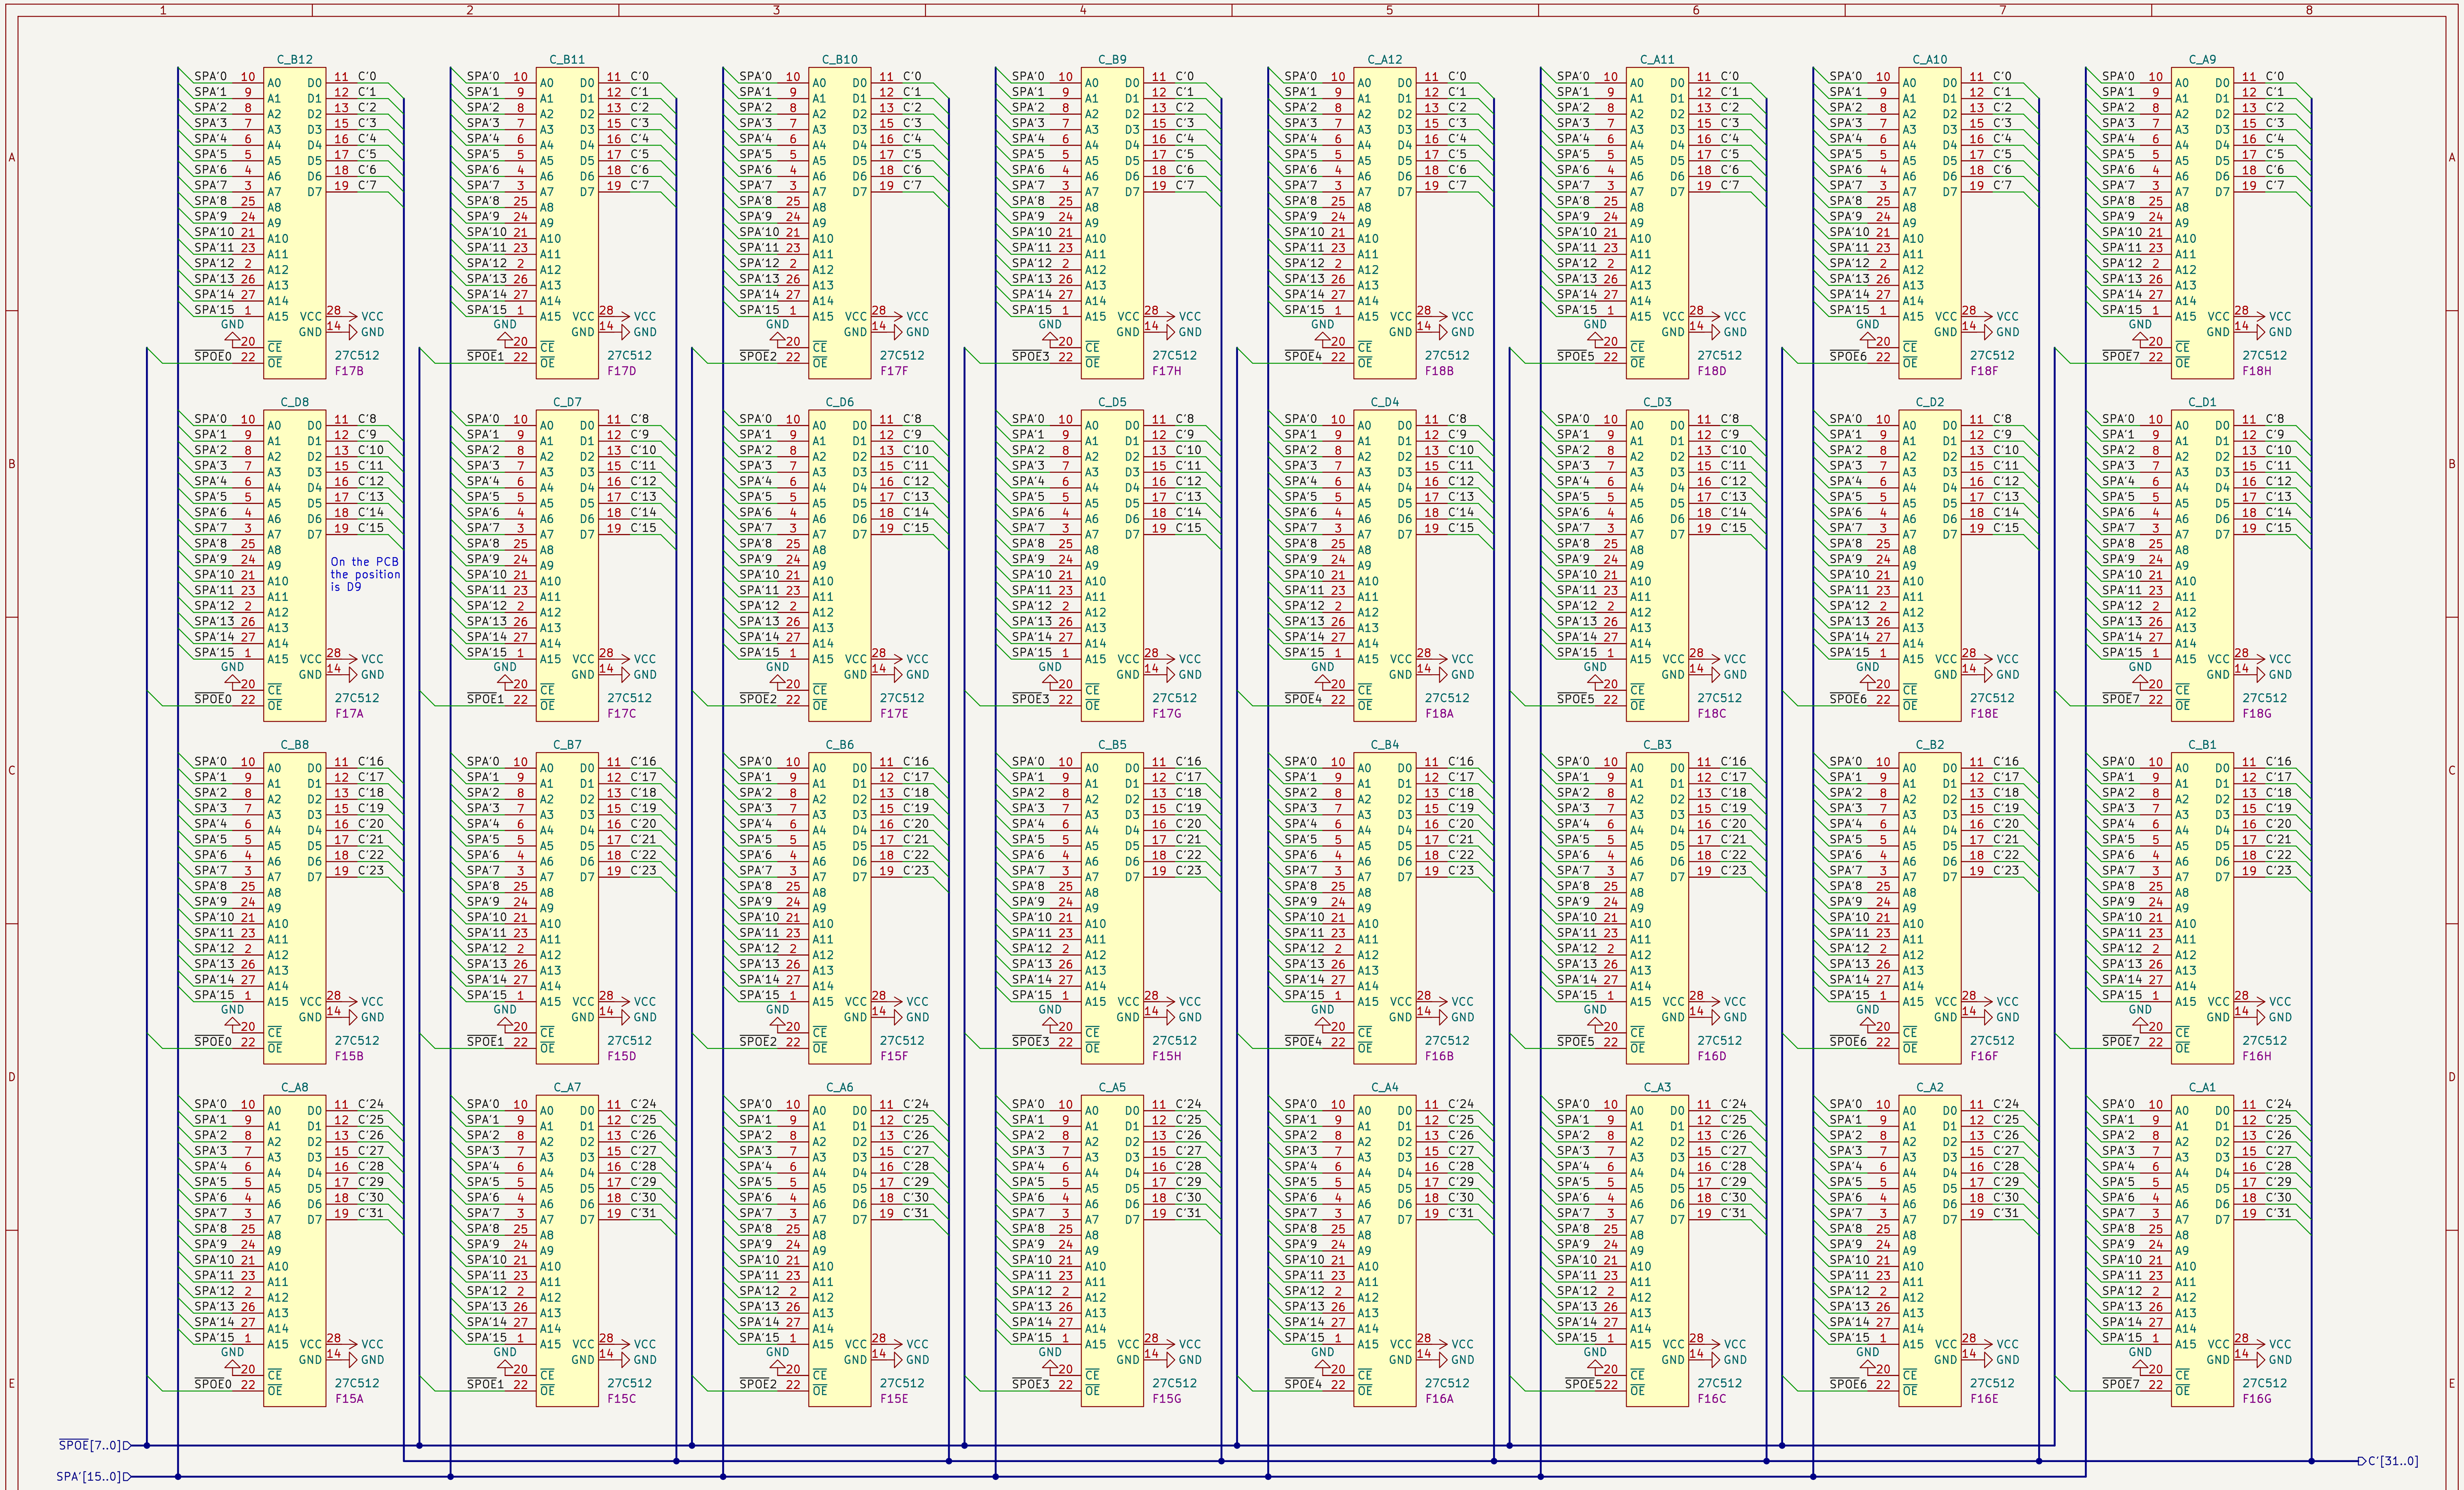

Konami GX785/GX870/GX808/GX903

Sheet: /Sprite ROM 2/

File: sprite_rom_2.kicad_sch

Title: Twin 16 — Rev B

Size: A3 Date: 2024-09-08 Rev:

KiCad E.D.A. 8.0.9 Id: 11/20

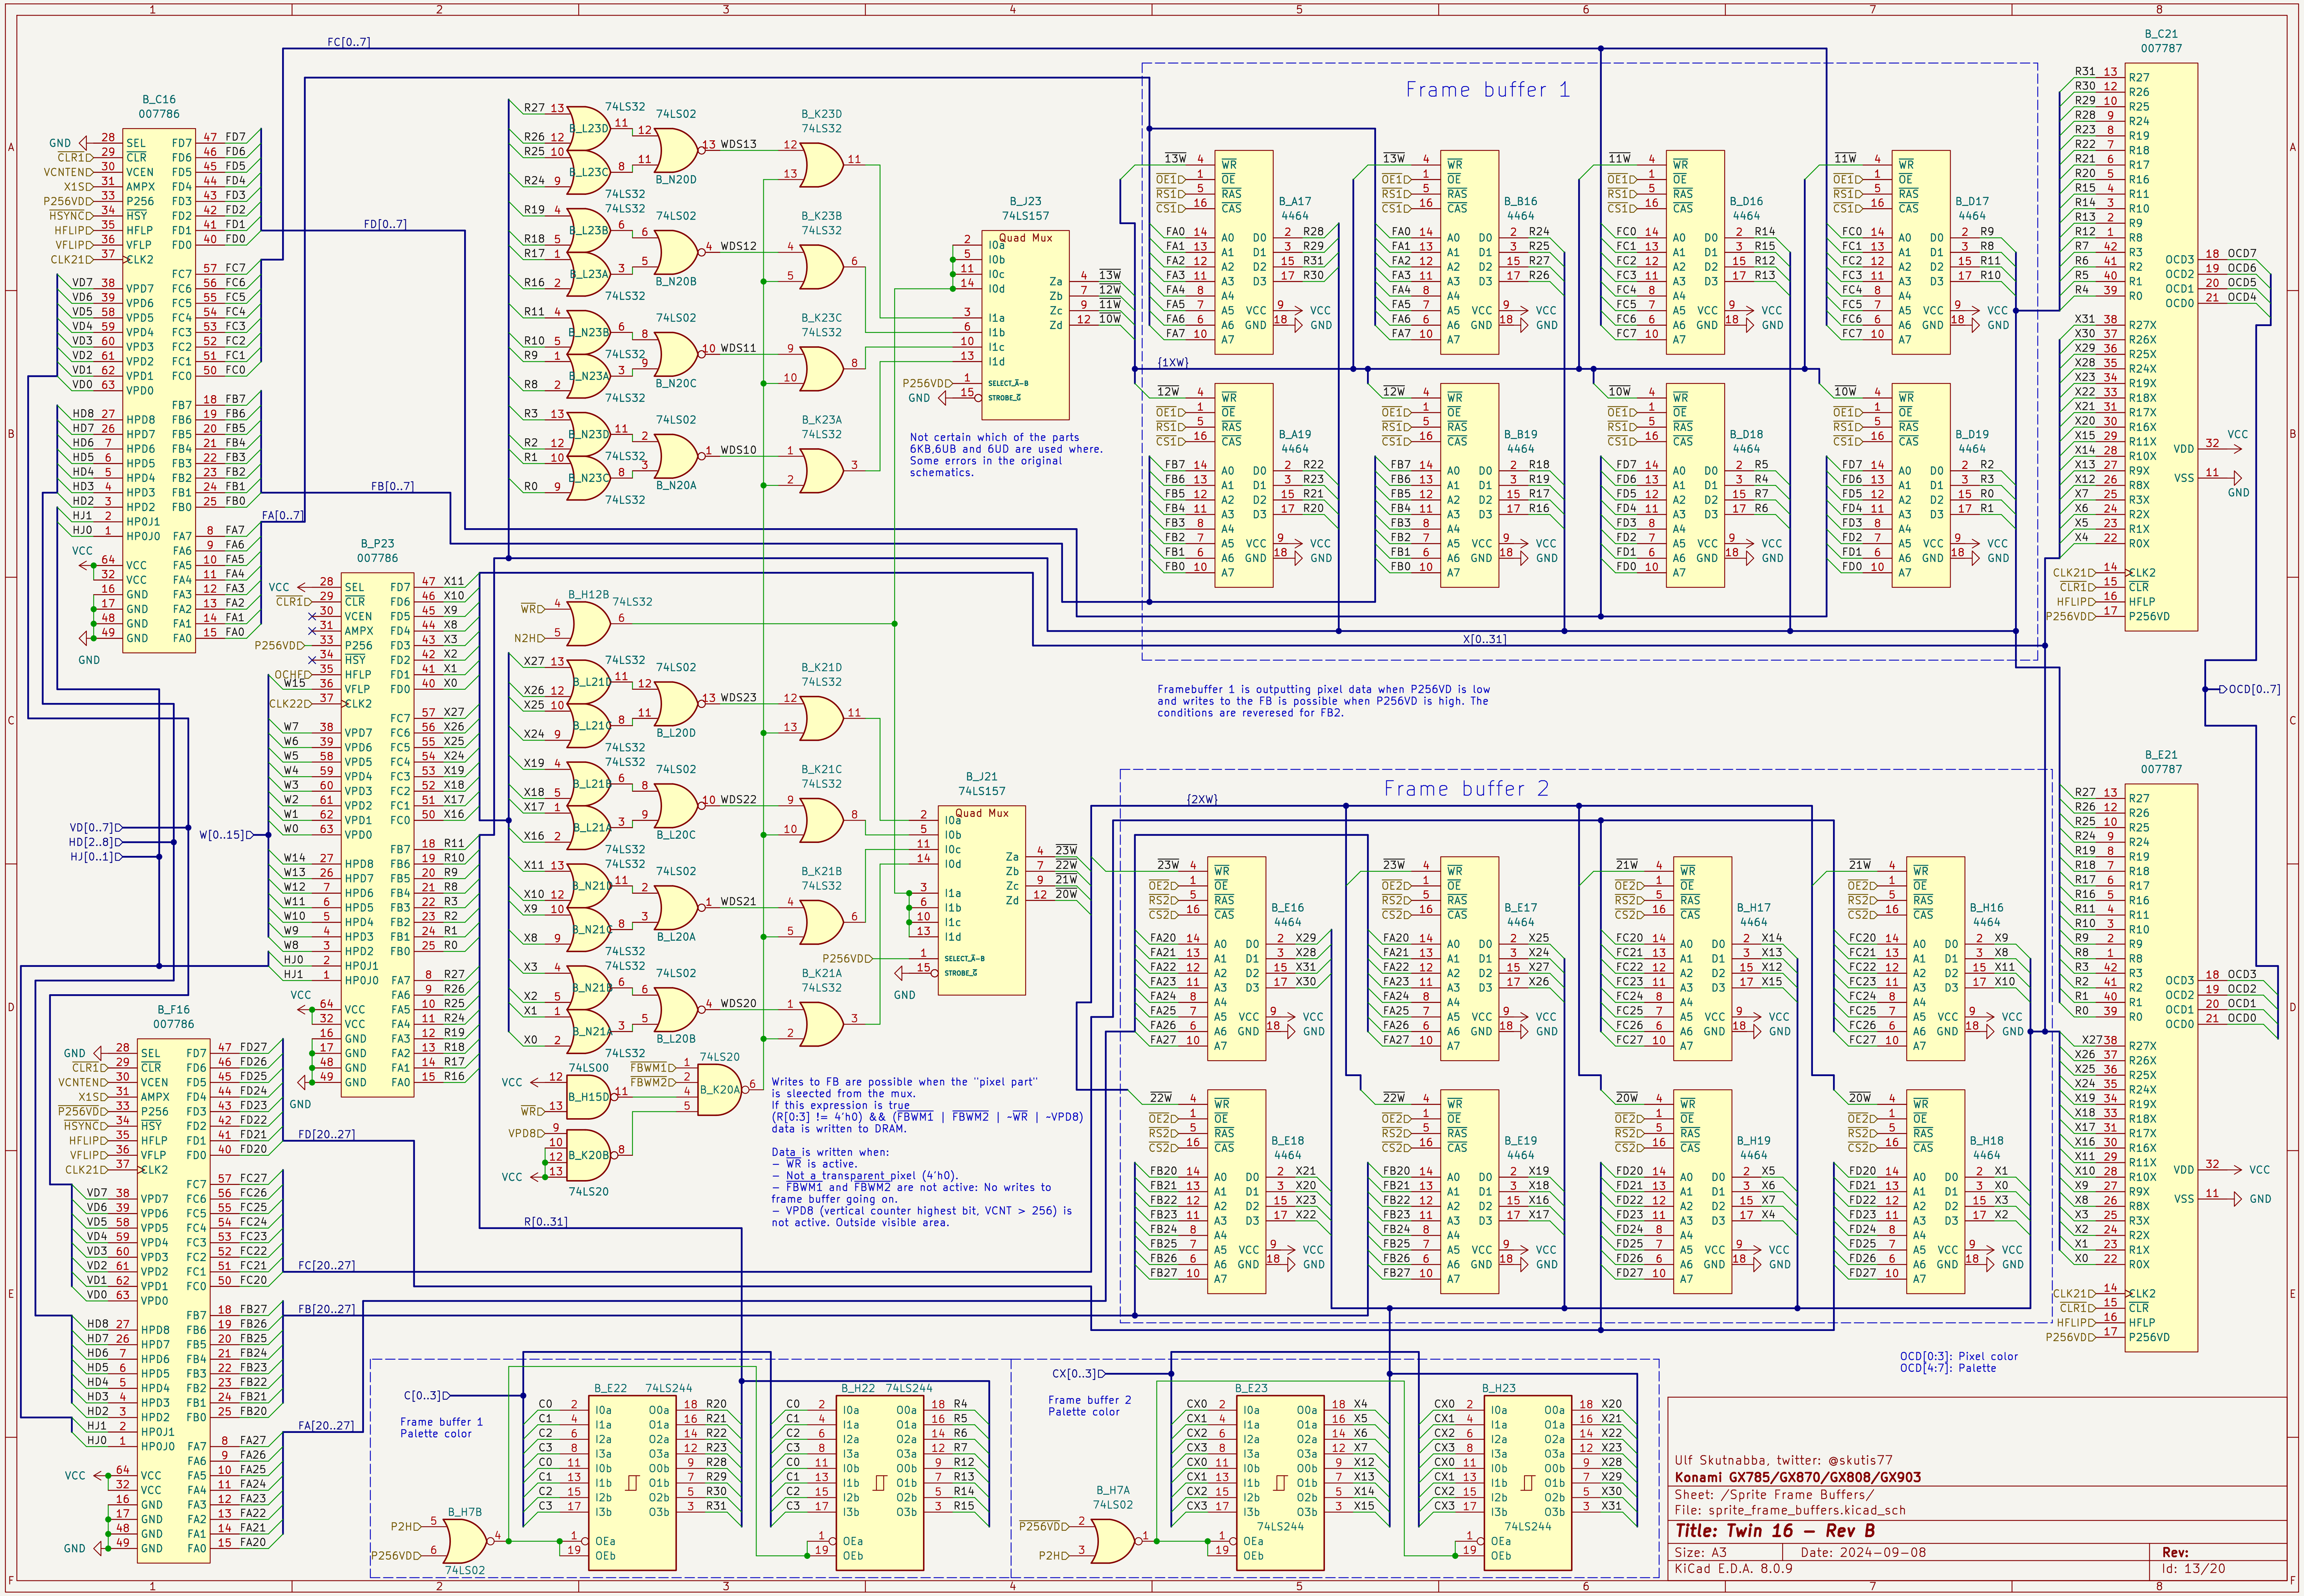

Frame buffer 1
Frame buffer 2
Not certain which of the parts 6KB,6UB and 6UD are used where. Some errors in the original schematics.
Framebuffer 1 is outputting pixel data when P256VD is low and writes to the FB is possible when P256VD is high. The conditions are revereserd for FB2.
Writes to FB are possible when the "pixel part" is sleected from the mux.
If this expression is true
(R[0:3] != 4'h0) && (FBWM1 | FBWM2 | ~WR | ~VPD8)
data is written to DRAM.
Data is written when:
– WR is active.
– Not a transparent pixel (4'h0).
– FBWM1 and FBWM2 are not active: No writes to frame buffer going on.
– VPD8 (vertical counter highest bit, VCNT > 256) is not active. Outside visible area.
Frame buffer 1 Palette color
Frame buffer 2 Palette color
OCD[0:3]: Pixel color
OCD[4:7]: Palette
Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /Sprite Frame Buffers/
File: sprite_frame_buffers.kicad_sch
Title: Twin 16 – Rev B
Size: A3
Date: 2024-09-08
Rev:
KiCad E.D.A. 8.0.9
Id: 13/20

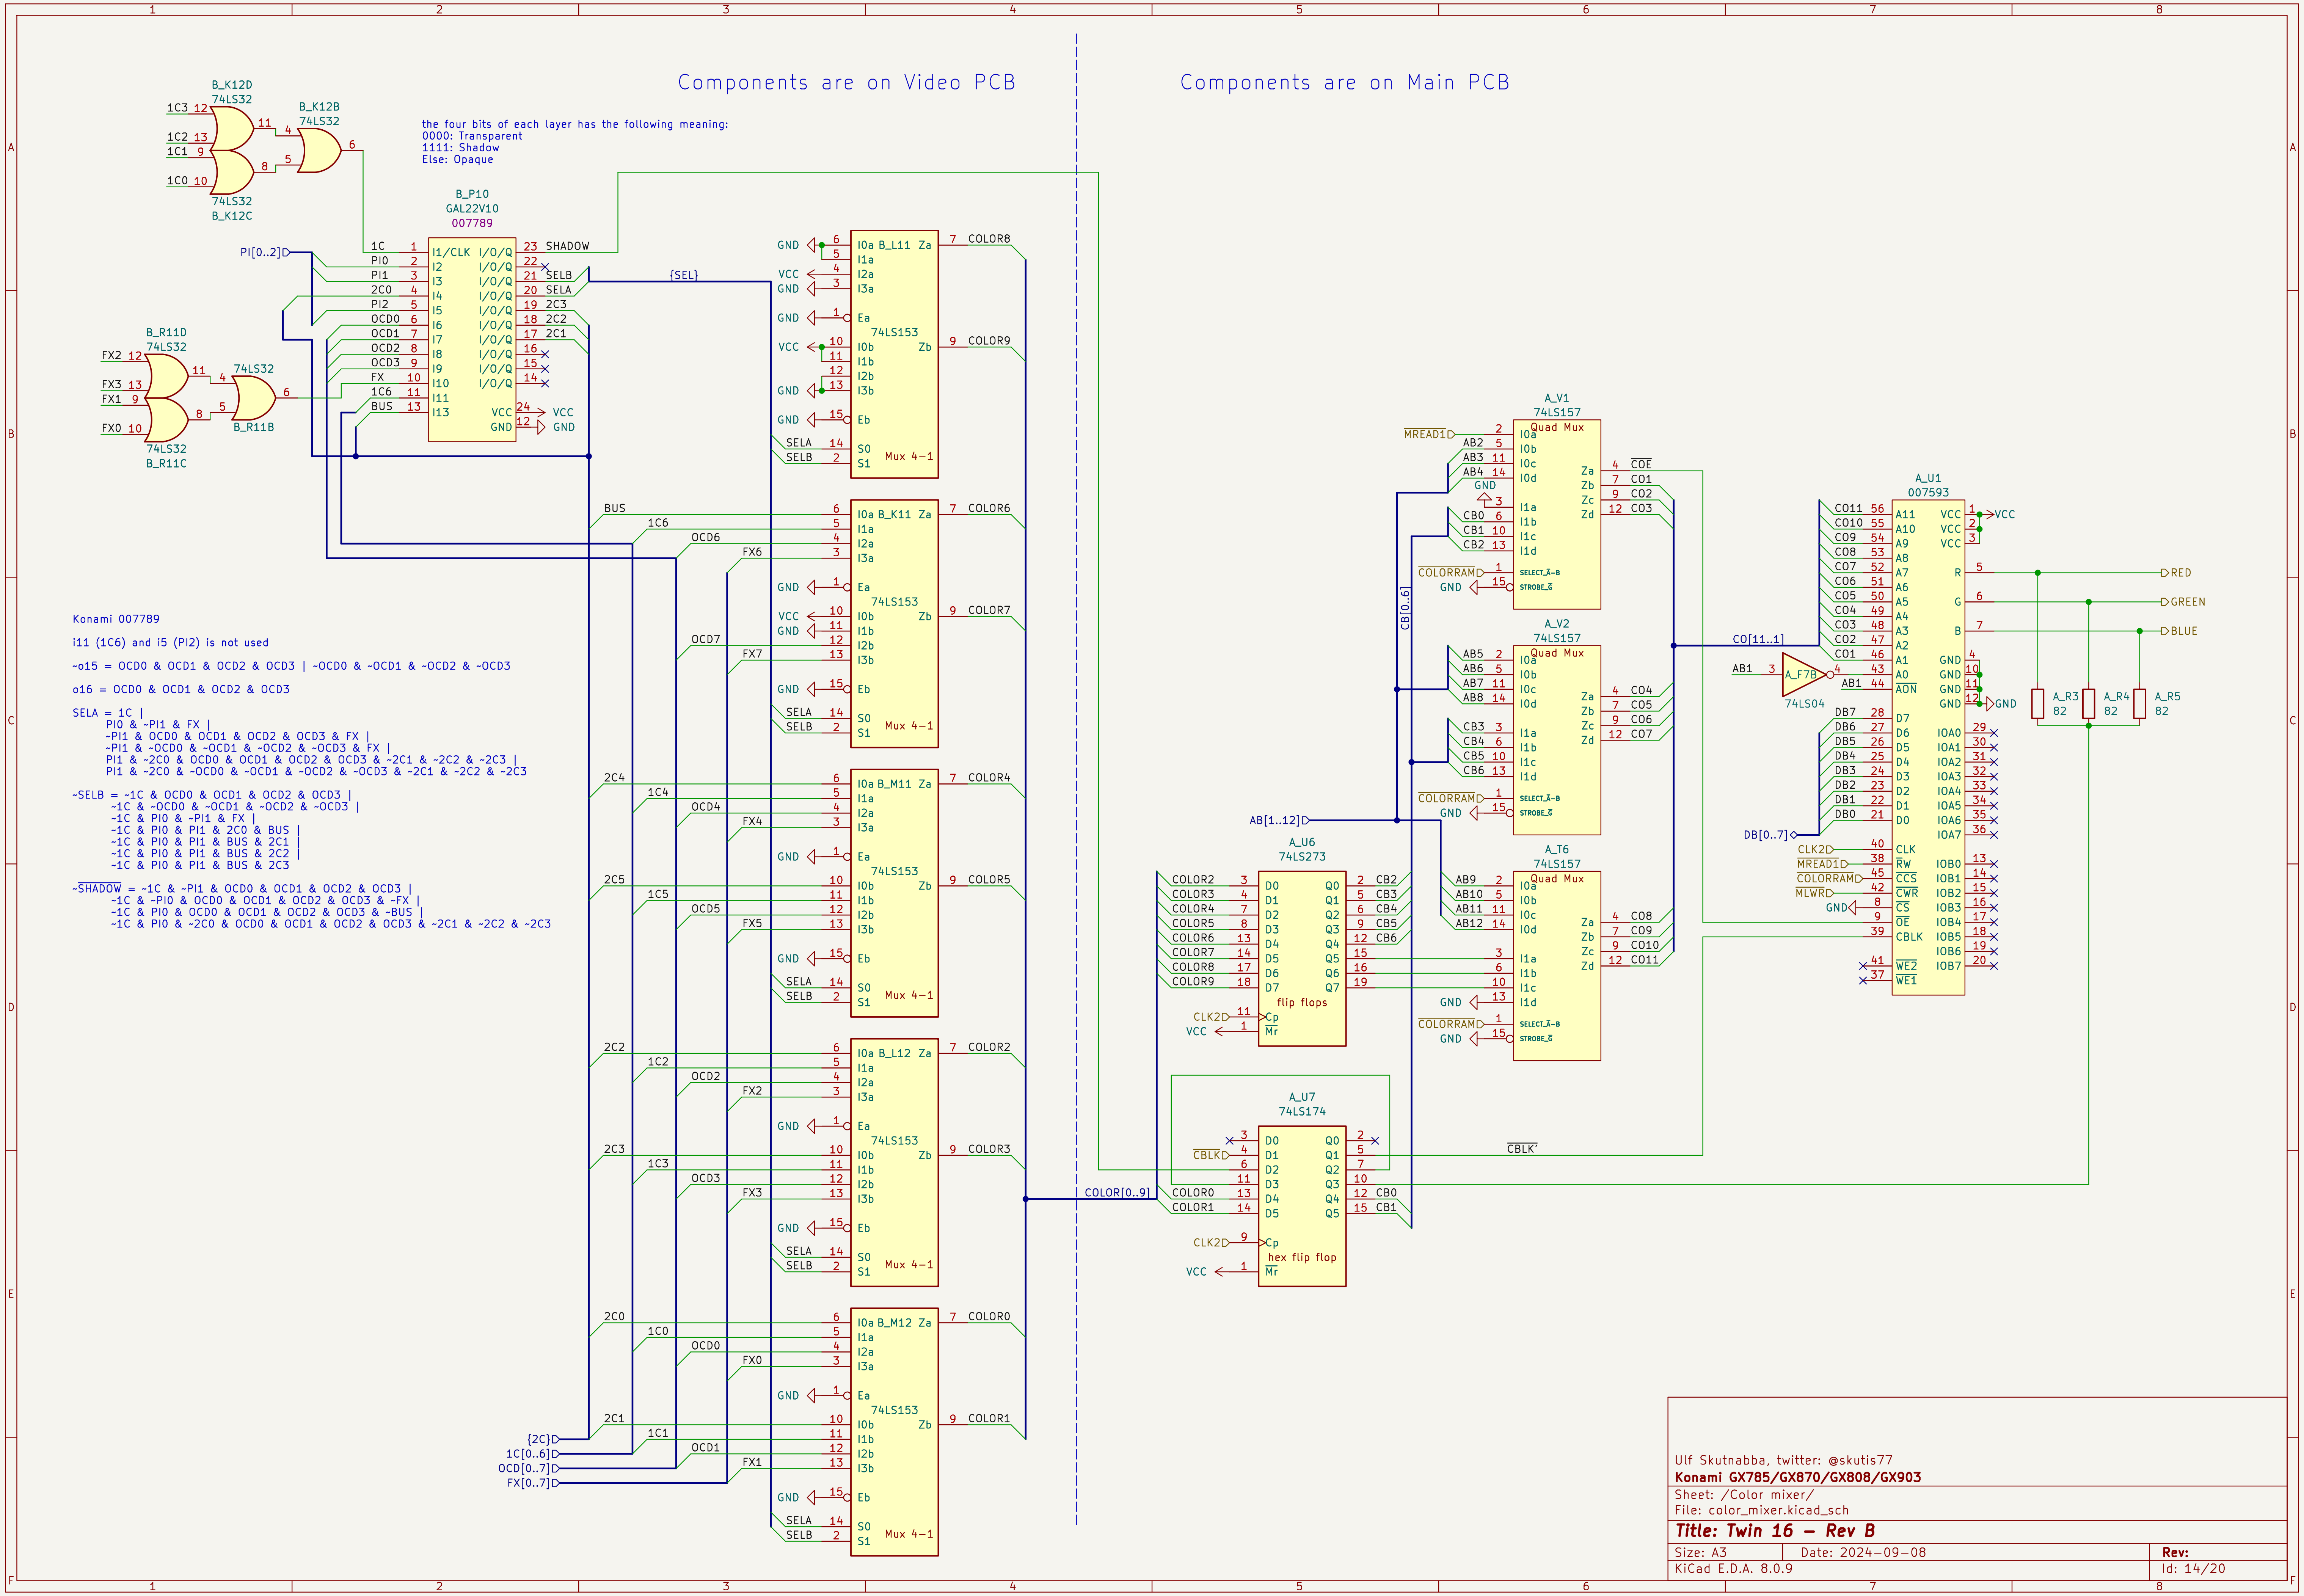
Components are on Video PCB
Components are on Main PCB
the four bits of each layer has the following meaning:
0000: Transparent
1111: Shadow
Else: Opaque
B_P10
GAL22V10
007789
B_K12D
74LS32
B_K12B
74LS32
B_K12C
B_R11D
B_R11B
B_R11C
B_L11
B_K11
B_M11
B_L12
B_M12
74LS153
Mux 4-1
A_V1
A_V2
A_T6
74LS157
Quad Mux
A_U6
74LS273
flip flops
A_U7
74LS174
hex flip flop
A_U1
007593
A_F7B
74LS04
A_R3
A_R4
A_R5
82
RED
GREEN
BLUE
COLOR[0..9]
CO[11..1]
AB[1..12]
DB[0..7]
CB[0..6]
{SEL}
{2C}
1C[0..6]
OCD[0..7]
FX[0..7]
PI[0..2]
Konami 007789
i11 (1C6) and i5 (PI2) is not used
~o15 = OCD0 & OCD1 & OCD2 & OCD3 | ~OCD0 & ~OCD1 & ~OCD2 & ~OCD3
o16 = OCD0 & OCD1 & OCD2 & OCD3
SELA = 1C |
PI0 & ~PI1 & FX |
~PI1 & OCD0 & OCD1 & OCD2 & OCD3 & FX |
~PI1 & ~OCD0 & ~OCD1 & ~OCD2 & ~OCD3 & FX |
PI1 & ~2C0 & OCD0 & OCD1 & OCD2 & OCD3 & ~2C1 & ~2C2 & ~2C3 |
PI1 & ~2C0 & ~OCD0 & ~OCD1 & ~OCD2 & ~OCD3 & ~2C1 & ~2C2 & ~2C3
~SELB = ~1C & OCD0 & OCD1 & OCD2 & OCD3 |
~1C & ~OCD0 & ~OCD1 & ~OCD2 & ~OCD3 |
~1C & PI0 & ~PI1 & FX |
~1C & PI0 & PI1 & 2C0 & BUS |
~1C & PI0 & PI1 & BUS & 2C1 |
~1C & PI0 & PI1 & BUS & 2C2 |
~1C & PI0 & PI1 & BUS & 2C3
~SHADOW = ~1C & ~PI1 & OCD0 & OCD1 & OCD2 & OCD3 |
~1C & ~PI0 & OCD0 & OCD1 & OCD2 & OCD3 & ~FX |
~1C & PI0 & OCD0 & OCD1 & OCD2 & OCD3 & ~BUS |
~1C & PI0 & ~2C0 & OCD0 & OCD1 & OCD2 & OCD3 & ~2C1 & ~2C2 & ~2C3
Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /Color mixer/
File: color_mixer.kicad_sch
Title: Twin 16 — Rev B
Size: A3
Date: 2024-09-08
Rev:
KiCad E.D.A. 8.0.9
Id: 14/20

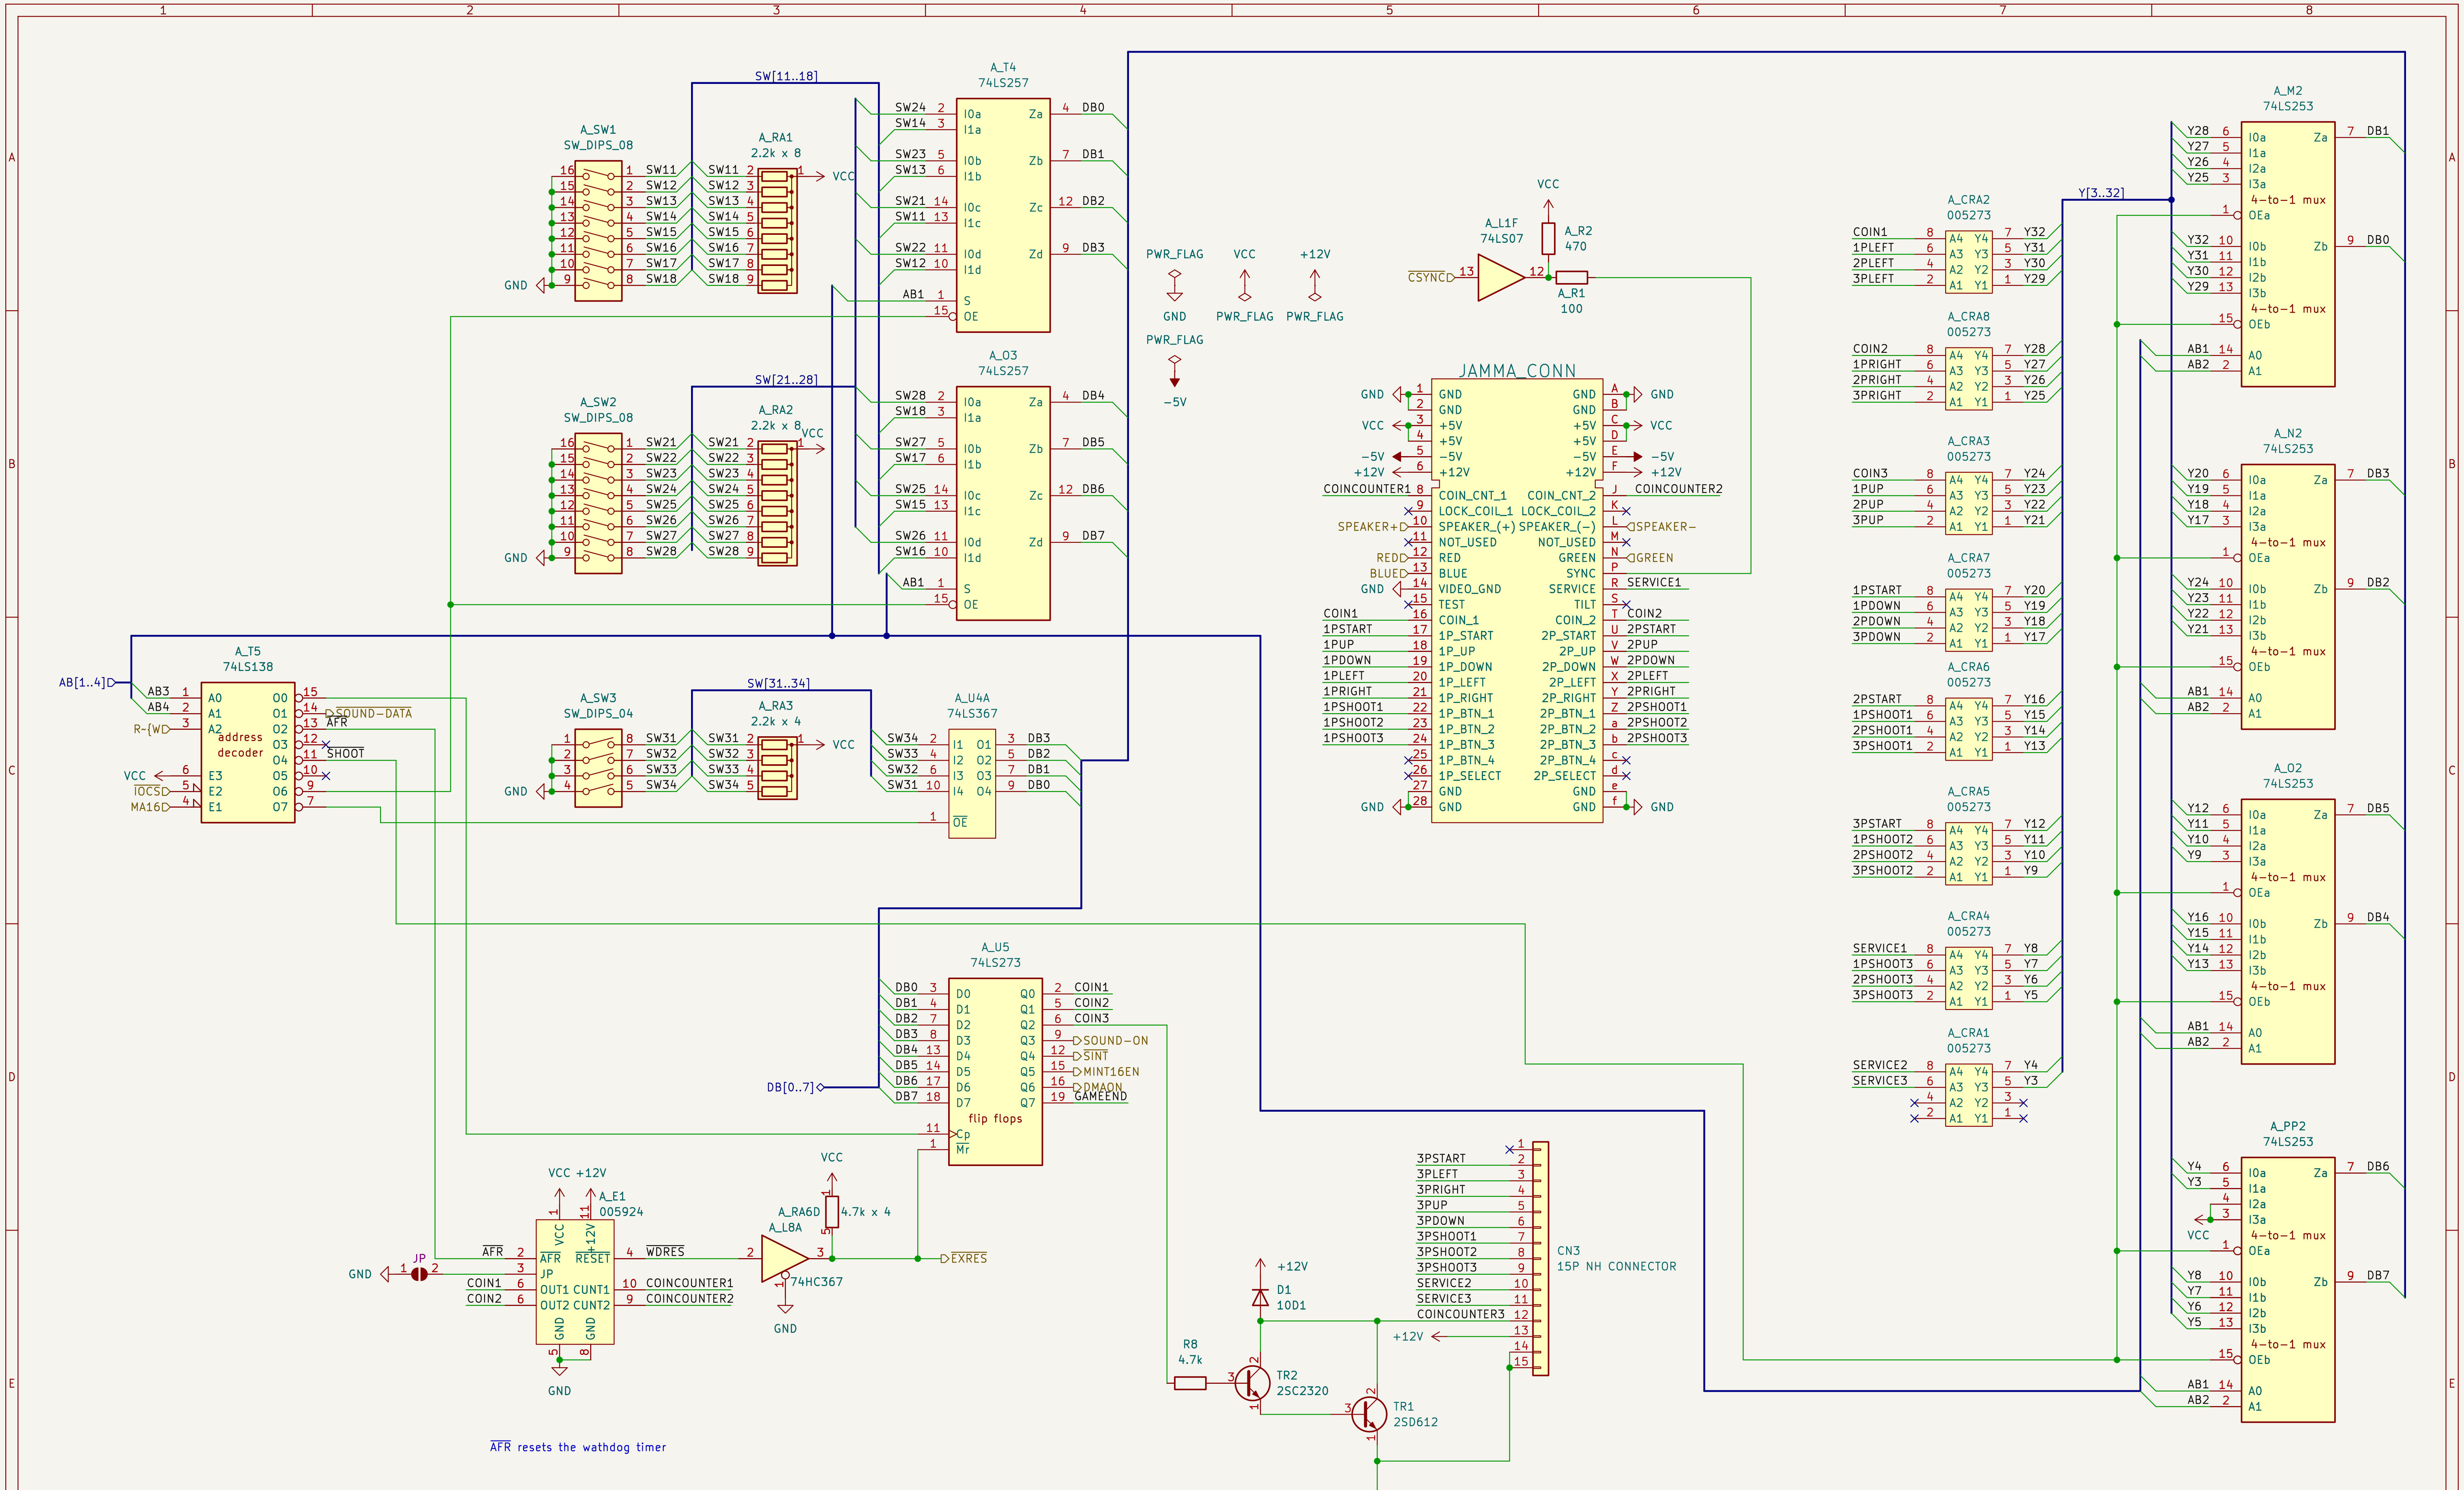

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /IO/

File: io.kicad_sch

Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08 Rev:

KiCad E.D.A. 8.0.9 Id: 15/20

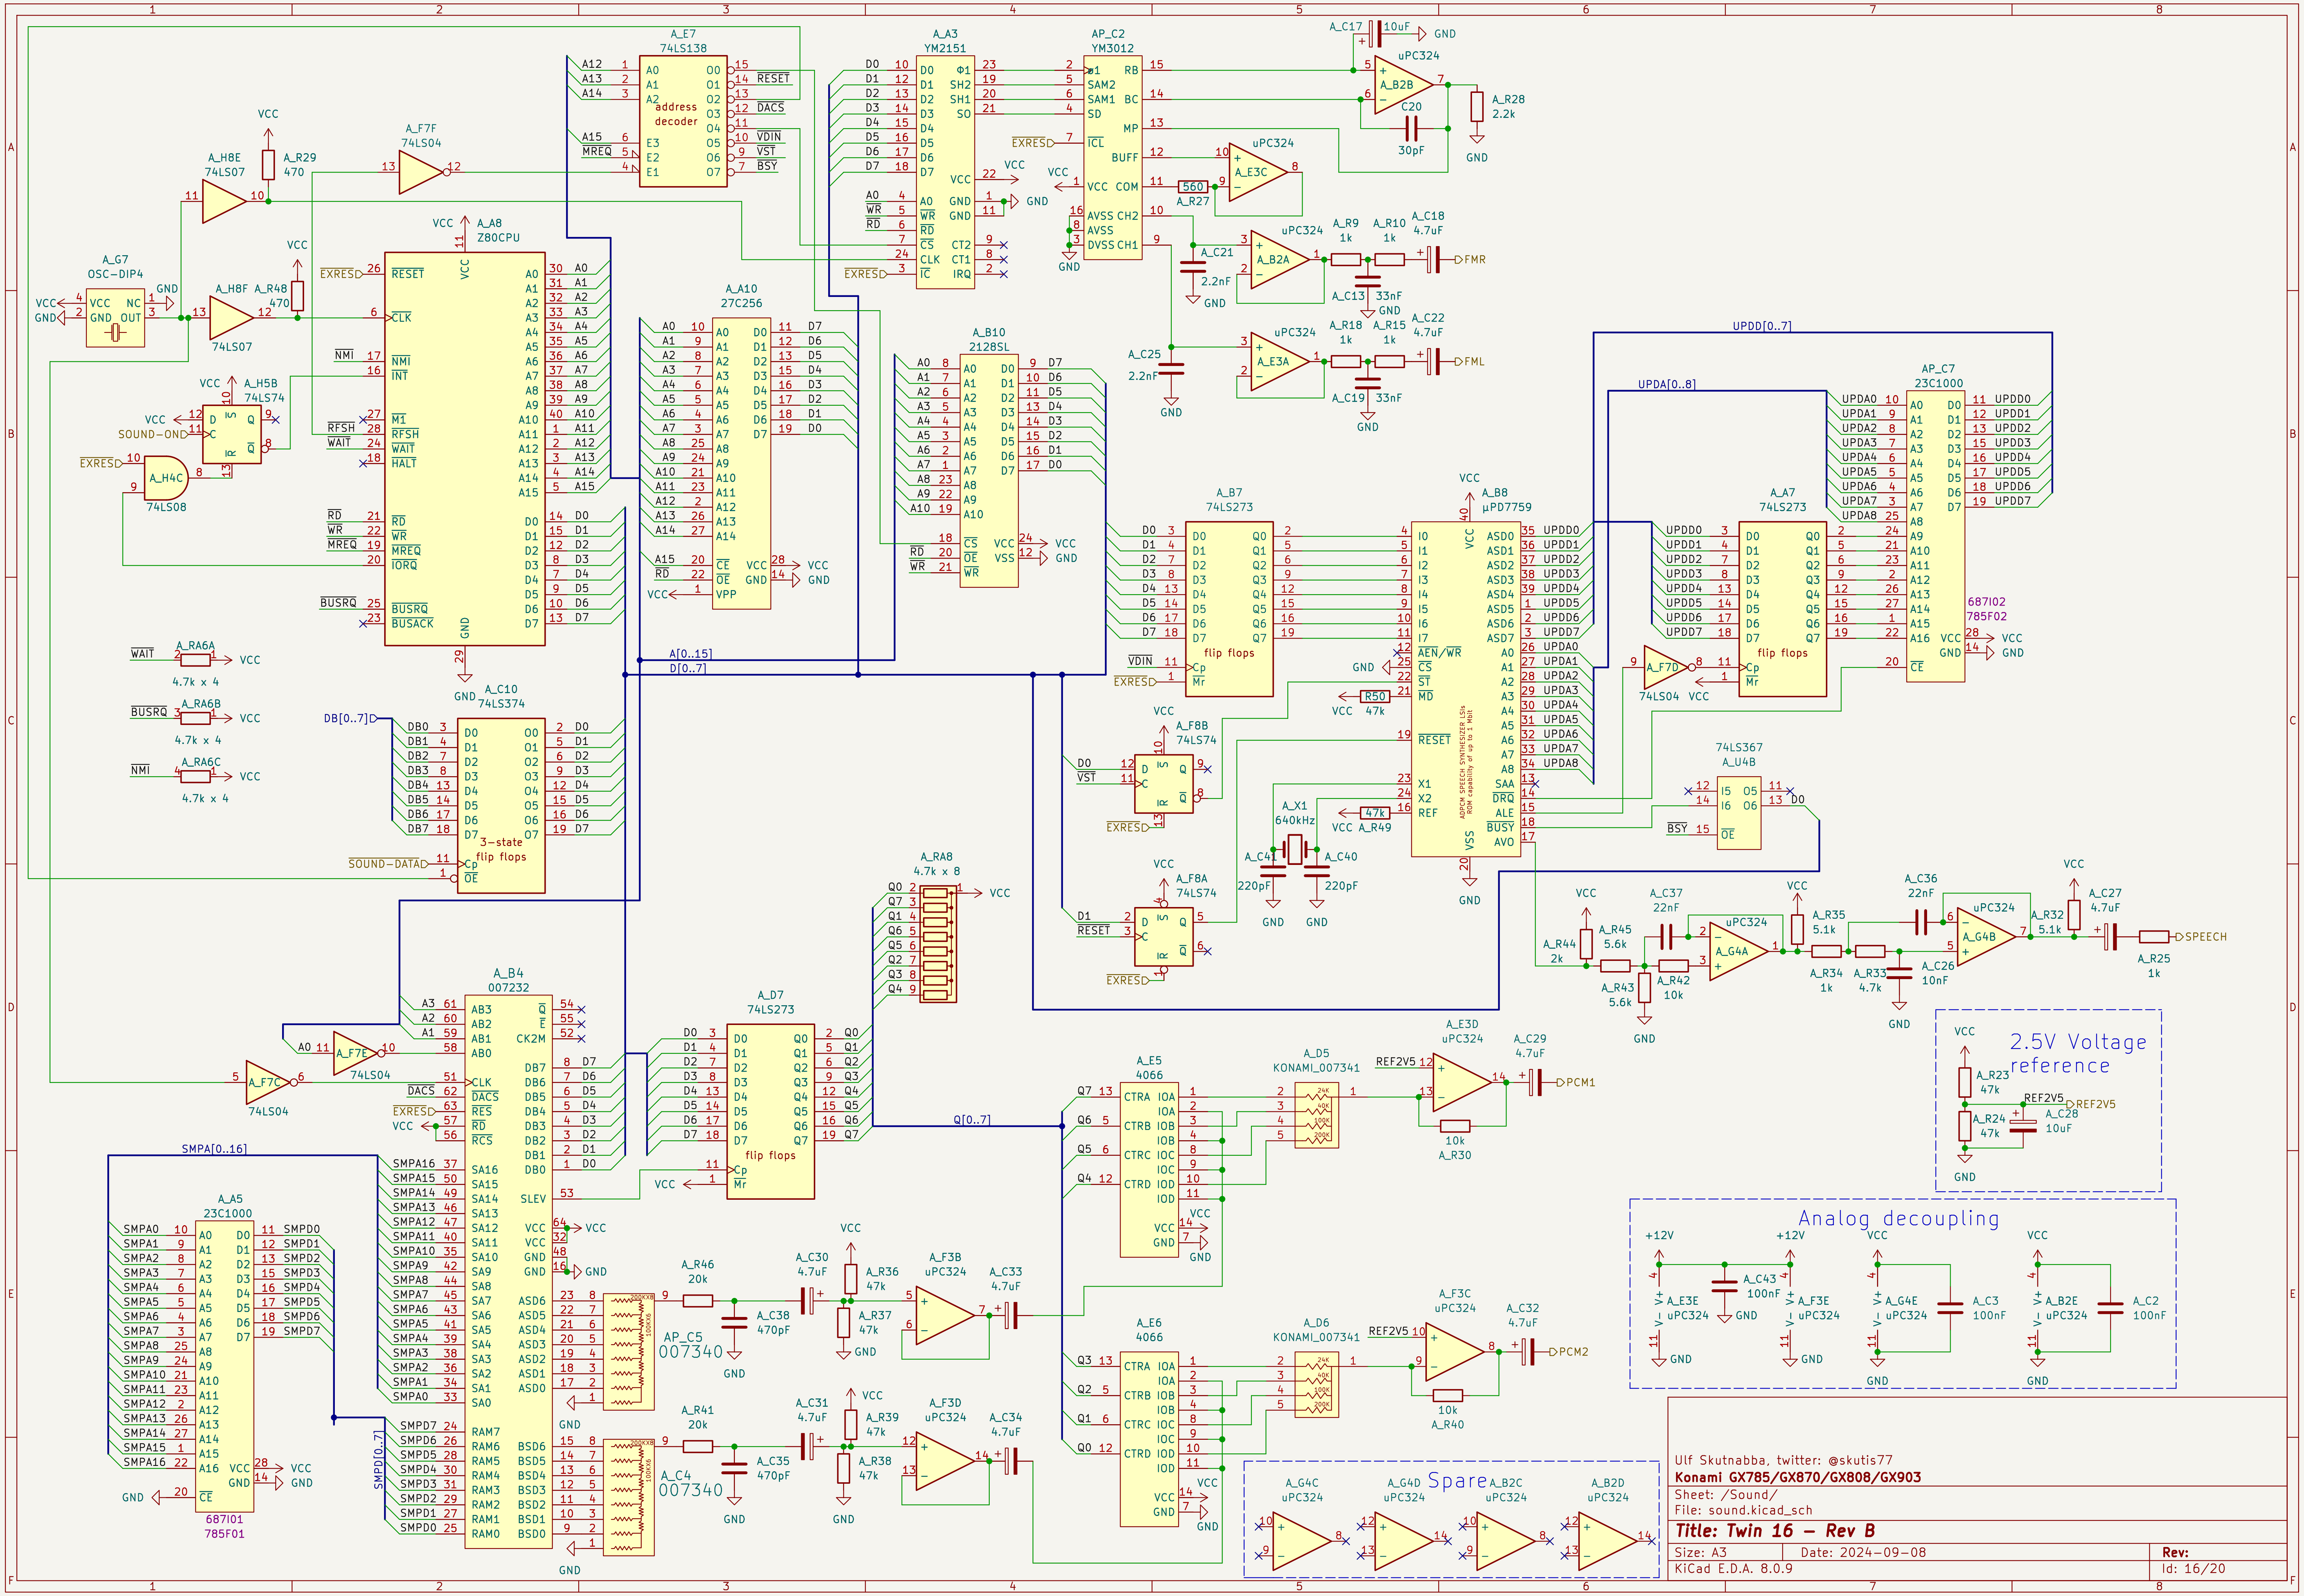

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /Sound/
File: sound.kicad_sch

Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08 Rev:
KiCad E.D.A. 8.0.9 Id: 16/20

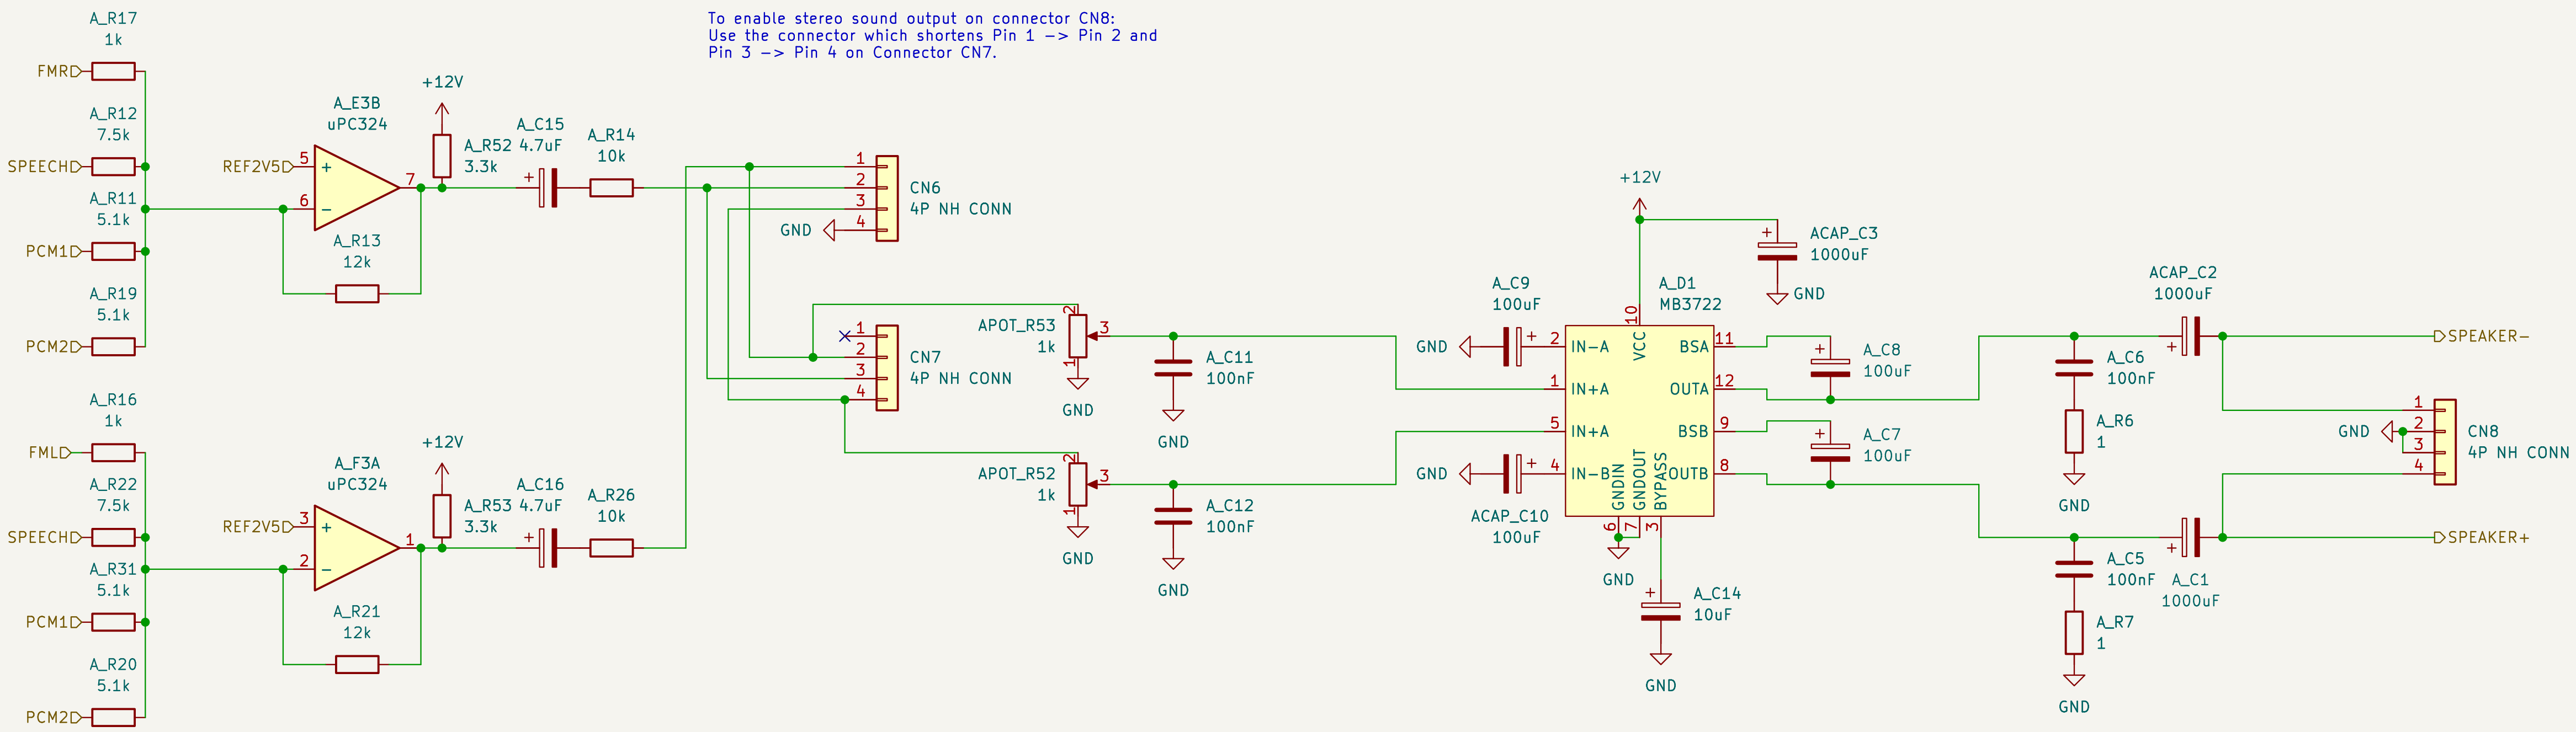

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /Sound mixer/
File: sound_mixer.kicad_sch

Title: Twin 16 - Rev B

Size: A3	Date: 2024-09-08	**Rev:**
KiCad E.D.A. 8.0.9		Id: 17/20

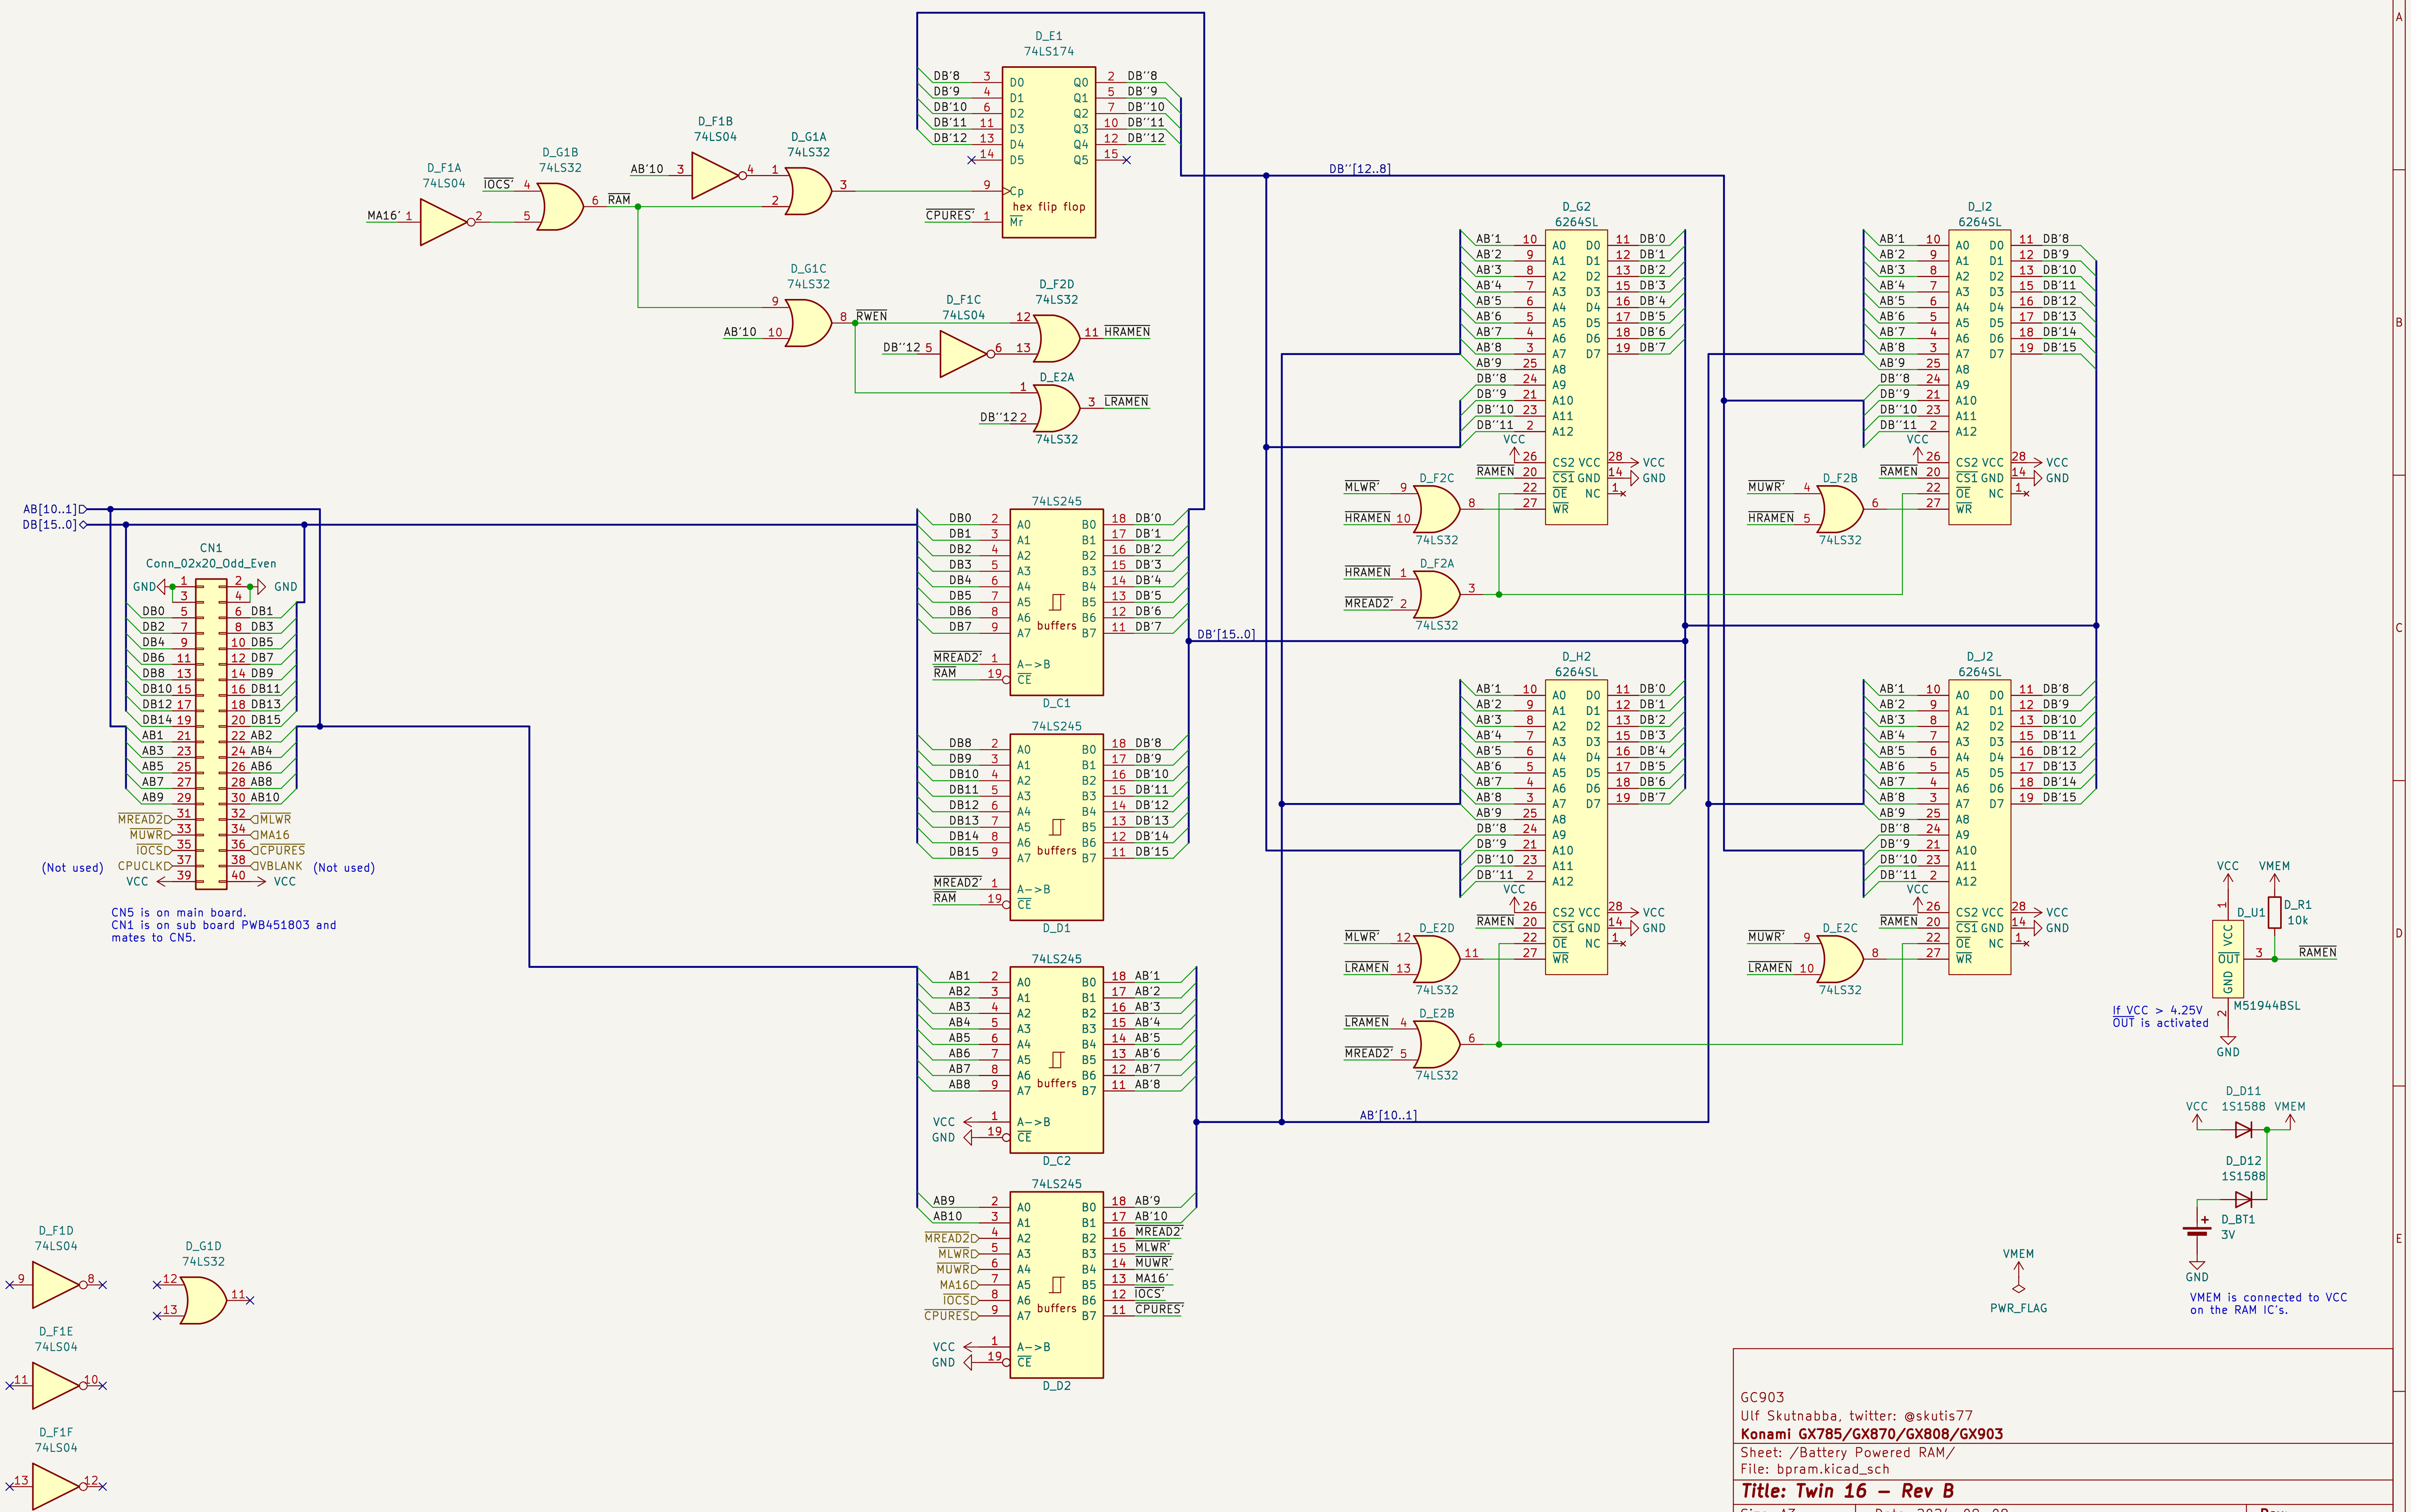

GC903

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Battery Powered RAM/

File: bpram.kicad_sch

Title: Twin 16 - Rev B

Size: A3	Date: 2024-09-08	Rev:
KiCad E.D.A. 8.0.9		Id: 18/20

Horizontal signals

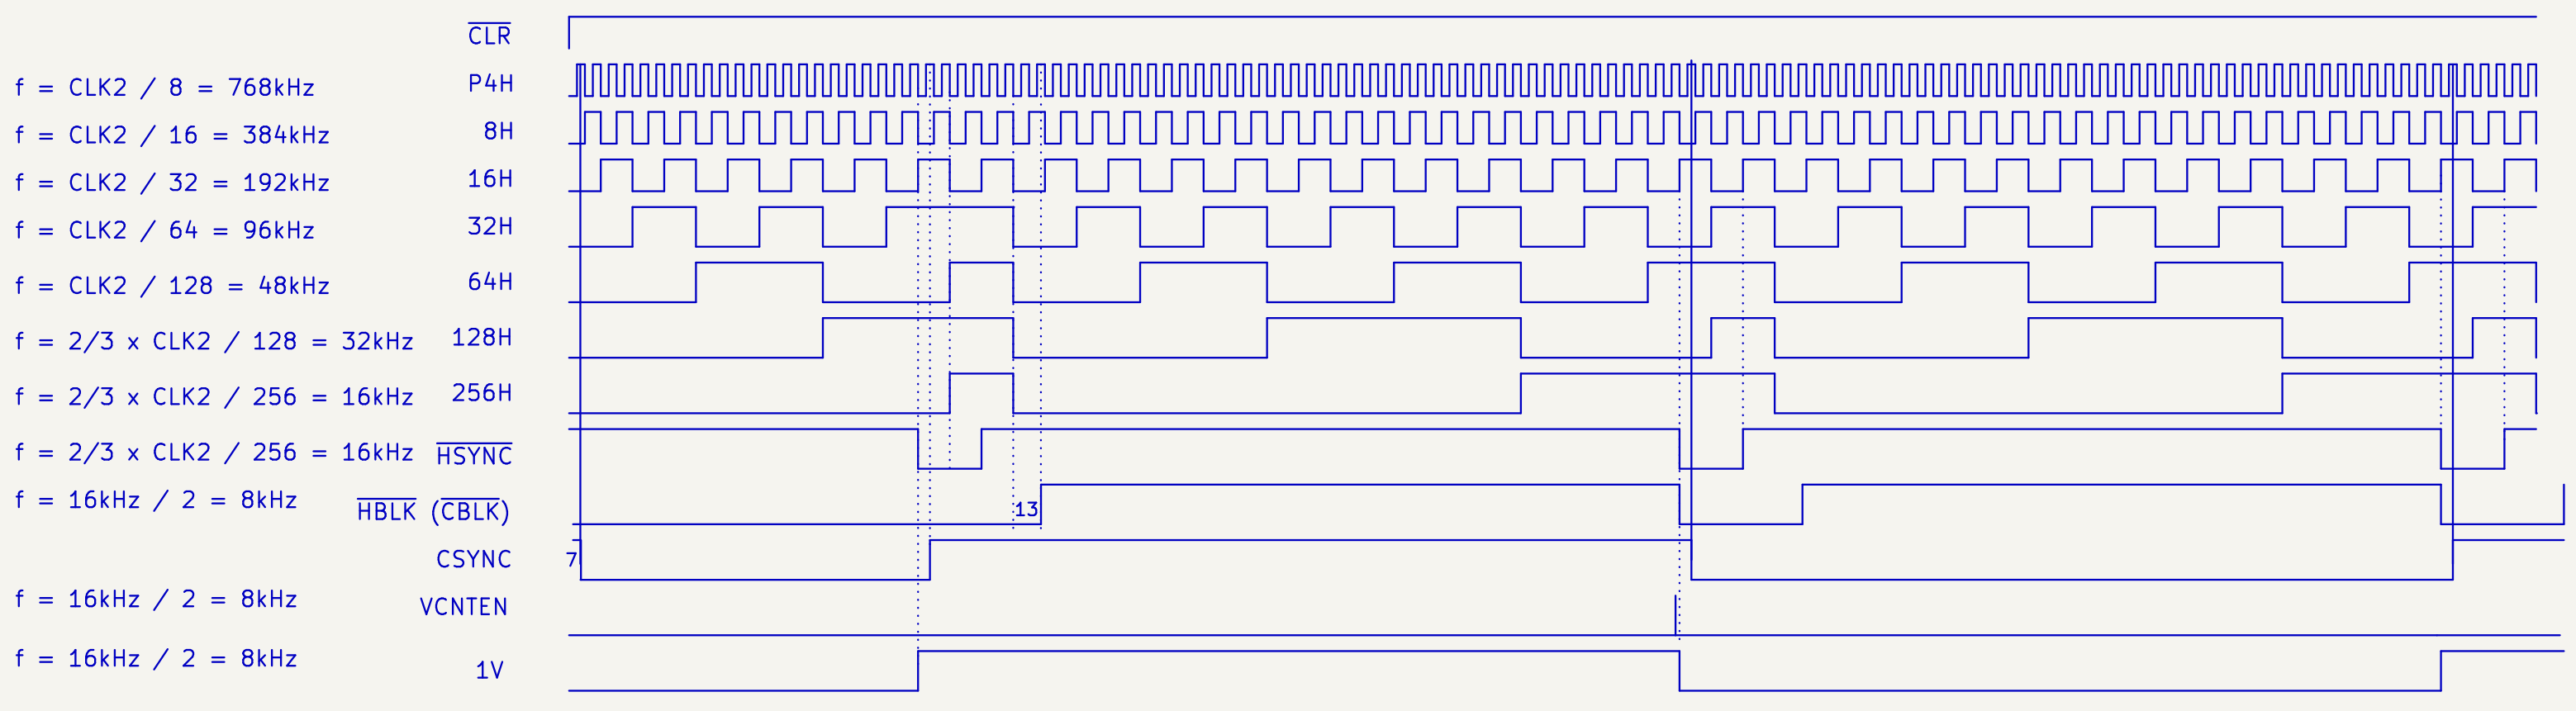

– The first VCNTEN is skipped after reset.
It goes low 140ns before HSYNC goes low,
and high again when HSYNC goes low.
VCNTEN is active right before every second falling edge of
HSYNC.

– CPURES goes high, and stays high, on the seventh falling edge
of HSYNC.

The first HSYNC is at HCOUNT 175 after reset.

Vertical signals



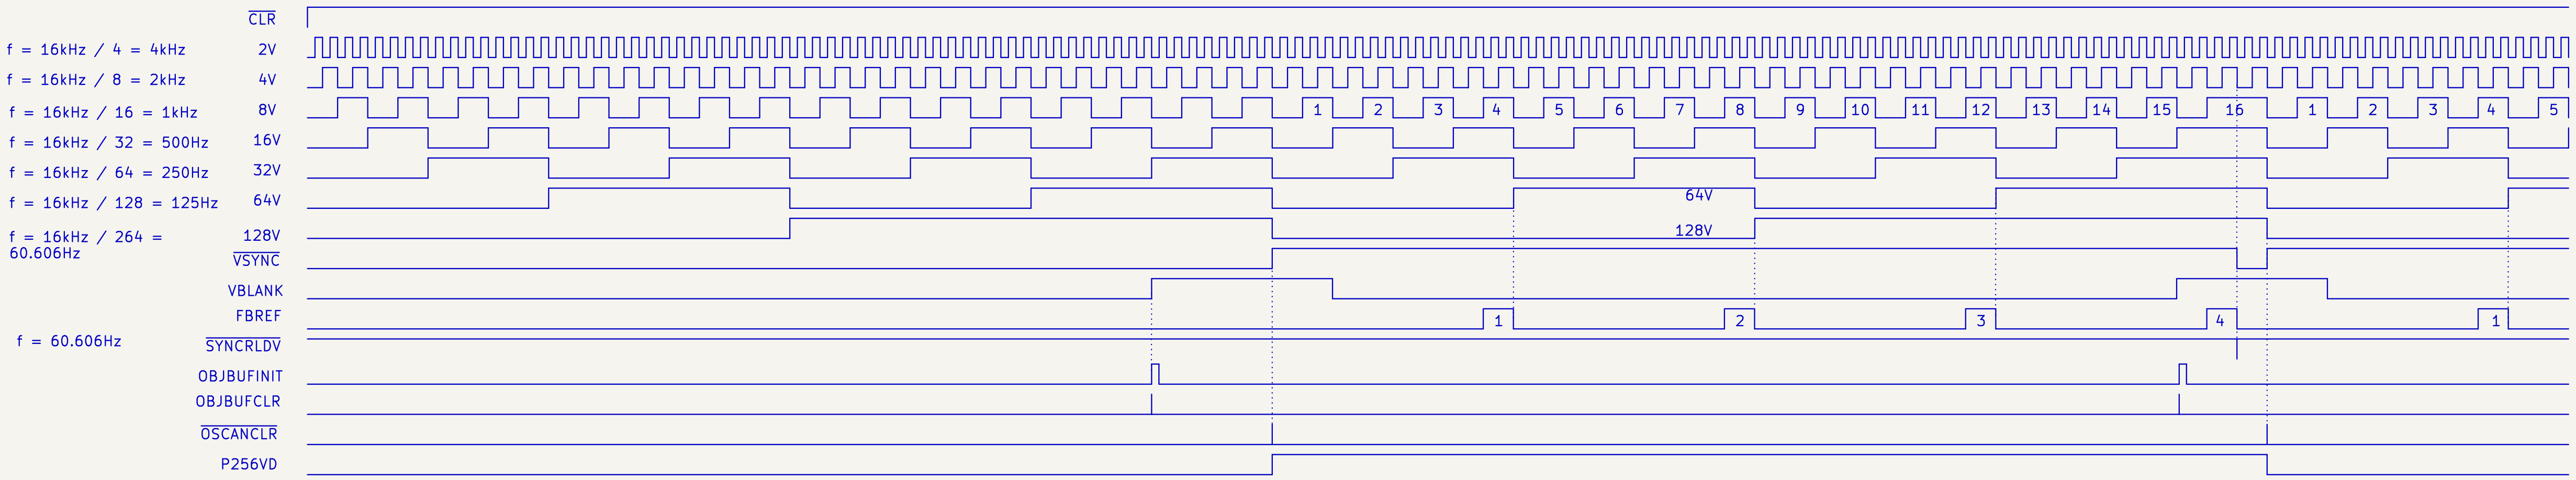

Every 16th pulse is long.
Every 8th pulse is long.
Every 4th pulse is long.
Every 2nd pulse is long.
High period is longer

VBLANK High: 7 x 16 x 2 = 224, Low: 5 x 4 x 2 = 40

SYNCRLDV goes low 140ns before FBREF goes low.
SYNCRLDV goes high again when FBREF goes low.

OBJBUFCLR goes low one pixel clock before the rising edge
of VBLANK and high again when VBLANK goes high.

60.606Hz, OSCANCLR goes low for 140ns - One pixel clock cycle.

P256VD goes high/low one
P4H cycle (8 pixels) after VSYNC goes high.

FBREF is measured at pin 22. At U186:3 FBREF is delayed by 22ns going high and 12ns going low.

Horizontal and vertical synch timing diagrams

Pixel clock CLK2 = 18.432MHz / 3 = 6.144MHz

Horizontal lines
HSYNC freq = 6.144MHz / 384 = 16kHz
HSYNC period = 1 / 16kHz = 62.5us
Pixels / line: 384
Active pixels: 320
Blank pixels: 64

Vertical lines
VSYNC freq = 16kHz / 264 = 60.606060Hz
VSYNC period = 1 / f = 264 / 16kHz = 16.5ms
scanlines / frame: 264
Active lines: 224
Blank lines: 40

The numbers in the HSYNC and HBLK diagrams are HSYNC cycles.
All edges are synchronised to the rising edge of CLK2.

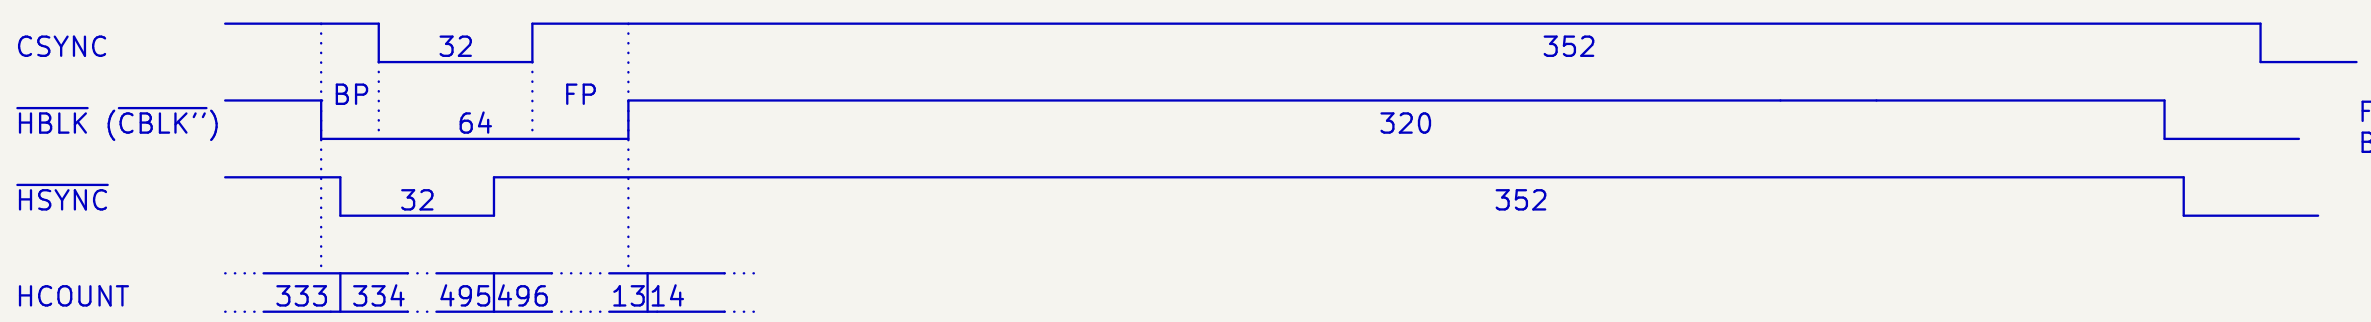

Front Porch (FP) 24 px,
Back Porch (BP) 8 px

The numbers in the VSYNC and VBLK diagrams are HSYNC cycles.
All edges are synchronised to the falling edge of HSYNC.



Front Porch (FP) and
Back Porch (BP) 16 HSYNC cycles.

HCOUNT is bits [256H, 128H, 64H, 32H, 16H, 8H, P4H, P2H, P1H]
VCOUNT is bits [128V, 64V, 32V, 16V, 8V, 4V, 2V, 1V]

CBLK" is at the output of color mixer 007593.
CBLK' is shifted inside the 007593 one pixel clock.

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Timing diagrams/
File: timing_diagrams.kicad_sch

Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08 **Rev:**
KiCad E.D.A. 8.0.9 Id: 19/20

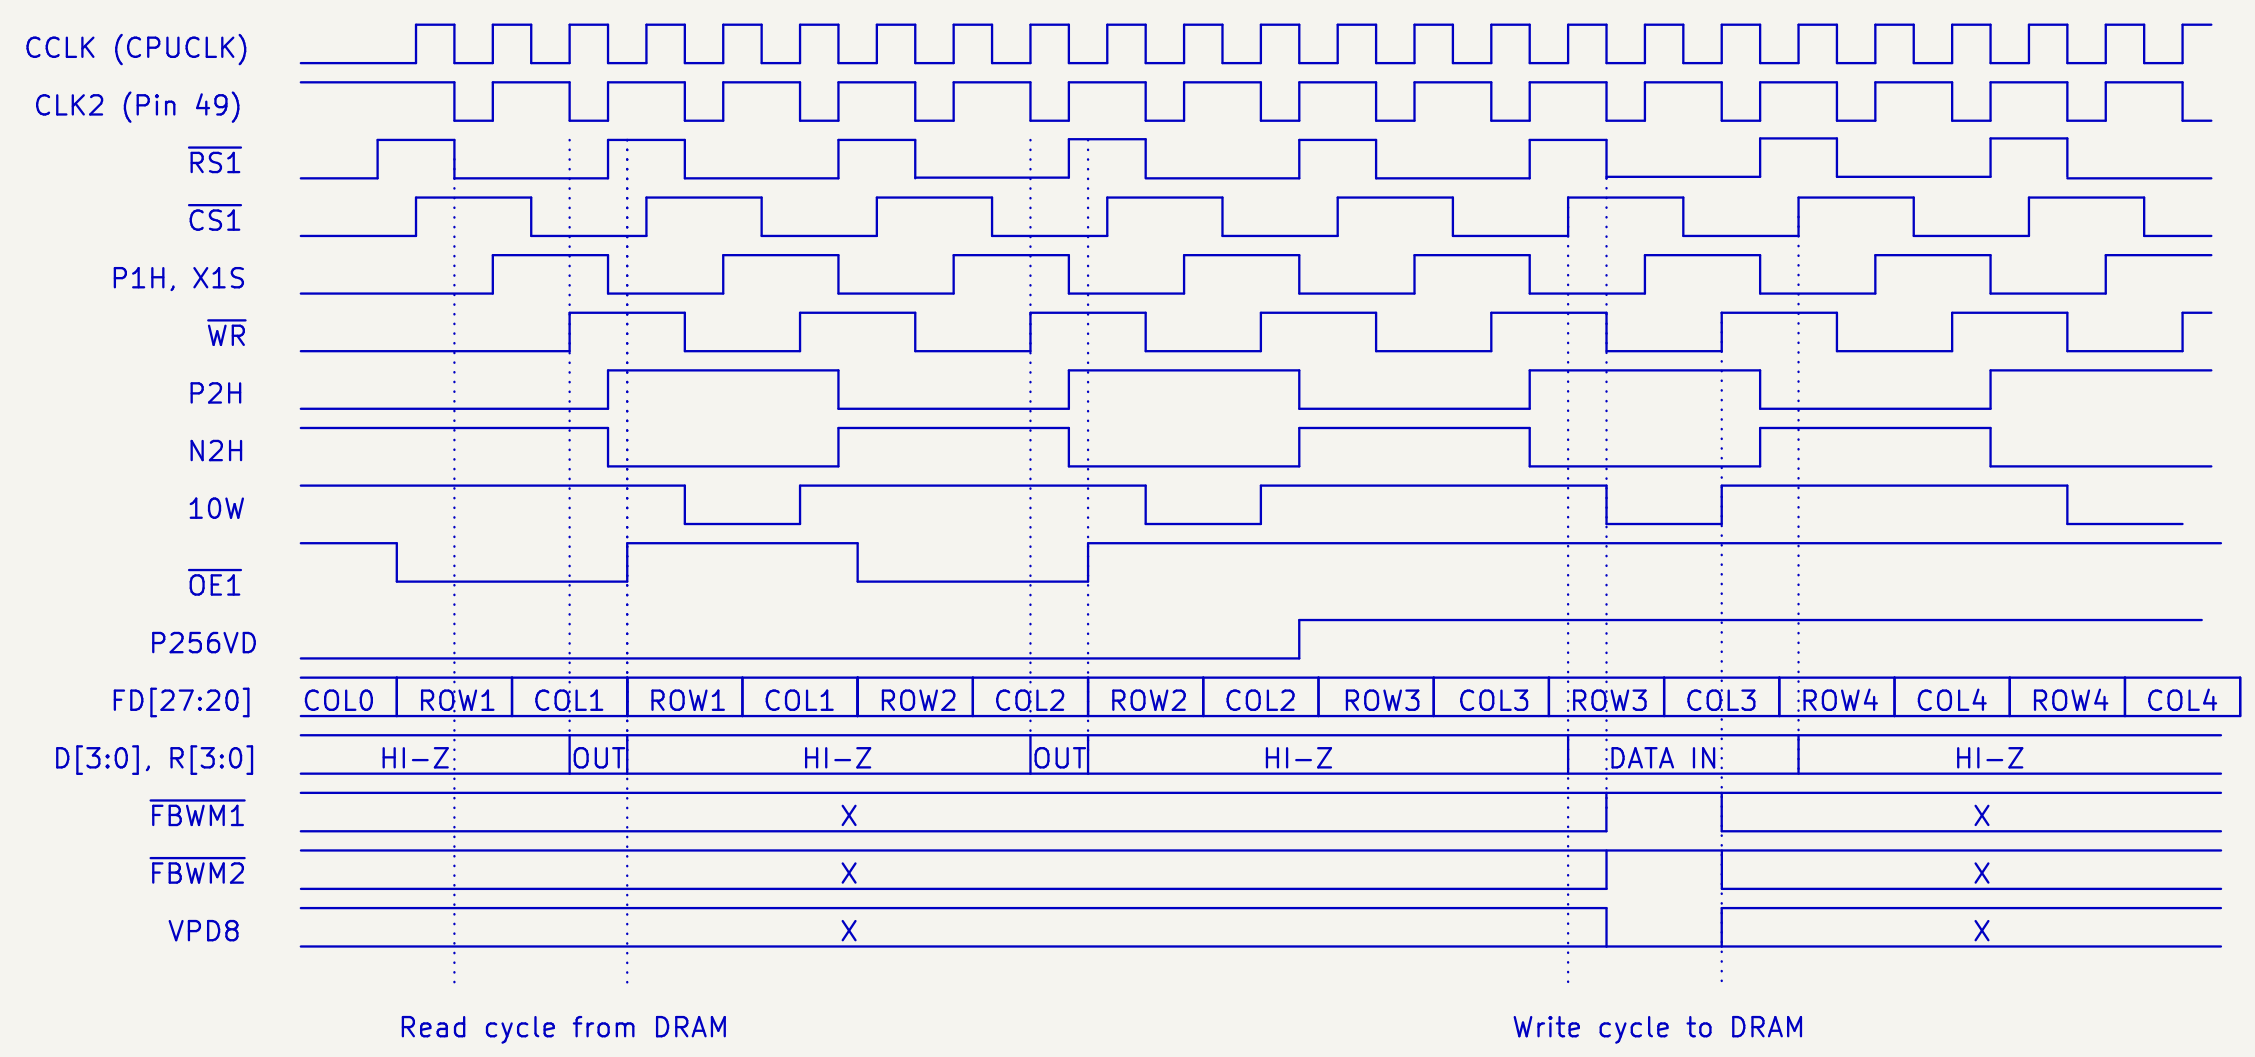

The same row and column addresses are repeated twice.
One for read cycle and the other for write cycles.

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /Sprite timing diagrams/
File: sprite_timing_diagrams.kicad_sch

Title: Twin 16 - Rev B

Size: A3	Date: 2024-09-08	**Rev:**
KiCad E.D.A. 8.0.9		Id: 20/20