
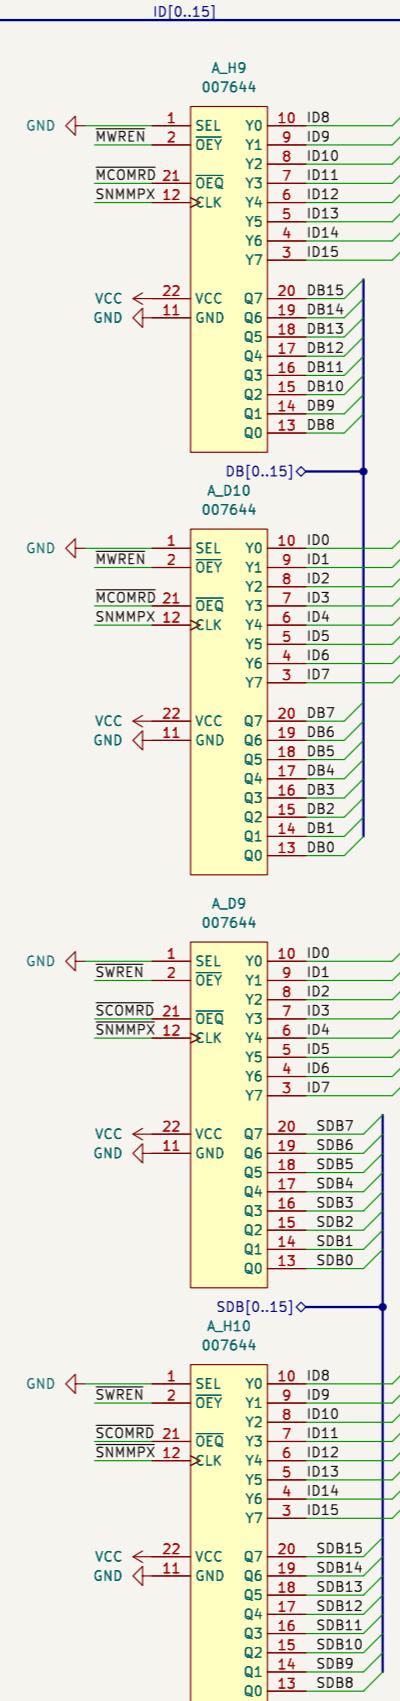
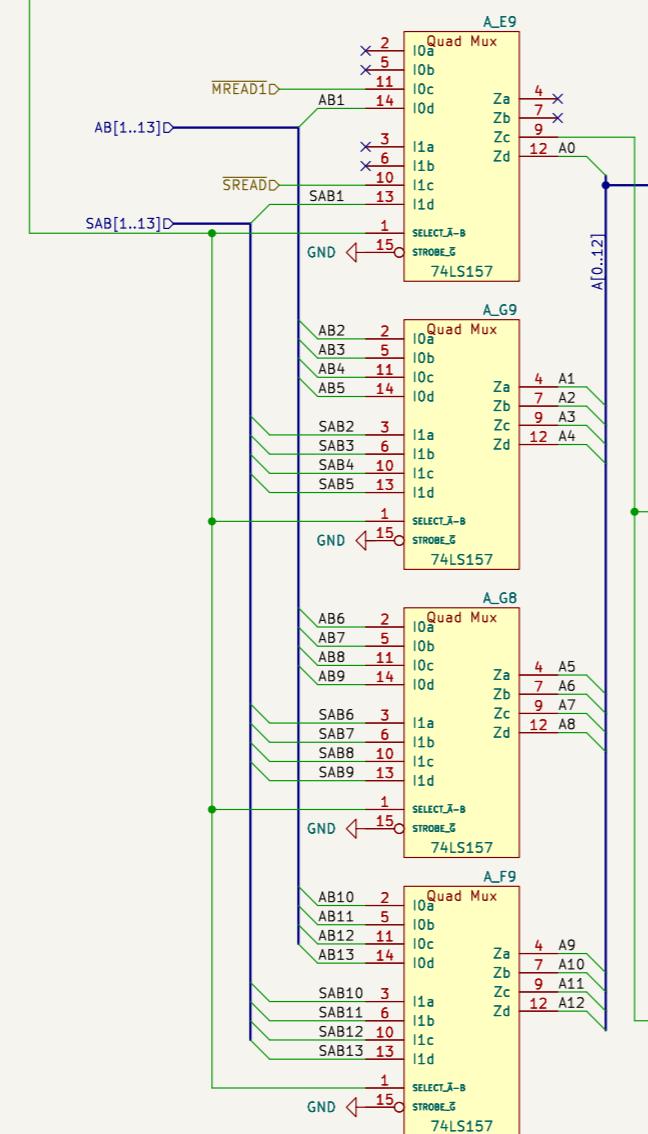


Konami 007790

$MCOMRD = \neg(MREAD1 \& \neg MCOMCS) = MREAD1 \mid MCOMCS$
 $SCOMRD = \neg(SREAD \& \neg SCOMCS)$
 $SWREN = \neg(SNMMPPX \& SREAD \& \neg SCOMCS)$
 $MWREN = \neg(SNMMPPX \& MREAD1 \& \neg MCOMCS)$
 $CLWR = \neg(CLWR \& \neg SNMMPPX \& SREAD \& \neg SCOMCS \& \neg CPUCLK \mid \neg SNMMPPX \& MREAD1 \& \neg MCOMCS \& \neg CPUCLK)$
 $CUWR = \neg(CUWR \& \neg SNMMPPX \& SREAD \& \neg SCOMCS \& \neg CPUCLK \mid \neg MUWR \& \neg SNMMPPX \& MREAD1 \& \neg MCOMCS \& \neg CPUCLK)$

A All AND logic can be converted to OR form. But since AND logic and inverters are used in the PAL16LB device it is kept in that form. The equations follow verilog syntax. The active low signals are not inverted, the bar is there only to show activeness.

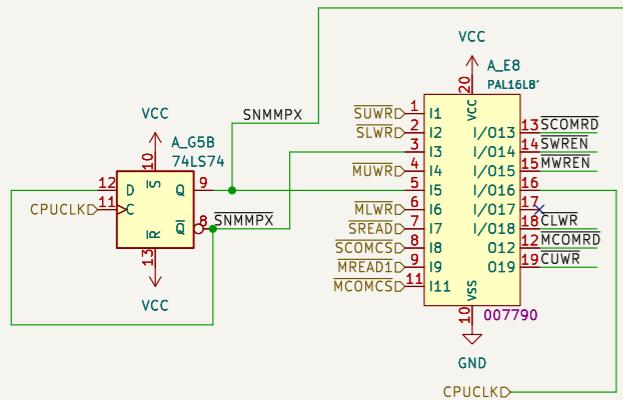

This is from jammarcade.net

Pin 1 = SEL – changes whether the Q outputs require a rising edge clock or not.
Pin 2 = OEQ – Output enable for the Y outputs else they are inputs. Active LOW
Pin 21 = OEQ – Output enable for the Q (clocked) outputs else they are inputs. Active LOW
Pin 12 = CLK – Clock input

Pins 3–10 = Y outputs – normal outputs. If OEQ is LOW these pins become outputs mirroring the state of the Q input pins. SEL and CLK pins are not used in this mode.
Pins 13–20 = Q outputs – clocked outputs. If OEQ is LOW these pins become outputs. If SEL is HIGH and CLK is HIGH these outputs will mirror the state of the Y inputs. If SEL is LOW then the outputs will only change state on a rising edge CLK.

Pins 13–20 = Q outputs – clocked outputs. If OEQ is LOW these pins become outputs.

If SEL is HIGH and CLK is HIGH these outputs will mirror the state of the Y inputs.

If SEL is LOW then the outputs will only change state on a rising edge CLK.



Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903
Sheet: /Shared Resources/
File: shared_resources.kicad_sch

Title: Twin 16 – Rev B

Size: A3 | Date: 2024-09-08
KiCad E.D.A. 8.0.8

Rev:
Id: 4/20

DMA Synchronization

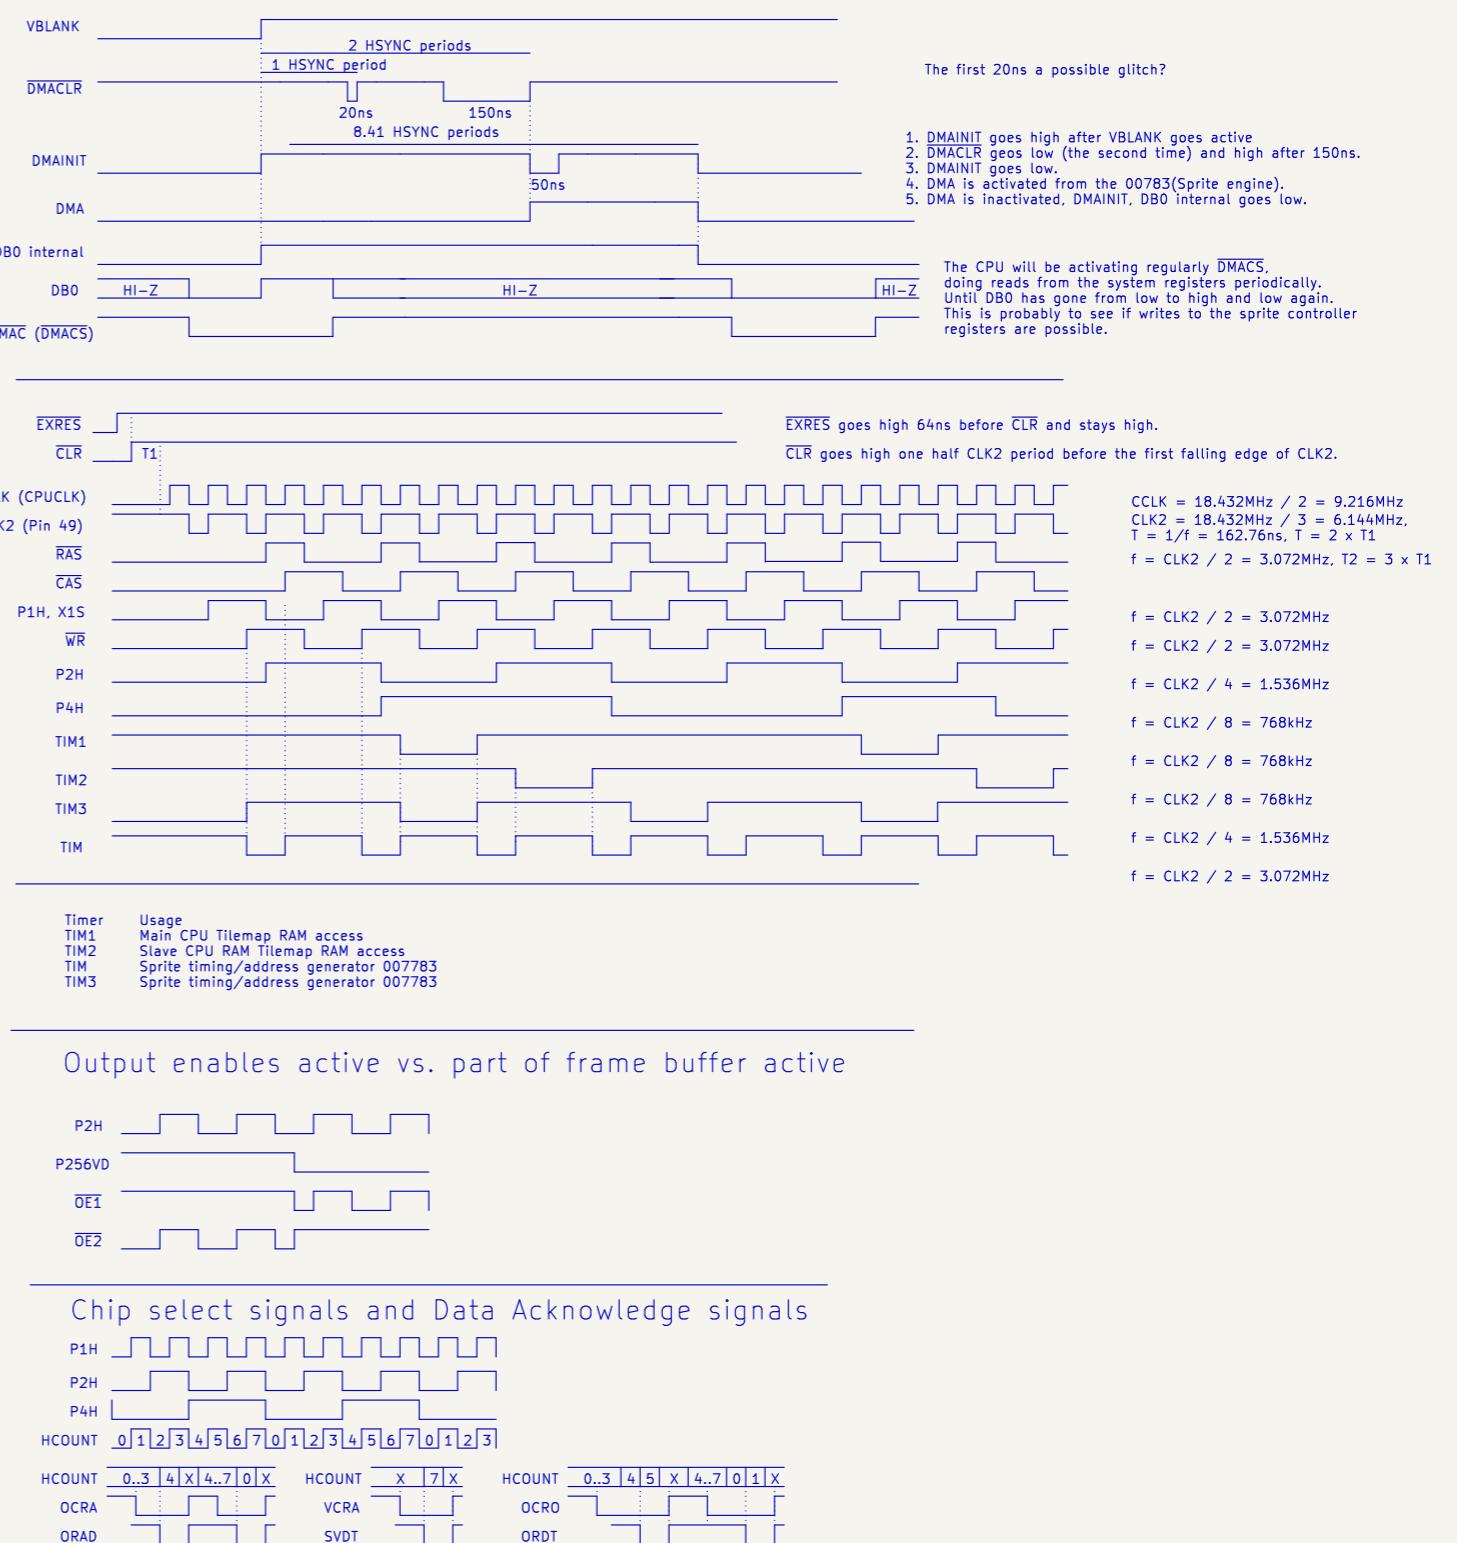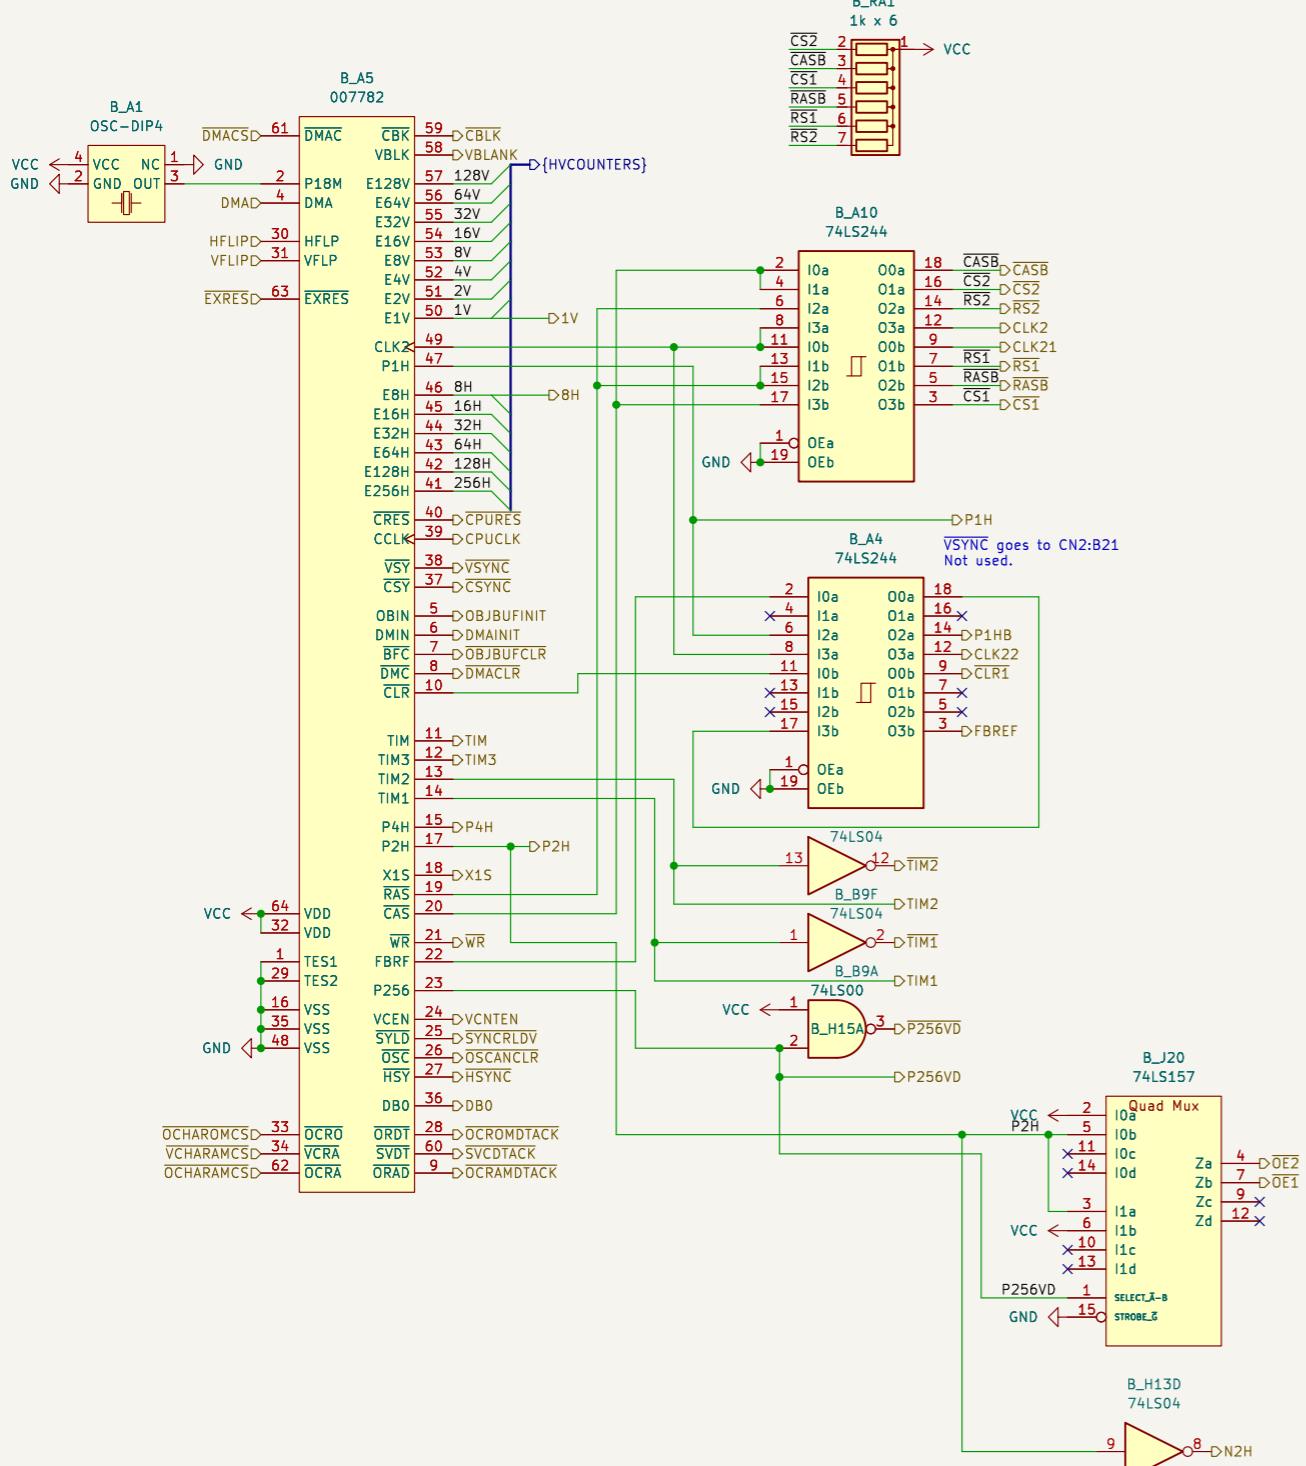


Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903


Sheet: /Timing/
File: timing.kicad_sch


Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08
KiCad E.D.A. 8.0.8


Rev: Id: 5/20

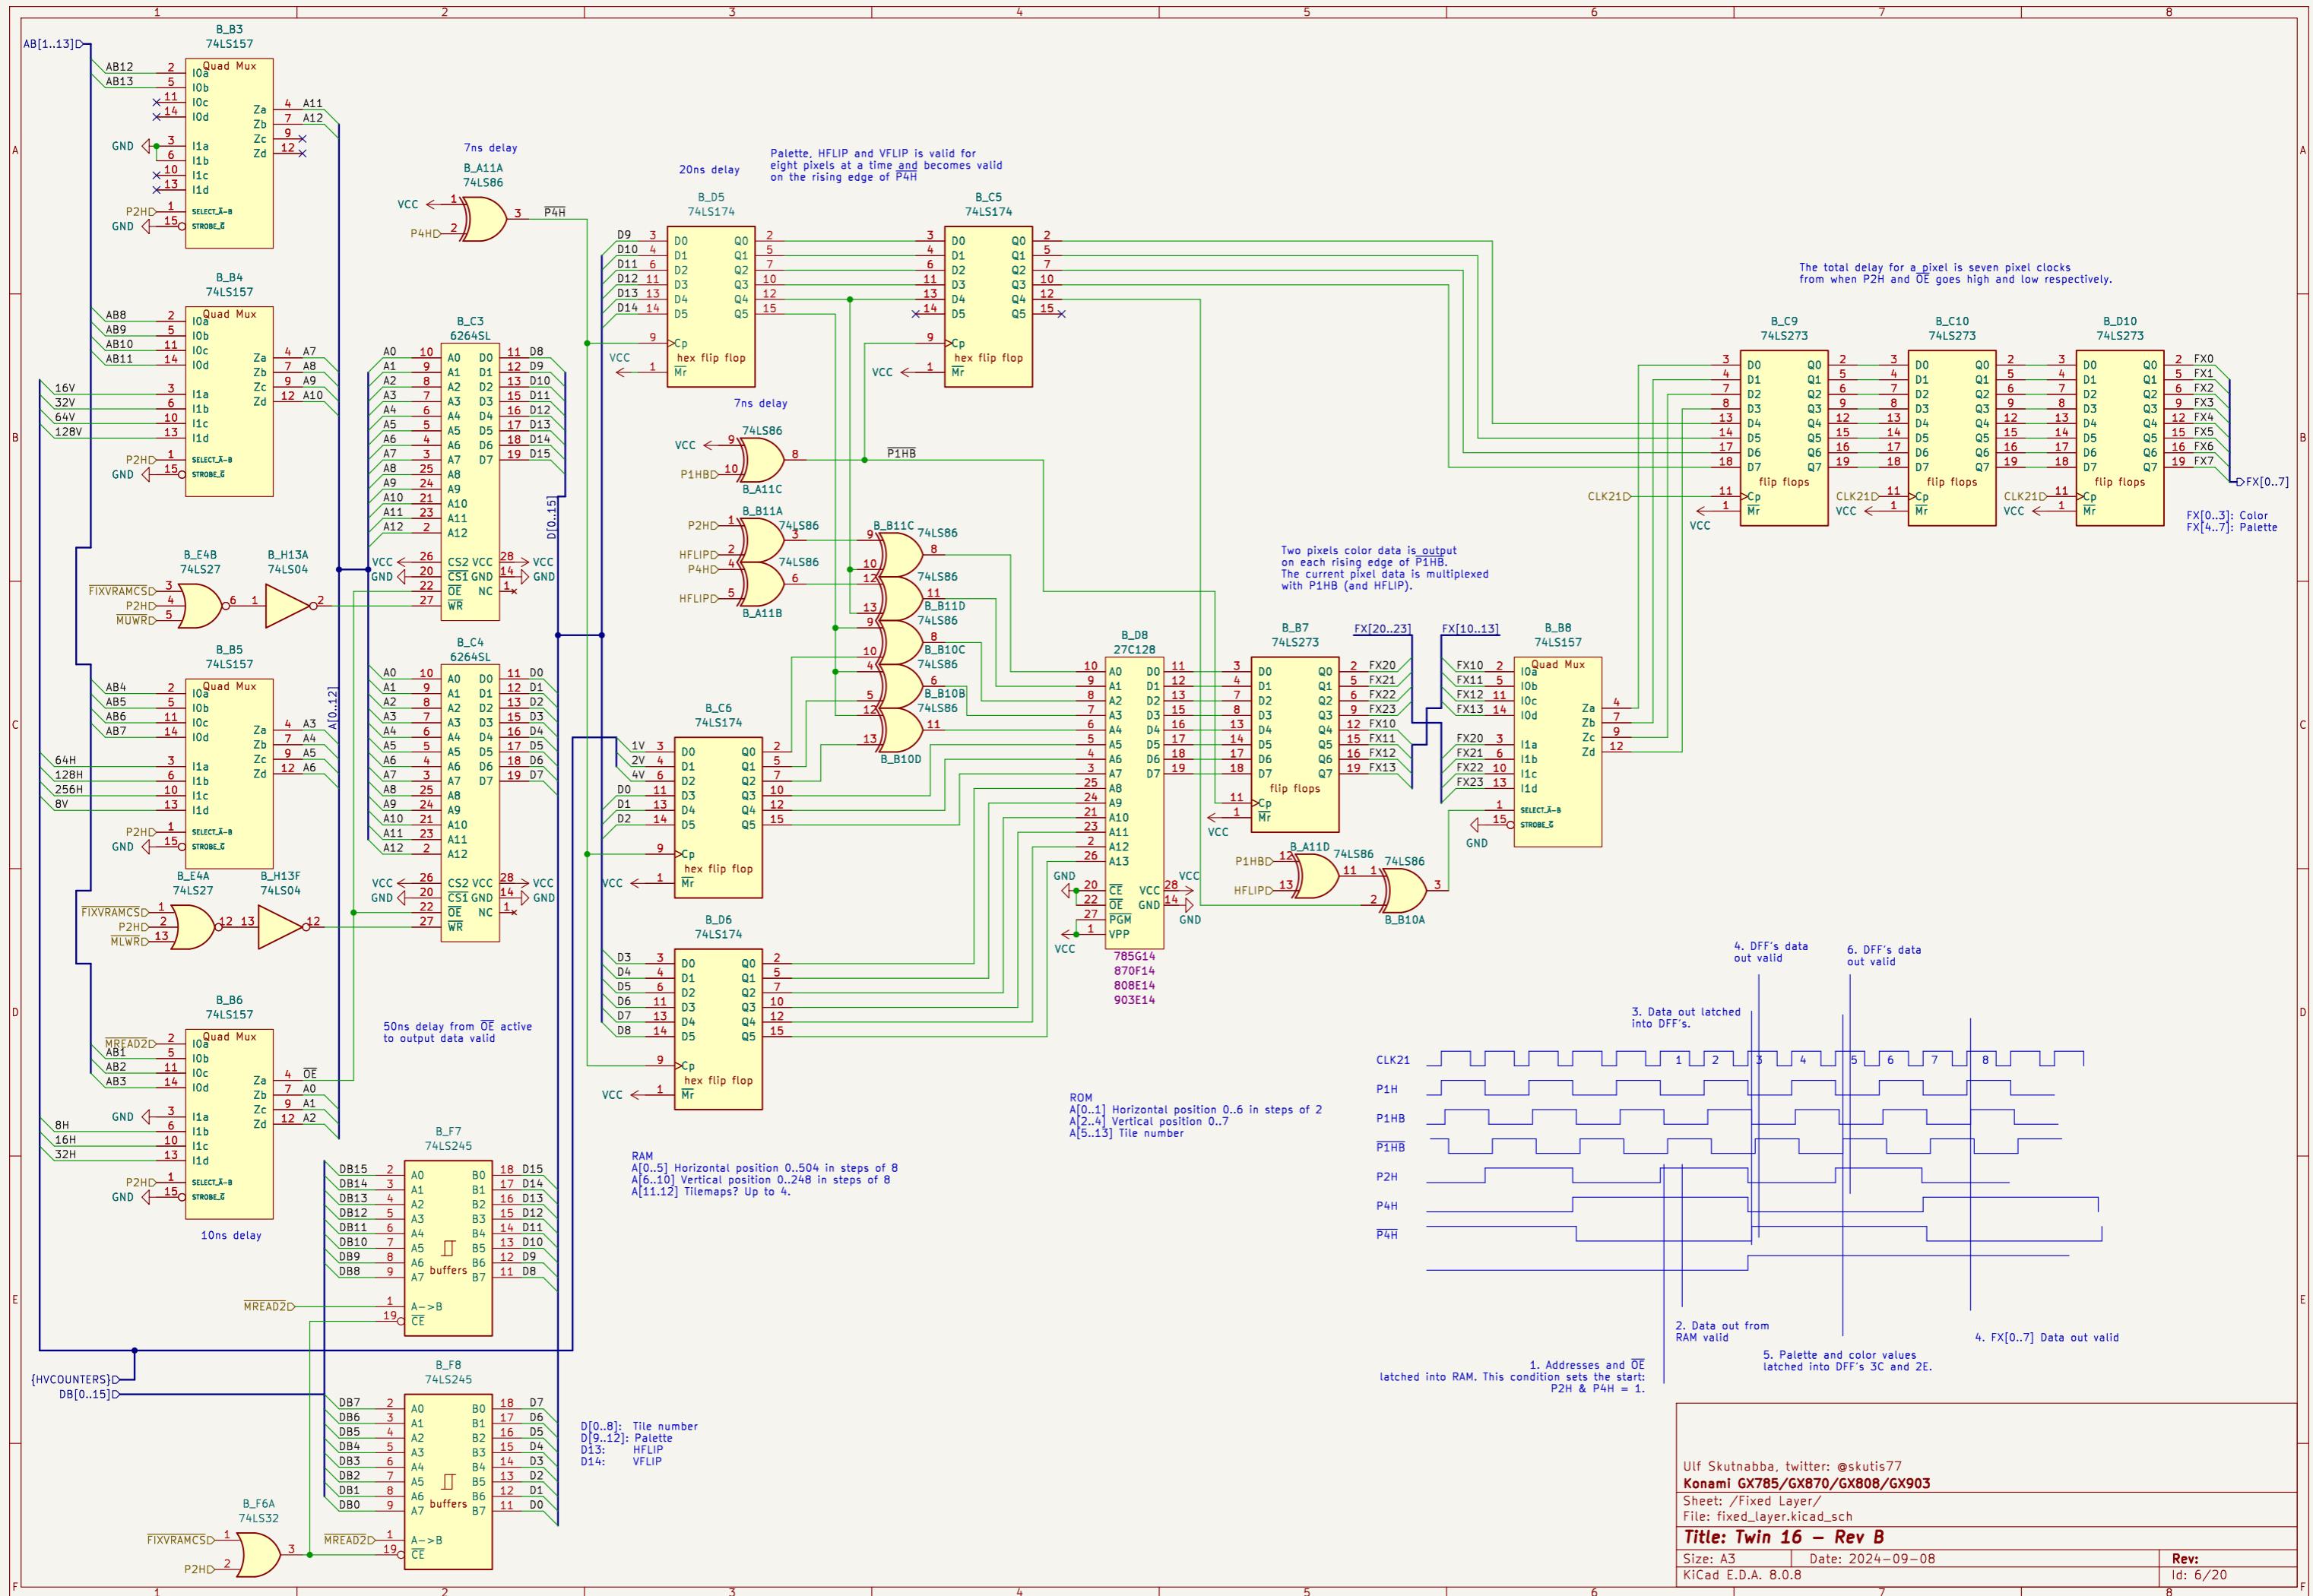


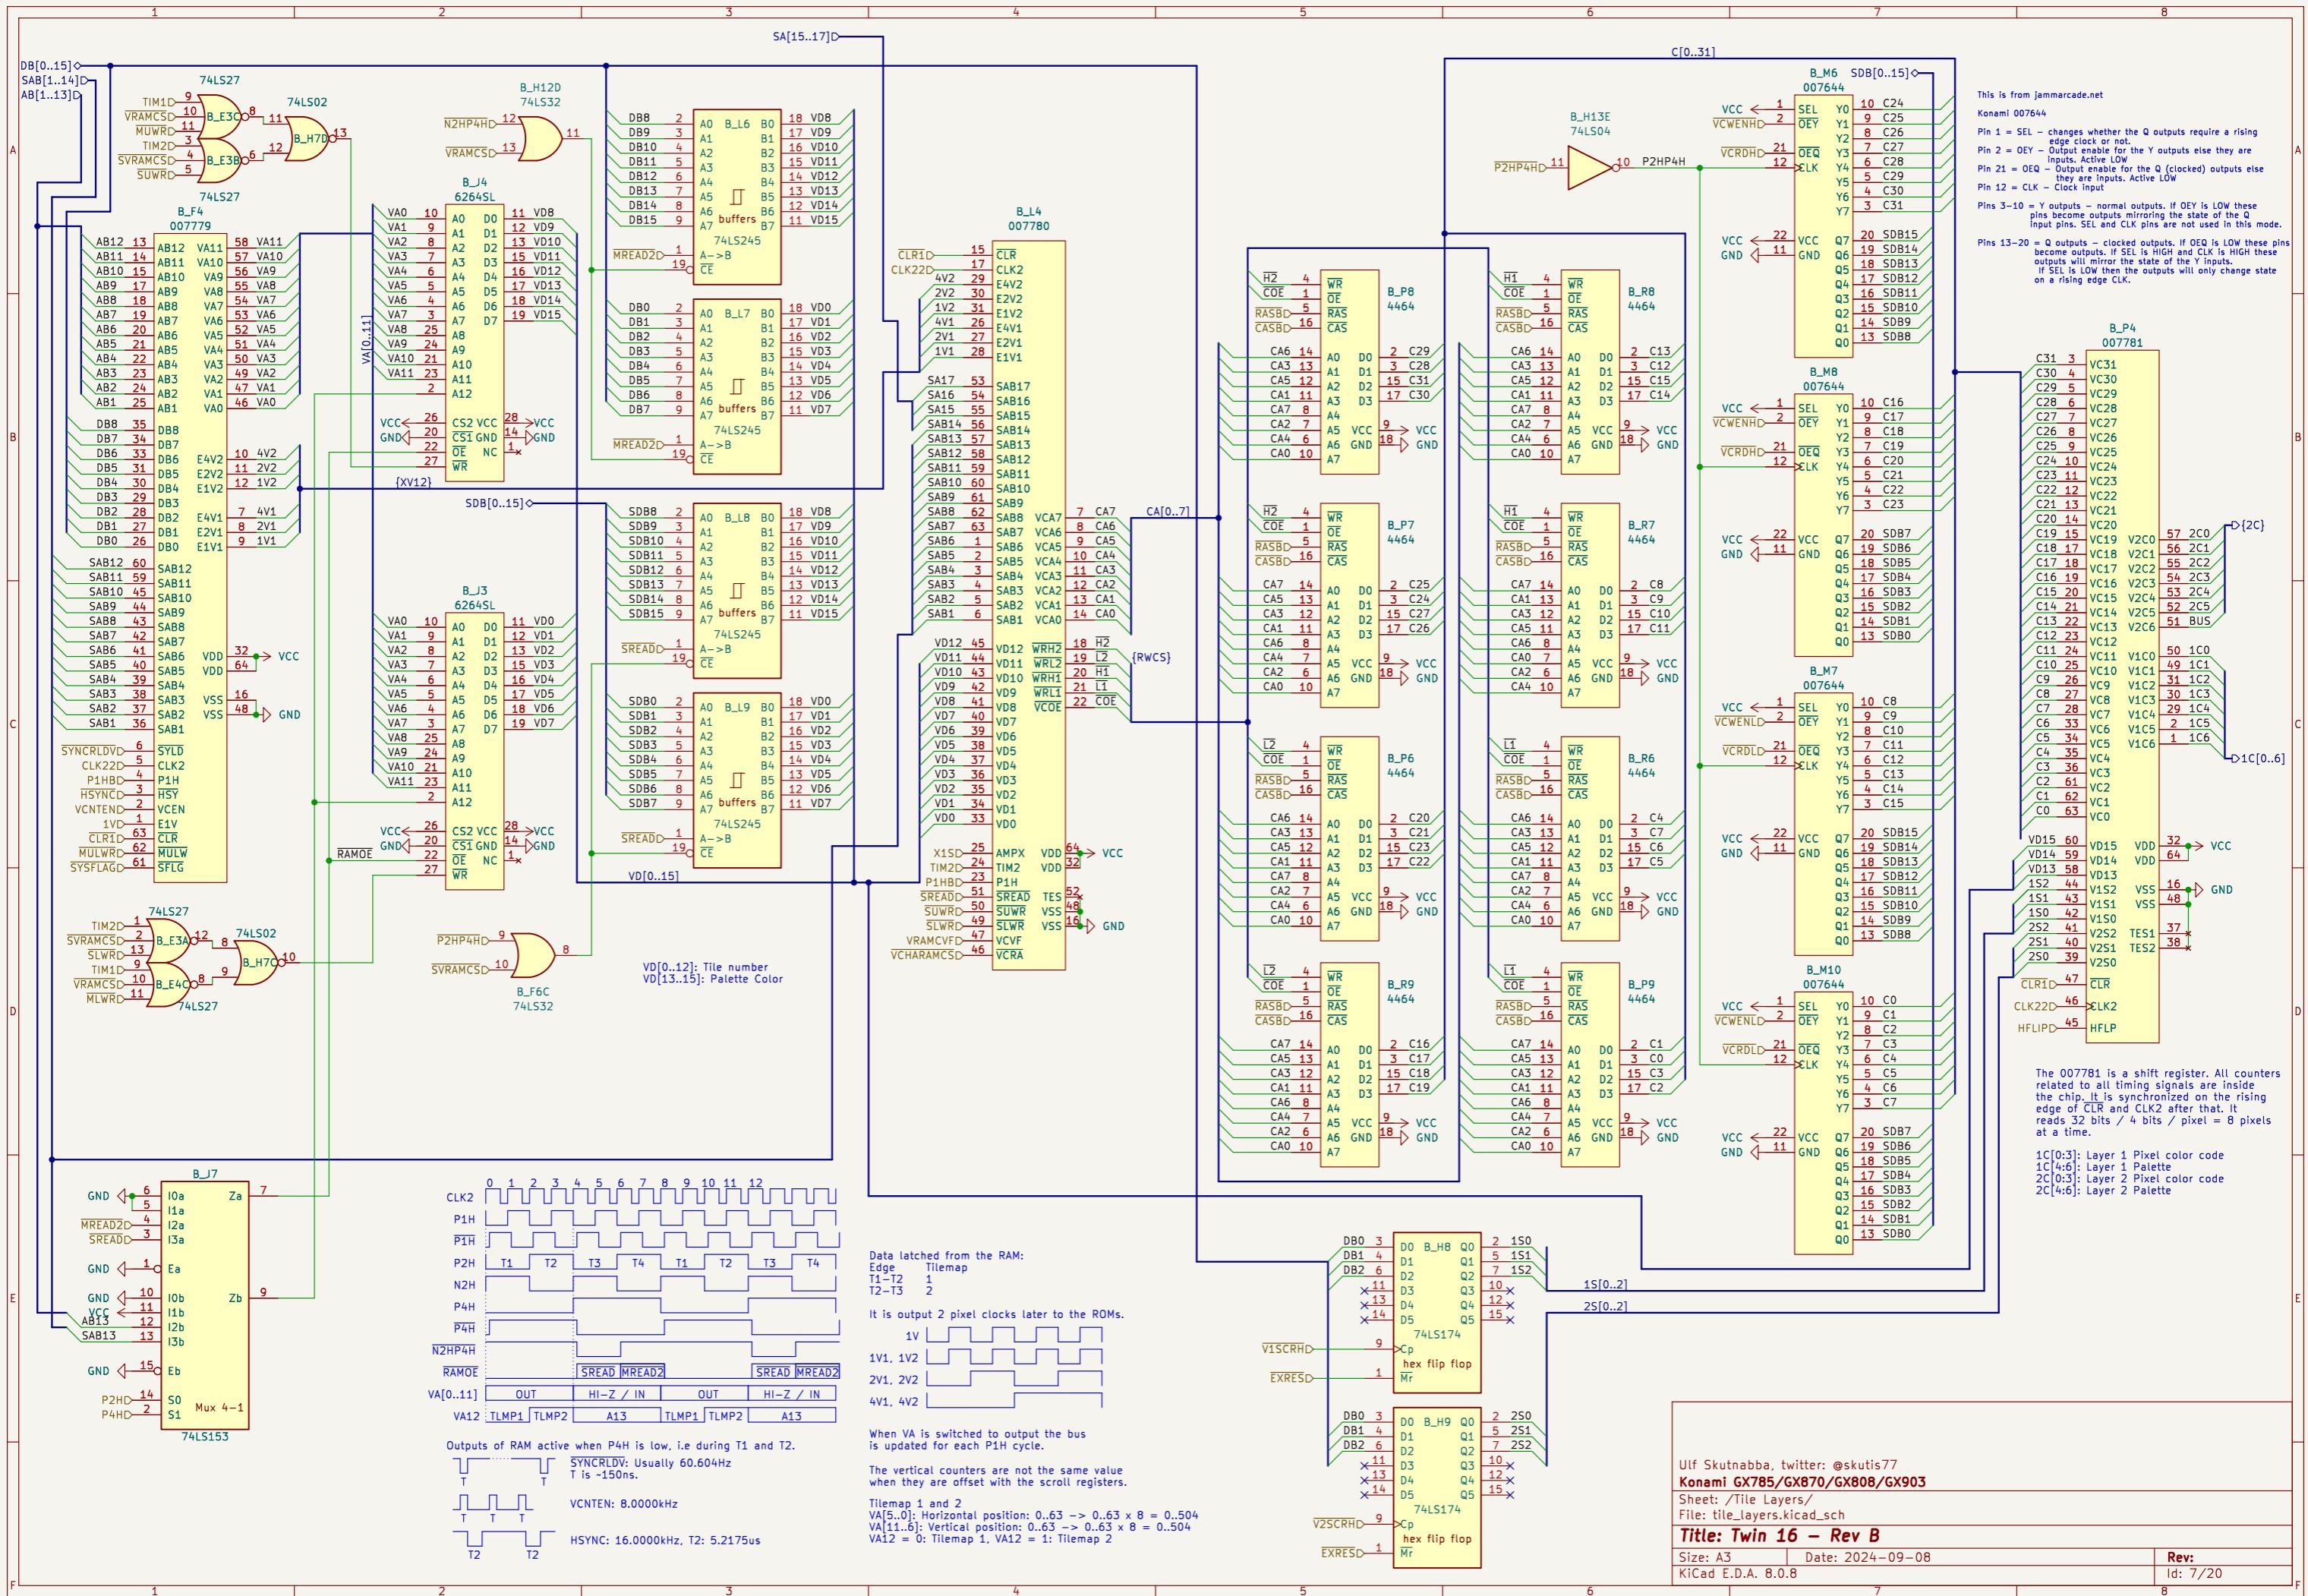


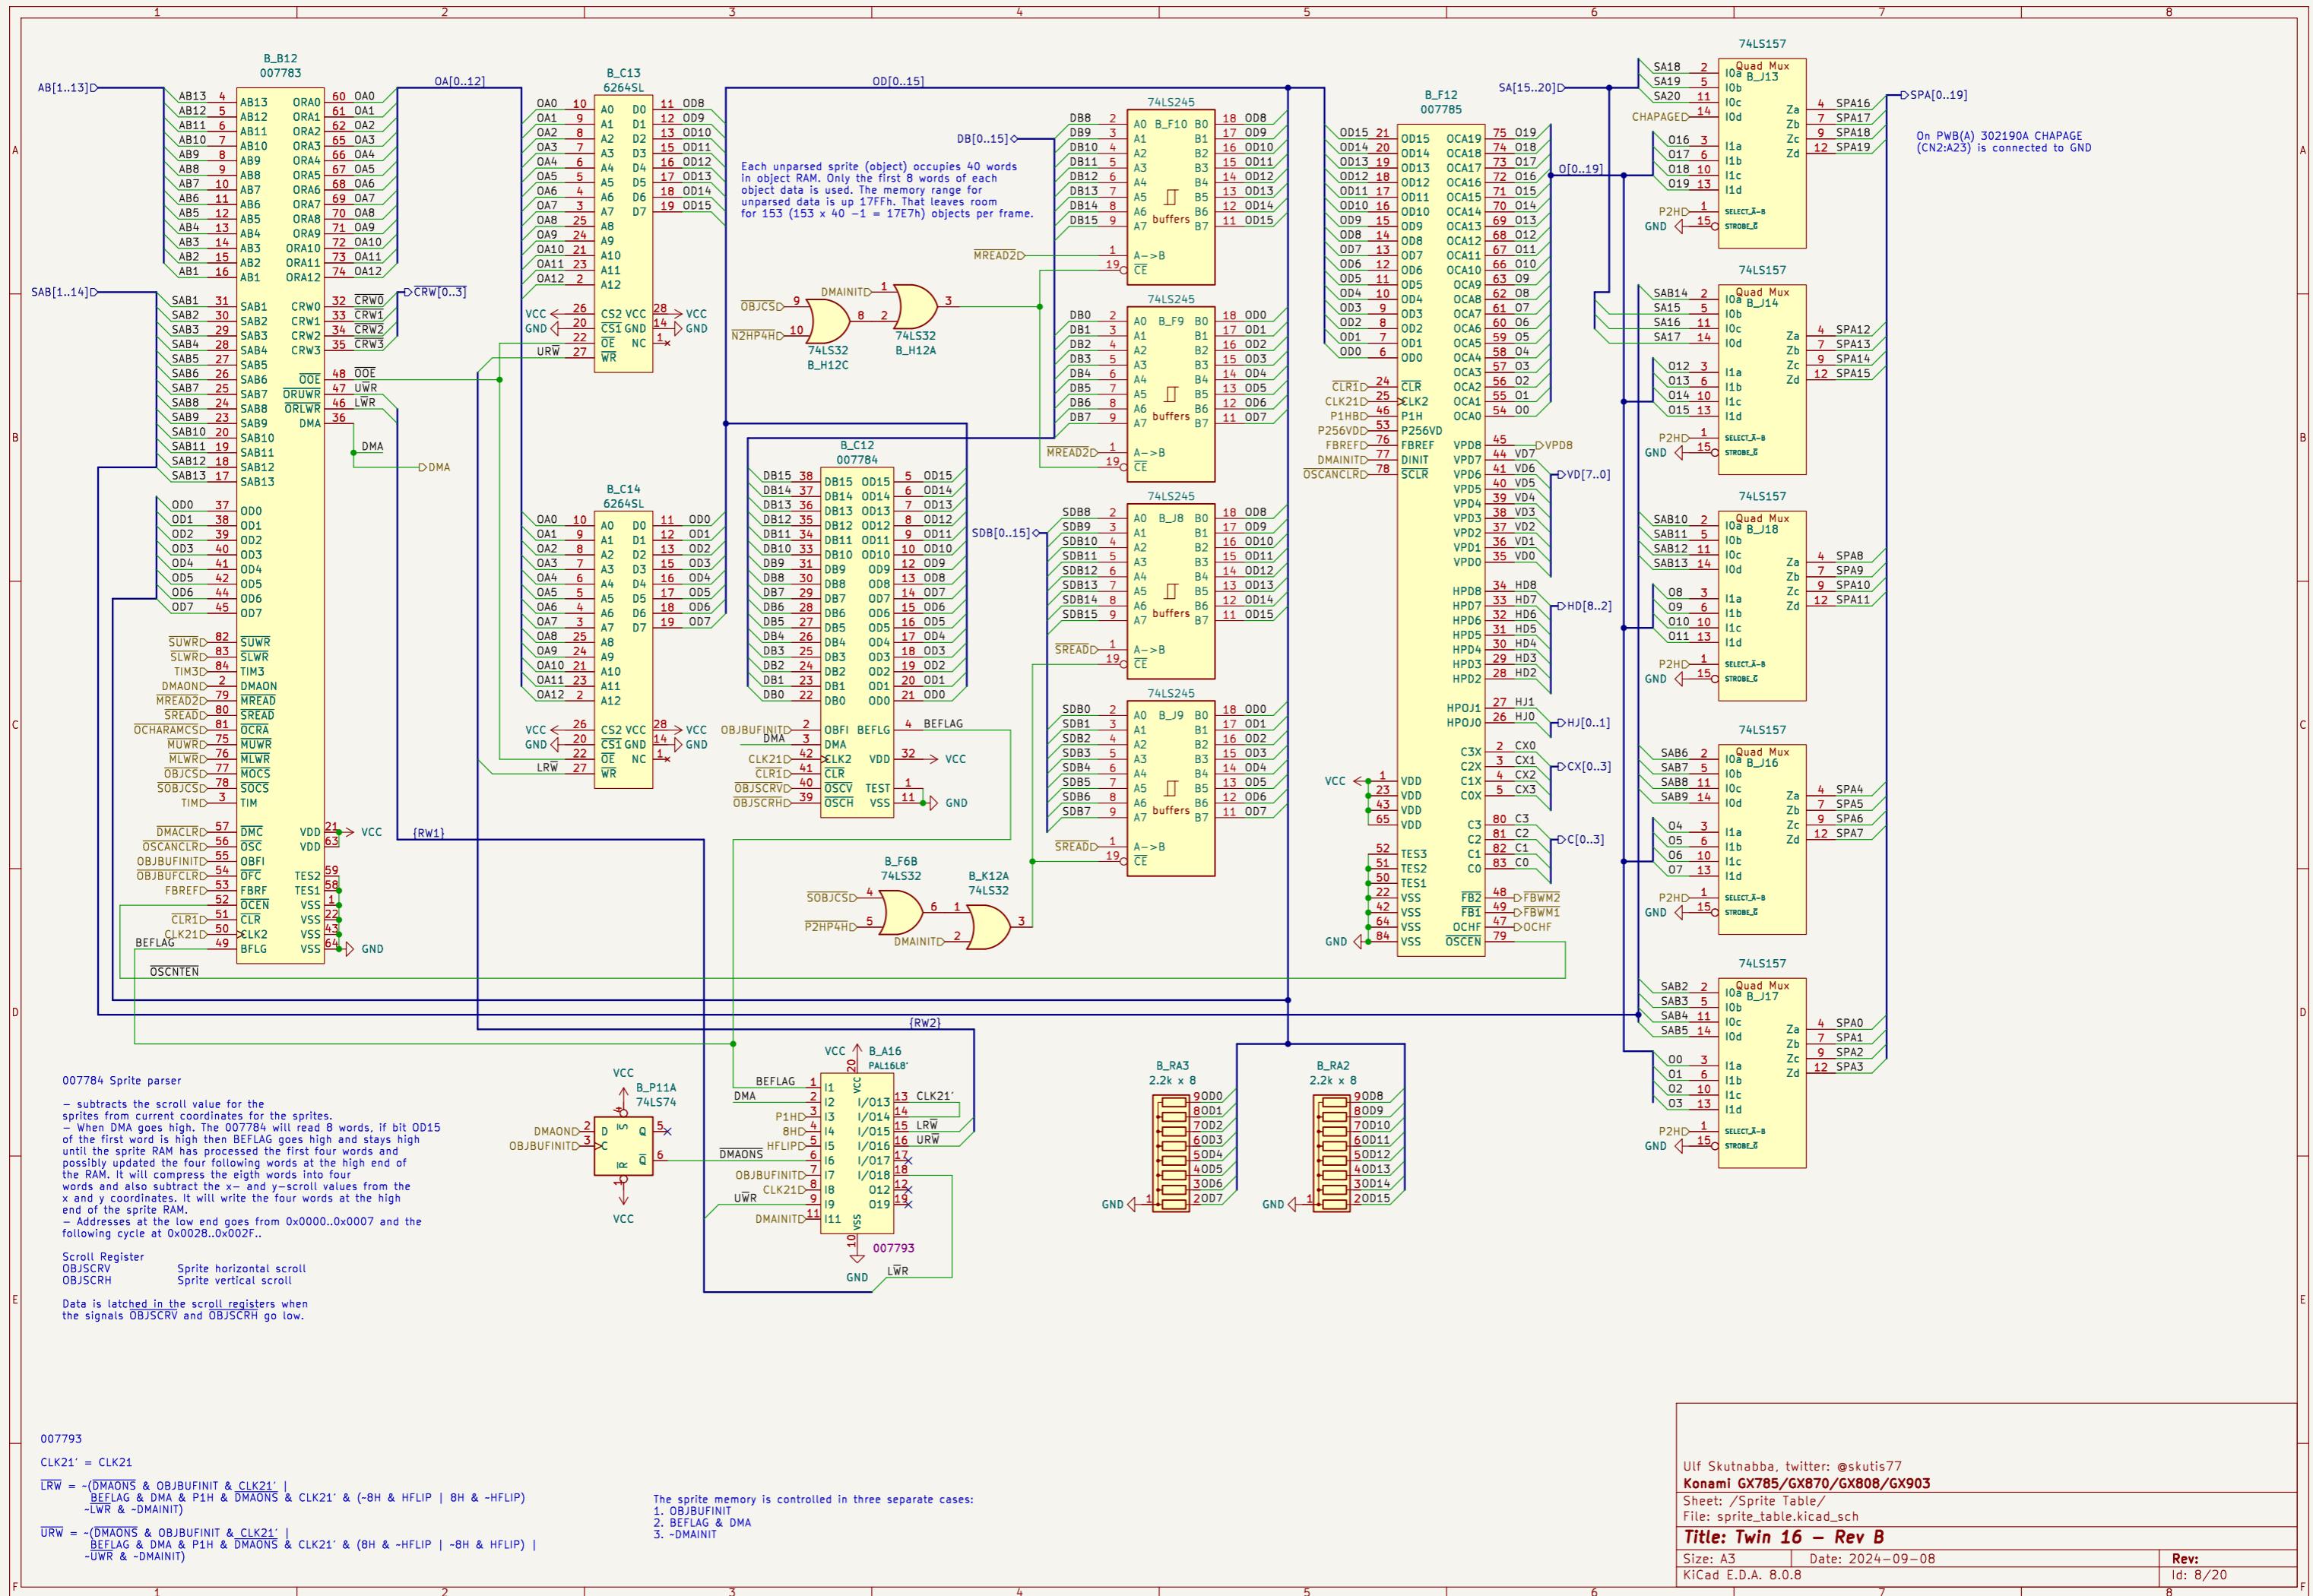


Graphics ROM and RAM

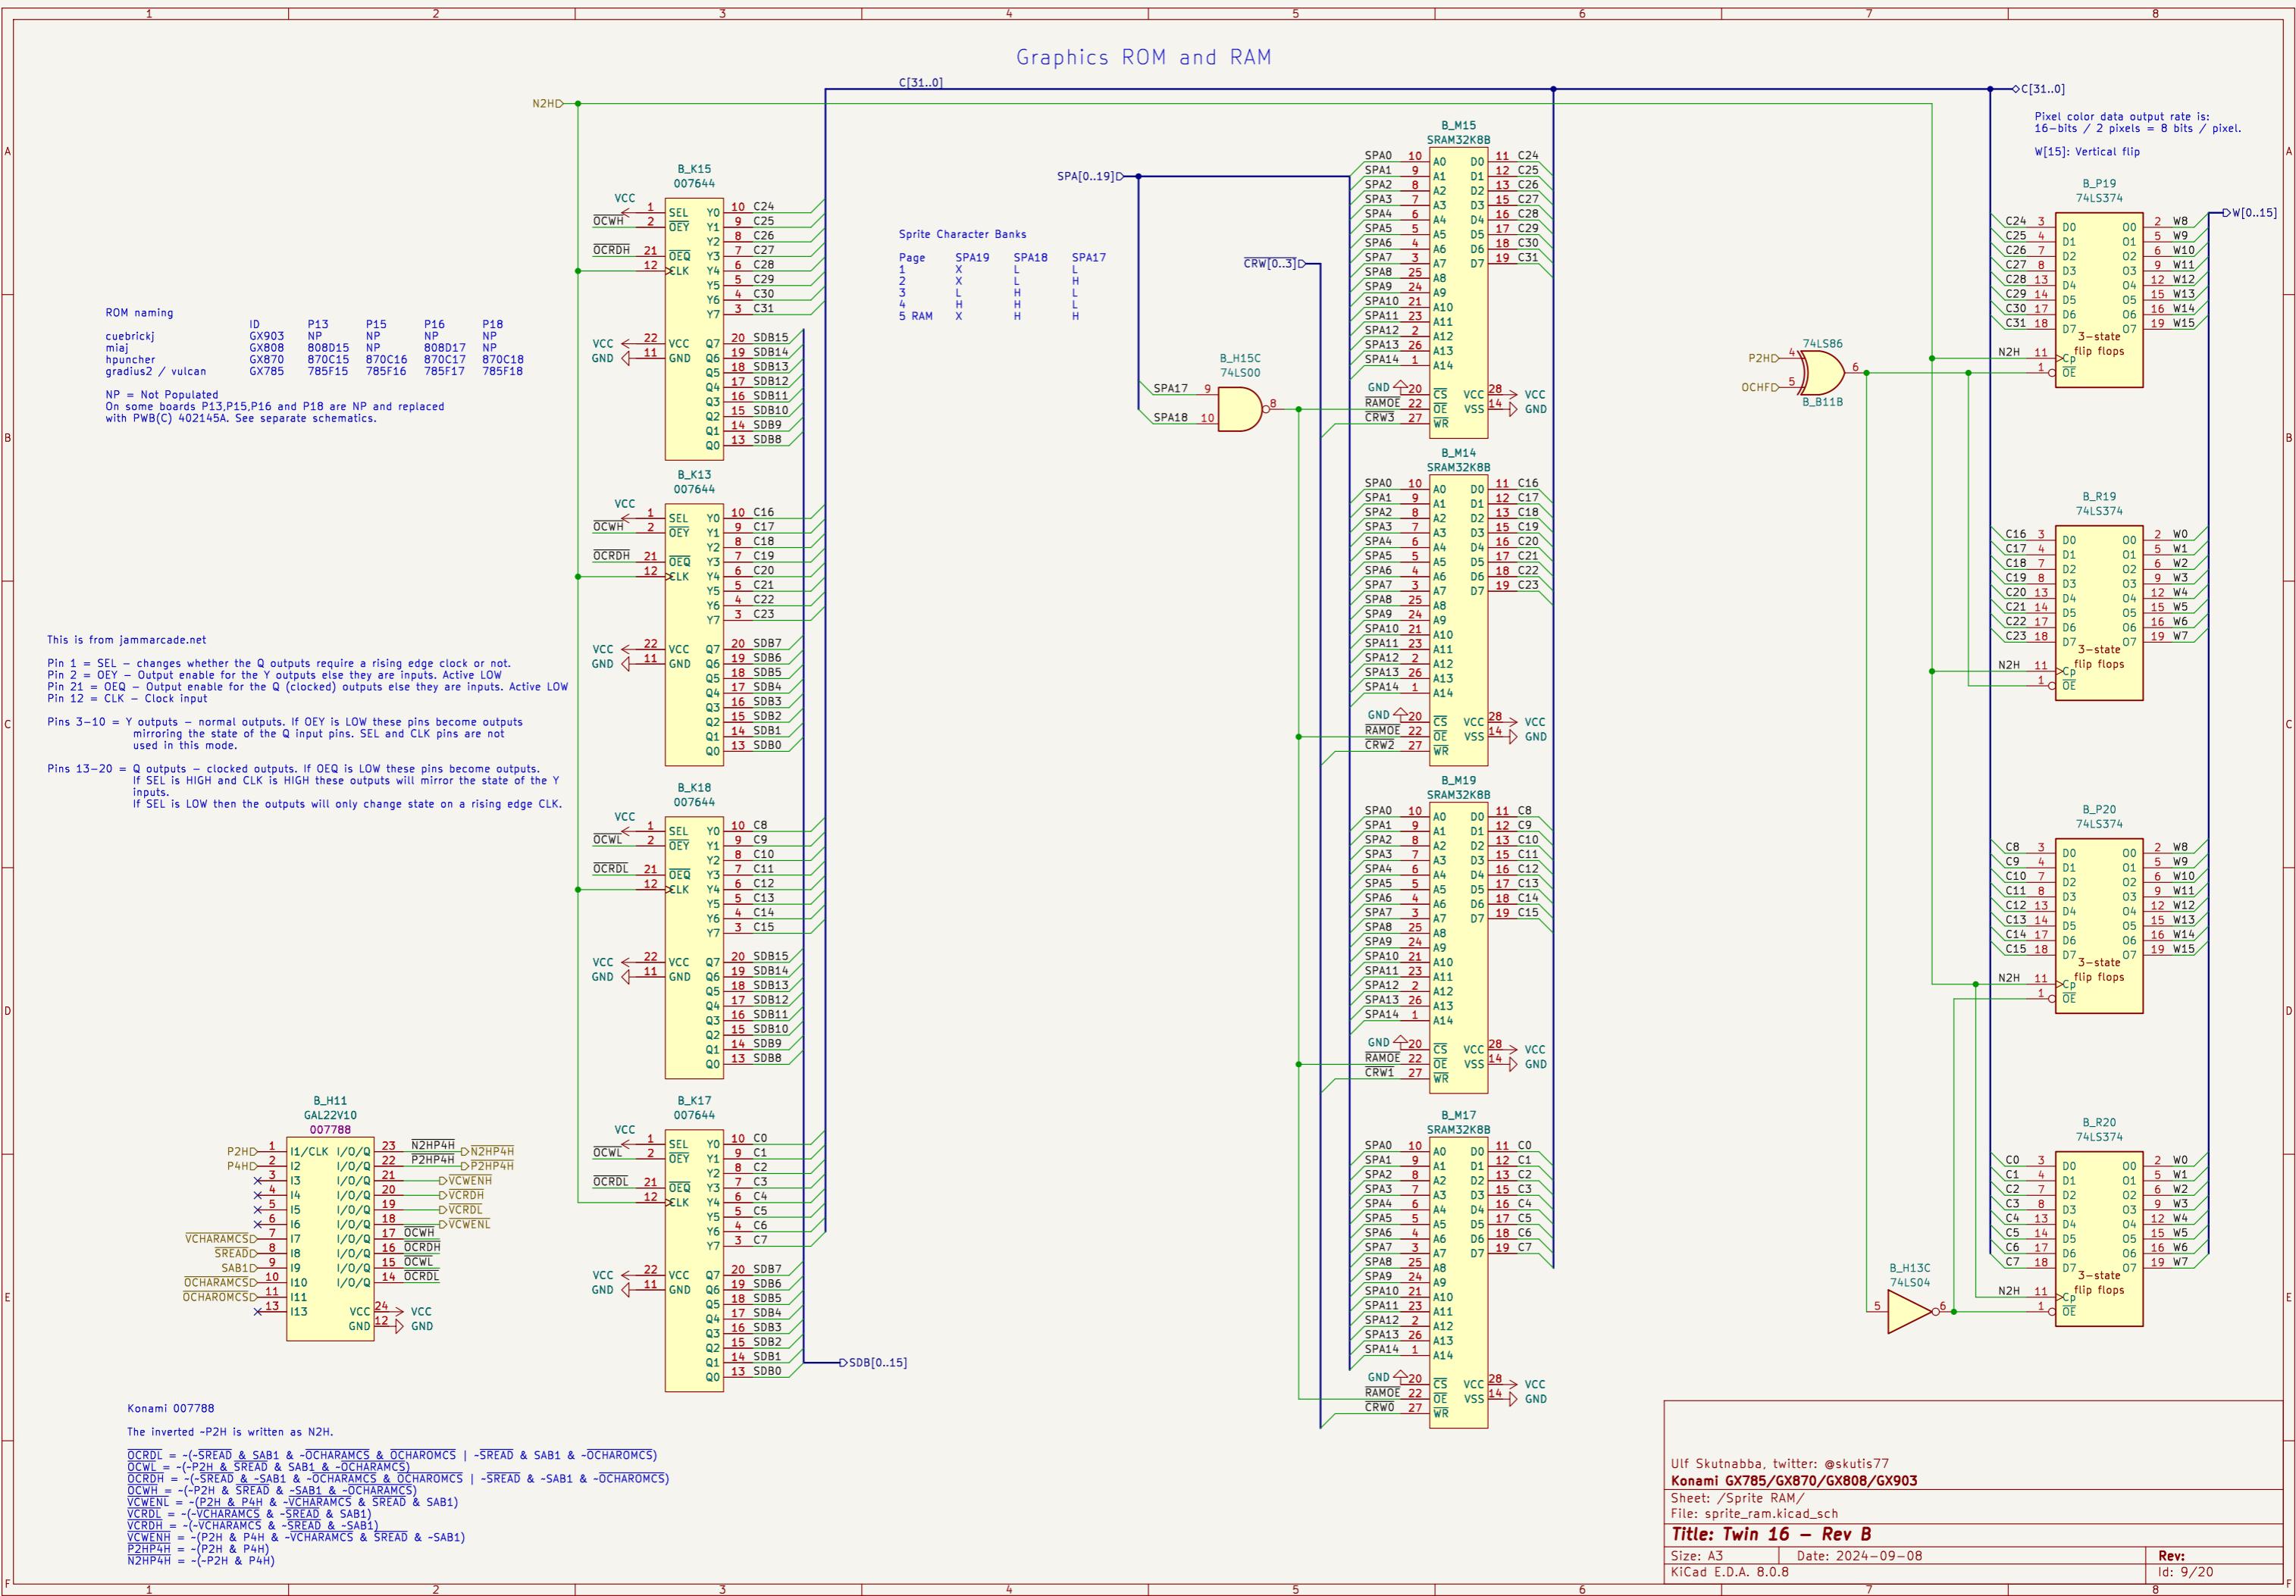

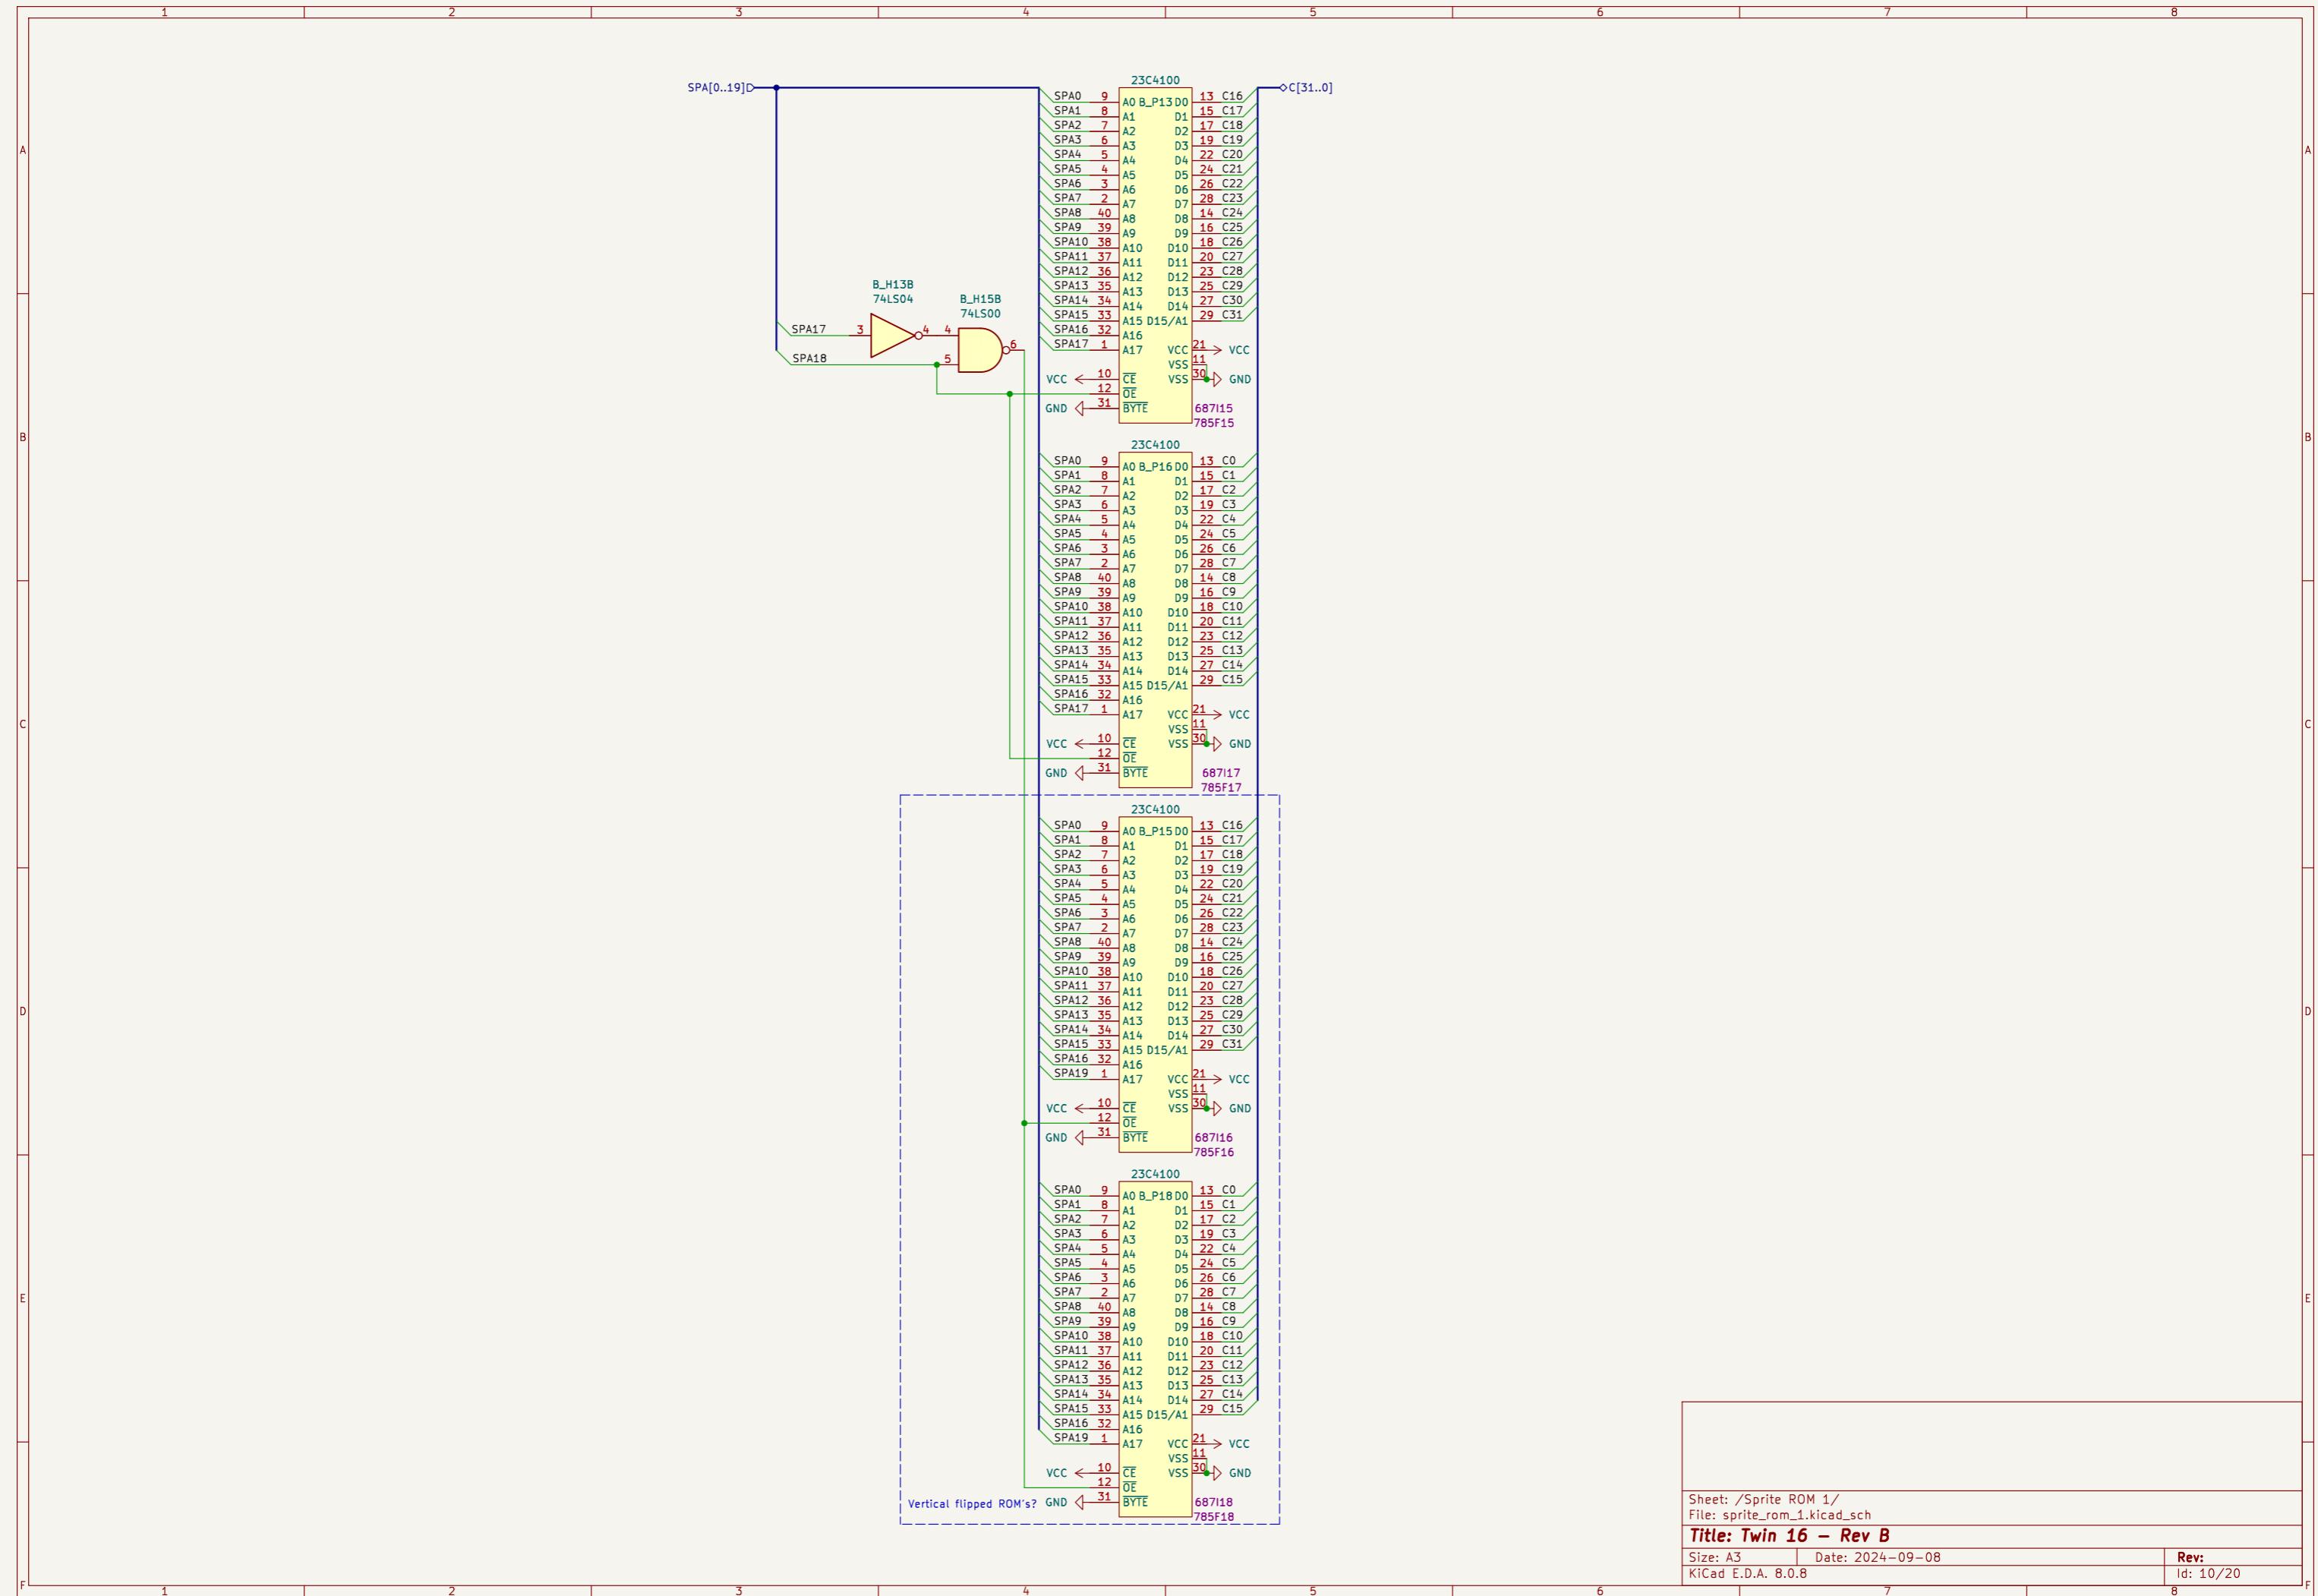

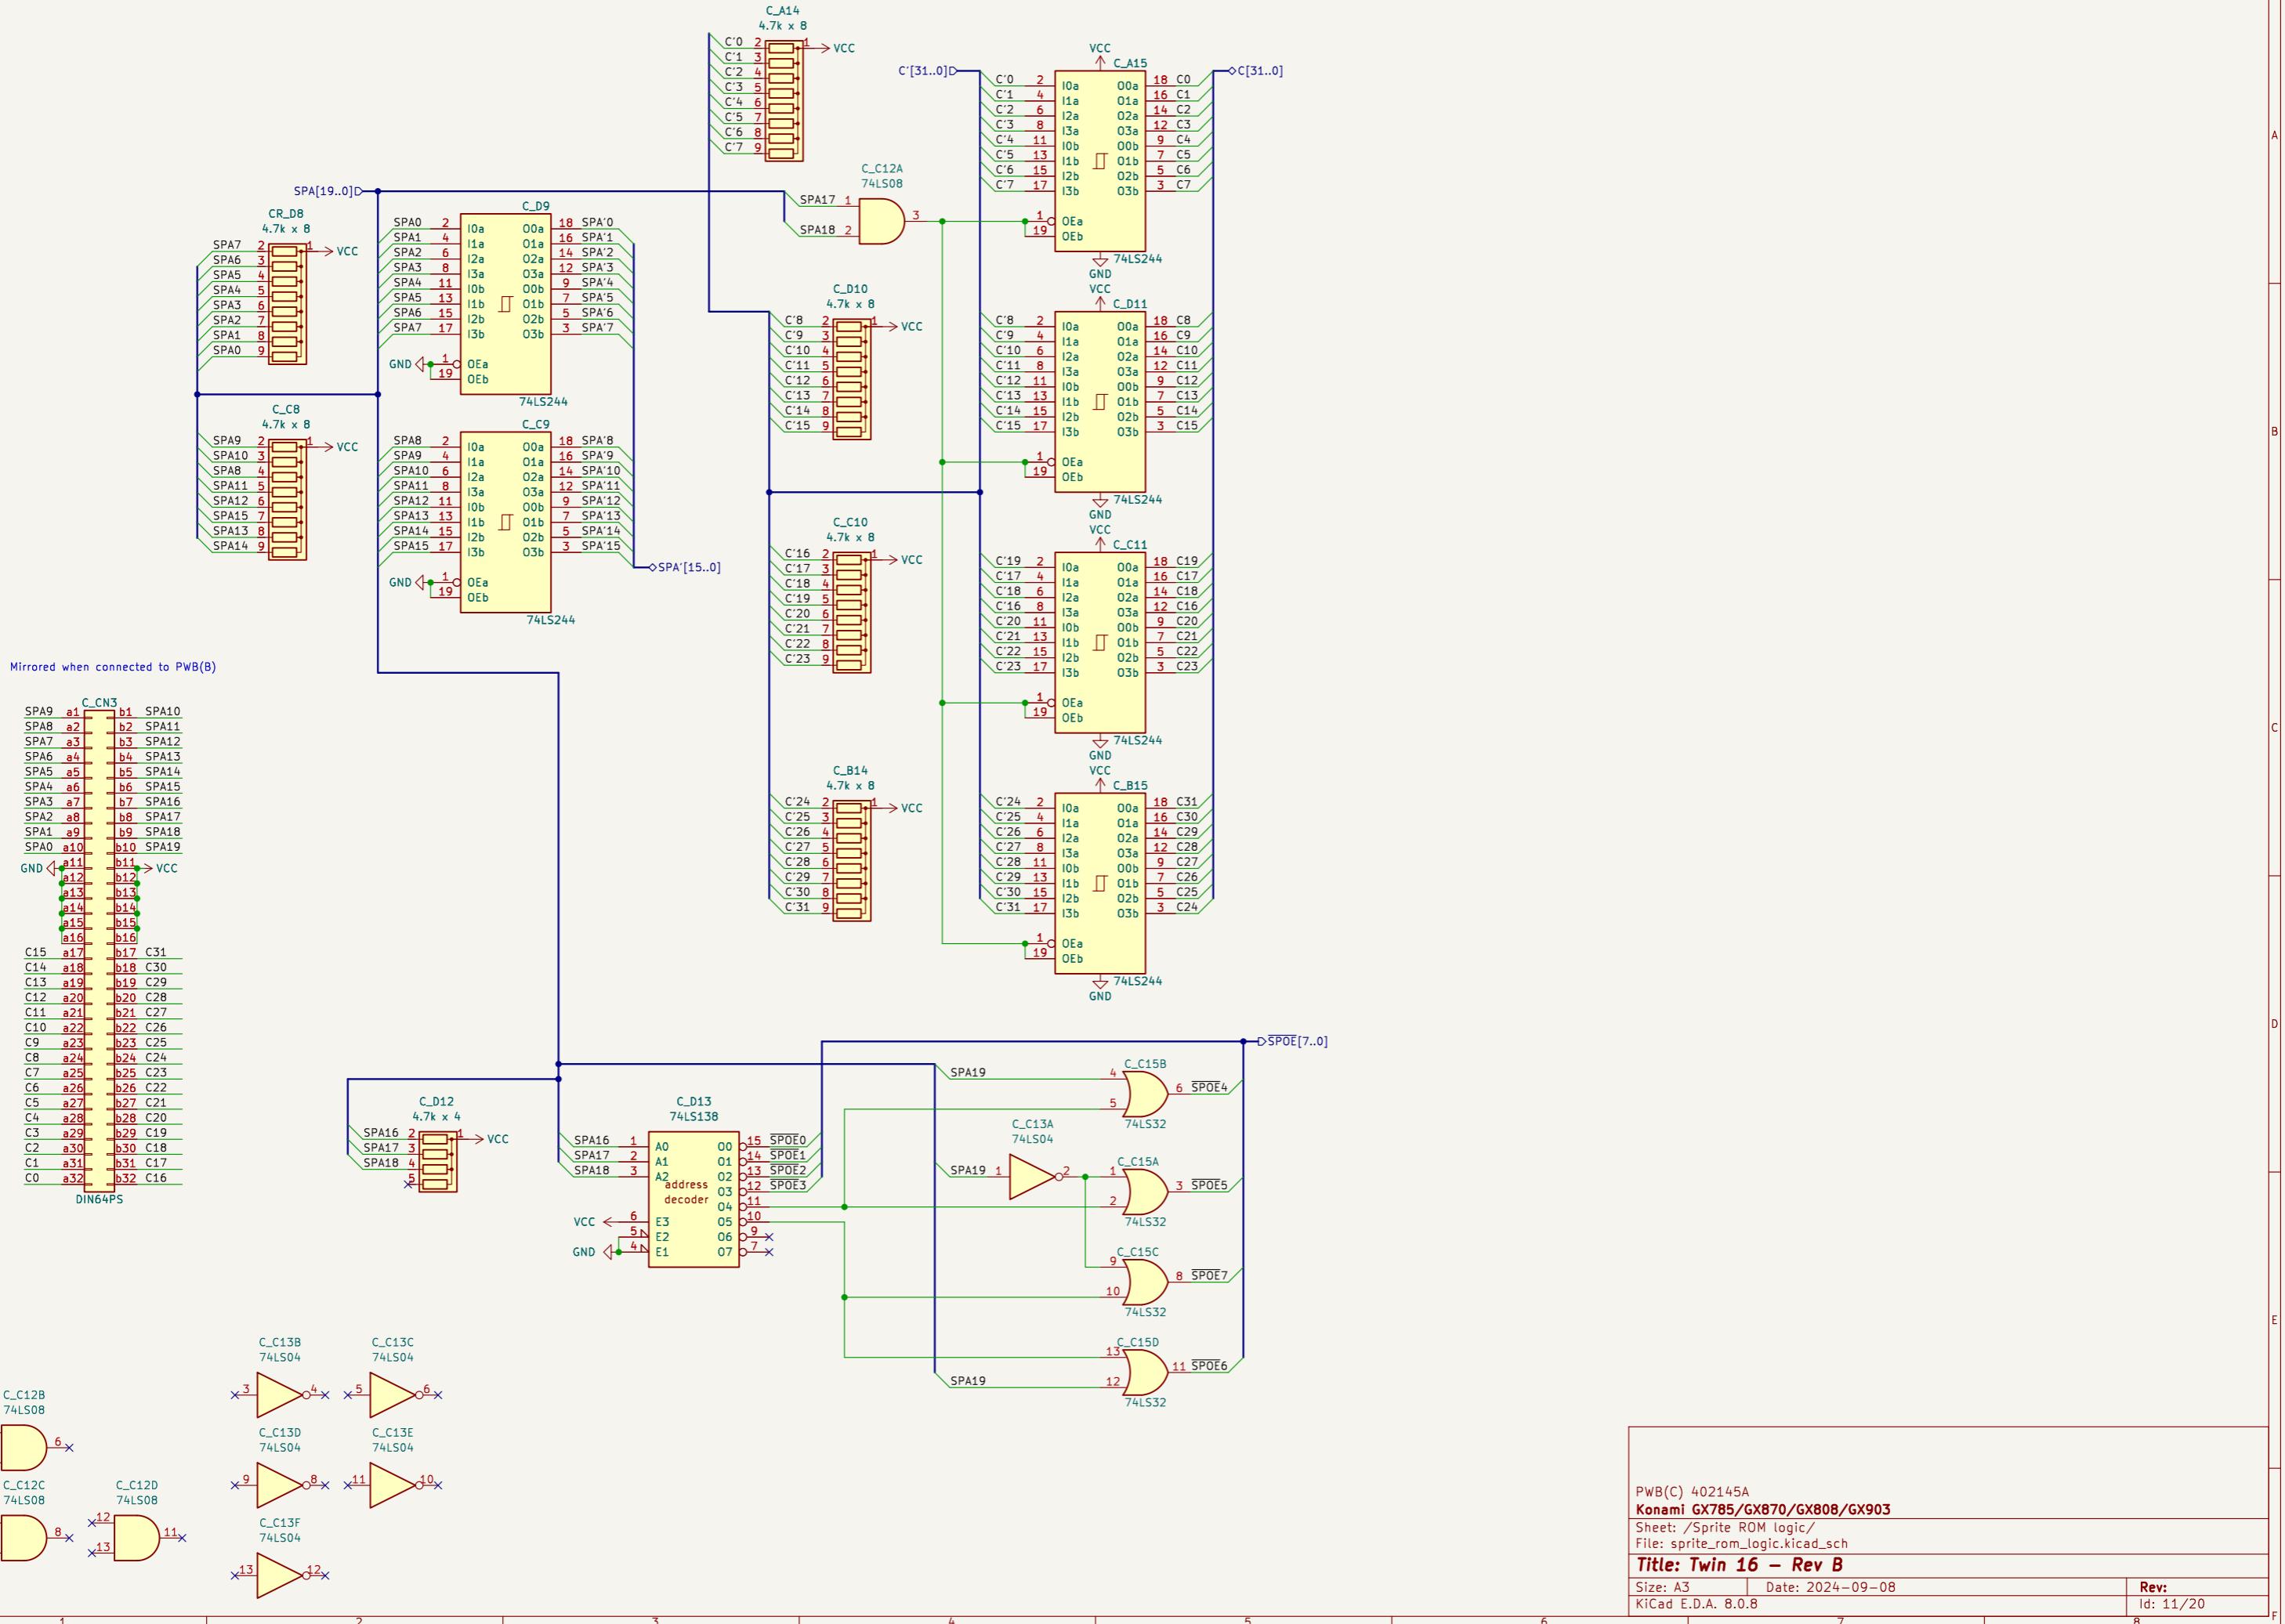

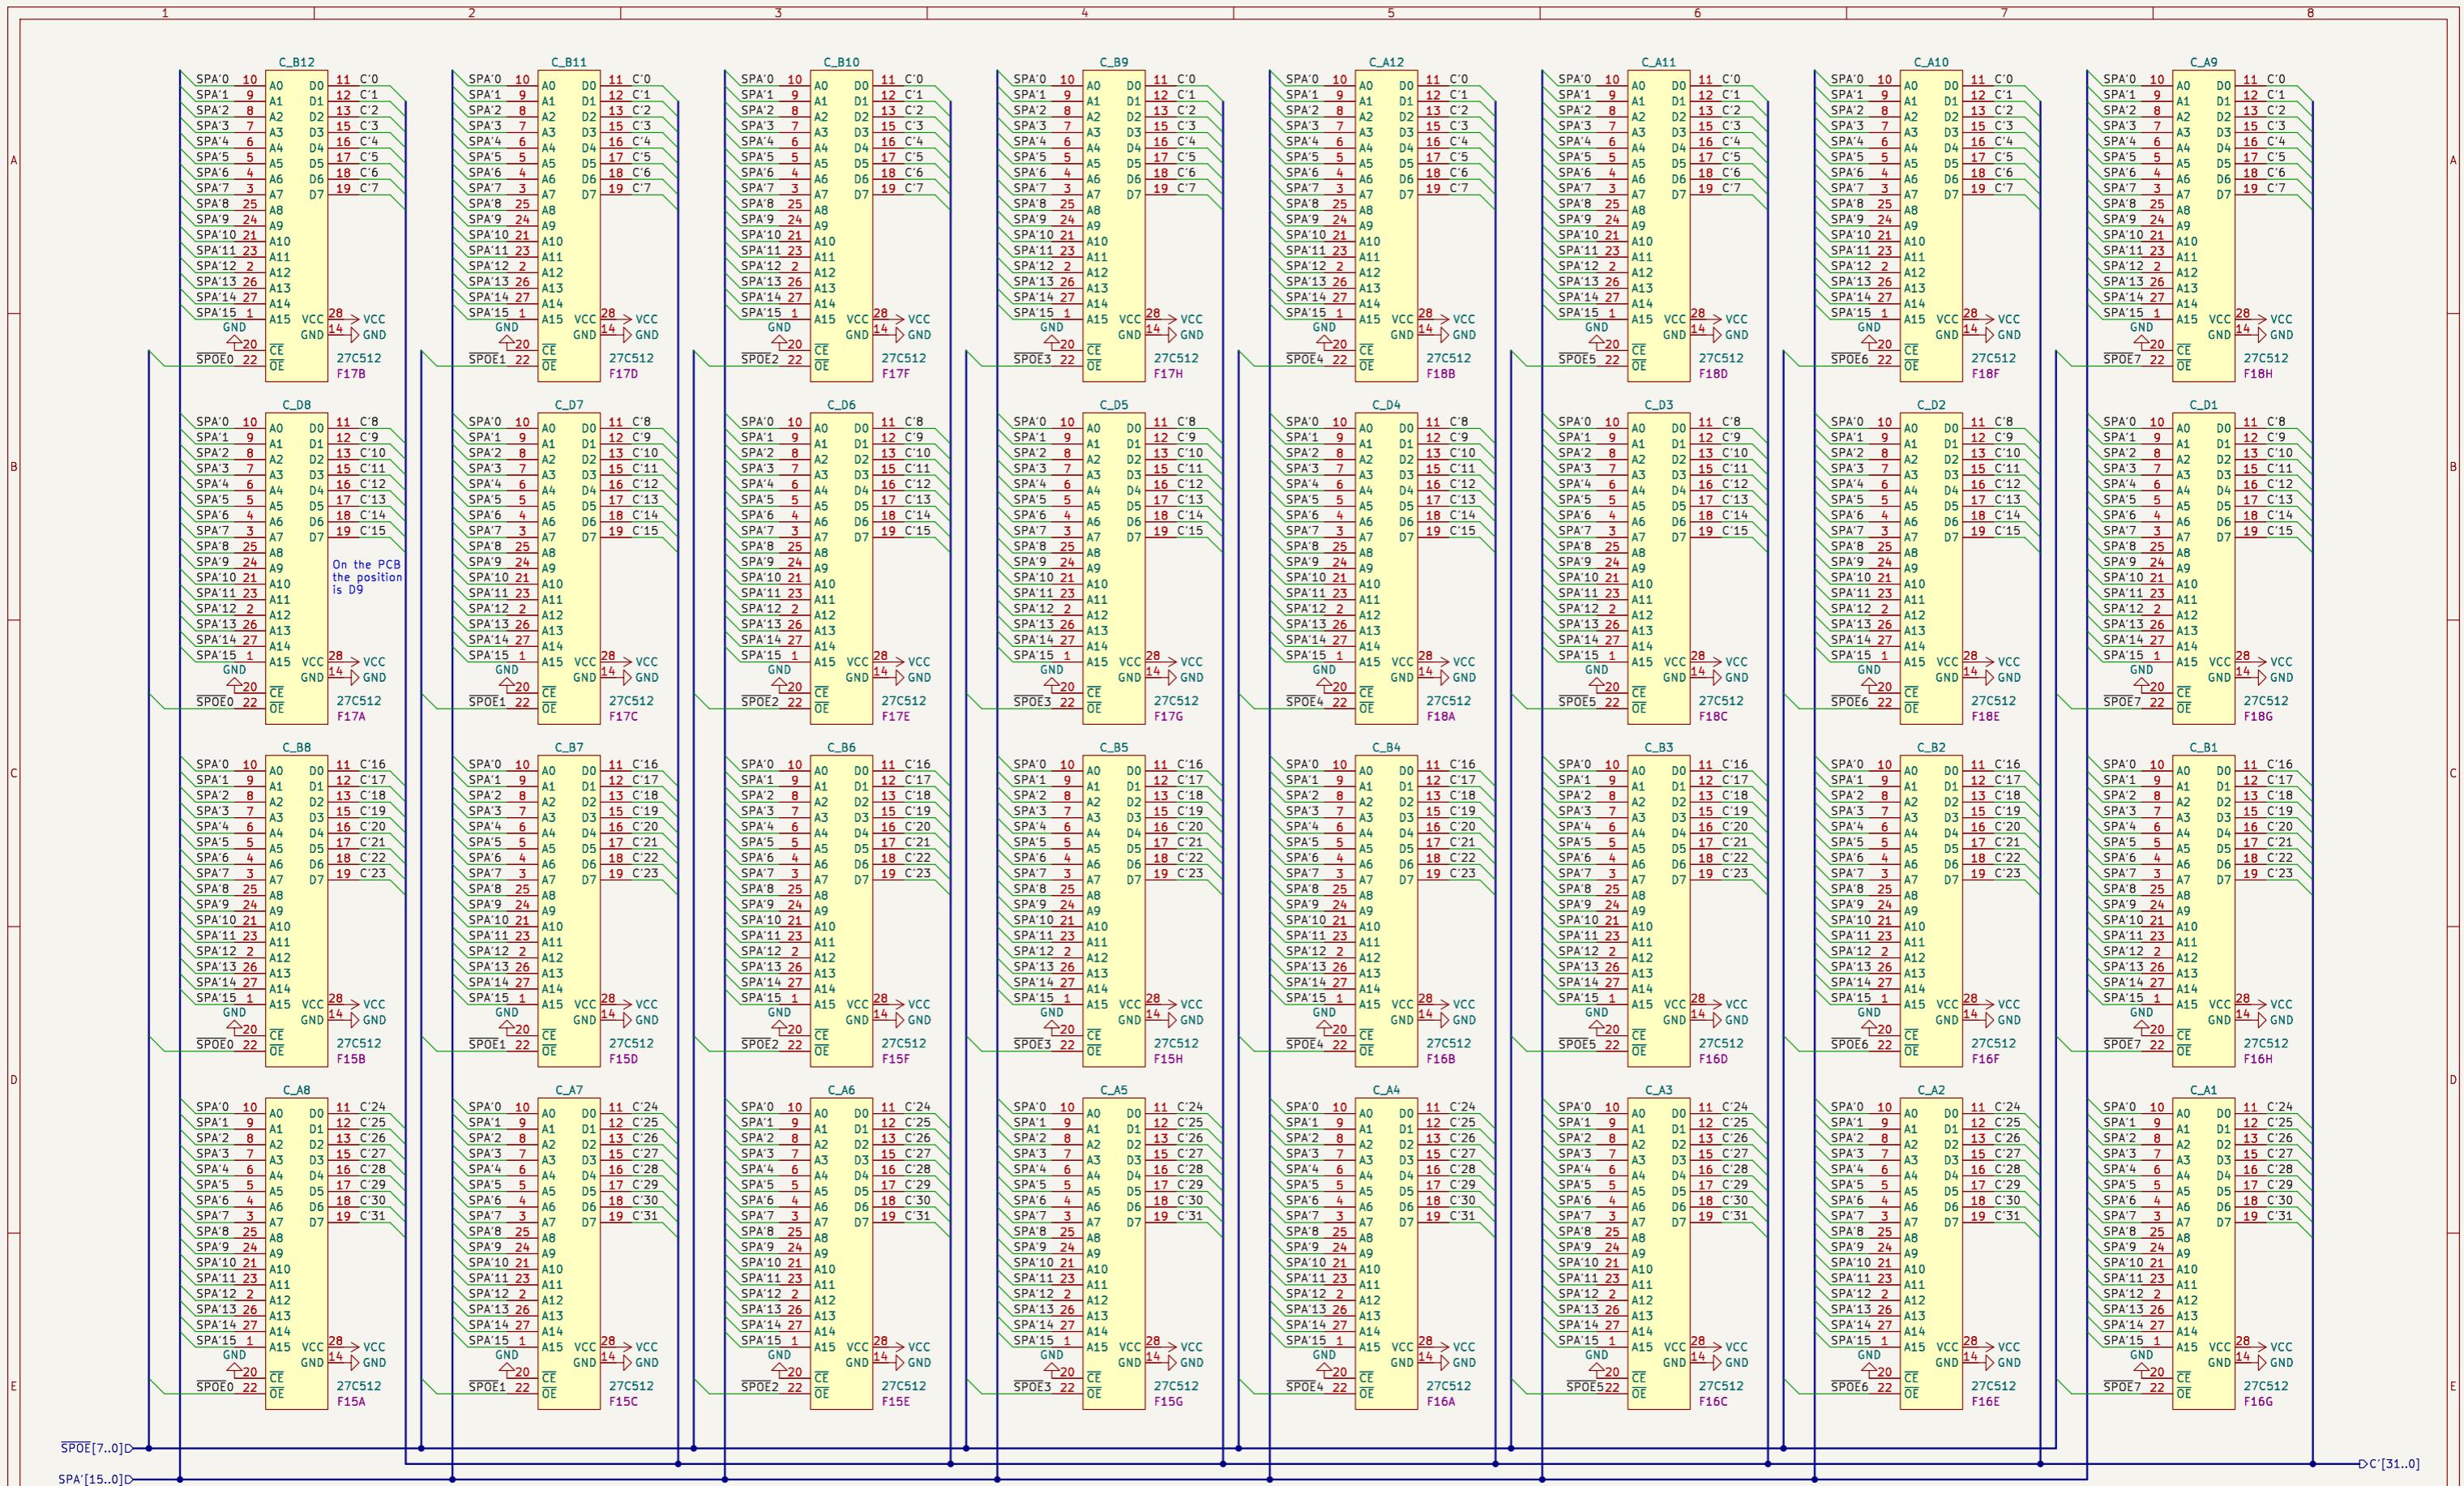


Konami GX785/GX870/GX808/GX903


Sheet: /Sprite ROM 2/
File: sprite_rom_2.kicad_sch


Title: Twin 16 - Rev B


Size: A3 Date: 2024-09-08
KiCad E.D.A. 8.0.8

Rev:
Id: 11/20

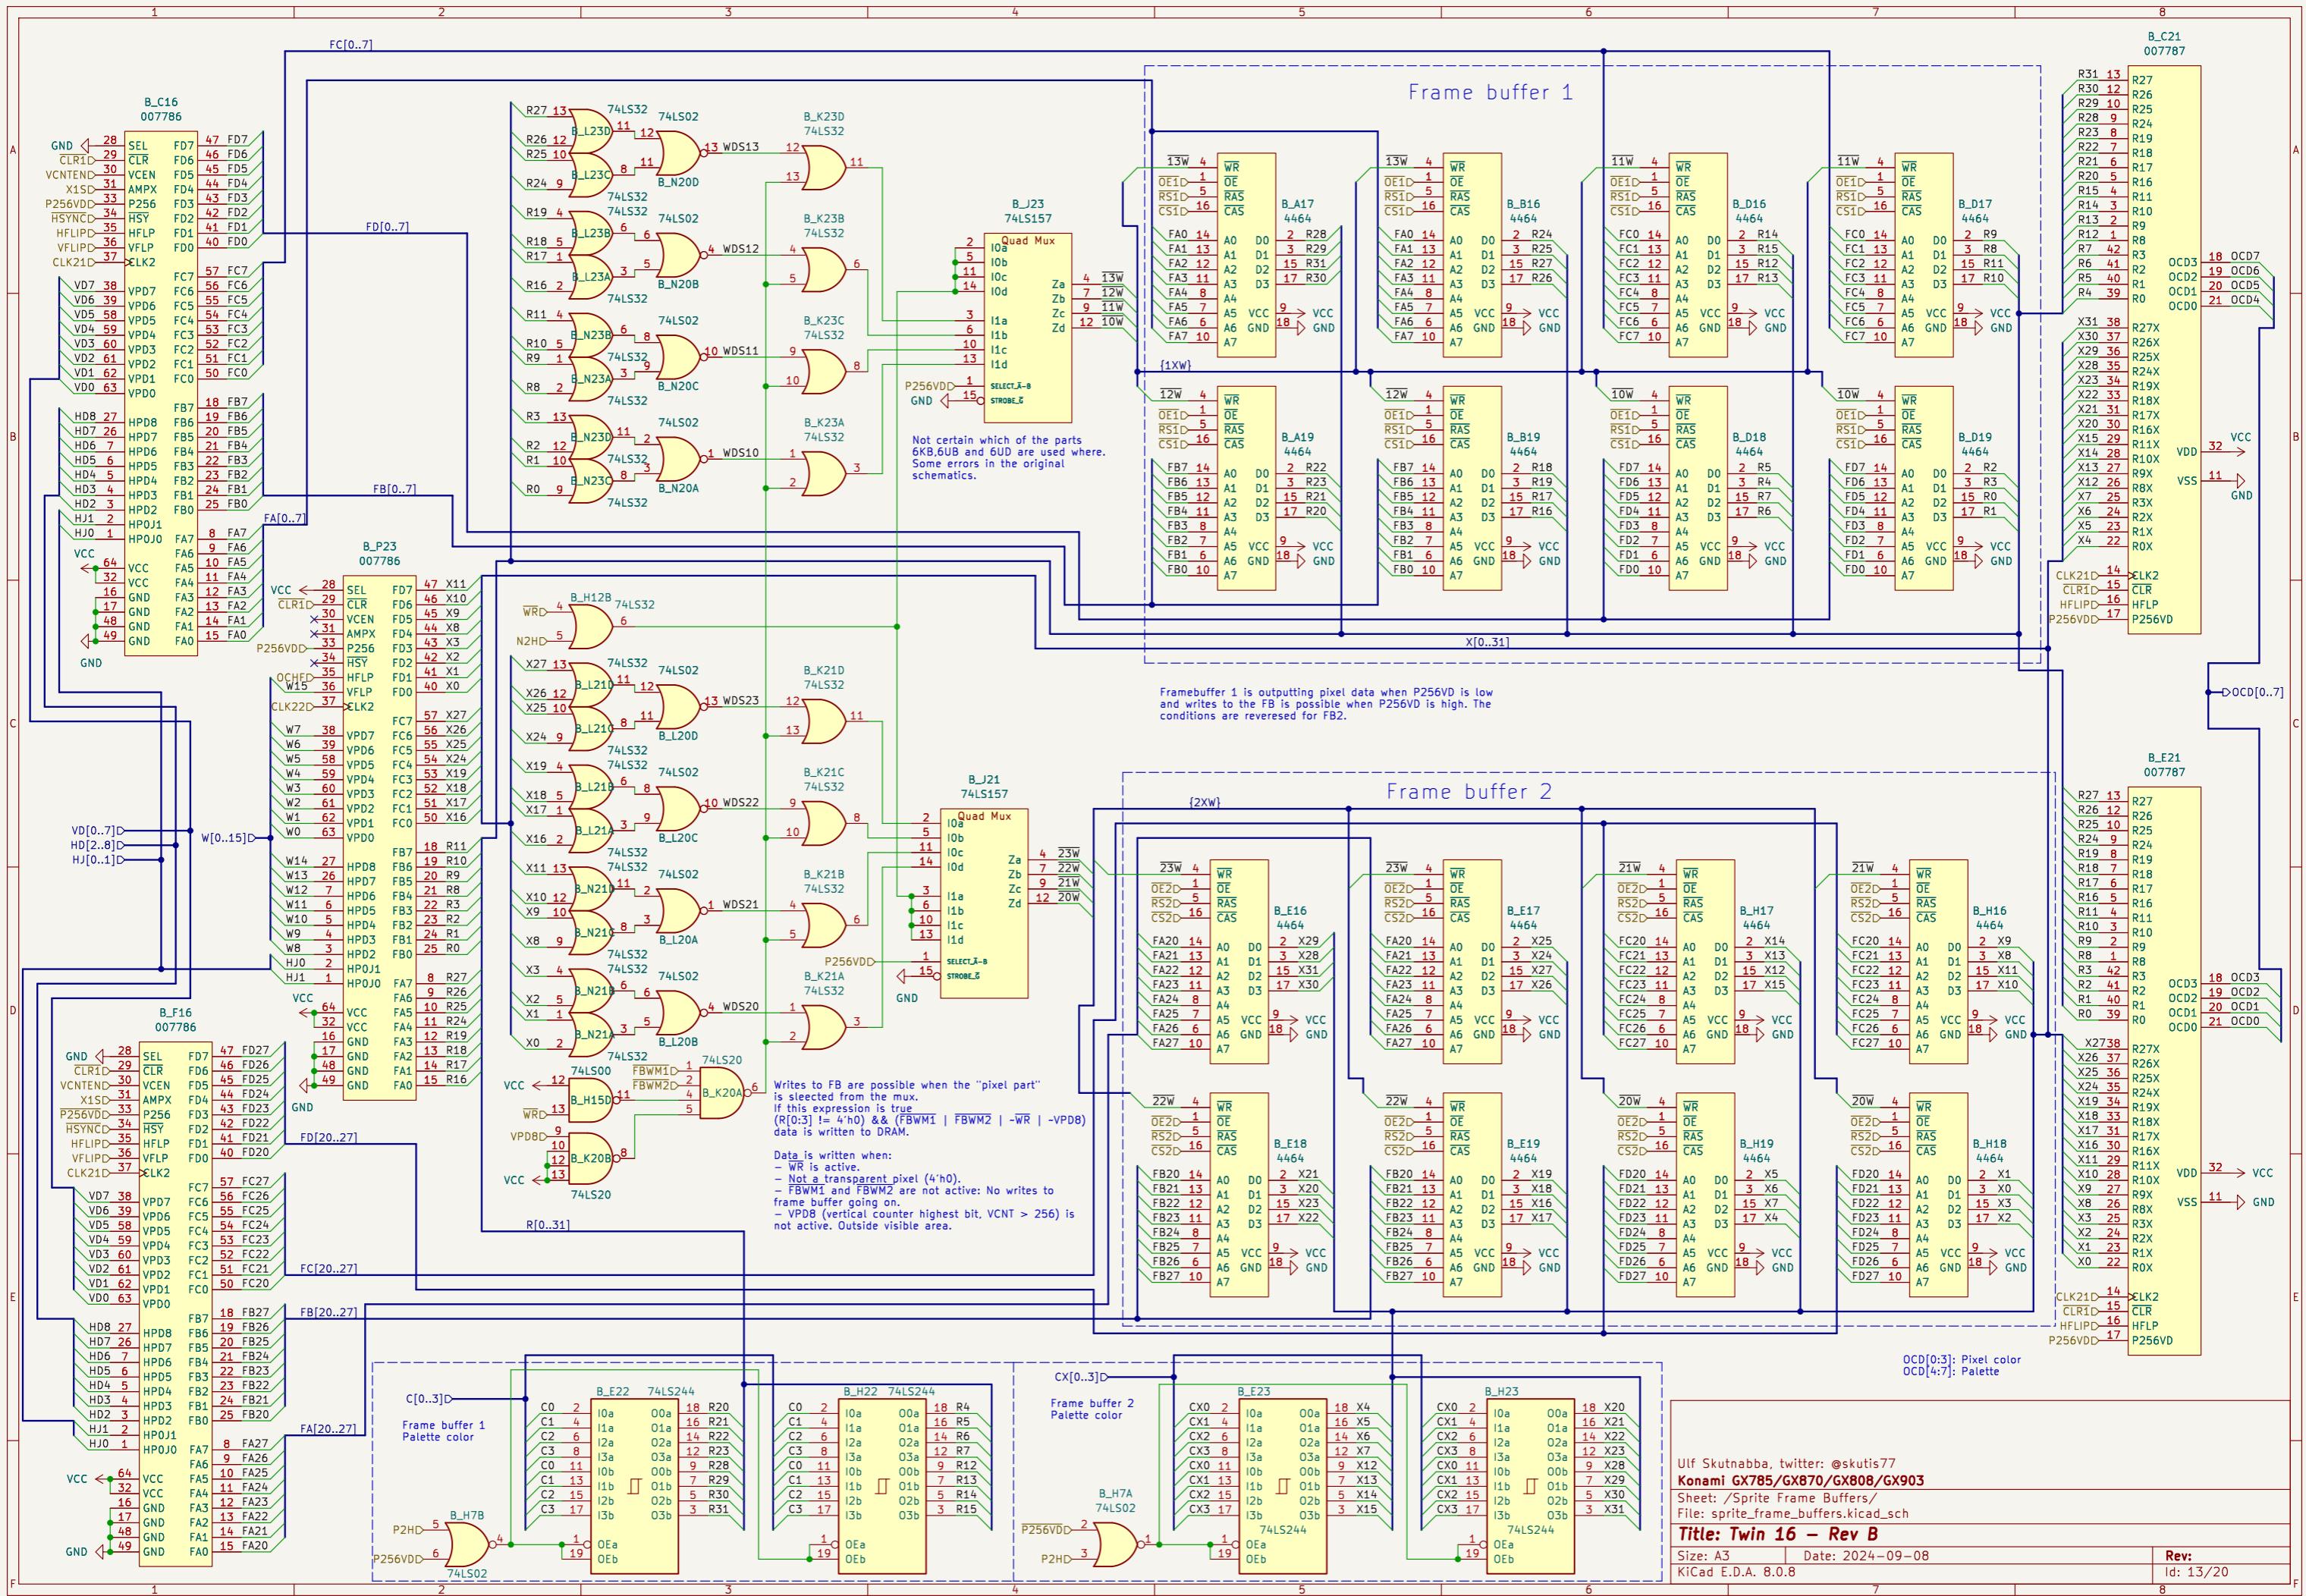


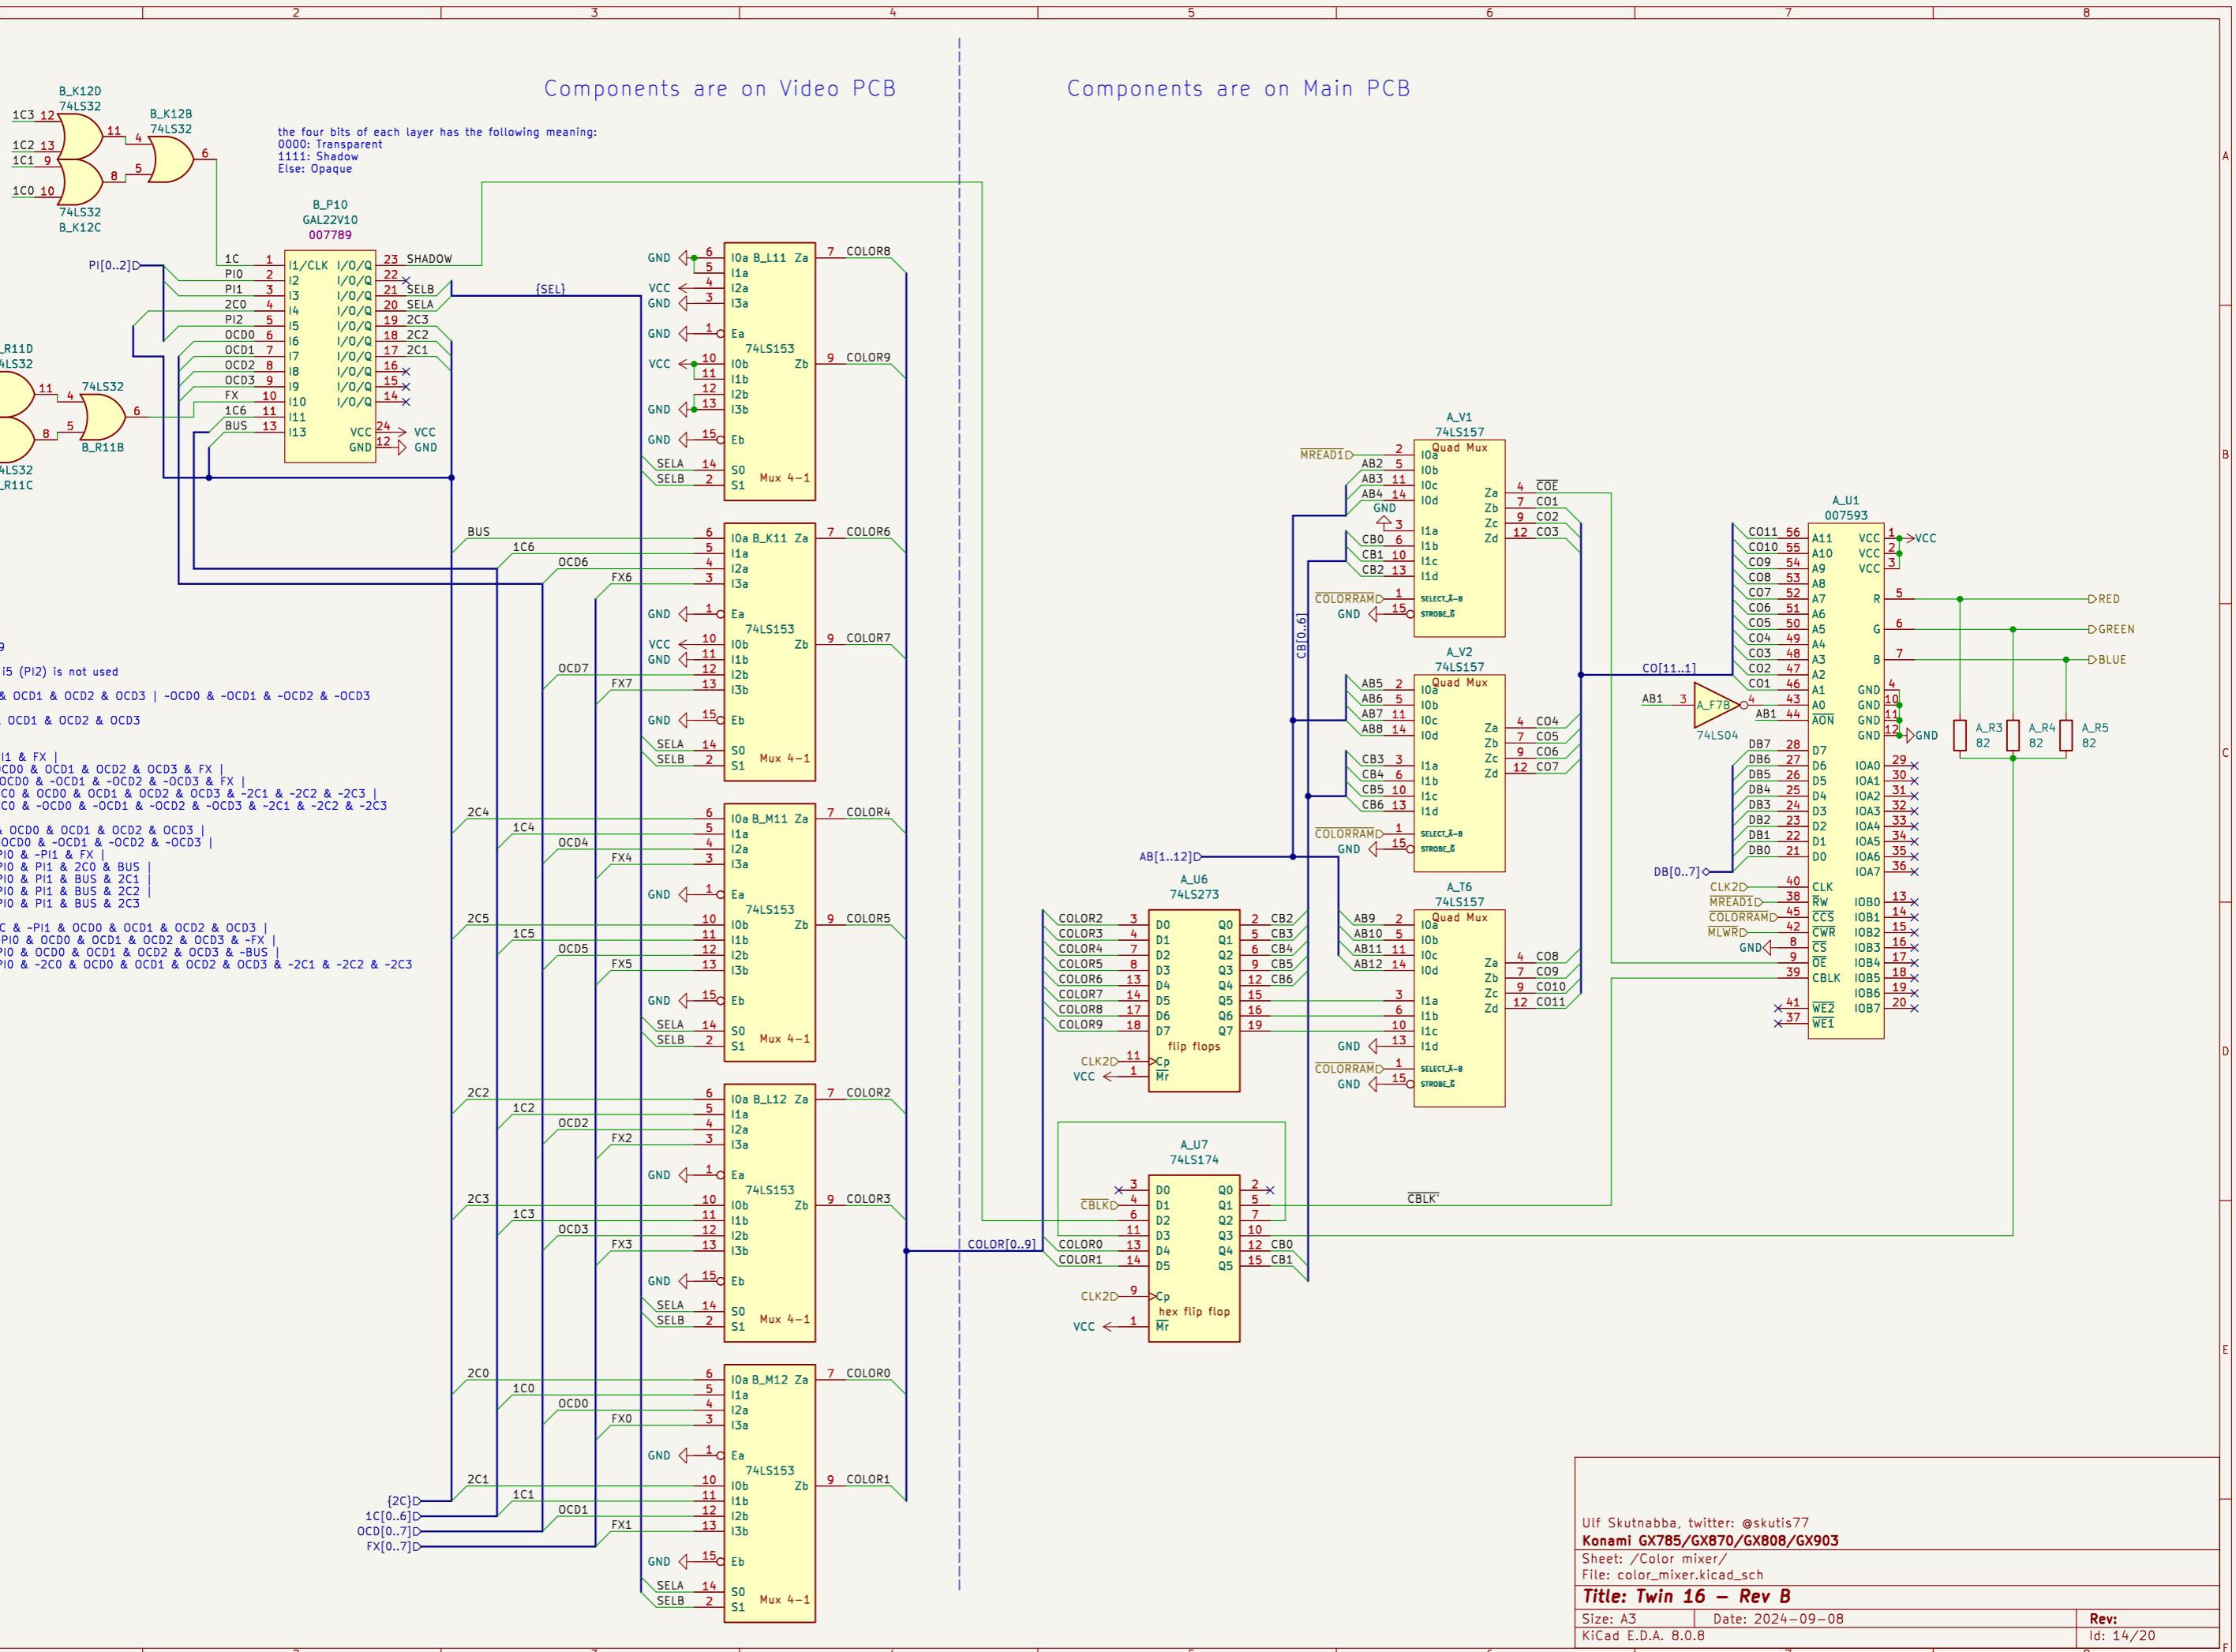

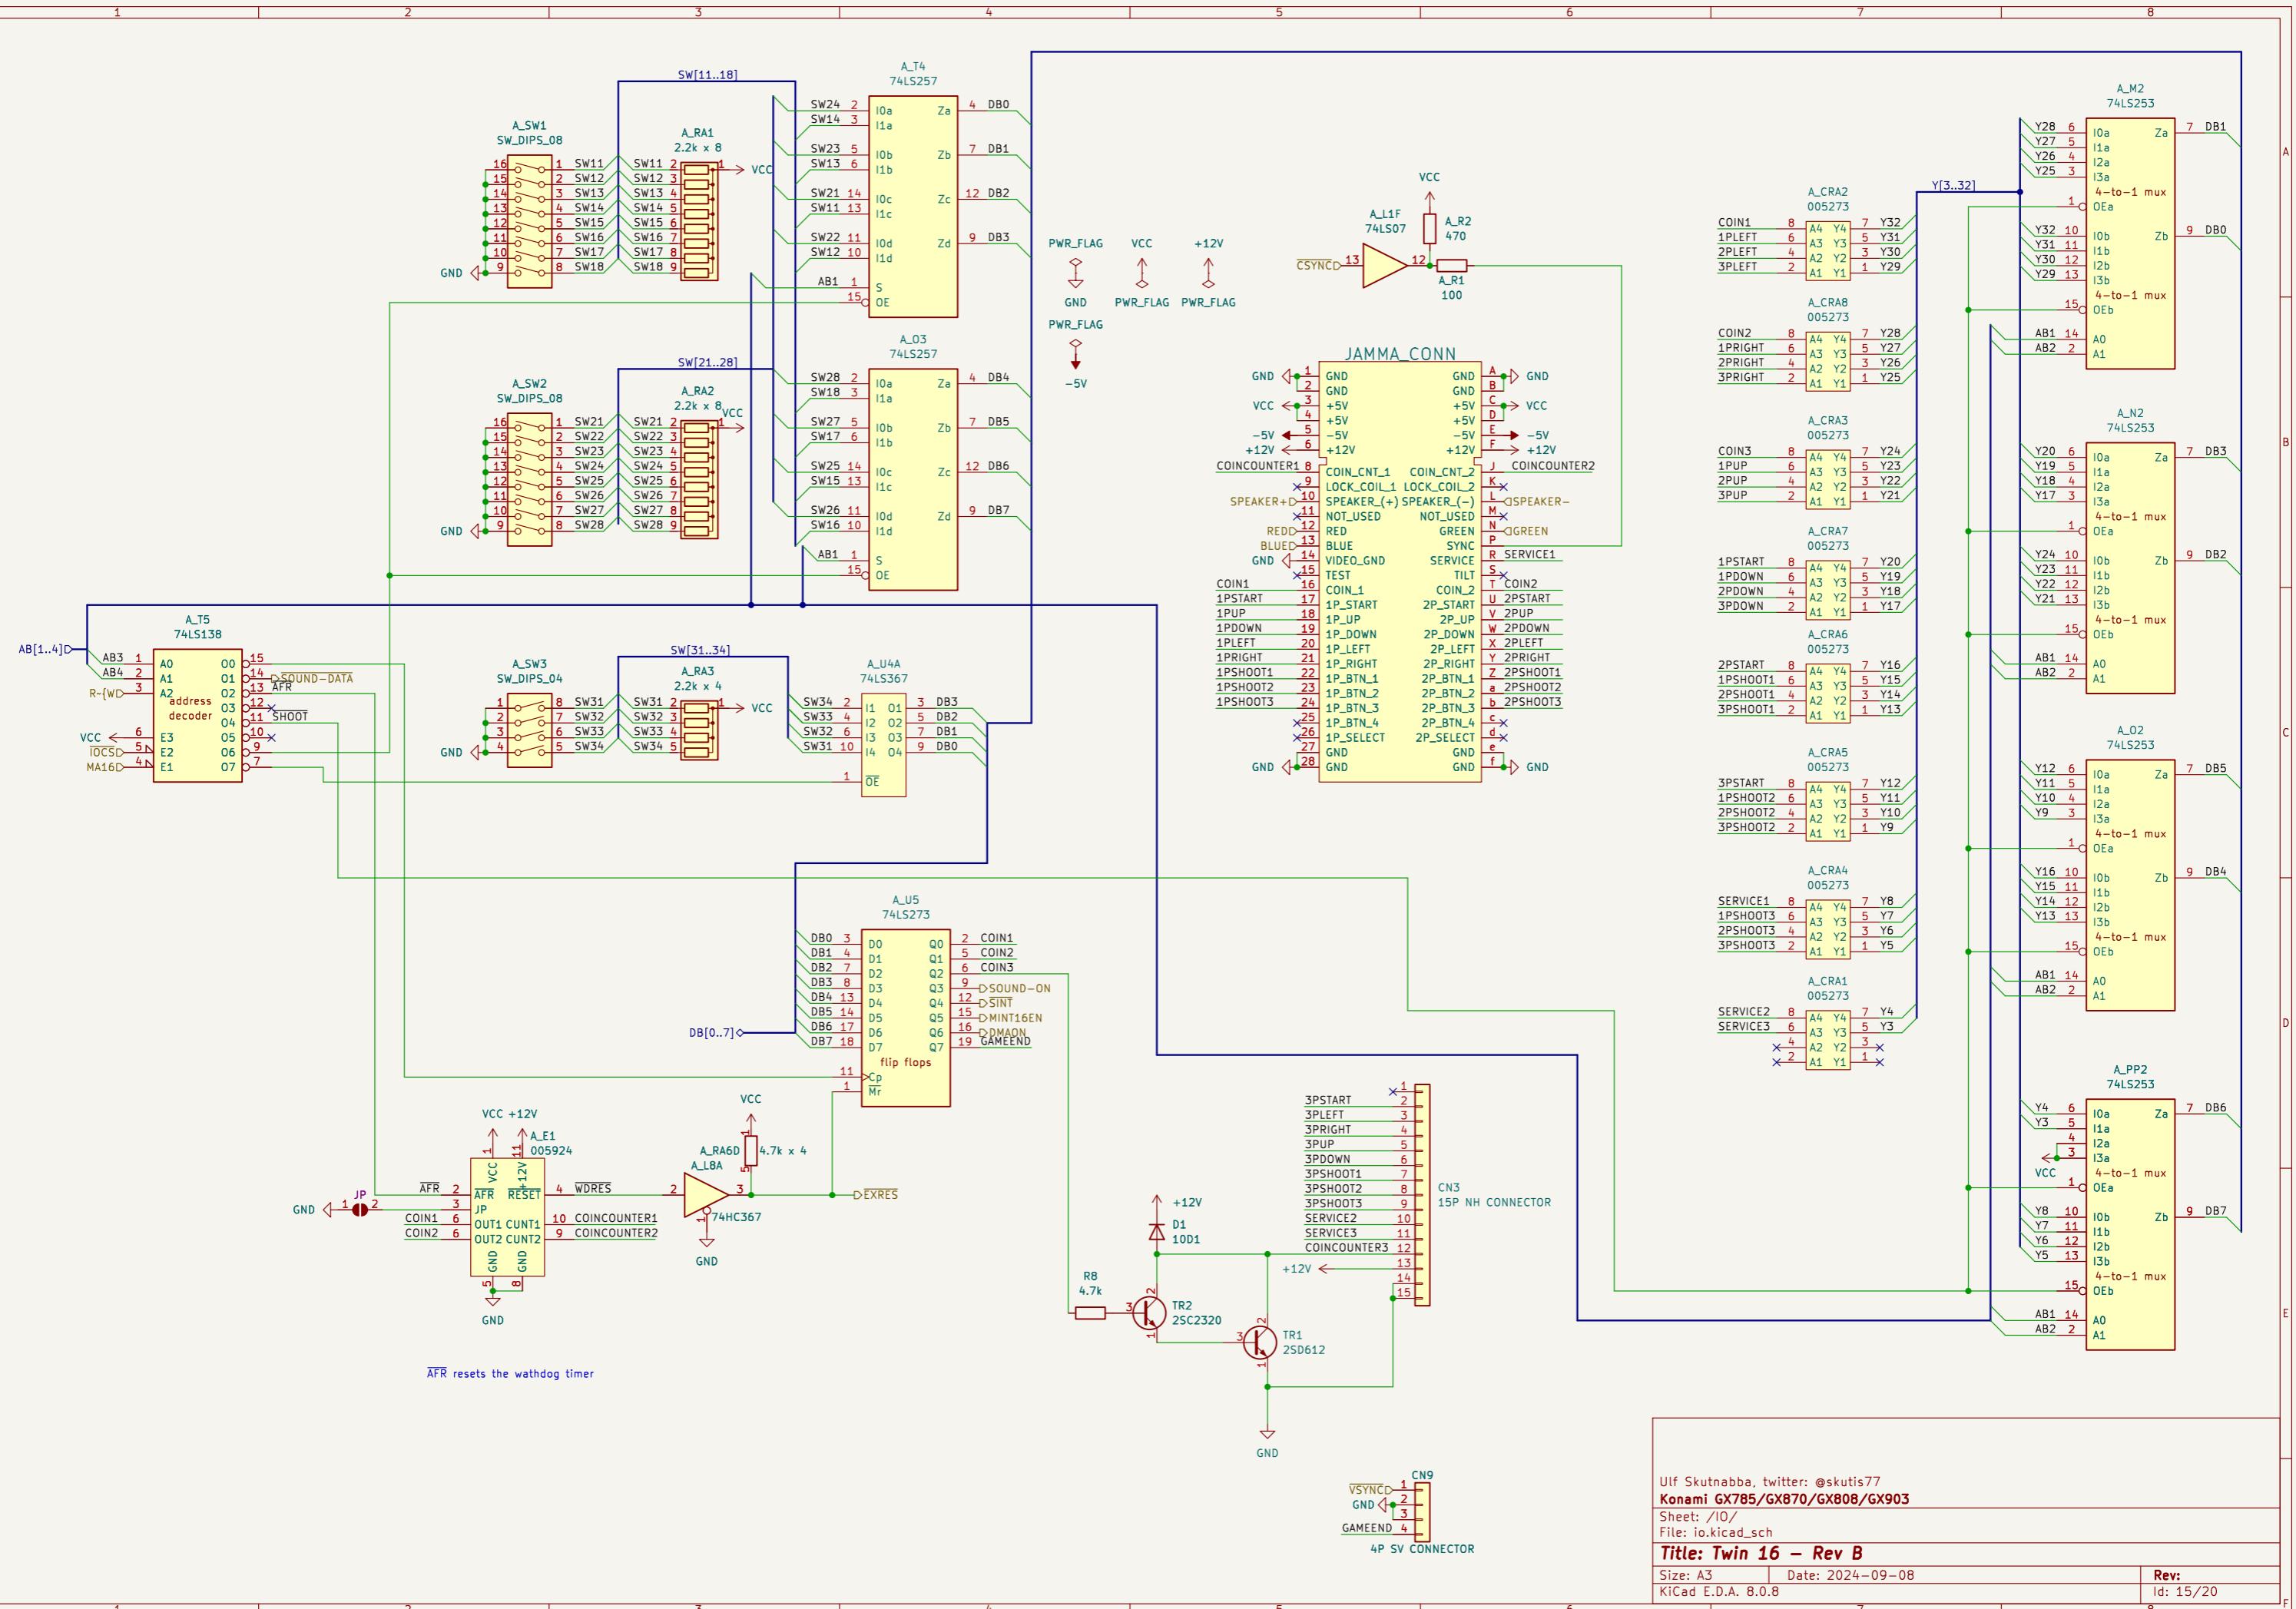

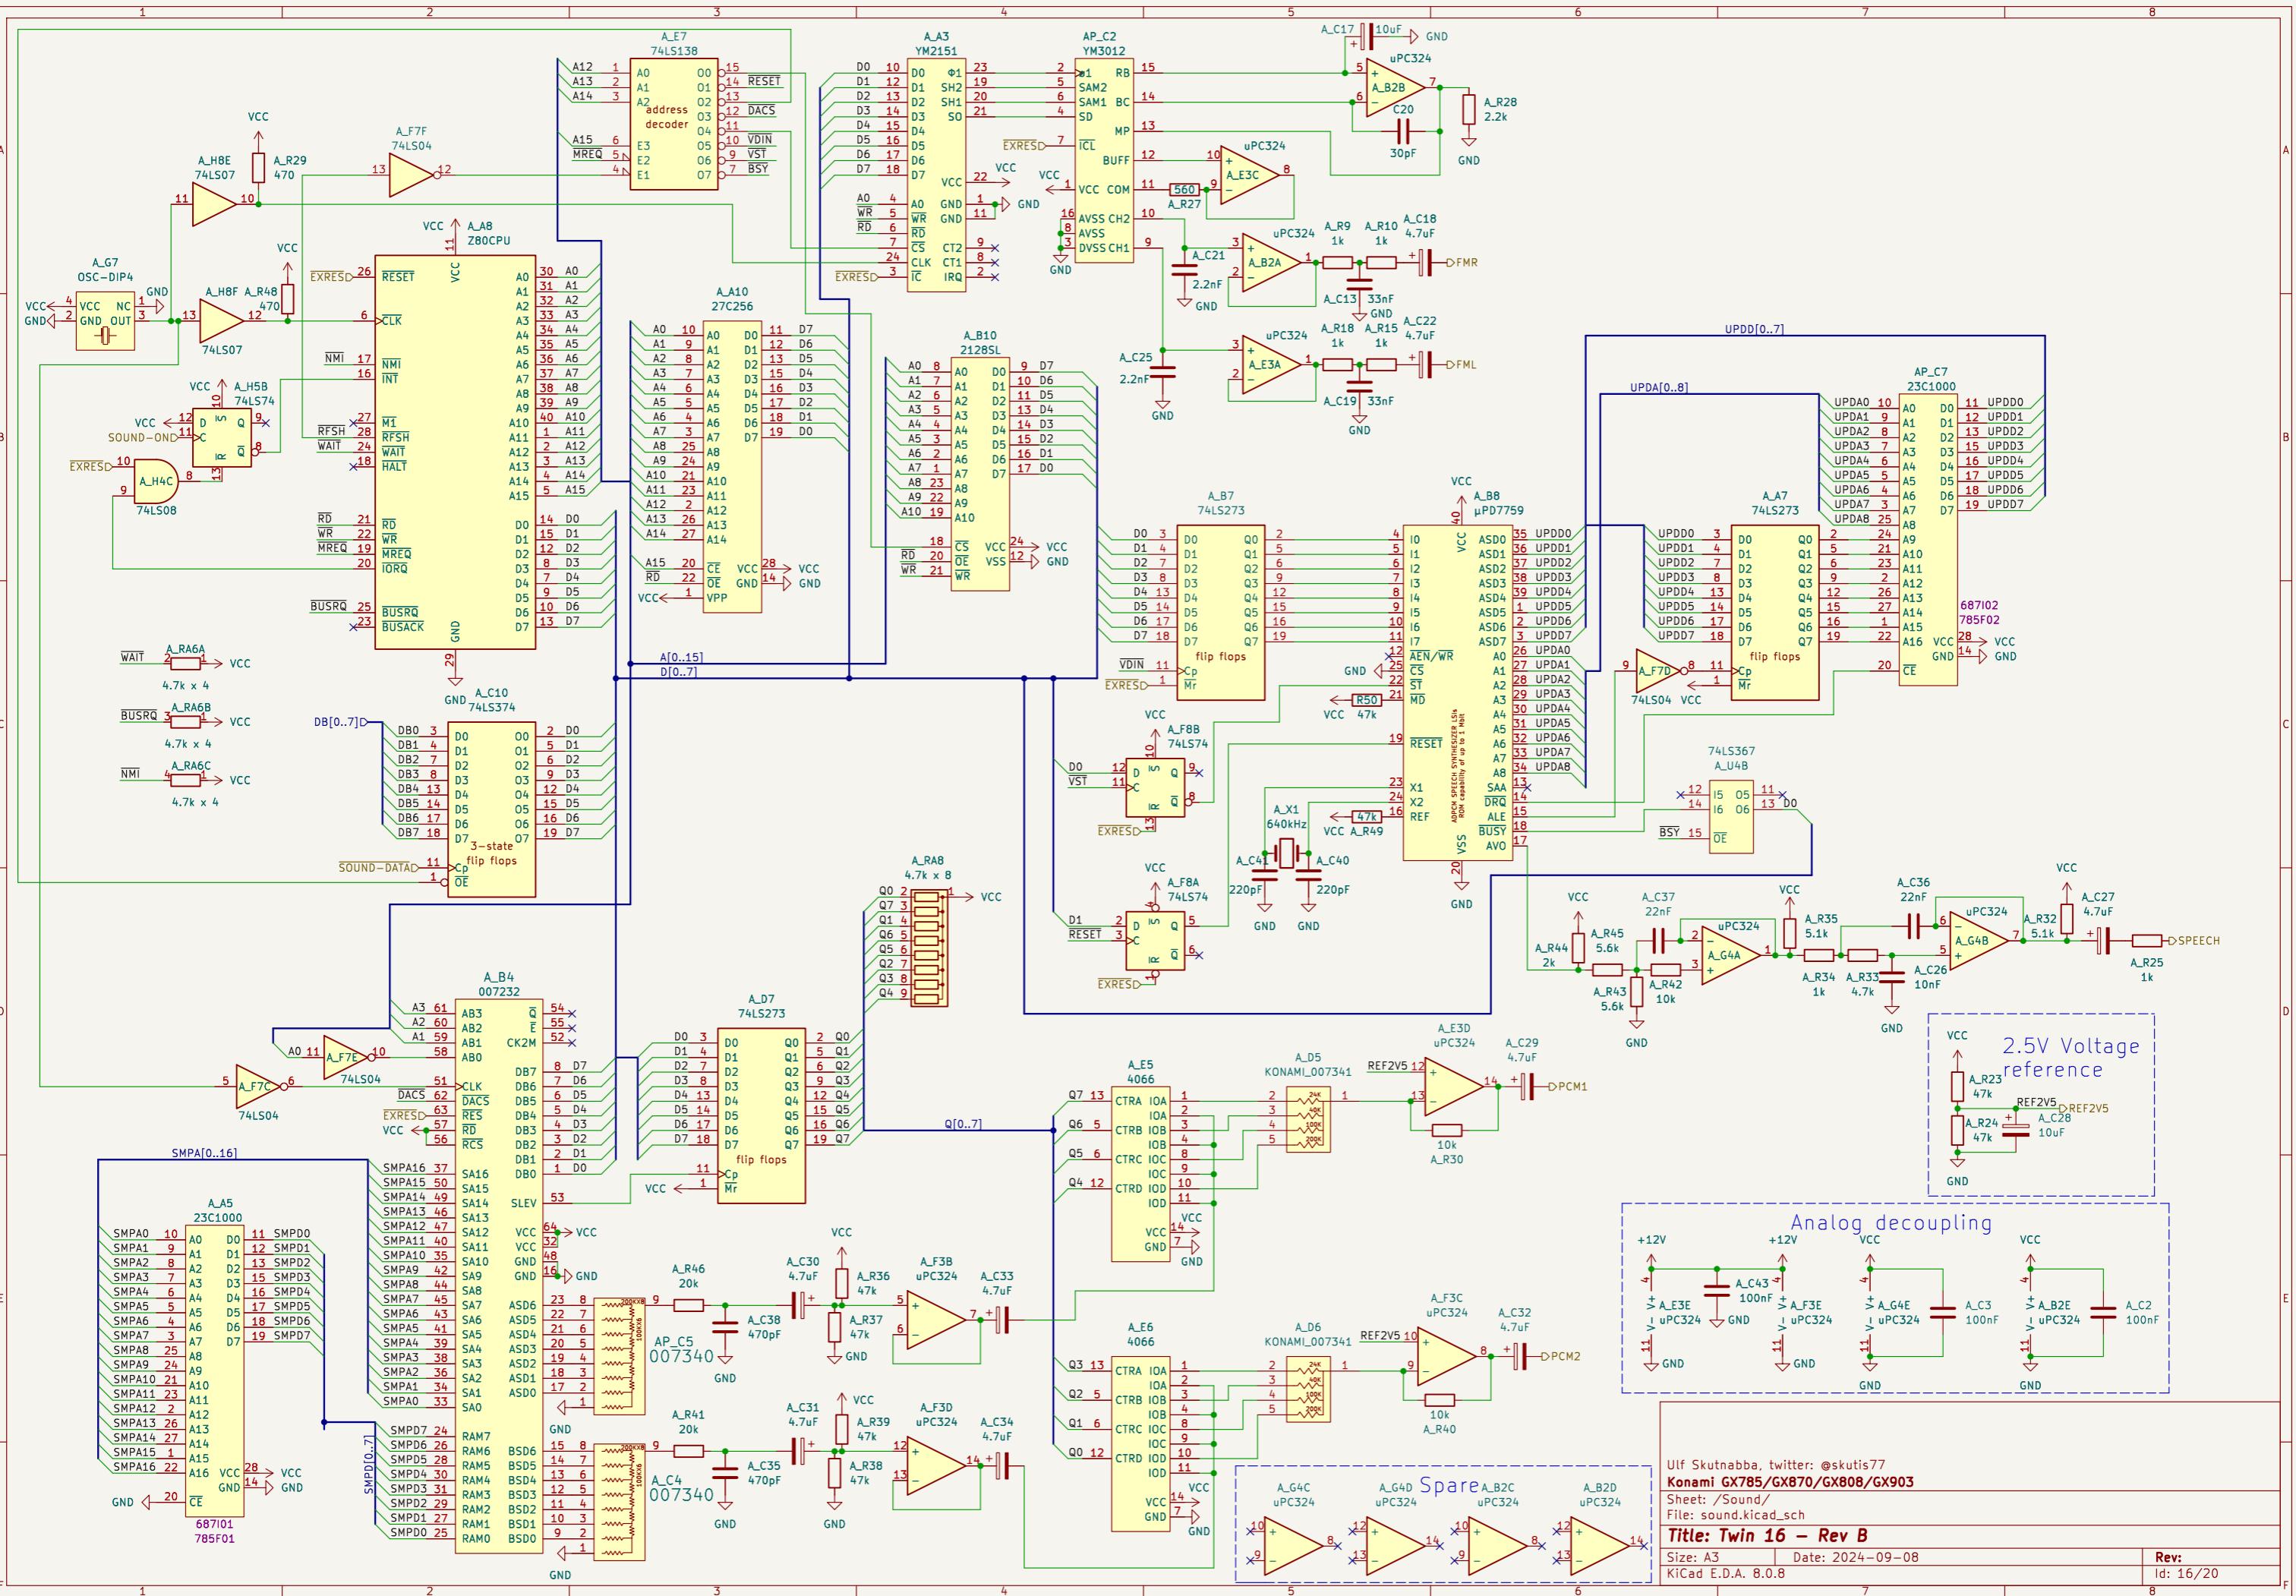

1 2 3 4 5 6 7 8

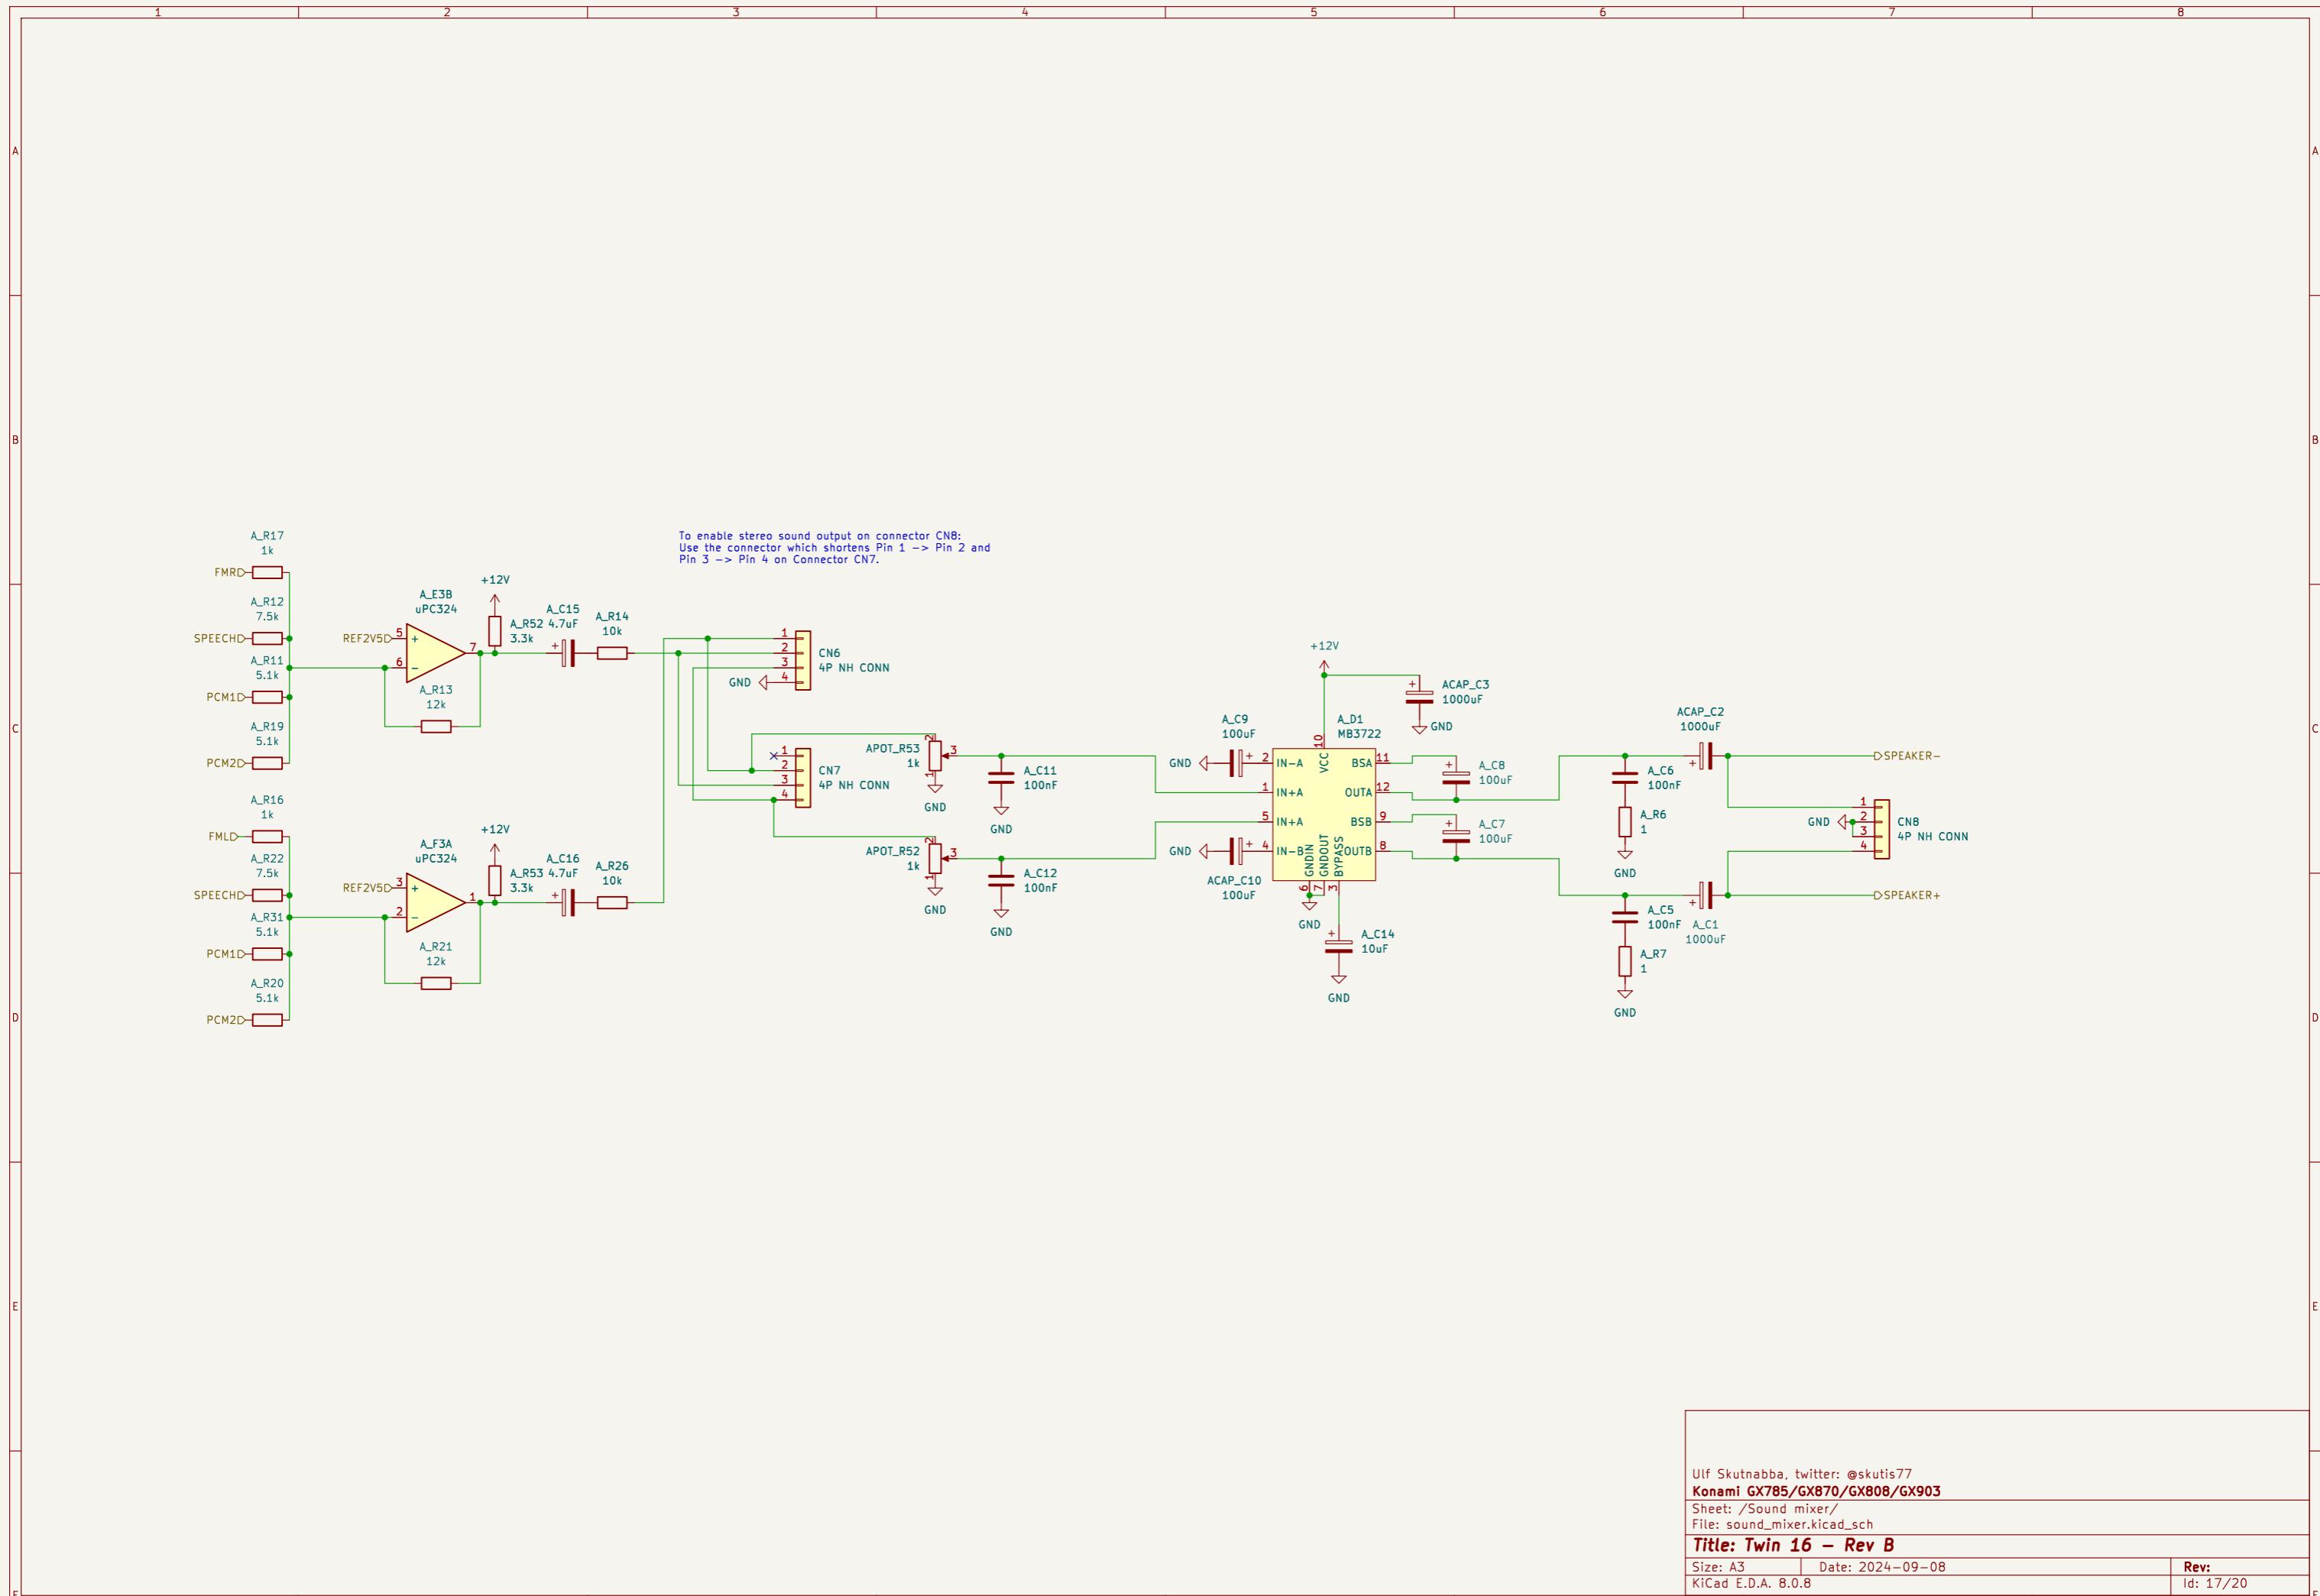

Ulf Skutnabba, twitter: @skutis77

Konami GX785/GX870/GX808/GX903

Sheet: /Sound mixer/

File: sound_mixer.kicad_sch


Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08


KiCad E.D.A. 8.0.8

Rev:

Id: 17/20

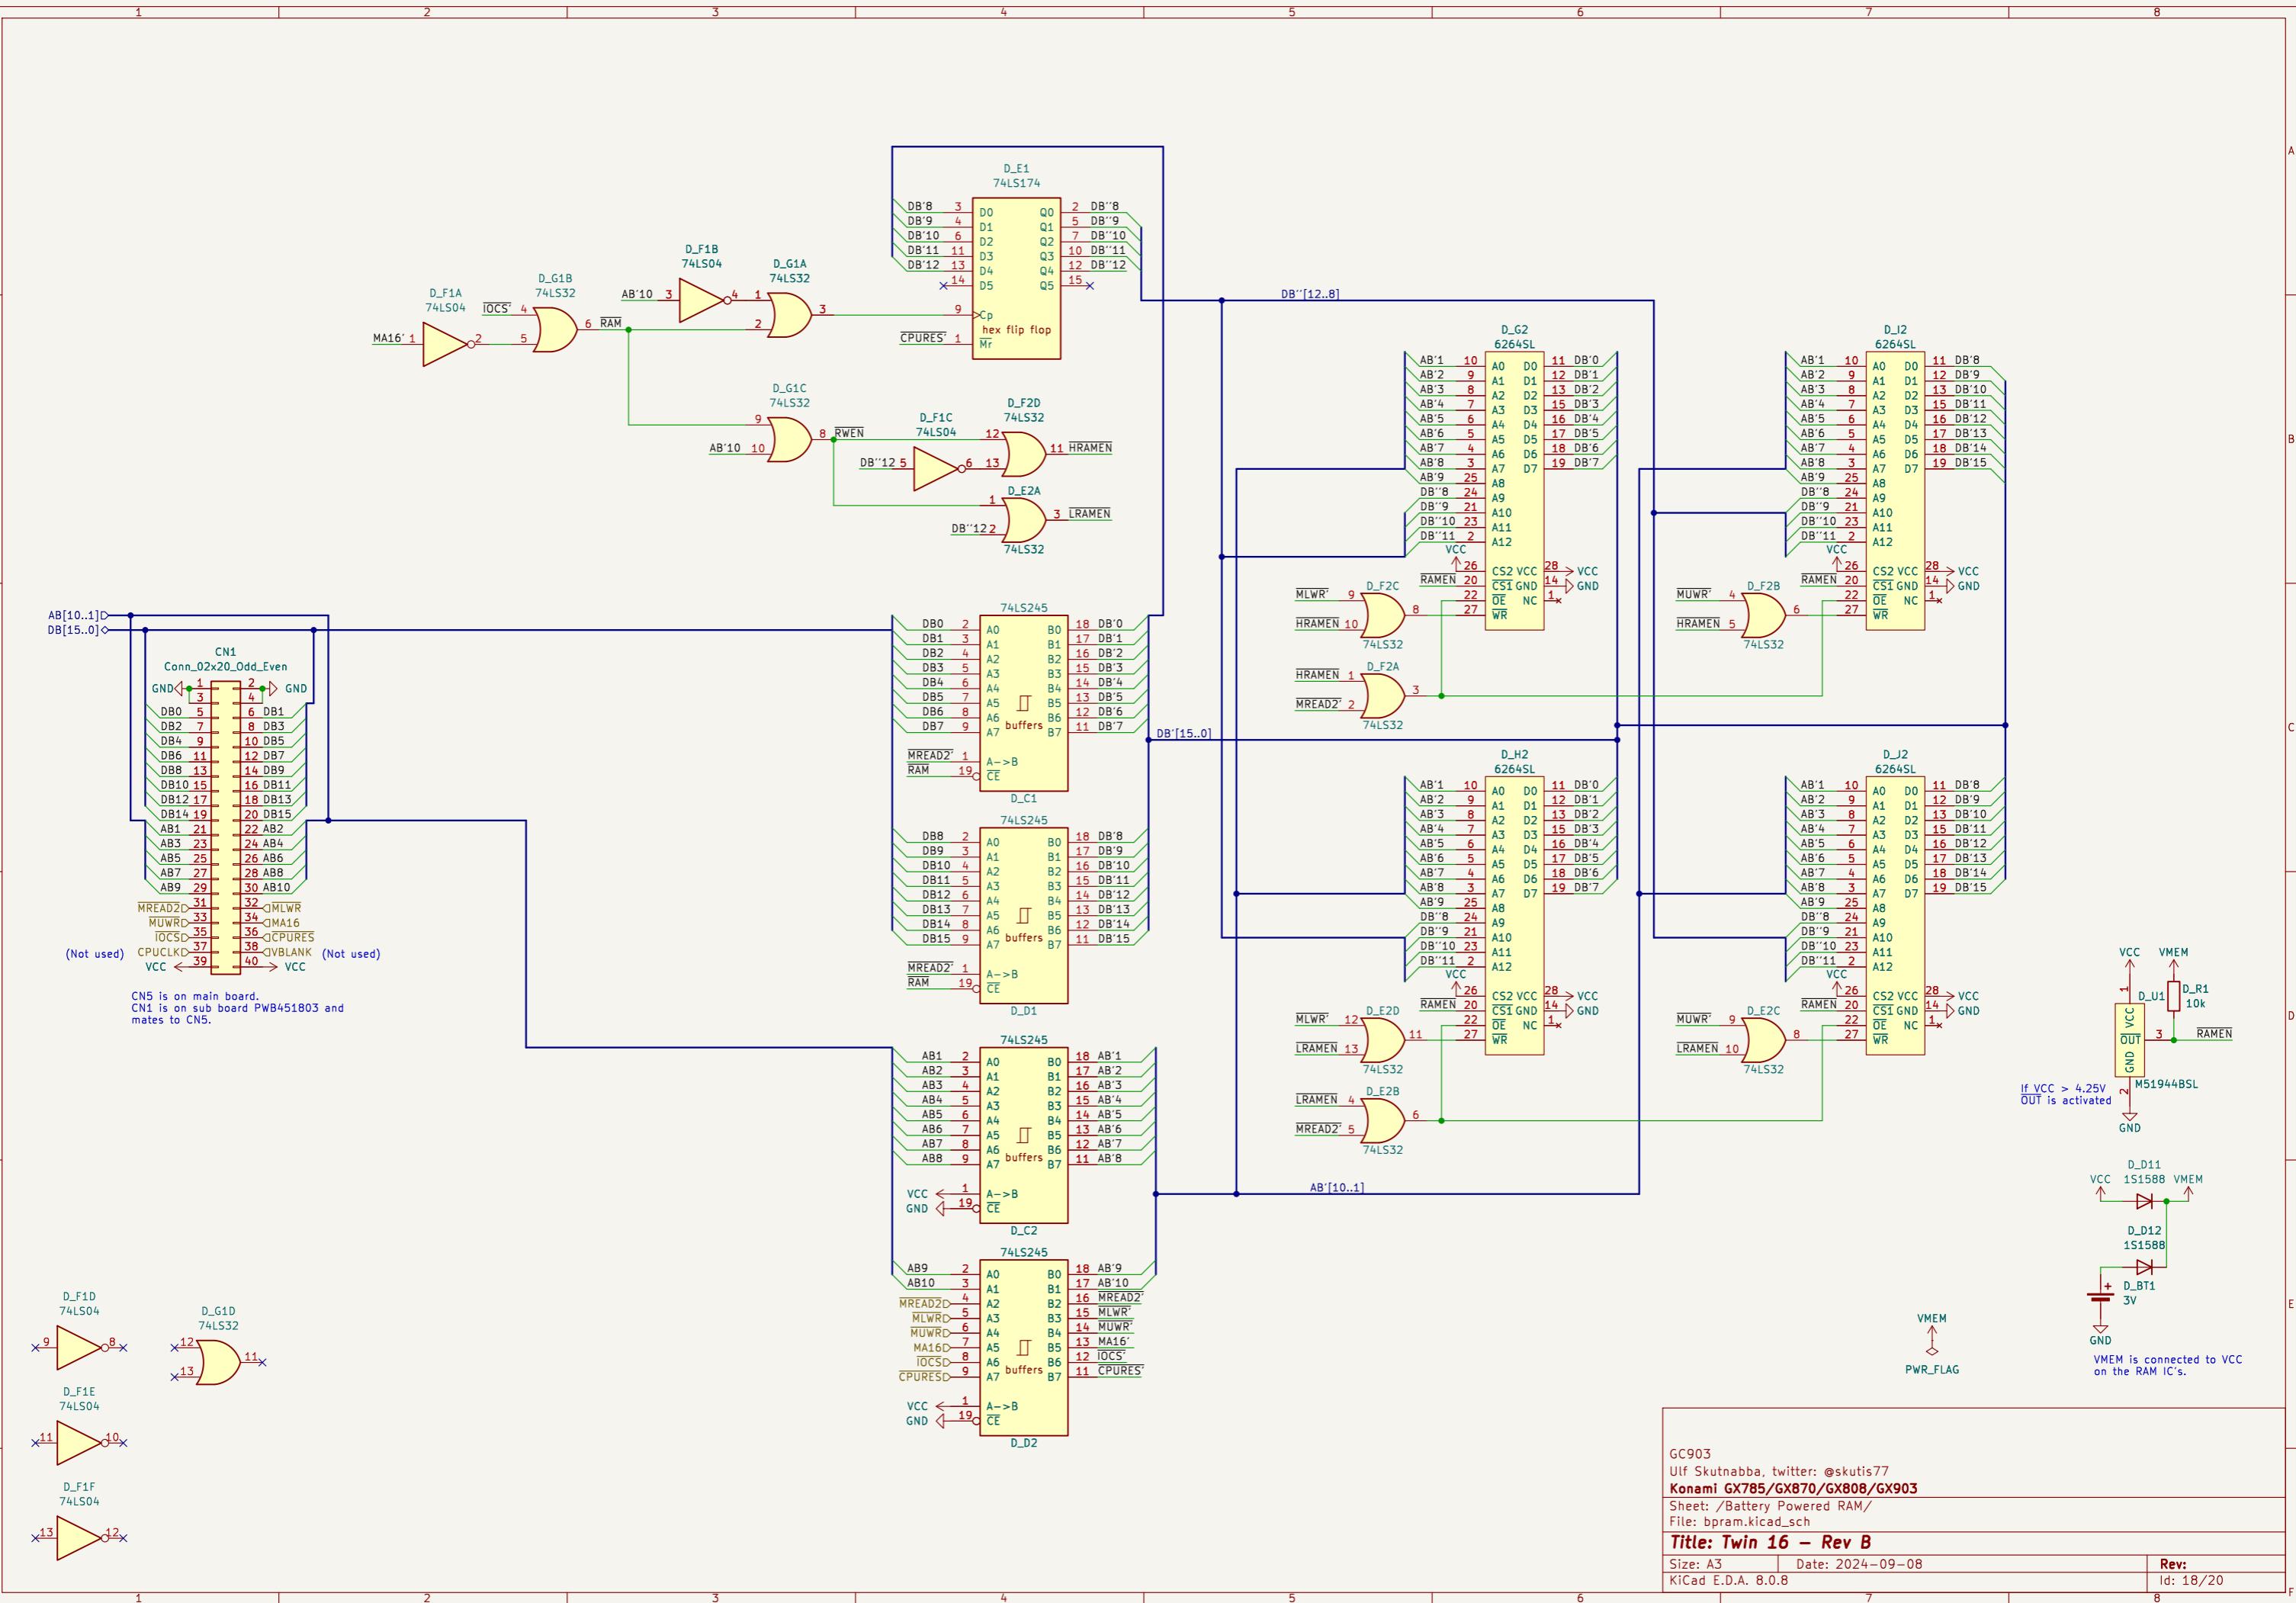



Horizontal signals

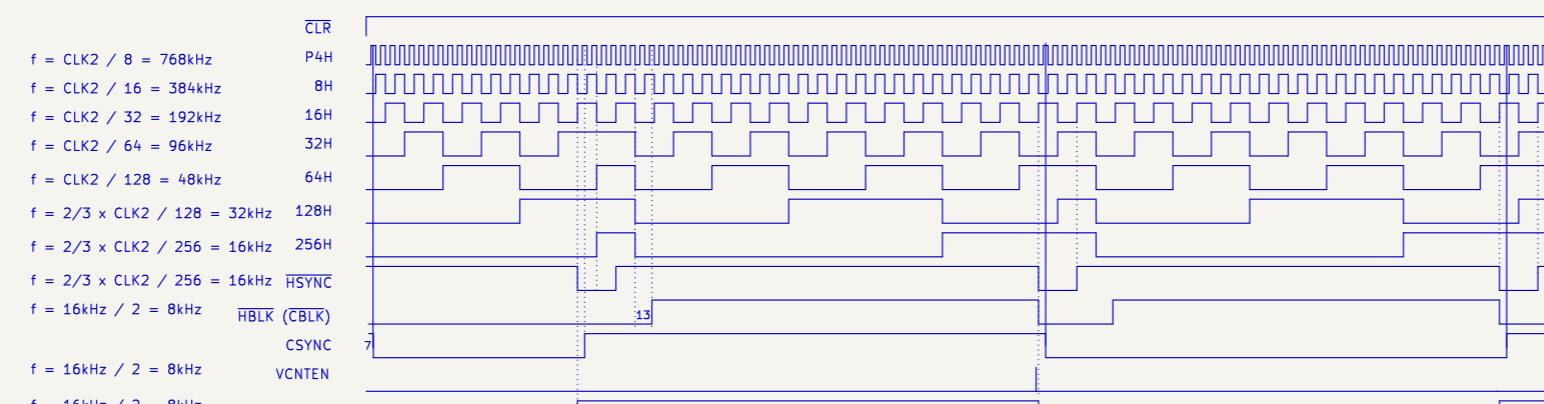

– The first VCNTEN is skipped after reset.
It goes low 140ns before HSYNC goes low,
and high again when HSYNC goes low.
VCNTEN is active right before every second falling edge of
HSYNC.

– CPURES goes high, and stays high, on the seventh falling edge
of HSYNC.

Vertical signals

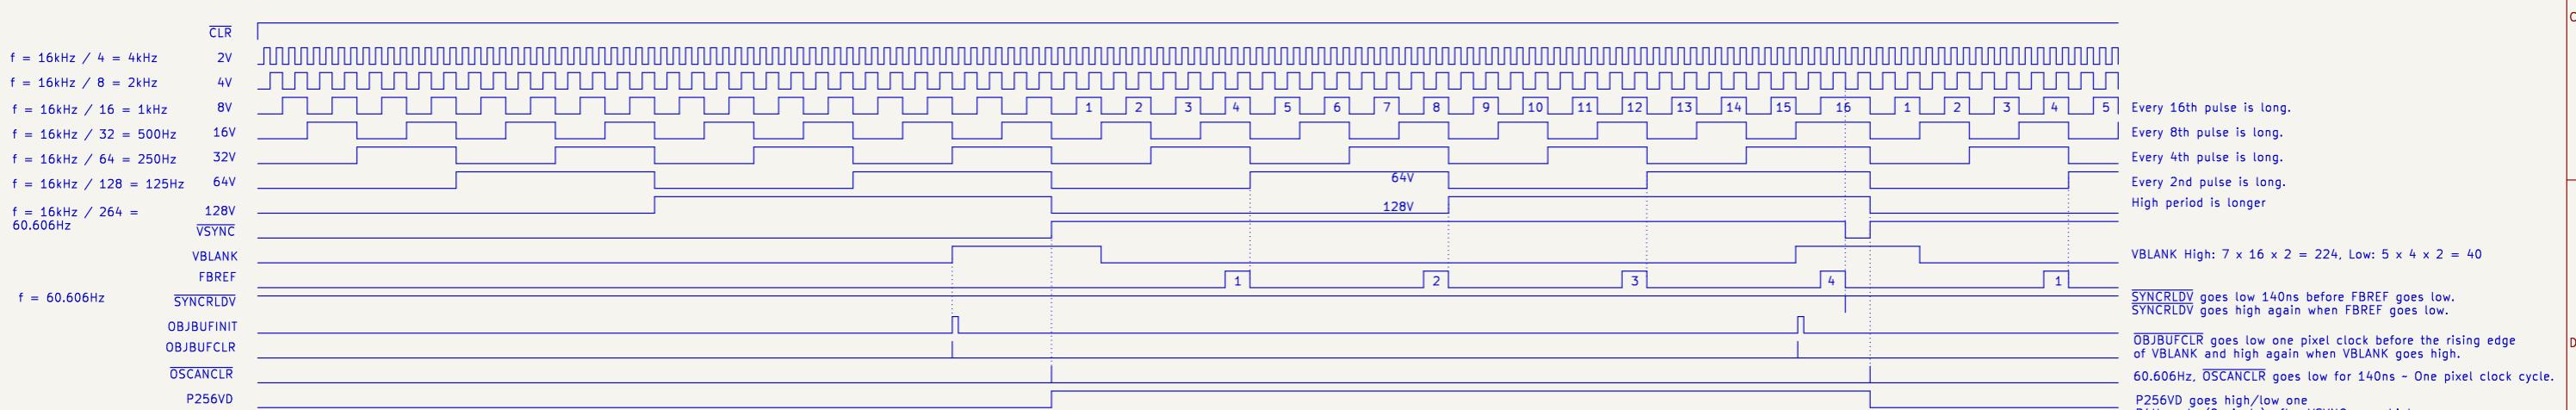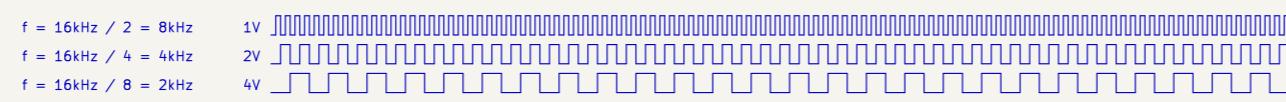

FBREF is measured at pin 22. At U186:3 FBREF is delayed by 22ns going high and 12ns going low.

Horizontal and vertical synch timing diagrams

Pixel clock CLK2 = 18.432MHz / 3 = 6.144MHz

Horizontal lines

HSYNC freq = 6.144MHz / 384 = 16kHz
HSYNC period = 1 / 16kHz = 62.5us

Pixels / line: 384

Active pixels: 320

Blank pixels: 64

Vertical lines



HSYNC freq = 16kHz / 264 = 60.606060Hz

HSYNC period = 1 / f = 264 / 16kHz = 16.5ms

scanlines / frame: 264

Active lines: 224

Blank lines: 40

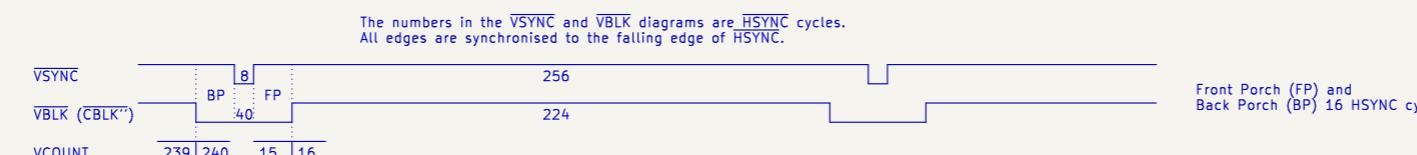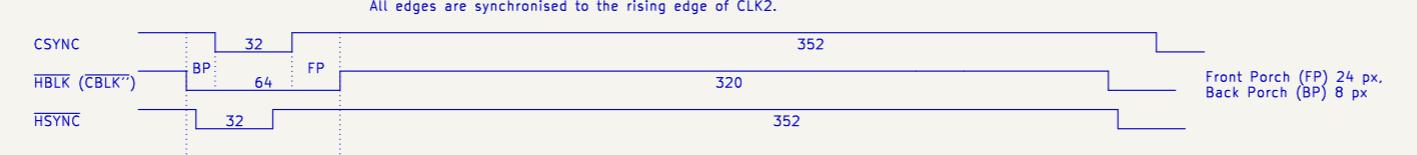

HCOUNT is bits [256H, 128H, 64H, 32H, 16H, 8H, P4H, P2H, P1H]
VCOUNT is bits [128V, 64V, 32V, 16V, 8V, 4V, 2V, 1V]

CBLK'' is at the output of color mixer 007593.
CBLK' is shifted inside the 007593 one pixel clock.

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903

Sheet: /Timing diagrams/
File: timing_diagrams.kicad_sch

Title: Twin 16 – Rev B

Size: A3 Date: 2024-09-08
KiCad E.D.A. 8.0.8

Rev: Id: 19/20

A

B

C

D

E

F

A


B

C

D

E

F

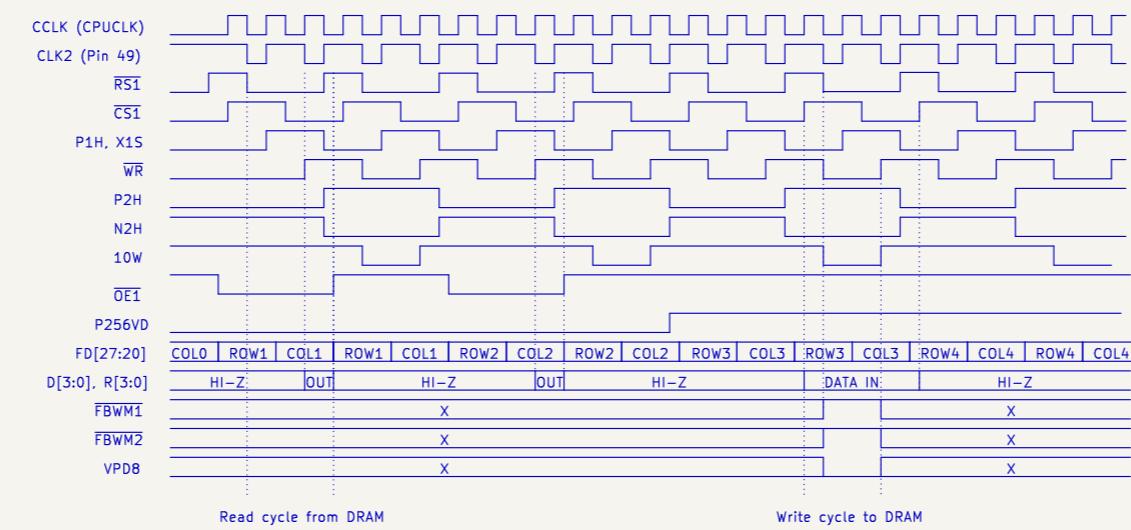

Ulf Skutnabba, twitter: @skutis77
Konami GX785/GX870/GX808/GX903

Sheet: /Sprite timing diagrams/
File: sprite_timing_diagrams.kicad_sch

Title: Twin 16 – Rev B

Size: A3 | Date: 2024-09-08
KiCad E.D.A. 8.0.8

Rev:
Id: 20/20