



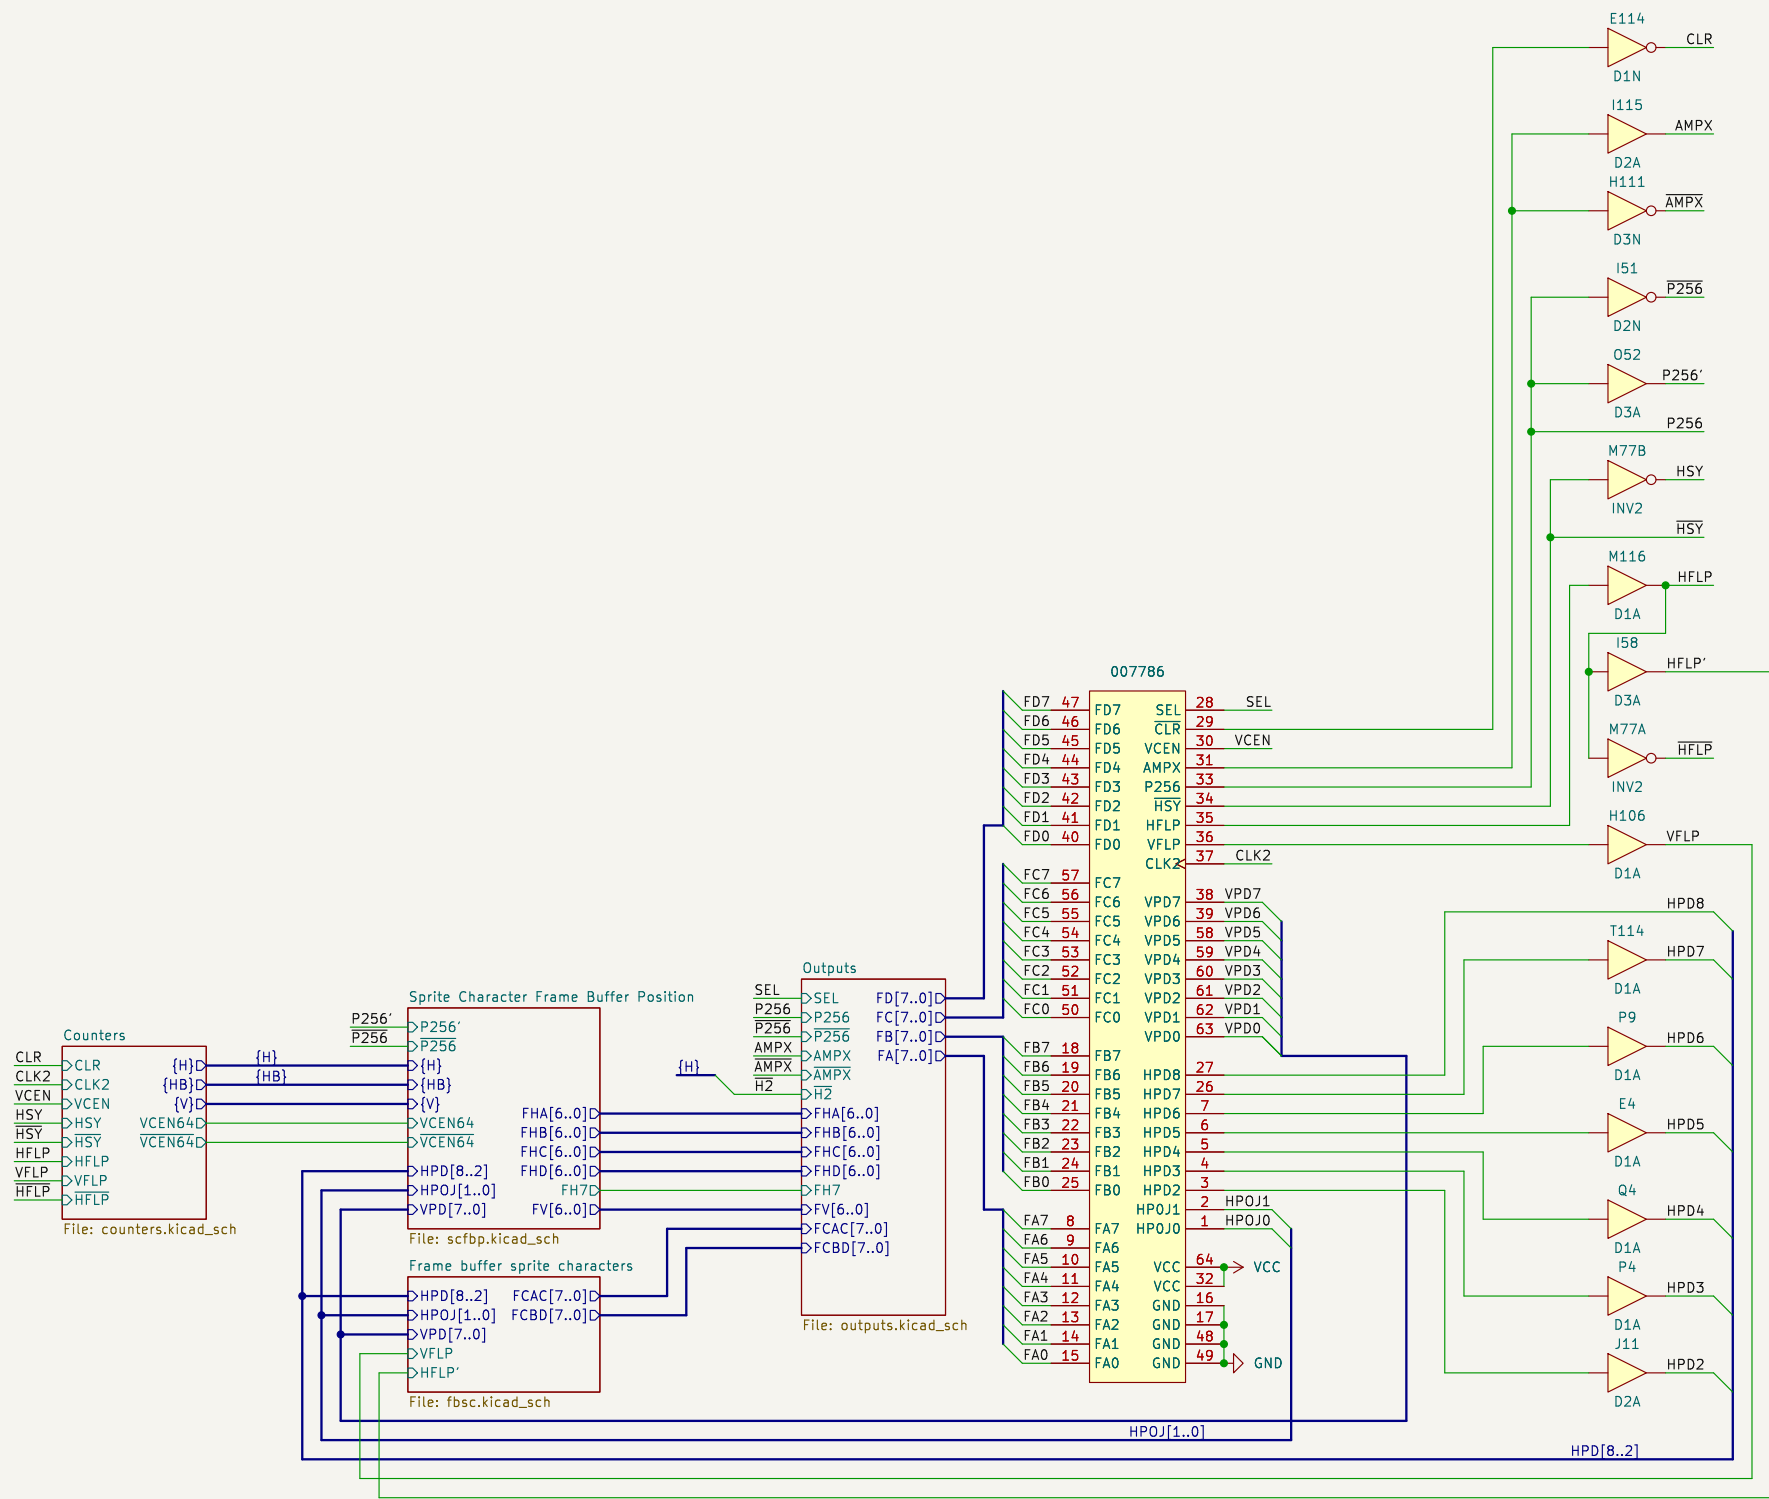

The 007786 is a sprite frame buffer controller.
It works in two modes:
- When SEL = 0, it generates addresses for the frame buffer.
- When SEL = 1, it parses sprite character data
It also handles refreshing of data in the DRAM memory.

The 007786 uses an OKI 74V000 CMOS gate array
with 2400 unit cells.

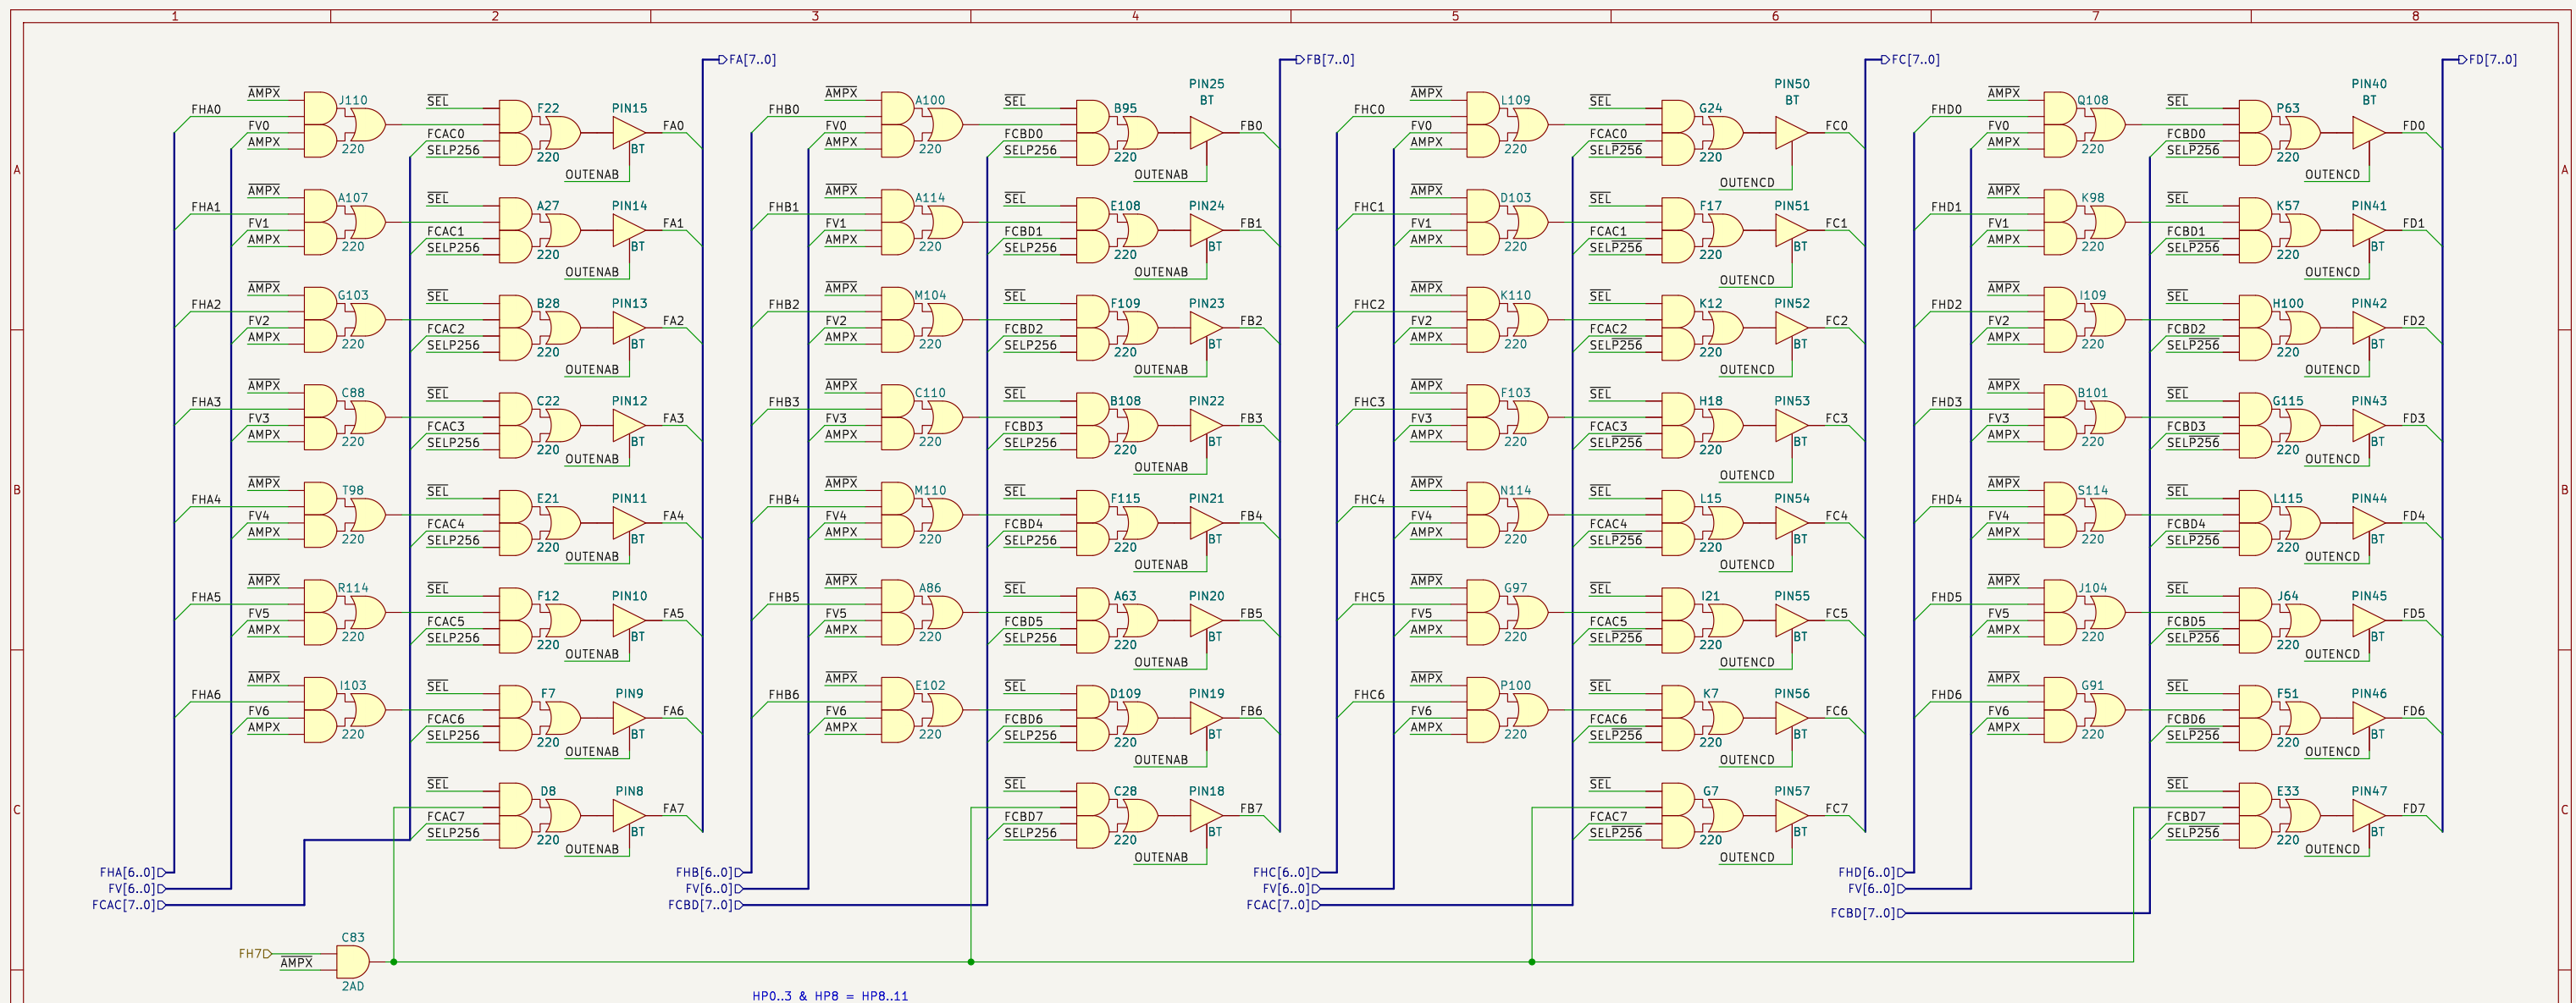

HP0..3 & HP8 = HP8..11

Output buffer enable


Addressing mode, SEL = 0

Outputs are enabled all the time when the 007786 is used for addressing sprite characters in the frame buffer, SEL = 0.


Sprite character mode, SEL = 1

When used for writing sprite characters to the frame buffer it is enabled when H2 = 1 or for FA and FB outputs when P256 = 1. The corresponding for C and D outputs is when P256 = 0.

A and B output
OUTENAB =
~SEL | ~H2 | ~P256 =
~SEL | H2 | P256

$$\text{OUTENCD} = \frac{\sim\text{SEL} \mid \sim\text{H2} \mid \sim\text{P256}}{\sim\text{SEL} \mid \text{H2} \mid \text{P256}}$$


SCM, P256 = 1, AB out enabled.



AMPX and $\overline{\text{AMPX}}$ selects between Row and Columns in the frame buffer DRAM.

