



AFP-3030 in CAB-900 and CAB650

AFP-3030

Intelligent Fire Alarm Control Panel

General

The Onyx AFP-3030 is an intelligent Fire Alarm Control Panel (FACP) with a flexible and scalable architecture which makes it suitable for virtually any application including large scale networked facilities. Fire emergency detection and evacuation are extremely critical to life safety, and the AFP-3030 is ideally suited for these applications.

AFP-3030 is part of the ONYX® Series of products from NOTIFIER. With one to ten Signaling Line Circuits (SLCs), the AFP-3030 supports up to 3,180 intelligent addressable devices per panel and is networkable up to 200 nodes.

A host of other options are available, including single- or multichannel voice; LED, LCD, or PC-based graphic annunciators; networking; advanced detection products for challenging environments, and many additional options.

Connectivity with a range of NOTI•FIRE•NET™ integration options such as Bacnet, Modbus and OnyxWorks permit the AFP-3030 and NOTI•FIRE•NET™ to integrate into critical component building management systems.

AFP-3030+ & Connected Life Safety Services (CLSS)

CLSS is an innovative, all-in-one cloud platform that enables system integrators and facilities managers to deliver an enhanced fire safety service, while maximizing the performance efficiencies offered by Honeywell's trusted detection and alarm systems.

By harnessing the power of data, CLSS delivers the connectivity and intelligence needed for secure, compliant and more efficient fire system management.

AFP-3030+ bundles the CLSS Gateway in the standard Onyx AFP-3030 which enables the customers to deliver an enhanced fire safety service, while maximizing the performance efficiencies by Honeywell's Connected Life Safety Services (CLSS)

Features

- One to ten isolated intelligent Signaling Line Circuits
- Up to 159 detectors and 159 modules per SLC, 318 devices per loop / 3,180 per FACP (or network node)
- Detectors can be any mix of photo, high-sensitivity thermal, multi-criteria or aspirating detectors; modules can be addressable manual call points, normally open contact devices, two-wire smoke detectors, notification, relay or 4-20 mA modules
- Large 640-character LCD backlit display or display-less (a node on a network)
- Network up to 200 nodes with high-speed Noti-Fire-Net
- VeriFire Tools non-proprietary online/offline program, test and reporting PC software.

- Weekly Occupancy Schedules allow changing sensitivity by time of day and day of week
- With built-in SLC Local mode operation; the system is capable of activating sounders and relays if a fire alarm condition is present even if the central processing unit (CPU) fails
- Range of annunciators for ancillary display & control
- History file with 4000-event capacity plus separate 1000-event alarm-only file
- Advanced history filters allow sorting by event, time, date, or address
- Alarm Verification Facility (AVF) selection per point, with automatic counter
- Enable / Disable Range of Points (Detectors/Modules) or Zones
- Auto-programming and Walk Test reports
- Alarm Delay Facility (ADF)
- Field-programmable on panel with QWERTY keypad
- Non-alarm points for lower priority functions
- Support for compliant smoke control with SCS Series smoke control system
- Remote Silence, System Reset, Evacuate via monitor modules

AFP-3030 Agent Release Panel



AFP-3030 Agent Release Panel in CAB-900 and CAB650

AFP-3030 Agent Release Panel provides reliable fire detection and protection for commercial, industrial and institutional buildings requiring extinguishing agent-based releasing.

The standard panel is equipped with 1 addressable loop and incorporates one Dual-risk Extinguishing Agent Release zone module. The module provides for connection of Visual Warning Devices (VWD) and Local Control Stations (LCS). The system can be configured for either single or dual activation (double interlock) prior to release.

Agent Release Panel Features

- Dual risk operation- from three risk inputs
- Field Devices:
 - Local Control Station (LCS)
 - Extensive range of warning signs
- Adjustable discharge delay timers
- Output contacts for:
 - Alarm1 & Alarm 2
 - System fault
 - Automatic/ Manual operation
 - Discharge
- Monitored for short and open circuit.
- High power 5A Extinguishing Agent release device output.
- Optional Pyrozone interface.
- "Do Not Enter", Dual Level and "System Inoperative" sign outputs.

See Agent Release Module Datasheet DOC-02-020 for more information.



Display Features

- **Large LCD Display:** 640 characters (16 lines x 40 characters) with long-life LED backlight
- **Program keypad:** full QWERTY keypad for field programmability
- **User Control:** Up to nine users, each with a password and selectable access levels
- **LED indicators:** Fire; Pre-Alarm; Fault; Disable; Supervisory; Other Event; System Fault; Alarm Routing Equipment Status; Alarm Devices Status; Smoke Control Status; Controls Active
- **Membrane Switch Controls:** Silence Buzzer; Silence/ Re-sound Alarm; Scroll Alarms; Reset; Disable

FlashScan® Intelligent Features

- Polls up to 318 devices on each loop in less than two seconds
- Activates up to 159 outputs in less than five seconds
- Multicolor LEDs blink device address during Walk Test
- Fully digital, high-precision protocol
- Manual sensitivity adjustment - up to nine levels
- Pre-alarm ONYX intelligent sensing - up to nine levels
- Multi-detector algorithm involves nearby detectors in alarm decision
- Automatic detector sensitivity testing
- Maintenance alert (two levels)
- Self-optimizing pre-alarm
- Sensitivity levels:
 - Photo electric – 2.0 to 8.0%/metre obscuration
 - Acclimate Plus™ – 2.0 to 10.0%/metre obscuration
 - IntelliQuad™ – 1.6 to 12.5%/metre obscuration
- Drift compensation
- Programmable activation of sounder/ relay bases during alarm or pre-alarm
- Read Status displays the level of detector cleanliness
- Support for compliant smoke control with SCS series smoke control system

FSP-951AUS & FSP-851AUS Photoelectric Smoke Detector

- Advanced ONYX intelligent sensing including automatic drift compensation to reduce unwanted alarms and provide warning of contamination build-up
- Addressable operation pinpoints the fire location
- Protection against the entry of insects and other contaminants

FAPT-851AUS Acclimate Plus™ Intelligent Multi-Criteria Detector

- Detector automatically adjusts sensitivity levels without operator intervention or programming. Sensitivity increases with heat
- Microprocessor-based technology; combination photo and thermal technology



FPTI-951AUS Series Multi-Criteria /Photo/ Thermal/ Infrared Detectors

- Photoelectric sensors detect airborne particles associated with smoke.
- Thermal sensors detect heat and rate-of-rise (A2S fixed temperature threshold)
- The Infrared sensor discerns light patterns in the environment as an additional data point for alarm determination.

FSC-851AUS IntelliQuad™ Advanced Multi-Criteria Detector

- Detects all four major elements of a fire (smoke, heat, CO, and flame)
- Automatic drift compensation of smoke sensor and CO cell
- High nuisance-alarm immunity

FST-851(R)-WP Sealed Thermal Sensor

- Suitable for harsh environments with wide operating temperature and sealed to IP67
- Addressable operation pinpoints the fire location and annunciates alarm with dual LEDs

VESDA-E

Intelligent Aspirating Smoke Detection integrating directly onto the SLC loop

- Detection Performance with vastly better sensitivity and faster response time
- Detection Reliability for operating temperature stability, while minimizing nuisance alarms
- Consistent Performance Over Time , even during long term exposure to dust
- Efficiency of Operation with lower power consumption per unit area

FMM-4-20 Interface Module

- Interface to industry standard linear scale 4-20mA sensors
- Five programmable thresholds



Voice Evacuation Features

- Up to eight channels of digital audio when using DVC
- 50 watt digital amplifiers (DAA2 series)
- 30/60/120 watt digital amplifiers (DA Series)
- Solid state message generation
- Hard-wired voice control module options
- Backup tone generator and amplifier option

Flashscan® World Leading Detector Protocol

At the heart of the AFP-3030 is a set of detection devices and device protocol — FlashScan. FlashScan is an all-digital protocol that gives superior precision and high noise immunity.

As well as giving quick identification of an active input device, this protocol can also activate many output devices in a fraction of the time required by competitive protocols. This high speed of communication also allows the AFP-3030 to have the largest device per loop capacity in the industry — 318 points — yet every input and output device is sampled in less than two seconds.

The FlashScan® detectors have bicolor LEDs that can be coded to provide diagnostic information, such as device address during Walk Test.

ONYX Intelligent Sensing Reducing Unwanted

ONYX Intelligent Sensing is a set of software algorithms that provide the AFP-3030 with industry-leading smoke detection capability. These complex algorithms require many calculations on each reading of each detector, and are made possible by the very high-speed microcomputer used by the AFP-3030.

Drift Compensation and Smoothing. Drift compensation allows the detector to retain its original ability to detect actual smoke, and resist false alarms, even as dirt accumulates. It reduces maintenance requirements by allowing the system to automatically perform the periodic sensitivity measurements required by AS1851. Smoothing filters are also provided by software to remove transient noise signals, usually caused by electrical interference.

Maintenance Warnings. When the drift compensation performed for a detector reaches a certain level, the performance of the detector may be compromised, and special warnings are given. There are three warning levels: (1) Low Chamber value; (2) Maintenance Alert, indicative of dust accumulation that is near but below the allowed limit; (3) Maintenance Urgent, indicative of dust accumulation above the allowed limit.

Sensitivity Adjust. Nine sensitivity levels are provided for alarm detection. These levels can be set manually, or can change automatically between day and night. Nine levels of pre-alarm sensitivity can also be selected, based on predetermined levels of alarm. Pre-alarm operation can be latching or self-restoring, and can be used to activate special control functions.



Self-Optimizing Pre-Alarm. Each detector may be set for “Self-Optimizing” pre-alarm. In this special mode, the detector “learns” its normal environment, measuring the peak analog readings over a long period of time, and setting the pre-alarm level just above these normal peaks.

Co-operative Multi Detector Sensing. A patented feature of ONYX Intelligent Sensing is the ability of a smoke sensor to consider readings from nearby sensors in making alarm or pre-alarm decisions. Without statistical sacrifice in the ability to resist false alarms, it allows a sensor to increase its sensitivity to actual smoke by a factor of almost two to one.

Alarm Verification Facility (AVF). All devices are capable of performing an alarm verification facility, whereby communication between the panel and the device performs an additional confirmation of an alarm event in order to reduce unwanted spurious alarms.

Alarm Delay Facility

Alarm delay Facility (ADF) is a function that is typically used for Sole Occupancy Units where alarms from smoke detection activates sounders within the SOU to allow occupant to address cause prior to a Fire Alarm signal being activated on the system.

Field Programming Options

Autoprogram is a timesaving feature. The FACP “learns” what devices are physically connected and automatically loads them in the program with default values for all parameters. Requiring less than one minute to run, this routine allows the user to have almost immediate fire protection in a new installation, even if only a portion of the detectors are installed.

Keypad Program Edit. The AFP-3030 has the exclusive feature of program creation and editing capability from the front panel keypad, while continuing to provide fire protection. The architecture of the AFP-3030 software is such that each point entry carries its own program, including control-by-event links to other points. This allows the program to be entered with independent per point segments, while the AFP-3030 simultaneously monitors other (already installed) points for alarm conditions.

VeriFire Tools. VeriFire Tools is a non-proprietary offline programming, test and reporting utility that can greatly reduce installation programming time, and increase confidence in the site-specific software. It is Windows® based and provides technologically advanced capabilities to aid the installer. The installer may create the program for the AFP-3030 and the entire network in the comfort of the office, test it, store a backup file, then bring it to the site and download from a laptop into the panel. VeriFire Tools can use Noti-Fire-Net to configure, diagnose or report on any node(s) from any location around the network.

ONYX Intelligent Testing

Intelligent Walk Test. One man walk test allows the testing engineer to activate devices on the system to ensure correct operation and connection. During a walk test ONYX AFP-3030 will deactivate intelligent algorithms in the devices resulting in a further 60% reduction in test time.



Alarm Test. When Alarm Test is activated on a specific device or devices on the system, the test engineer is capable of verifying the cause and effect of the device in the same manner as an alarm event removing the need to actually activate a device which may be difficult to access for this task.

Automatic Device Test. Each Notifier FlashScan detector is capable of performing an automatic device test each 24 hours to ensure correct communication and operation between FACP and device.

Specifications

System Capacity

Intelligent Signaling Line Circuits	1 expandable to 10
Intelligent detectors	159 per SLC
Addressable monitor/control modules	159 per SLC
Programmable software zones	Over 2000
ACS annunciators per CPU	32 address x 64 or 96 points

NOTE: The CPU2-3030AU can support up to 96 annunciator address points per ACM-24AT/48A.

Electrical Specifications

Primary Input Power	NPS-5CHS Fitted: 240vac, 0.8A, 50Hz NPS-11CHS Fitted: 240vac, 1.5A, 50Hz. Input Fuse: 2=M205 8.0A, 250vac
Battery	Two 12V Sealed Lead-Acid batteries
Battery charger capacity	7AH-85AH (CAB650/CAB900 enclosures hold a maximum of two 33AH batteries)
Current draw (Standby/Alarm):	AFP-3030 (with display): 0.205 A / 0.225 A. AFP-3030 (without display): 0.140 A / 0.150 A. LCM-320: 0.130 A. LEM-320: 0.100 A

NOTE: See AFP-3030 Manual # DOC-01-031 for a complete current draw calculation sheet and details of input and output values.

Agency Listing and Approvals

These listings and approvals apply to the system specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult system consultant for latest listing status.

- AS7240.2:2018 & AS7240.4:2018.
- AS4428.3:2020
- Activfire certificate # afp-2973



Product Line Information

Main System Components

CPU2-3030AU	AFP-3030 central processing unit including field interfaces.
DISP-3030AU	Keypad and display; includes 640-character backlit LCD display, QWERTY programming and control keypad.
NPS-5CHS/NPS-11CHS	24VDC power supply unit for AFP-3030.
LCM-320	Loop Control Module. Provides one SLC. AFP-3030 supports up to five LCM-320s and five LEM-320 expanders for a total of ten SLCs.
LEM-320	Loop Expander Module. Expands an LCM-320.

Networking Options

NCA-2	Network Control Annunciator, 640 characters. An alternate primary display for CPU2-3030AU can be provided by the NCA-2, or ONYXWorks. On network systems, the NCA-2 connects to a standard NCM or HS-NCM. See DOC-02-166.
AFP-2800*	Addressable fire alarm control panel. See DOC-02-023 Discontinued
NCM-W, NCM-F	Standard Network Communications Modules. Wire and multi-mode fiber versions available. See DOC-02-109.
HS-NCM-W (-2), HS-NCM-MF, HS-NCM-SF, HS-NCM-WMF (2), HS-NCM-WSF (-2), HS-NCM-MFSF	High-speed Network Communications Modules that can connect to two nodes. Wire, single-mode fiber, multi-mode fiber, and media conversion models are available. See DOC-02-072.
RPT-W, RPT-F, RPT-WF	Standard-network repeater board with wire connection (RPT-W), multi-mode fiber connection (RPT-F), or allowing a change in media type between wire and fiber (RPT-WF). Not used with high-speed networks. See DOC-02-165.
ONYXWorks	Graphics PC workstation, ONYXWorks GUI software, and computer hardware. See DOC-02-080.
NFN-GW-EM-3	NFN Gateway, embedded. See DOC-02-091.
NWS-3*	NOTI•FIRE•NET™ Web Server. See DOC-02-079. Discontinued
VESDA-HLI-GW	VESDAnet high-level interface gateway. See DOC-02-142.
BACNET-GW-3*	Bacnet Gateway, embedded. See DOC-02-082. Discontinued
MODBUS-GW-3*	Modbus Gateway, embedded. See DOC-02-097. Discontinued
HON-CGW-MBB-ANZ / CGW-MB	CLSS Gateway, See DOC-02-202

Auxiliary Power Supplies and Batteries

NPS-5S	One optional for each AFP-3030. Power supply and battery charger with two 24 VDC outputs up to 5A output total. Charges 7 to 200 AH batteries. Auxiliary power for panel or panel equipment.
NPS-11S	One optional for each AFP-3030. Power supply and battery charger with two 24 VDC outputs up to 11A output total. Charges 7 to 200 AH batteries. Auxiliary power for panel or panel equipment.
BATT Series	Batteries. PS5/PS11 and NPS-5S/NPS-11S use two 12 volt, 7 to 200 AH batteries. See DOC-02-171.

Audio Options

DVC-EM	Digital Voice Command, digital audio processor with message storage for up to 32 minutes of standard quality (4 minutes at high quality) digital audio. See DOC-02-130.
DVC-KD	DVC-EM keypad for local annunciation and controls; status LEDs and 24 user-programmable buttons. See DOC-02-130
DS-FM, DS-SFM	Fiber conversion modules for DVC-EM, and DAA2 Series amplifiers. See DOC-02-130/DOC-02-131
DAA2-5070(E)	50W, 70.7 Vrms Digital Audio Amplifier assembly with power supply; includes chassis. See DOC-02-131.
CMIC-1	Microphone used with DVC/DVC-EM. Included with CA-2 chassis assembly. See DOC-02-130.
DA2-30/ DA2-60, DA2-120	Digital Amplifier. DA2-30 is 30 watts, DA2-60 is 60 watts, DA2-120 is 120 watts, 100 Vrms. Includes audio input and amplified output supervision. See DOC-02-202
DA-DISP/A*, DA-DISP/B*, DA-DISP/C*, DA-DISP/D, DA-DISP/E* * Discontinued	Display control and paging microphone modules for DA series amplifiers. See DOC-02-066.
DA-DISPF	DA2 Mic Pre-amp with Metalwork
SDM-4* Discontinued	4way Speaker distribution module for use with DA series amplifiers. See DOC-02-085
SAM-4	SAM-4 provides monitoring of the integrity of DA2-Series amplifiers and can also be used to distribute four speaker lines to up to 4 areas of a building, see DOC-01-051



Compatible Devices, EIA-485 Ports

ACM-24AT	ONYX® Series ACS annunciator – up to 96 points of annunciation with Alarm or Active LED, Trouble LED, and switch per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) by point to be red, green, or yellow; the Trouble LED is always yellow. See DOC-02-167.
AEM-24AT	Same LED and switch capabilities as ACM-24AT; expands the ACM-24AT to 48, 72, or 96 points. See DOC-02-167.
ACM-48A	ONYX® Series ACS annunciator – up to 96 points of annunciation with Alarm or Active LED per circuit. Active/ Alarm LEDs can be programmed (by powered-up switch selection) in groups of 24 to be red, green, or yellow. Expandable to 96 points with one AEM-48A. See DOC-02-167.
AEM-48A	Same LED capabilities as ACM-48A; expands the ACM-48A to 96 points. See DOC-02-167.
ACM-8RA	Relay Module with eight Form-C contacts. See DOC-02- 168.
LCD2-80	Terminal and ACS mode. 80-character, backlit LCD display. Mounts up to 1800m from panel. Up to 32 per FACP. See DOC-02-169. SCS Series (SCS-8A, SCE-8A, SCS-8L): Smoke control station; eight (expandable to 16) circuits. See DOC-02-035.
LDM-32	Lamp Driver Module - up to 32 points that provide low-current outputs to LEDs, typically used for graphical mimics. See DOC-02-035. LDM-E32: Same LED output capabilities as LDM-32; expands outputs up to 64 points. See DOC-02-035.
LDM-E32	Same LED output capabilities as LDM-32; expands outputs up to 64 points. See DOC-02-035.
LDM-R32	Relay module for LDM-32, LDM-E32 - up to 32 points that provide 1A relay outputs. See DOC-02-035.

Compatible Intelligent Devices

FSB-200*	Intelligent beam smoke detector. See DOC-02-051. Discontinued
FSB-200S*	Intelligent beam smoke detector with integral sensitivity test. DOC-02-051. Discontinued
FS-OSI-RI	OSID, Intelligent Beam Smoke Detector. See DN_61042
FSC-851*	FlashScan IntelliQuad Advanced Multi-Criteria Detector. See DOC-02-048. Discontinued
FSI-851AUS*	Low-profile FlashScan ionization detector. See DOC-02- 025. Discontinued
FSP-851AUS*	Low-profile FlashScan photoelectric detector. See DOC- 02-026. Discontinued

FSP-951AUS	FlashScan, Addressable intelligent Photoelectric detector See DOC-02-205
FST-851AUS*	FlashScan thermal detector 57°C. See DOC-02-027. Discontinued
FST-951AUS	FlashScan, Addressable intelligent Thermal Detector Class A2. see DOC-02-207
FST-851RAUS*	FlashScan thermal detector 57°C with rate-of-rise. See DOC-02-027. Discontinued
FST-951RAUS	FlashScan, Addressable intelligent Thermal Detector A2R with Rate-of-Rise. see DOC-02-207
FST-851-WP	FlashScan sealed thermal detector 57°C. See DOC-02- 135.
FST-851R-WP	FlashScan sealed thermal detector 57°C with rate-of- rise. See DOC-02-135.
FST-851HAUS	FlashScan 88°C high-temperature thermal detector. See DOC-02-027.
FST-951HAUS	FlashScan, Addressable intelligent Type C High-Temperature Thermal Detector. See DOC-02-207
FAPT-851AUS*	FlashScan Acclimate Plus™ low-profile multi-sensor detector. See DOC-02-029. Discontinued
FPTI-951AUS	FlashScan, Addressable intelligent multi-criteria photoelectric, thermal and IR sensors, See DOC-02-206
FSL-751*	FlashScan VIEW® laser photo detector. See DOC-02-049. Discontinued
FSV-951RAUS	Flashscan VIEW®, Addressable Intelligent high-sensitivity photoelectric detector, see DOC-02-208
SDX-851AUS*	Low-profile CLIP photoelectric detector. See DOC-02-128. Discontinued
FDX-851AUS*	CLIP thermal detector 57°C. See DOC-02-133. Discontinued
FDX-851RAUS*	CLIP thermal detector 57°C with rate-of-rise. See DOC-02-133. Discontinued
IDX-751AE	Intrinsically-safe CLIP photoelectric detector. See DOC-02- 129
DNR-AUS	InnovairFlex low-flow non-relay duct-detector housing (order FSP- 851AUS separately). See DOC-02-098.
DNRW	Same as above with NEMA-4 rating, watertight. See DOC-02- 098.
B501AUS	4" (10.16 cm) universal detector base. See DOC-02-030.
B521IEFT-IV*	4" (10.16 cm) universal detector base with in-built short- circuit isolator. See DOC-02-030. Discontinued
B501BI	4" (10.16 cm) plug-in universal detector base with in-built short- circuit isolator



AAM	Alarm acknowledgement module. Models available in vertical and horizontal orientation and with (or without) remote indicator.
AAM-VL, AAM-V, AAM-HL	Alarm Acknowledgement Modules. See DOC-02-086.
FMM-1-AUS	FlashScan monitor module. See DOC-02-040.
FDM-1	FlashScan dual monitor module. See DOC-02-040.
FZM-1-AUS	FlashScan conventional zone module. See DOC-02-040.
FMM-101-AUS	FlashScan miniature monitor module. See DOC-02-040.
FMM-4-20*	FlashScan 4-20 mA protocol monitor module. See DOC- 02-170. Discontinued
FCM-1-AUS	FlashScan control module. See DOC-02-038.
FRM-1-AUS	FlashScan relay module. See DOC-02-038.
FDMR-1-AUS	FlashScan dual monitor/dual relay module. See DOC-02-033.
ISO-X	Isolator module. See DOC-02-042.
WCP-5A	CLIP outdoor manual call point. See DOC-02-088.
XP6-C	FlashScan six-way monitored control module. See DOC-02- 044.
XP6-MA	FlashScan six-zone interface module; connects intelligent alarm system to two-wire conventional detection zone. See DOC-02- 043.
XP6-R	FlashScan six-relay (Form-C) control module. See DOC-02-045.
XP10-M	FlashScan ten-input monitor module. See DOC-02-046.
IMX-IE	Translator module for use with intrinsically safe devices. See DOC-02-129
Y-2221	Single channel galvanic isolator for use with IMX-IE. See DOC- 02-129
SLC-IM*	SLC integration module, for VESDAnet detectors or modbus devices. See DOC-02-174 Discontinued
NFX/MCP/GLASS	Notifier FlashScan Indoor Manual Call point

Addressable Loop Powered AV Devices

FS-WS0	FlashScan Wall Mound Sounder - off white. See DOC-02-182.
FS-WSS	FlashScan Wall Mount Sounder and Strobe– red. See DOC-02-182.
FS-WST	FlashScan Wall Mount Strobe – red. See DOC-02-182.
FS-BS0	FlashScan Detector Base Sounder- off white. See DOC-02-182.
FS-BSS	FlashScan Detector Base Sounder and Strobe (Detector Base Sounder- off white / Strobe – red). See DOC-02-182
VAD-PC-102*	Notifier CLIP pure white Beacon, white flash, clear lens, with Isolator. See DOC-02-198 Discontinued
DSS-PC-102	Notifier CLIP pure white Sounder Beacon Base, red flash, clear lens, with Isolator. See DOC-02-198
WSS-PC-102	Notifier CLIP pure white Sounder Beacon red flash, clear lens, with Isolator. See DOC-02-198
NFX-BS*	CLIP Sounder base, Temporal 3 or Continuous tone. See DOC-02-144. Discontinued
NFX-BF*	CLIP Beacon base. See DOC-02-144. Discontinued
NFX-BSF*	CLIP Sounder beacon base, Temporal 3 or Continuous tone. See DOC-02-144. Discontinued
NFX-WS*	CLIP Wall Sounder Temporal 3 or Continuous tone. See DOC-02-145. Discontinued
NFX-WF*	CLIP Wall Beacon. See DOC-02-145. Discontinued
NFX-WSF*	CLIP Wall Sounder beacon, Temporal 3 or Continuous tone. See DOC-02-145. Discontinued
NTF-BGD-STRB-LABEL	Notifier Brigade Label
WWL-PC-I02	Strobe, Wall Mnt, Pure White,Clear, Isolation, W Class
WRL-PC-I02	Strobe, Wall Mtd Strb, Red Len, ISO
WRL-RC-I02	Strobe, Wall Mnt, Red Body,Red Flash, Isolation
WWA-PC-I02	Sounder/Strobe, Wall Mnt, Pure White,Clear, Isolation, W Class
BGL-PC-I02	Detector Base Strobe AS 7240-23 C Category
BRS-PC-I02	Detector Base Sounder Strobe (VAD) AS 7240-23 C Category Standard
BRH-PC-I02	Detector Base Sounder Strobe (VAD) AS 7240-23 C Category Premium

NOTE: NFX addressable AV devices are available in a range of colours. Colour variants are included as part of the models listed above. For example red wall sounder is NFX-WS-R. Versions of NFX series addressable AV are available with in-built short circuit isolator. These are designated in the model NFXI. for example red wall sounder with isolator is NFXI-WS-R.



Intelligent VESDA Devices

VEU-A00-NTF / VEU-A10-NTF (FlashScan)*:	VEU-A00-NTF Intelligent aspiration smoke detector with LEDs. VEU-A10-NTF Intelligent aspiration smoke detector with LCD display. See DOC-02-185. Discontinued
VEP-A00-1P-NTF / VEP-A00-P-NTF / VEP-A10-P-NTF (FlashScan)*:	VEP-A00-1P-NTF Intelligent aspirating smoke detector, 1 pipe with LED display. VEP-A00-P-NTF Intelligent aspirating smoke detector, 4 pipe with LED display. VEP-A10-P-NTF Intelligent aspirating smoke detector, 4 pipe with LCD display. See DOC-02-184. Discontinued
VEA-040-A00-NTF /VEA-040-A10-NTF (FlashScan) :	40-point VEA with LED only (VEA-040-A00-NTF) or LED and LCD display (VEA-040-A10-NTF). See DOC-02-186.

Enclosures, Chassis and Dress Plates

CAB Series Enclosures	AFP-3030 mounts in a standard CAB Series enclosure (available in two sizes, CAB650 and CAB900). The CAB series enclosures are available with a solid and window outer door. A trim ring option is available for semi-flush mounting.
U Series Enclosures	AFP-3030 mounts in a "U" series enclosure (available in four sizes, 12U, 18U, 28U, 40U). The 18U, 28U and 40U series cabinets are available with a solid and window outer door. Custom trim ring options are available for semi-flush mounting.
BMP-1	Blank module for unused module positions.
CHS-3L	Low-profile Chassis. Mounts up to three modules in any CAB series row.
CHS-4L	Low-profile Chassis. Mounts up to four modules in any U series row.
CHS-4	Chassis used with the XP6 and XP10 Multi-Modules. Mounts up to four modules in any CAB series row.
CHS-6	Chassis used with the XP6 and XP10 Multi-Modules. Mounts up to six modules in any U series row.
18U/BB	Enclosure for batteries and additional equipment. The 18U/BB is used to mount up to six 40AH batteries (three sets) if needed. 300mm high x 450mm wide x 190mm deep. Depth includes door.


Other Options

ARM-AUS	Agent releasing module for extinguishing agent releasing CIE in accordance with AS4214.1:2002, AS & ISO14520.1:2009. See DOC- 02-020.
IFS-993	Strobe/sounder interface. See DOC-02-173.

NOTE: For other options including compatibility with retrofit equipment, refer to the SLC manual, and the AFP-3030 manual.



AFP-3030 Overview

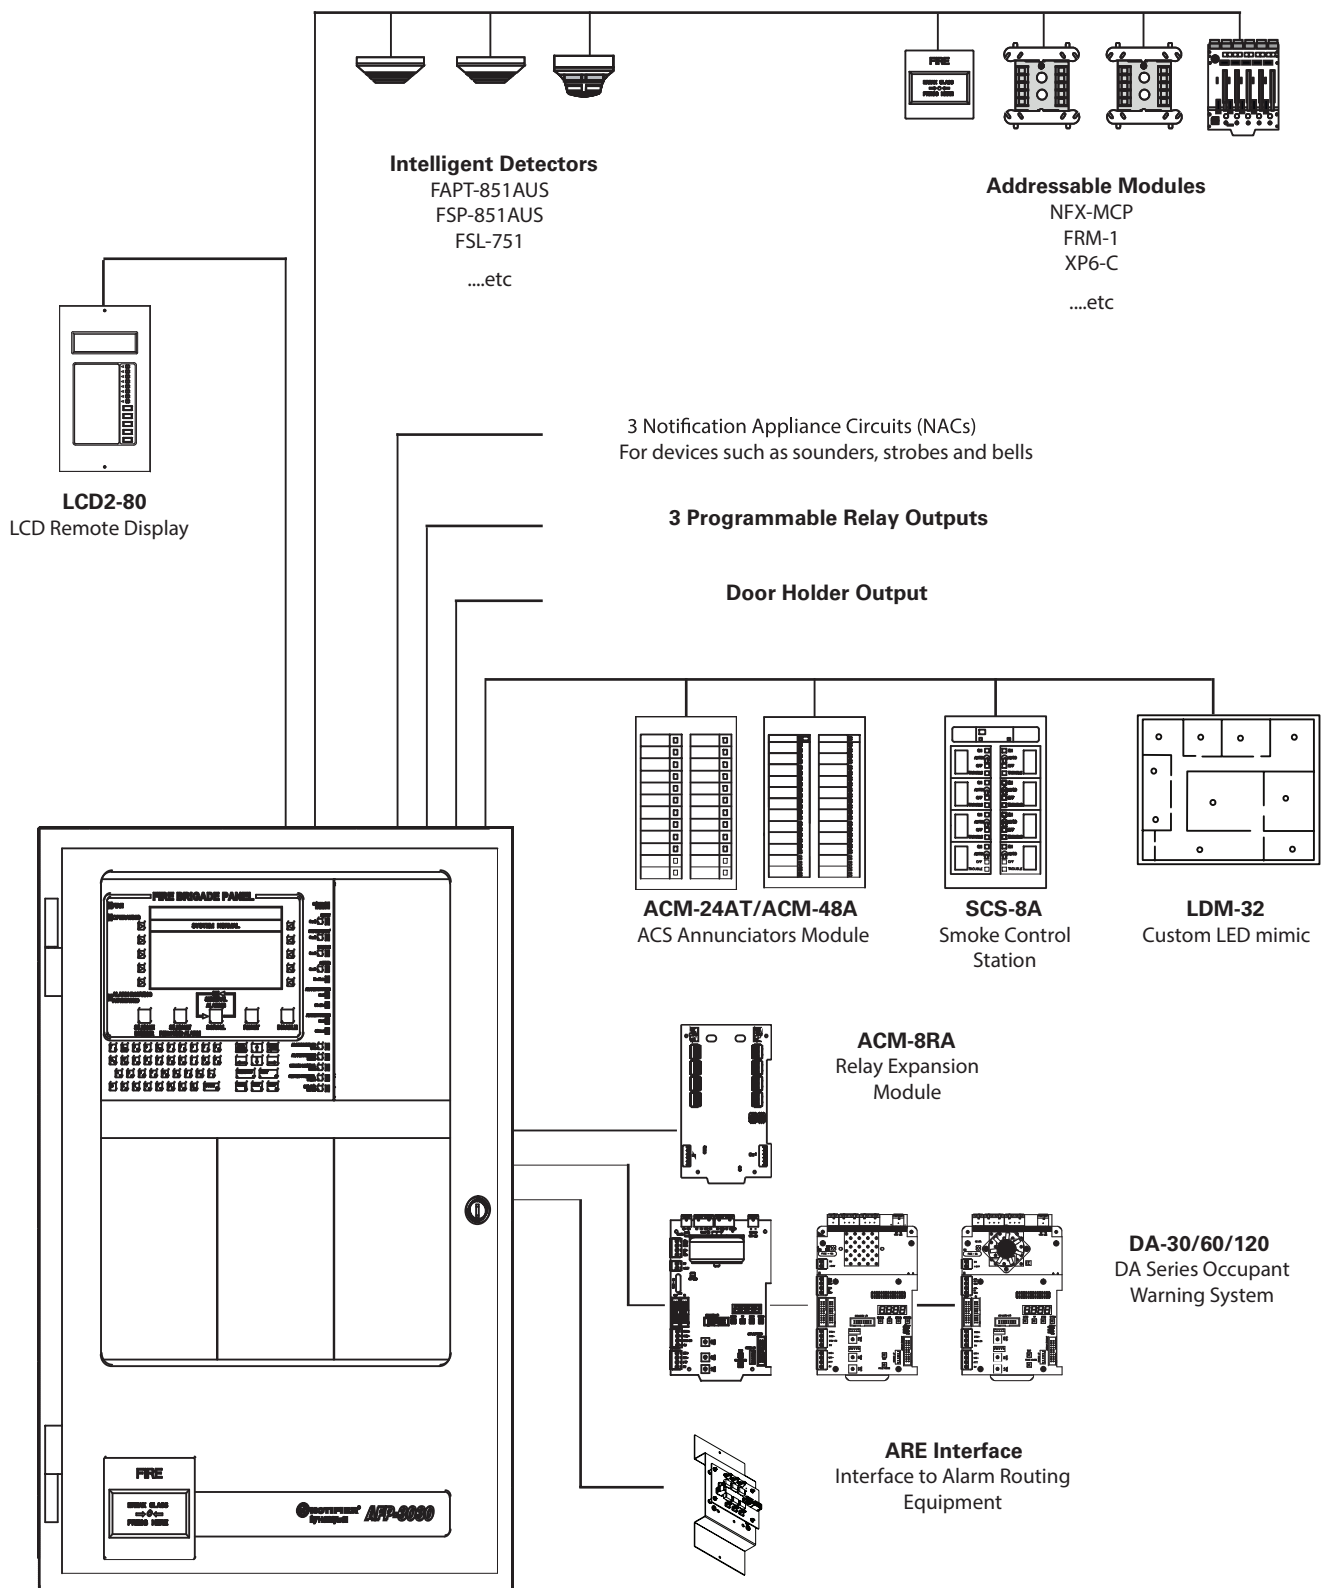

This document is not intended for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

© 2025Honeywell International Inc.

For more information, contact Notifier:
Phone (Australia): 1800 220 345 (Toll Free)
Phone (New Zealand): 800 220 345 (Toll Free)

www.notifier.com.au
www.notifier.co.nz

DOC-02-159 / 12/25| Rev G

