

QUANTUM^X MX840


Universal amplifier



Special features

- 8 individually configurable inputs (electrically isolated)
- Connection of more than 10 transducers technologies
- Data rate: up to 19,200 values/s
- 24-bit A/D converter per channel for synchronous, parallel measurements
- Active low pass filter
- TEDS support
- Supply voltage (DC): 10 V ... 30 V
- Supply voltage for active transducers (DC): 5 V ... 24 V

Block diagram

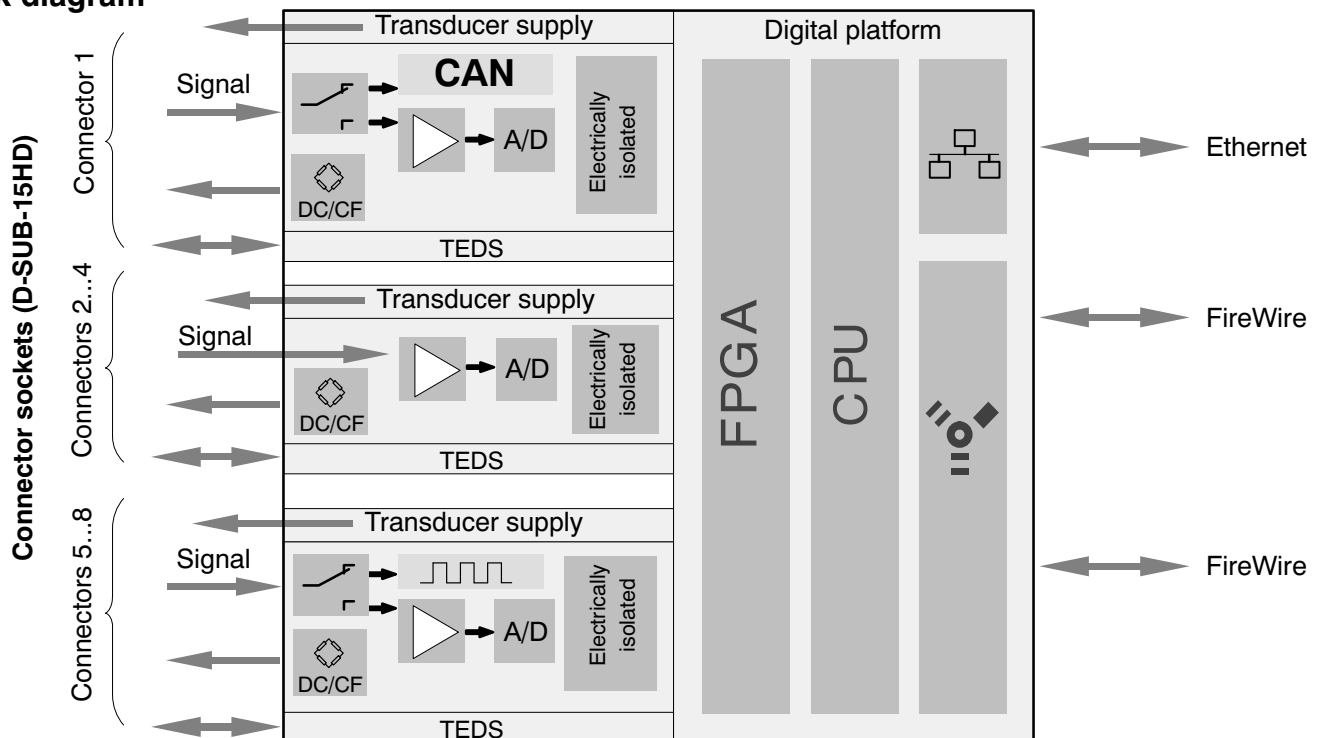

Specifications

General specifications		
Inputs	Number	8, electrically isolated from each other
Transducer technologies		Strain gage full bridge, inductive full and half bridge, piezoresistive full bridge, Potentiometric transducers, three voltage ranges, current; resistance thermometers; thermocouples (K, N, E, T, S, ...) with cold junction in the plug (1-THERMO-MXBOARD) Frequency, pulse counting, SSI, incremental rotary encoder (connectors 5-8 only) CAN (ISO 11898; connector 1 only)
Data rate	Values/s	0.1 ... 19200, adjustable for each channel
A/D converter		24 Bit Delta Sigma converter
Active low-pass filter (Bessel/Butterworth)	Hz	0.01 ... 3200 (-3 dB)
Transducer identification (TEDS, IEEE 1451.4) max. distance of the TEDS module	m	100
Transducer connection		D-SUB-15HD
Supply voltage range (DC)	V	10 ... 30, 24 V nominal (rated) voltage
Supply voltage interruption		max. 5 ms at 24 V
Power consumption without adjustable transducer excitation with adjustable transducer excitation	W W	< 10 < 13
Transducer Excitation (active transducers) Adjustable supply voltage (DC) Maximum output power	V W	5 ... 24; adjustable for each channel 0.7 each channel / a total of 2
Ethernet (data link) Protocol/addressing Connection Max. cable length to module	- - m	10Base-T / 100Base-TX TCP/IP (direct IP address or DHCP) 8P8C plug (RJ-45) with twisted pair cable (CAT-5) 100
FireWire (module synchronization, data link, optional supply voltage) Baud rate Max. current from module to module Max. cable length between the nodes Max. number of modules connected in series (daisy chain) Max. number of modules in a FireWire system (including hubs ¹⁾ , backplane) Max. chain of hops ²⁾	MBaud A m - - -	IEEE 1394b (HBM modules only) 400 (approx. 50 MByte/s) 1.5 5 12 (=11 Hops) 24 14
Nominal (rated) temperature range	°C [°F]	-20 ... +60 [-4 ... +140]
Operating temperature range (no dewing allowed/module not dew-point proof)	°C [°F]	-20 ... +65 [-4 ... +149]
Storage temperature range	°C [°F]	-40 ... +75 [-40 ... +167]
Rel. humidity at 31 °C	%	80 (non condensing) lin. reduction to 50 % at 40 °C
Protection class (up to 2000 m height, degree of contamination 2)		III
Degree of protection		IP20 per EN 60529
Mechanical tests ³⁾ Vibration (30 min) Shock (6 ms)	m/s ² m/s ²	50 350
EMC requirements		per EN 61326
Maximum input voltage at transducer socket to ground (PIN 6) PIN 1, 2, 3, 4, 5, 7, 8, 10, 13 PIN 14	V V	5.5 (no transients) 60 (no transients)/typ. 500
Dimensions, horizontal (W x H x D)	mm	52.5 x 200 x 122 (with case protection) 44 x 174 x 119 (without case protection)
Weight, approx.	g	980

¹⁾ Hub: FireWire node or distributor

²⁾ Hop: Transition from module to module/signal conditioning

³⁾ Mechanical stress is tested according to European Standard EN60068-2-6 for vibrations and EN60068-2-27 for shock. The equipment is subjected to an acceleration of 25 m/s² in a frequency range of 5...65 Hz in all 3 axes. Duration of this vibration test: 30min per axis. The shock test is performed with a nominal acceleration of 200 m/s² for 11 ms, half sine pulse shape, with 3 shocks in each of the 6 possible directions.

Specifications (Continued)

5 mV/V CF strain gage full bridge with 1 V or 2.5 V excitation (effective)		
Accuracy class		0.05
Carrier frequency (sine)	Hz	4800 ± 0.6
Bridge excitation voltage (effective)	V	1 and 2.5 (± 5 %)
Transducers that can be connected		strain gage full bridges
Permissible cable length between MX840 and transducer	m	100
Measuring ranges at 2.5 V excitation at 1 V excitation	mV/V mV/V	± 5 ± 10
Measurement frequency range (–3 dB)	kHz	0 ... 1.6
Transducer impedance at 2.5 V excitation at 1 V excitation	Ω Ω	300 ... 1000 80 ... 1000
Noise at 25 °C and 2.5 V excitation (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 0.2 < 0.5 < 1 < 4
Linearity error	%	< 0.02 of full scale
Zero drift (2.5 V excitation)	% / 10 K	0.02 of full scale
Full-scale drift (2.5 V excitation)	% / 10 K	< 0.05 of measurement value

100 mV/V (DC) piezoresistive strain gage full bridge with 2.5 V (DC) excitation		
Accuracy class		0.05
Excitation voltage (DC)	V	2.5
Transducers that can be connected		piezoresistive strain gage full bridges
Permissible cable length between MX840 and transducer	m	100
Measuring range	mV/V	± 100
Measurement frequency range (–3 dB)	kHz	0 ... 3.2
Transducer impedance Carrier frequency DC supply	Ω Ω	300 ... 1000 300 ... 5000
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 4 < 6 < 15 < 80
Linearity error	%	< 0.02 of full scale
Zero drift (2.5 V excitation)	% / 10 K	< 0.02 of full scale
Full-scale drift (2.5 V excitation)	% / 10 K	< 0.05 of measurement value

1000 mV/V (DC) piezoresistive strain gage full bridge with 2.5 V (DC) excitation		
Accuracy class		0.05
Bridge excitation voltage (DC)	V	2.5
Transducers that can be connected		piezoresistive strain gage full bridges
Permissible cable length between MX840 and transducer	m	100
Measuring range	mV/V	± 1000
Measurement frequency range (–3 dB)	kHz	0 ... 3.2
Transducer impedance	Ω	300 ... 1000
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 40 < 100 < 200 < 700
Linearity error	%	< 0.02 of full scale
Zero drift (1 V excitation)	% / 10 K	< 0.02 of full scale
Full-scale drift (1 V excitation)	% / 10 K	< 0.1 of measurement value

Specifications (Continued)

100 mV/V CF inductive full bridge with 1 V or 2.5 V excitation (effective)		
Accuracy class		0.05
Carrier frequency (sine)	Hz	4800 ± 0.6
Bridge excitation voltage (effective)	V	1 and 2.5 (± 5 %)
Transducers that can be connected		inductive full bridges
Permissible cable length between MX840 and transducer	m	100
Measuring ranges at 2.5 V excitation at 1 V excitation	mV/V mV/V	± 100 ± 300
Measurement frequency range (–3 dB)	kHz	0 ... 1.6
Transducer impedance at 2.5 V excitation at 1 V excitation	Ω Ω	300 ... 1000 80 ... 1000
Noise at 25 °C and 2.5 V excitation (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 3 < 5 < 15 < 50
Linearity error	%	< 0.02 of full scale
Zero drift (2.5 V excitation)	% / 10 K	< 0.02 of full scale
Full-scale drift (2.5 V excitation)	% / 10 K	< 0.05 of measurement value

1000 mV/V CF inductive full bridge with 1 V excitation (effective)		
Accuracy class		0,05
Carrier frequency (sine)	Hz	4800 ± 0.6
Bridge excitation voltage (effective)	V	1 (± 5 %)
Transducers that can be connected		inductive full bridges
Permissible cable length between MX840 and transducer	m	100
Measuring range	mV/V	± 1000
Measurement frequency range (–3 dB)	kHz	0 ... 1.6
Transducer impedance	Ω	80 ... 1000
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 40 < 100 < 500 < 1200
Linearity error	%	< 0.02 of full scale
Zero drift (1 V excitation)	% / 10 K	< 0.02 of full scale
Full-scale drift (1 V excitation)	% / 10 K	< 0.1 of measurement value

Specifications (Continued)

100 mV/V CF inductive half bridge with 1 V or 2.5 V excitation (effective)		
Accuracy class		0.1
Carrier frequency (sine)	Hz	4800 ± 0.6
Bridge excitation voltage (effective)	V	1 and 2.5 (± 5 %)
Transducers that can be connected		inductive half bridges
Permissible cable length between MX840 and transducer	m	100
Measuring ranges at 2.5 V excitation at 1 V excitation	mV/V mV/V	± 100 ± 300
Measurement frequency range (–3 dB)	kHz	0 ... 1.6
Transducer impedance at 2.5 V excitation at 1 V excitation	Ω Ω	300 ... 1000 80 ... 1000
Noise at 25 °C and 2.5 V excitation (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 3 < 5 < 15 < 50
Linearity error	%	< 0.02 of full scale
Zero drift (2.5 V excitation)	% / 10 K	< 0.1 of full scale
Full-scale drift (2.5 V excitation)	% / 10 K	< 0.1 of measurement value

LVDT		
Accuracy class		0.1
Carrier frequency (sine)	Hz	4800 ± 0.6
Bridge excitation voltage (effective)	V	1 (± 5 %)
Transducers that can be connected		LVDT
Permissible cable length between MX840 and transducer	m	100
Measuring range	mV/V	± 3000
Measurement frequency range (–3 dB)	kHz	0 ... 1.6
Transducer impedance	mH	4 ... 33
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 40 < 100 < 500 < 1200
Linearity error	%	< 0.02 of full scale
Zero drift (1 V excitation; effective)	% / 10 K	< 0.1 of full scale
Full-scale drift (1 V excitation; effective)	% / 10 K	< 0.1 of measurement value

Specifications (Continued)

Potentiometric transducer		
Accuracy class		0.1
Excitation voltage (DC)	V	2.5
Transducers that can be connected		potentiometric transducers
Permissible cable length between MX840 and transducer	m	100
Measuring range	mV/V	± 1000
Measurement frequency range (-3 dB)	kHz	0 ... 3.2
Transducer impedance	Ω	300 ... 5000
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV/V μV/V μV/V μV/V	< 40 < 100 < 200 < 700
Linearity error	%	< 0.02 of full scale
Zero drift (1 V excitation)	% / 10 K	< 0.1 of full scale
Full-scale drift (1 V excitation)	% / 10 K	< 0.1 of measurement value

10 V DC voltage		
Accuracy class		0.05
Transducers that can be connected		voltage generator ± 10 V
Permissible cable length between MX840 and transducer	m	100
Measuring range	V	± 10
Measurement frequency range (-3 dB)	kHz	0 ... 3.2
Internal resistance of the voltage source	Ω	< 500
Internal impedance	MΩ	typ. 1
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μV μV μV μV	< 150 < 300 < 600 < 3000
Linearity error	%	< 0.02 of full scale
Common-mode rejection with DC common mode with 50 Hz common mode	dB dB	> 100 typ. 75
Maximum common-mode voltage (to housing and supply ground)	V	± 60
Zero drift	% / 10 K	< 0.02 of full scale
Full-scale drift	% / 10 K	< 0.1 of measurement value

Specifications (Continued)

60 V DC voltage		
Accuracy class		0.05
Transducers that can be connected		voltage generator ± 60 V
Permissible cable length between MX840 and transducer	m	100
Measuring range	V	± 60
Measurement frequency range (-3 dB)	kHz	0 ... 3.2
Internal resistance of the voltage source	Ω	< 500
Input impedance	M Ω	typ. 1
Noise at 25 °C (peak to peak)		
with filter 1Hz Bessel	μ V	< 150
with filter 10Hz Bessel	μ V	< 300
with filter 100Hz Bessel	μ V	< 600
with filter 1kHz Bessel	μ V	< 3000
Linearity error	%	< 0.02 of full scale
Common-mode rejection		
with DC common mode	dB	> 100
with 50 Hz common mode	dB	typ. 75
Maximum common-mode voltage (to housing and supply ground)	V	± 60
Zero drift	% / 10 K	< 0.02 of full scale
Full-scale drift	% / 10 K	< 0.05 of measurement value

100 mV DC voltage		
Accuracy class		0.05
Transducers that can be connected		voltage generator
Permissible cable length between MX840 and transducer	m	100
Measuring range	mV	± 300
Measurement frequency range (-3 dB)	kHz	0 ... 3.2
Input impedance	M Ω	> 20
Noise at 25 °C (peak to peak)		
with filter 1 Hz Bessel	μ V	< 5
with filter 10 Hz Bessel	μ V	< 100
with filter 100 Hz Bessel	μ V	< 1000
with filter 1 kHz Bessel	μ V	< 1500
Linearity error	%	< 0.03 of full scale
Common-mode rejection		
with DC common mode	dB	> 90
with 50 Hz common mode	dB	typ. 75
Maximum common-mode voltage (to housing and supply ground)	V	± 30
Zero drift	% / 10 K	< 0.1 of full scale
Full-scale drift	% / 10 K	< 0.1 of measurement value

Specifications (Continued)

20 mA DC current		
Accuracy class		0.05
Transducers that can be connected		transducers with 4 ... 20 mA current output
Permissible cable length between MX840 and transducer	m	100
Measuring range	mA	± 30
Measurement frequency range (-3 dB)	kHz	0 ... 3.2
Measurement resistance value	Ω	typ. 10
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	μA μA μA μA	< 1 < 1.5 < 15 < 40
Linearity error	%	< 0.02 of full scale
Common-mode rejection with DC common mode with 50 Hz common mode	dB dB	> 100 typ. 75
Maximum common-mode voltage (to housing and supply ground)	V	± 30
Zero drift	% / 10 K	< 0.05 of full scale
Full-scale drift	% / 10 K	< 0.1 of measurement value

Resistance thermometer		
Transducers that can be connected		resistance thermometers
Permissible cable length between MX840 and transducer	m	100
Measuring ranges		PT100 PT1000
Linearization range	°C [°F]	-200 ... +848 [-328 ... +1558.4]
Measurement frequency range (-3 dB)	kHz	0 ... 3.2
Noise at 25 °C (peak to peak) with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel	K K K K	< 0.1 < 0.2 < 0.5 < 1.5
Linearity error	K	< ± 0.3
Zero drift with PT100 with PT1000	K / 10 K K / 10 K	< 0.2 < 0.1
Full-scale drift with PT100 with PT1000	K / 10 K K / 10 K	< 0.5 < 1

Specifications (Continued)

Thermocouples ⁴⁾		
Transducers that can be connected		Thermocouples
Permissible cable length between MX840 and transducer	m	100
Measuring range	mV	± 100
Linearization ranges Type B (Pt-30 % Rh and Pt-6 % Rh) Type E (Ni-Cr and Cu-Ni) Type J (Fe and Cu-Ni) Type K (Ni-Cr and Ni-Al) Type N (Ni-14,2 % Cr and Ni-4,4 % Si-0,1 % Mg) Type R (Pt-13 % Rh and Pt) Type S (Pt-10 % Rh and Pt) Type T (Cu and Cu-Ni)	°C [°F] °C [°F] °C [°F] °C [°F] °C [°F] °C [°F] °C [°F] °C [°F]	+100 ... +1820 [+212 ... +3308] -200 ... +900 [-328 ... +1652] -210 ... +1200 [-346 ... +2192] -270 ... +1372 [-454 ... +2501.6] -270 ... +1300 [-454 ... +2372] -50 ... +1768 [-58 ... +3214.4] -50 ... +1768 [-58 ... +3214.4] -270 ... +400 [-454 ... +752]
Measurement frequency range (-3 dB)	kHz	0 ... 3.2
Noise at 25 °C and Type K (peak to peak) with Filter 1 Hz Bessel with Filter 10 Hz Bessel with Filter 100 Hz Bessel with Filter 1 kHz Bessel	K K K K	0.05 0.1 0.5 1
Zero error Type E, J, K, T Type N, R, S Type B	K K K	< ± 0.3 < ± 3 < ± 30
Linearity error Type E, J, K, T Type N, R, S Type B	K K K	< ± 0.3 < ± 3 < ± 30
Max. error of the cold junction	K	< ± 0.5
Total error limit Type E, J, K, T Type N, R, S Type B	K K K	± 1 ± 6.5 ± 60
Cold junction 1-THERMO-MXBOARD Nominal (rated) temperature range Operating temperature range Storage temperature range	°C [°F] °C [°F] °C [°F]	-20 ... +60 [-4 ... +140] -20 ... +65 [-4 ... +149] -40 ... +75 [-40 ... +167]

⁴⁾ The external cold junction is required for connecting thermocouples to the MX840 (Order no.: 1-THERMO-MXBOARD).

Specifications (Continued)

Frequency or pulse counting (connections 5 ... 8)		
Accuracy class		0.01
Transducers that can be connected		Torque transducers, Frequency signal sources (square and sine), incremental encoder
Permissible cable length between MX840 and transducer	m	50
Signals f ₁ (±) f ₂ (±) Zero index (±)		Frequency or pulse signal Direction of rotation signal shifted by ± 90° to f ₁ Zero position signal
Input level with differential operation Low level High level		Differential inputs (RS422): Signal (+) < Signal (-) -200 mV Differential inputs (RS422): Signal (+) > Signal (-) +200 mV
Input level with unipolar operation Low level High level	V V	<1.5 > 3.5
Maximum input voltage at transducer socket to ground	V	5.5 (no transients)
Measuring ranges Frequency Pulse counting	pulses/s	0.1 Hz ... 1000 kHz 0 ... 1000000
Input impedance	kΩ	typ. 10
SSI mode (differentially) Shift clock Word length Code Input level Low level High level Signals Data Shift clock	kHz Bit -	100, 200, 500, 1000 12-31 dual or gray Differential inputs (RS422): Signal (+) < Signal (-) -200 mV Differential inputs (RS422): Signal (+) > Signal (-) +200 mV Data+, Data-, RS-422 Clk+, Clk-, RS-422



CAN (connection 1)		
Supported protocols		CAN 2.0A, CAN 2.0B
Number of CAN-ports		1 (connection 1)
Bus link		two wire, according to ISO11898
Baud rates and permissible cable lengths	kBit/s m	1000, 500, 250, 125, 100 25, 100, 250, 500, 600
Sampling rate	signals/s	max. 10000
CAN channels		≤ 128
CAN signal types		standard, mode-dependent, mode-signal

Amplitude responses of the adjustable filters



MX840 active low-pass filter data (4th order Bessel/Butterworth)

Type	-1dB (Hz)	-3dB (Hz)	-20dB (Hz)	Phase delay (ms)	Rise time (ms)	Overshoot (%)	Data rate (values/s)
Bessel	2000	3210	8100	0.15	0.1	1.5	19200
	1000	1630	4050	0.24	0.2	1.4	19200
	1000	1640	5150	0.21	0.2	0.7	9600
	500	820	2120	0.4	0.43	1.4	9600
	200	335	860	1	1.04	1	9600
	100	167	430	2	2.1	0.8	9600
	50	83	215	4	4.28	0.8	9600
	20	33,7	85	10	10.6	0.8	9600
	10	16,5	42	20	21.3	0.8	9600
	5	8.4	21	40	41.6	0.8	2400
	2	3.4	8.5	99	104	0.8	2400
	1	1.6	4.2	200	214	0.8	2400
	0.5	0.83	2.1	400	420	0.8	300
	0.2	0.34	0.85	1000	1060	0.8	300
	0.1	0.17	0.43	2000	2130	0.8	300
	0.05	0.084	0.21	3940	4200	0.8	20
	0.02	0.033	0.085	10000	10600	0.8	20
	0.01	0.017	0.042	20100	21300	0.8	20
Butterworth	2000	2360	4331	0.2	0.15	11	19200
	1000	1178	2100	0.38	0.3	11	19200
	1000	1168	2140	0.32	0.32	11	9600
	500	586	1050	0.66	0.66	11	9600
	200	235	420	1.7	1.6	11	9600
	100	118	210	3.46	3.2	11	9600
	50	49	105	6.98	6.6	11	9600
	20	24	42	17.3	16	11	9600
	10	12	21	34.9	32	11	9600
	5	5.95	10.5	69	66	11	2400
	2	2.37	4.24	173	160	11	2400
	1	1.26	2.1	347	320	11	2400
	0.5	0.59	1.05	701	660	11	300
	0.2	0.236	0.421	1760	1600	11	300
	0.1	0.118	0.21	3510	3200	11	300
	0.05	0.059	0.105	6950	6600	11	20
	0.02	0.0235	0.042	17500	16000	11	20
	0.01	0.012	0.021	34600	32000	11	20

Amplitude response of MX840 Butterworth filter

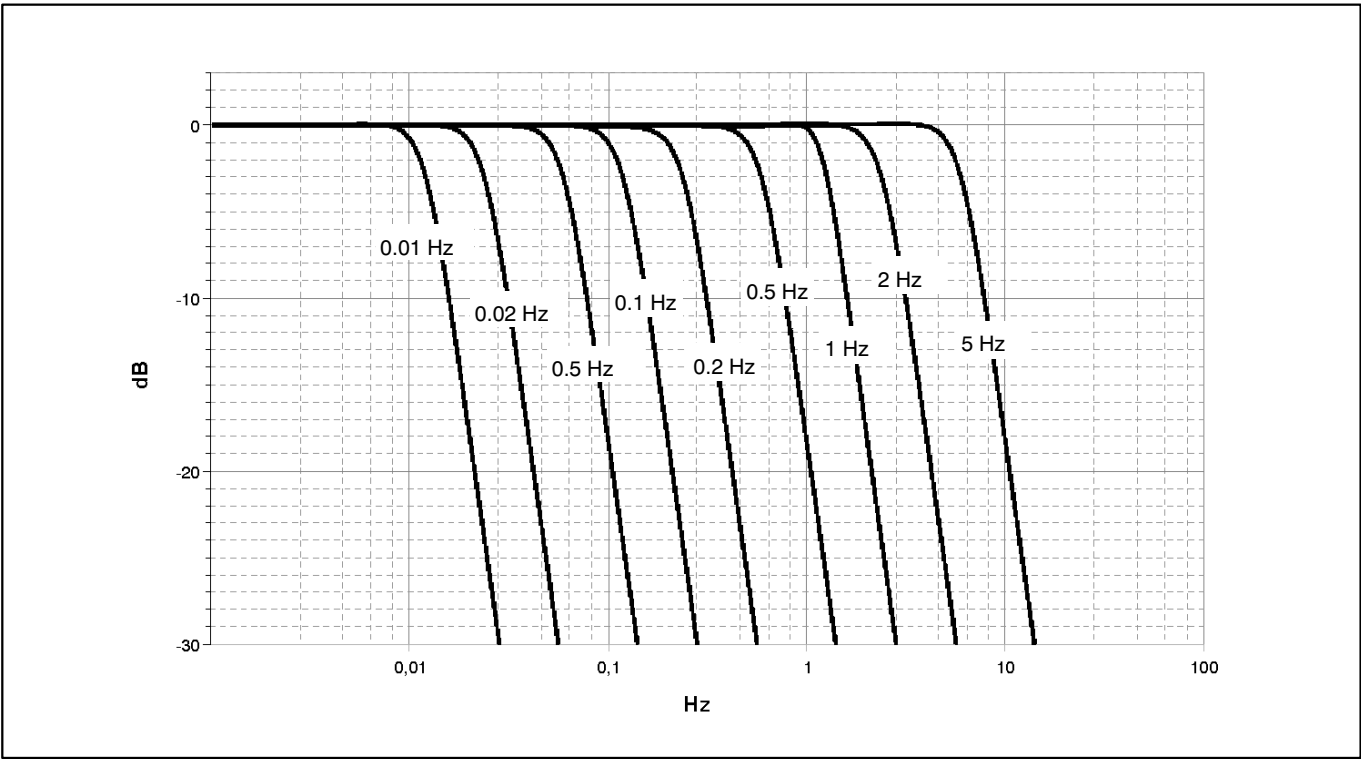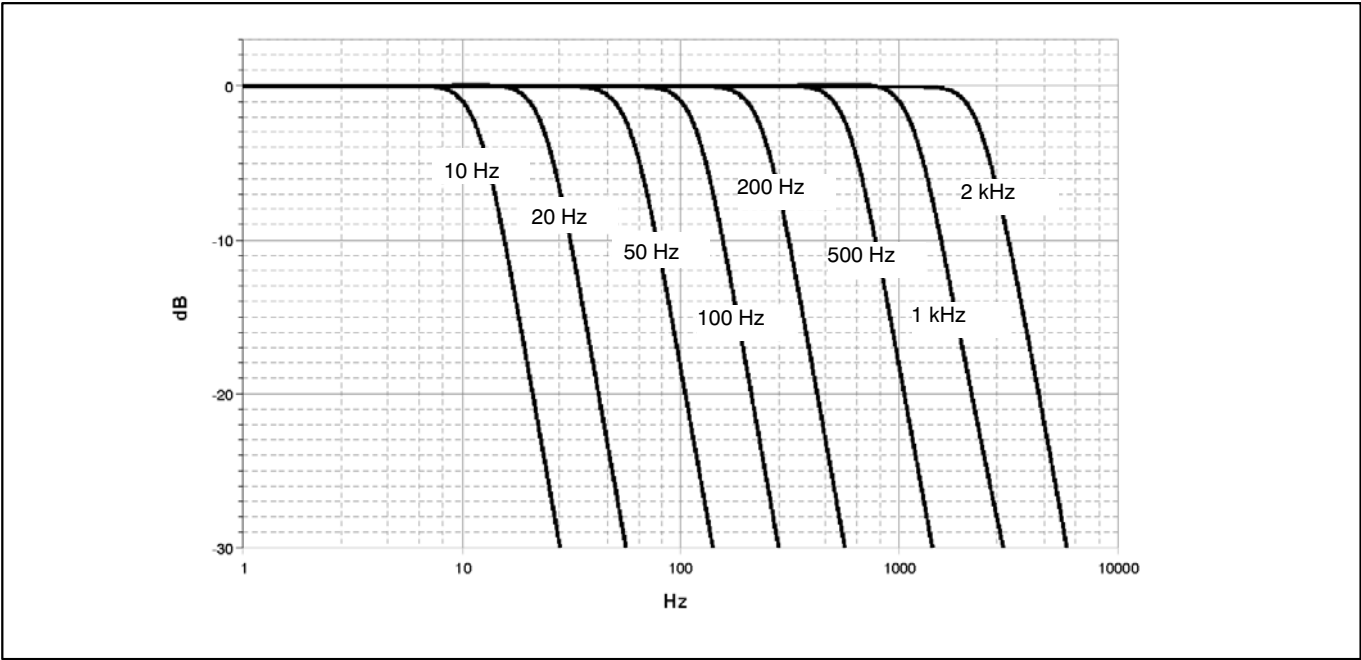

Amplitude response of MX840 Bessel filter

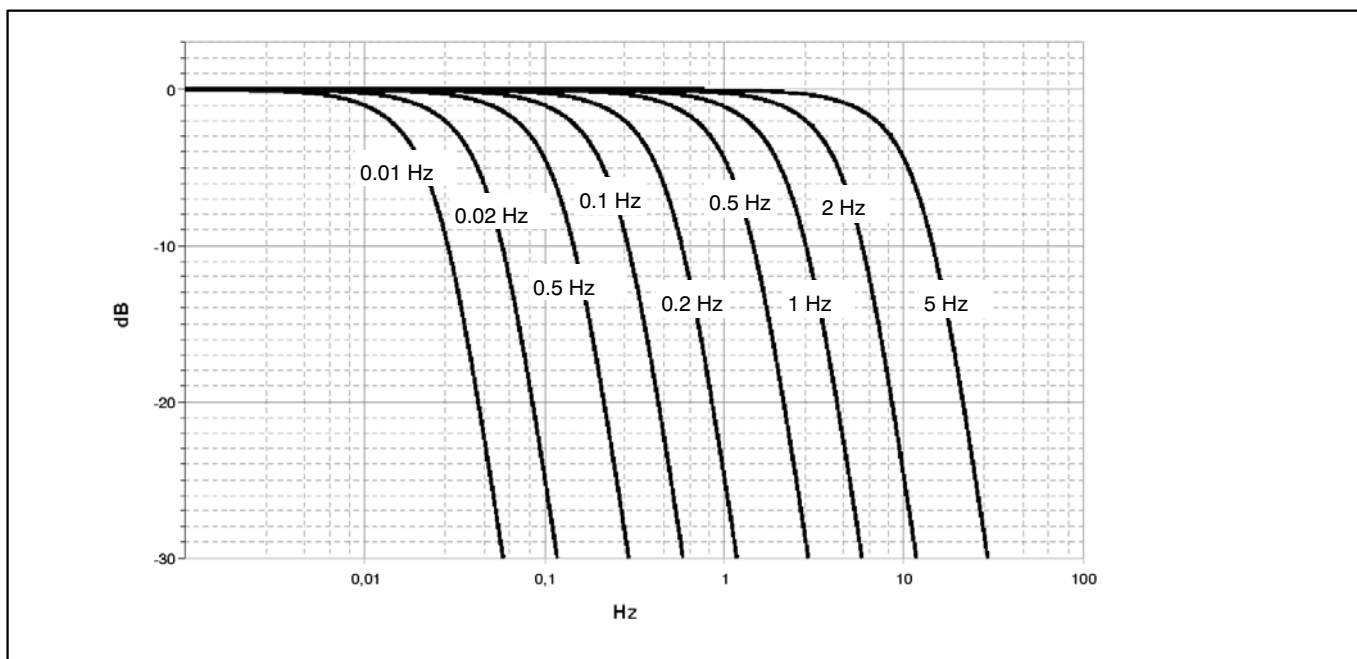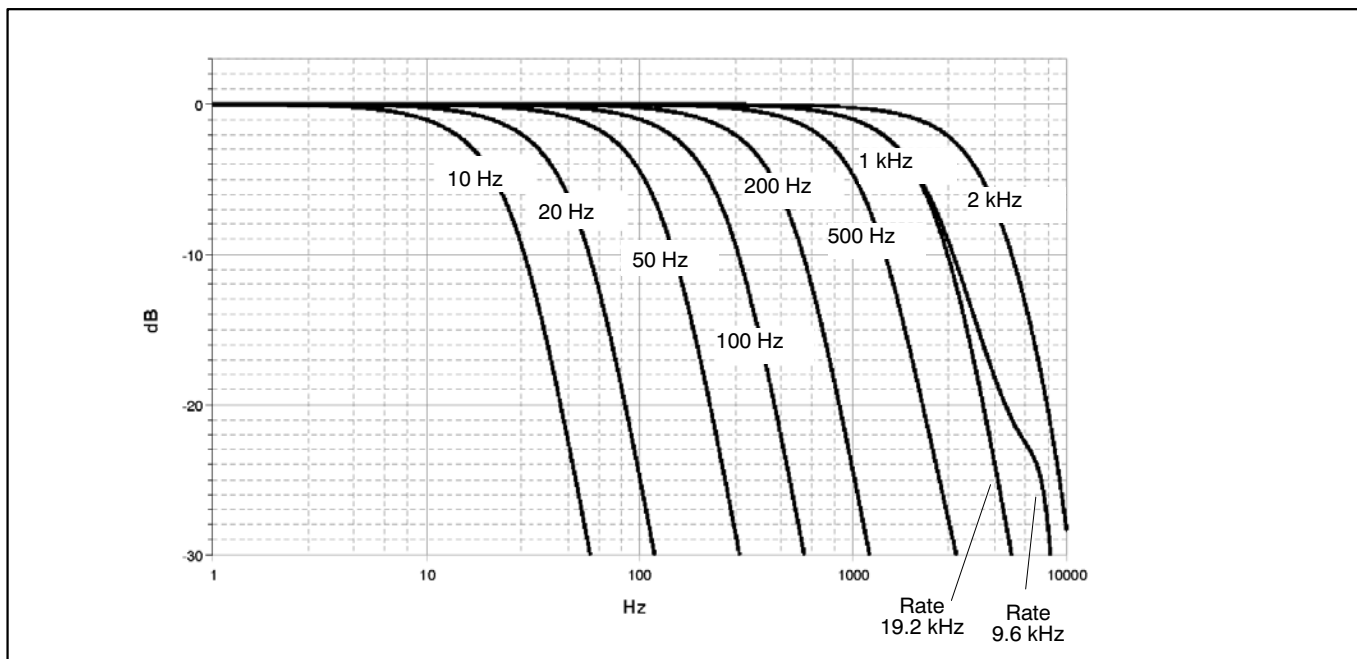


Specifications Power pack NTX001

NTX001		
Nominal input voltage (AC)	V	100 ... 240 ($\pm 10\%$)
Stand-by power consumption at 230 V	W	0.5
Nominal load		
U_A	V	24
I_A	A	1.25
Static output characteristics		
U_A	V	$24 \pm 4\%$
I_A	A	0 - 1.25
U_{Br} (Output voltage ripple; peak to peak)	mV	≤ 120
Current limiting, typically from	A	1.6
Primary – secondary separation		galvanically, by optocoupler and converter
Creep distance and clearance	mm	≥ 8
High-voltage test	kV	≥ 4
Ambient temperature range	$^{\circ}\text{C}$ [$^{\circ}\text{F}$]	0... +40 [+32 ... +104]
Storage temperature	$^{\circ}\text{C}$ [$^{\circ}\text{F}$]	-40 ... +70 [-40 ... +158]

Accessories, to be ordered separately

Accessories MX840		
Article	Description	Order No.
Cold junction for thermocouples on MX840	Electronics for temperature compensation for measurements with thermocouples on MX840 including: – PT1000 cold junction – incl. TEDS chip for transducer identification Note: Installation in DSubHD 15-pole transducer plug.	1-THERMO-MXBOARD
DSubHD 15 pole-to-DSub 15 pole adapter	DSubHD 15 pole-to-DSub 15 pole adapter for connection of transducers with pre-wired DSub plug to MX840 (length approx. 0.3 m); Note: Pre-wired for full bridge (6-wire).	1-KAB416
DSubHD15-to-DSub9 (CAN) adapter	Adapter for connection of CAN instruments to MX840. DSubHD 15-pole (plug) to DSub 9-pole (socket); Length: approx. 0.3 m.	1-KAB418
General accessories		
Article	Description	Order No.
DSubHD 15-pole connector kit with TEDS chip	DSubHD 15-pole connector kit (male) with TEDS chip for storage of a sensor data sheet; Housing: Metallised plastic with knurled screws. Note: The TEDS chip comes blank.	1-SUBHD15-MALE
AC-DC power supply / 24 V	Input : 100 ... 240 V AC ($\pm 10\%$), 1.5 m cable Output: 24 V DC, max. 1.25 A, 2 m cable with ODU connector	1-NTX001
3m cable – QuantumX supply	3 m cable for voltage supply of QuantumX modules; Suitable plug (ODU Medi-Snap S11M08-P04MJGO-5280) on one side and open strands on the other end.	1-KAB271-3
3 m FireWire cable PC-to-module	Firewire connection cable from the PC to the first module for data transfer from QuantumX modules to the PC; With matching plugs on both sides; Length: 3 m.	1-KAB275-3
0.2 m FireWire cable (module-to-module)	FireWire connection cable for QuantumX modules; with matching plugs on both sides; Length: 0.2 m Note: The cable enables QuantumX modules to be supplied with voltage (max. 1.5 A, from the source to the last drain).	1-KAB269-0.2
2 m Firewire cable (module-to-module)	FireWire connection cable for QuantumX modules (Length: 2 m); With matching plugs on both sides; Note: The cable enables QuantumX modules to be supplied with voltage (max. 1.5 A, from the source to the last drain).	1-KAB269-2
Connecting elements for QuantumX modules	Connecting elements (clips) for QuantumX modules; Set comprising 2 case clips including mounting material for fast connection of 2 modules.	1-CASECLIP

Cold junction 1-THERMO-MXBOARD

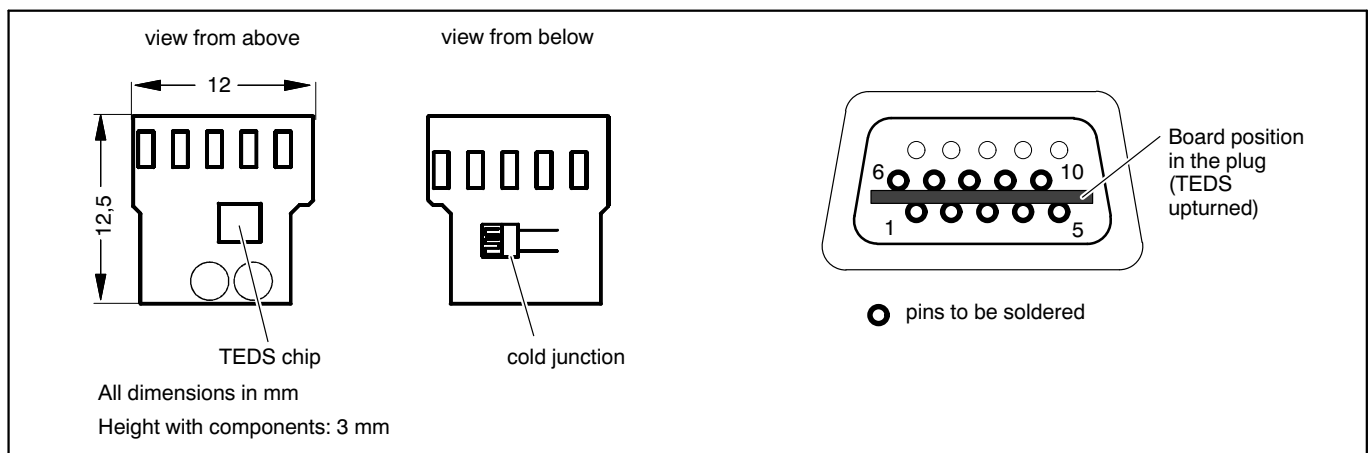

Modifications reserved.

All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

B2358-2.0 en

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany

Tel.: +49 6151 803-0 Fax: +49 6151 803 9100

Email: support@hbm.com Internet: www.hbm.com



measurement with confidence